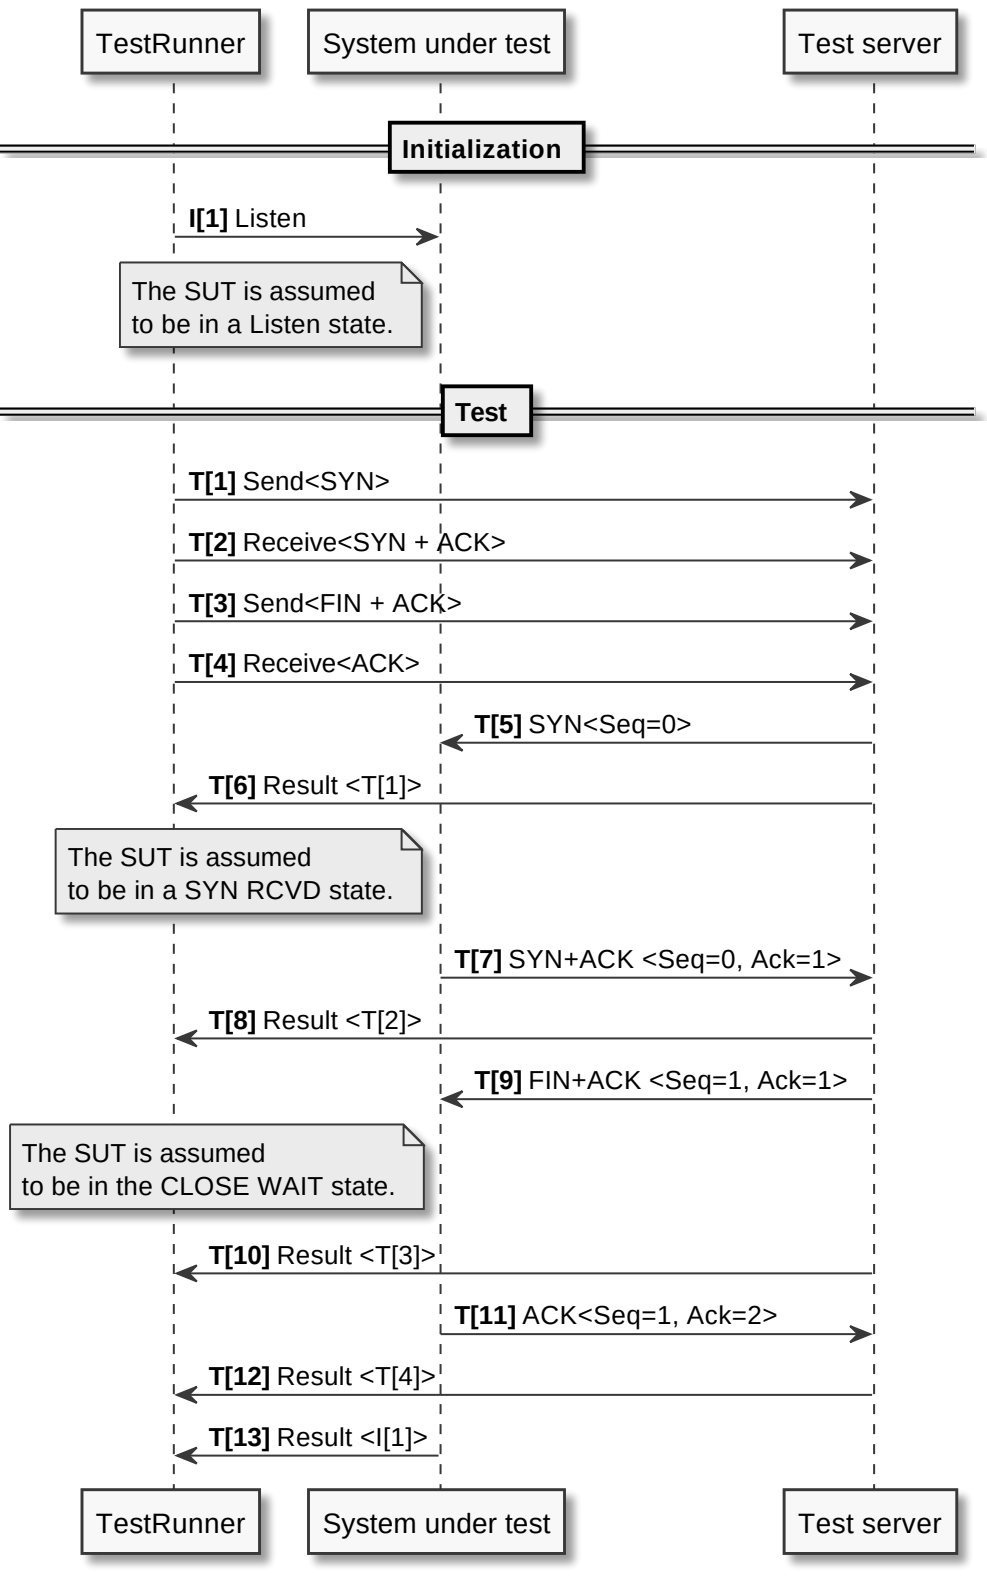
TestRunner
System under test
Test server
Initialization
I[1] Listen
The SUT is assumed to be in a Listen state.
Test
T[1] Send<SYN>
T[2] Receive<SYN + ACK>
T[3] Send<FIN + ACK>
T[4] Receive<ACK>
T[5] SYN<Seq=0>
T[6] Result <T[1]>
The SUT is assumed to be in a SYN RCVD state.
T[7] SYN+ACK <Seq=0, Ack=1>
T[8] Result <T[2]>
T[9] FIN+ACK <Seq=1, Ack=1>
The SUT is assumed to be in the CLOSE WAIT state.
T[10] Result <T[3]>
T[11] ACK<Seq=1, Ack=2>
T[12] Result <T[4]>
T[13] Result <I[1]>
TestRunner
System under test
Test server