




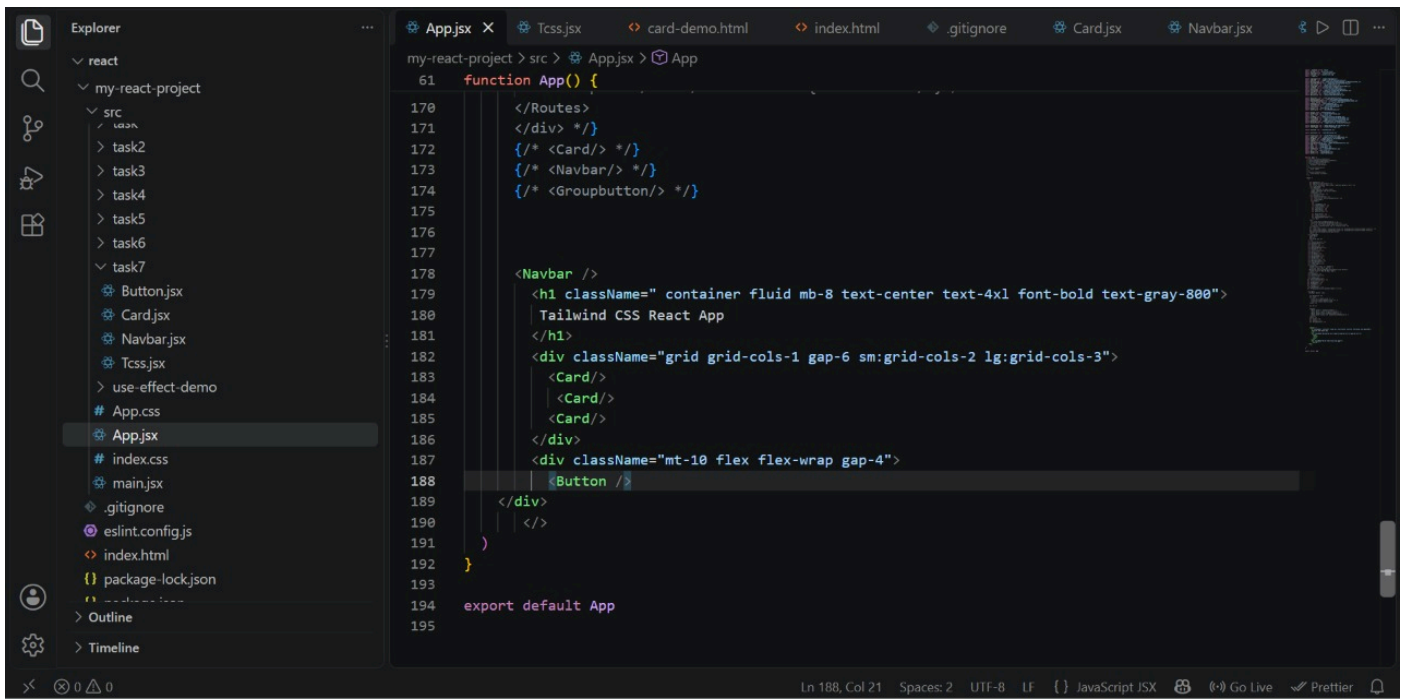


The image shows a VS Code editor interface with a dark theme. On the left, the Explorer sidebar displays a file tree for a project named 'my-react-project'. The tree includes a 'src' directory with subfolders 'task2' through 'task7', and files 'Button.jsx', 'Card.jsx', 'Navbar.jsx', 'Tcss.jsx', 'App.css', 'App.jsx', 'index.css', 'main.jsx', '.gitignore', 'eslint.config.js', 'index.html', and 'package-lock.json'. The 'Button.jsx' file is selected and highlighted. The main editor area shows the code for 'Button.jsx'. At the top, there are tabs for 'card-demo.html', 'index.html', '.gitignore', 'Card.jsx', 'Navbar.jsx', and 'Button.jsx'. The code in the editor is as follows:

```
1 import React from "react";
2
3 function Button() {
4   return (
5     <div className="flex gap-4">
6
7       <button
8         className="
9           rounded-lg bg-blue-600 px-5 py-2 text-white
10          hover:bg-blue-700
11          focus:outline-none focus:ring-4 focus:ring-blue-300
12          active:scale-95
13        ">
14        Primary
15      </button>
16
17      <button
18        className="
19          rounded-lg border border-gray-400 px-5 py-2 text-gray-700
20          hover:bg-gray-100
21          focus:outline-none focus:ring-4 focus:ring-gray-300
22          active:scale-95
23        ">
24        Secondary
25      </button>
26    </div>
27  );
28 }
29
```

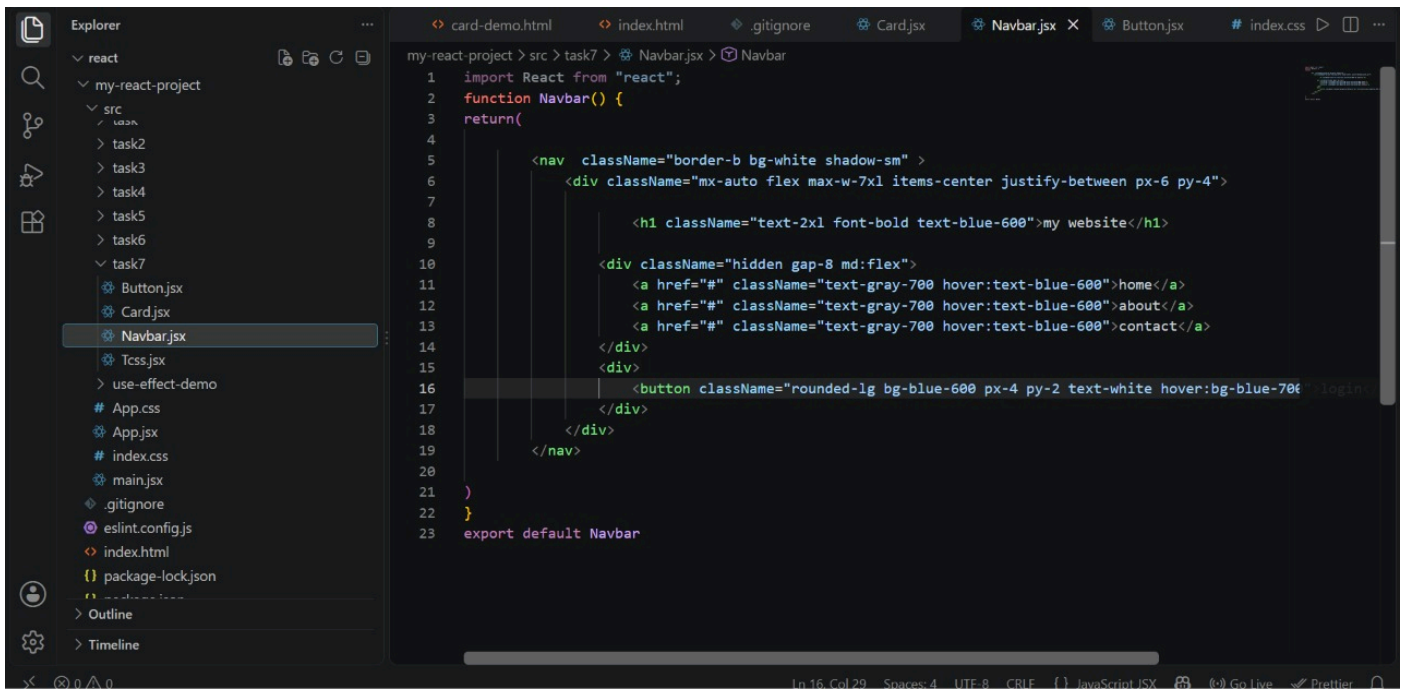

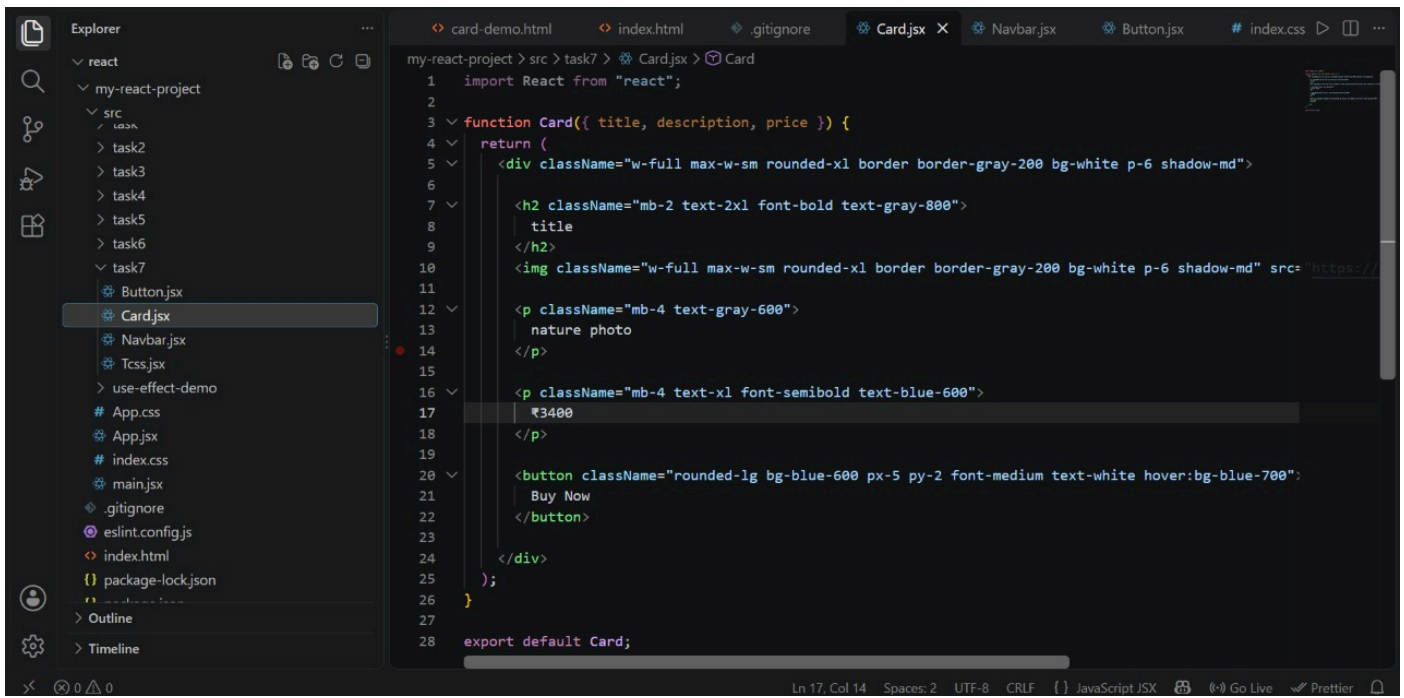

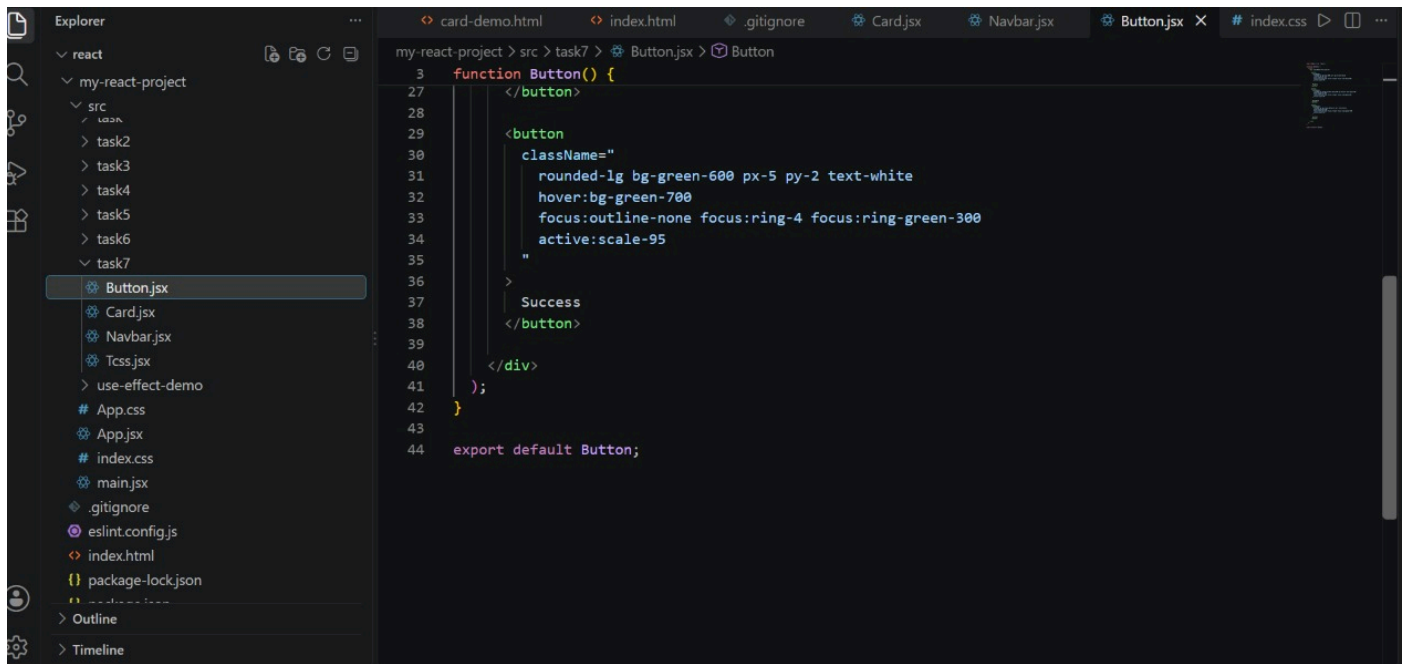

title



nature photo

₹3400

Buy Now

Primary

Secondary

Success

Tailwind CSS React App

title



nature photo

title



nature photo