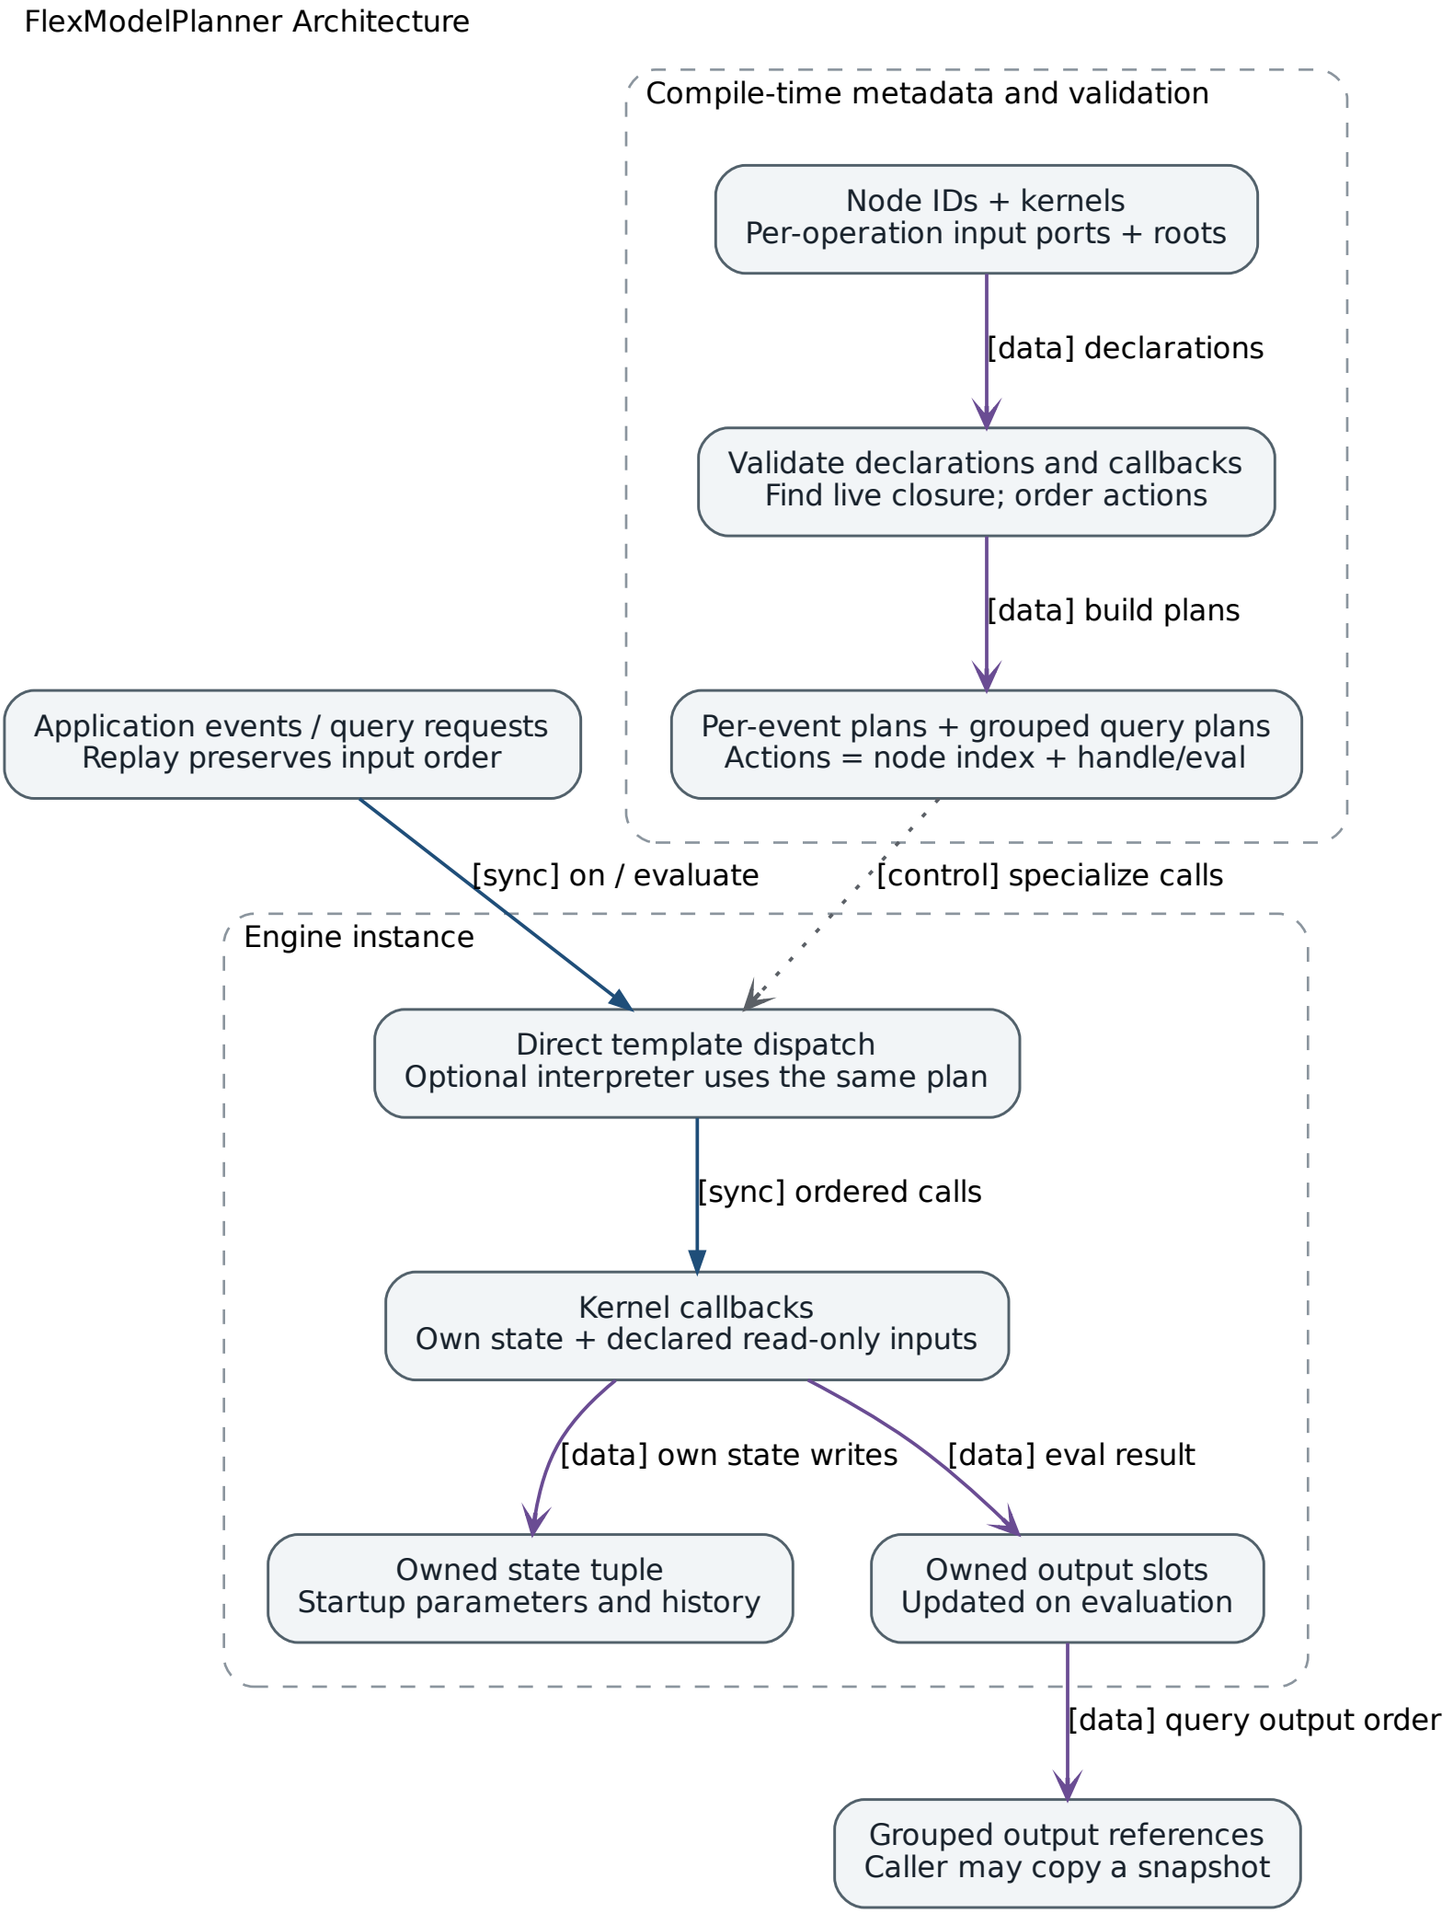
FlexModelPlanner Architecture
Compile-time metadata and validation
Node IDs + kernels
Per-operation input ports + roots
[data] declarations
Validate declarations and callbacks
Find live closure; order actions
[data] build plans
Application events / query requests
Replay preserves input order
Per-event plans + grouped query plans
Actions = node index + handle/eval
[sync] on / evaluate
[control] specialize calls
Engine instance
Direct template dispatch
Optional interpreter uses the same plan
[sync] ordered calls
Kernel callbacks
Own state + declared read-only inputs
[data] own state writes
[data] eval result
Owned state tuple
Startup parameters and history
Owned output slots
Updated on evaluation
[data] query output order
Grouped output references
Caller may copy a snapshot