Compile-Time Planning vs. Runtime Execution
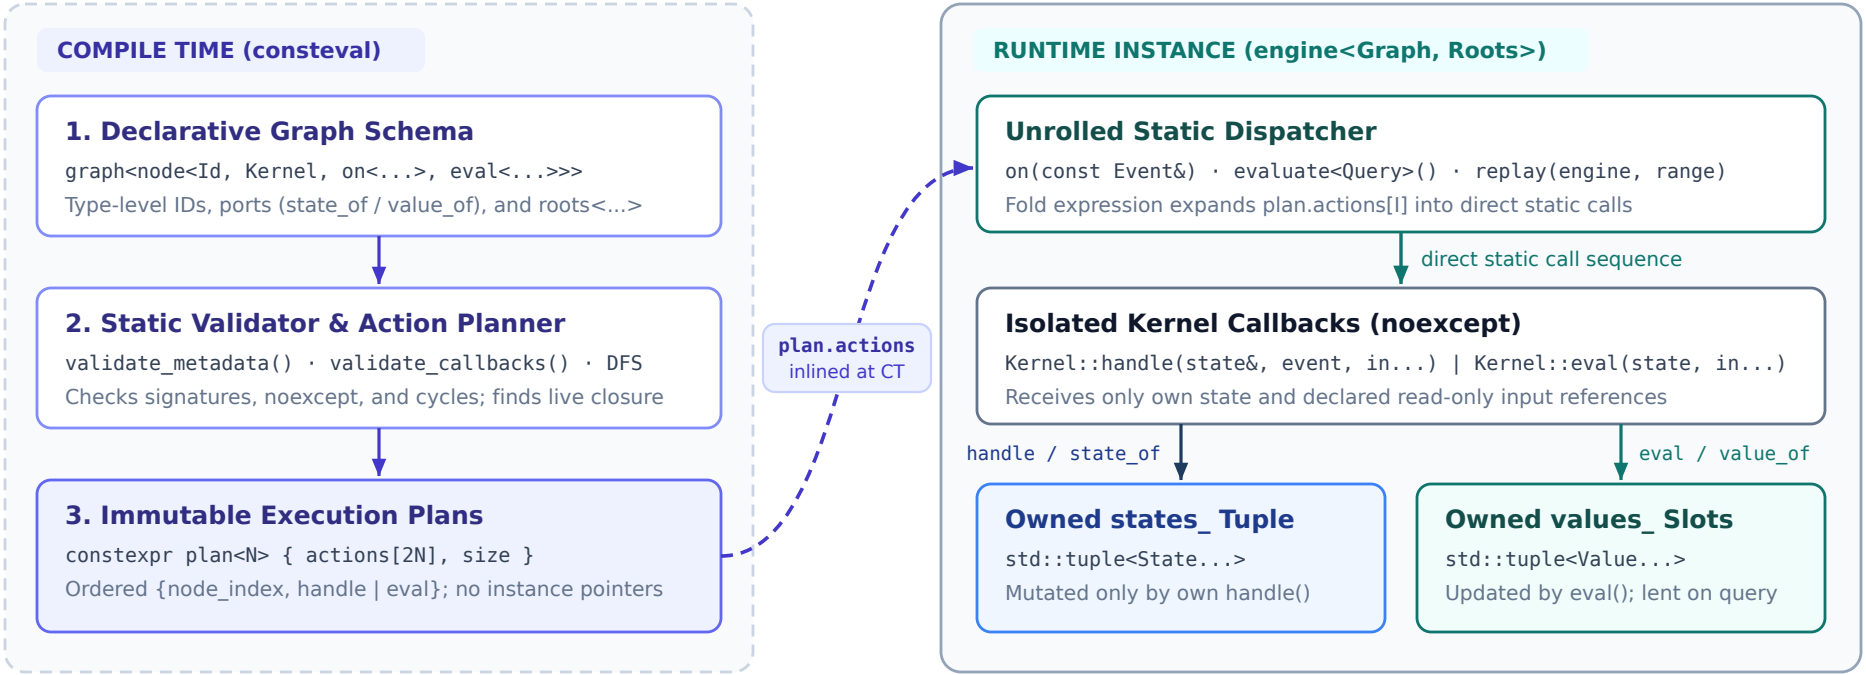
Topology and plans are pure C++20 types and constexpr arrays; each engine<Graph, Roots> instance owns isolated state and value slots.