titute of Information Technology

Lockdown Browser Practice Test

the following code and complete the missing

```
tatic void executeStoredProcedure(Connection con
CallableStatement cstmt = con.prepareCall("{call
cstmt.setInt( Choose... );
cstmt.registe                                    ose...
cstmt.execute
System.out.pr                                    " + Choose...
```

Choose...
"2", 5
0, 5
employeeID, 5
"employeeID", 5
5, "employeeID"


```
(Connection con) throws SQLException {
pareCall("{call dbo.GetImmediateManager(?,
);
```

se...);

\+ Choose...);

Choose...
con.getString("managerID")
con.getString("managerID")
con.getInt("managerID")
cstmt.getString(1)
cstmt.getInt("managerID")

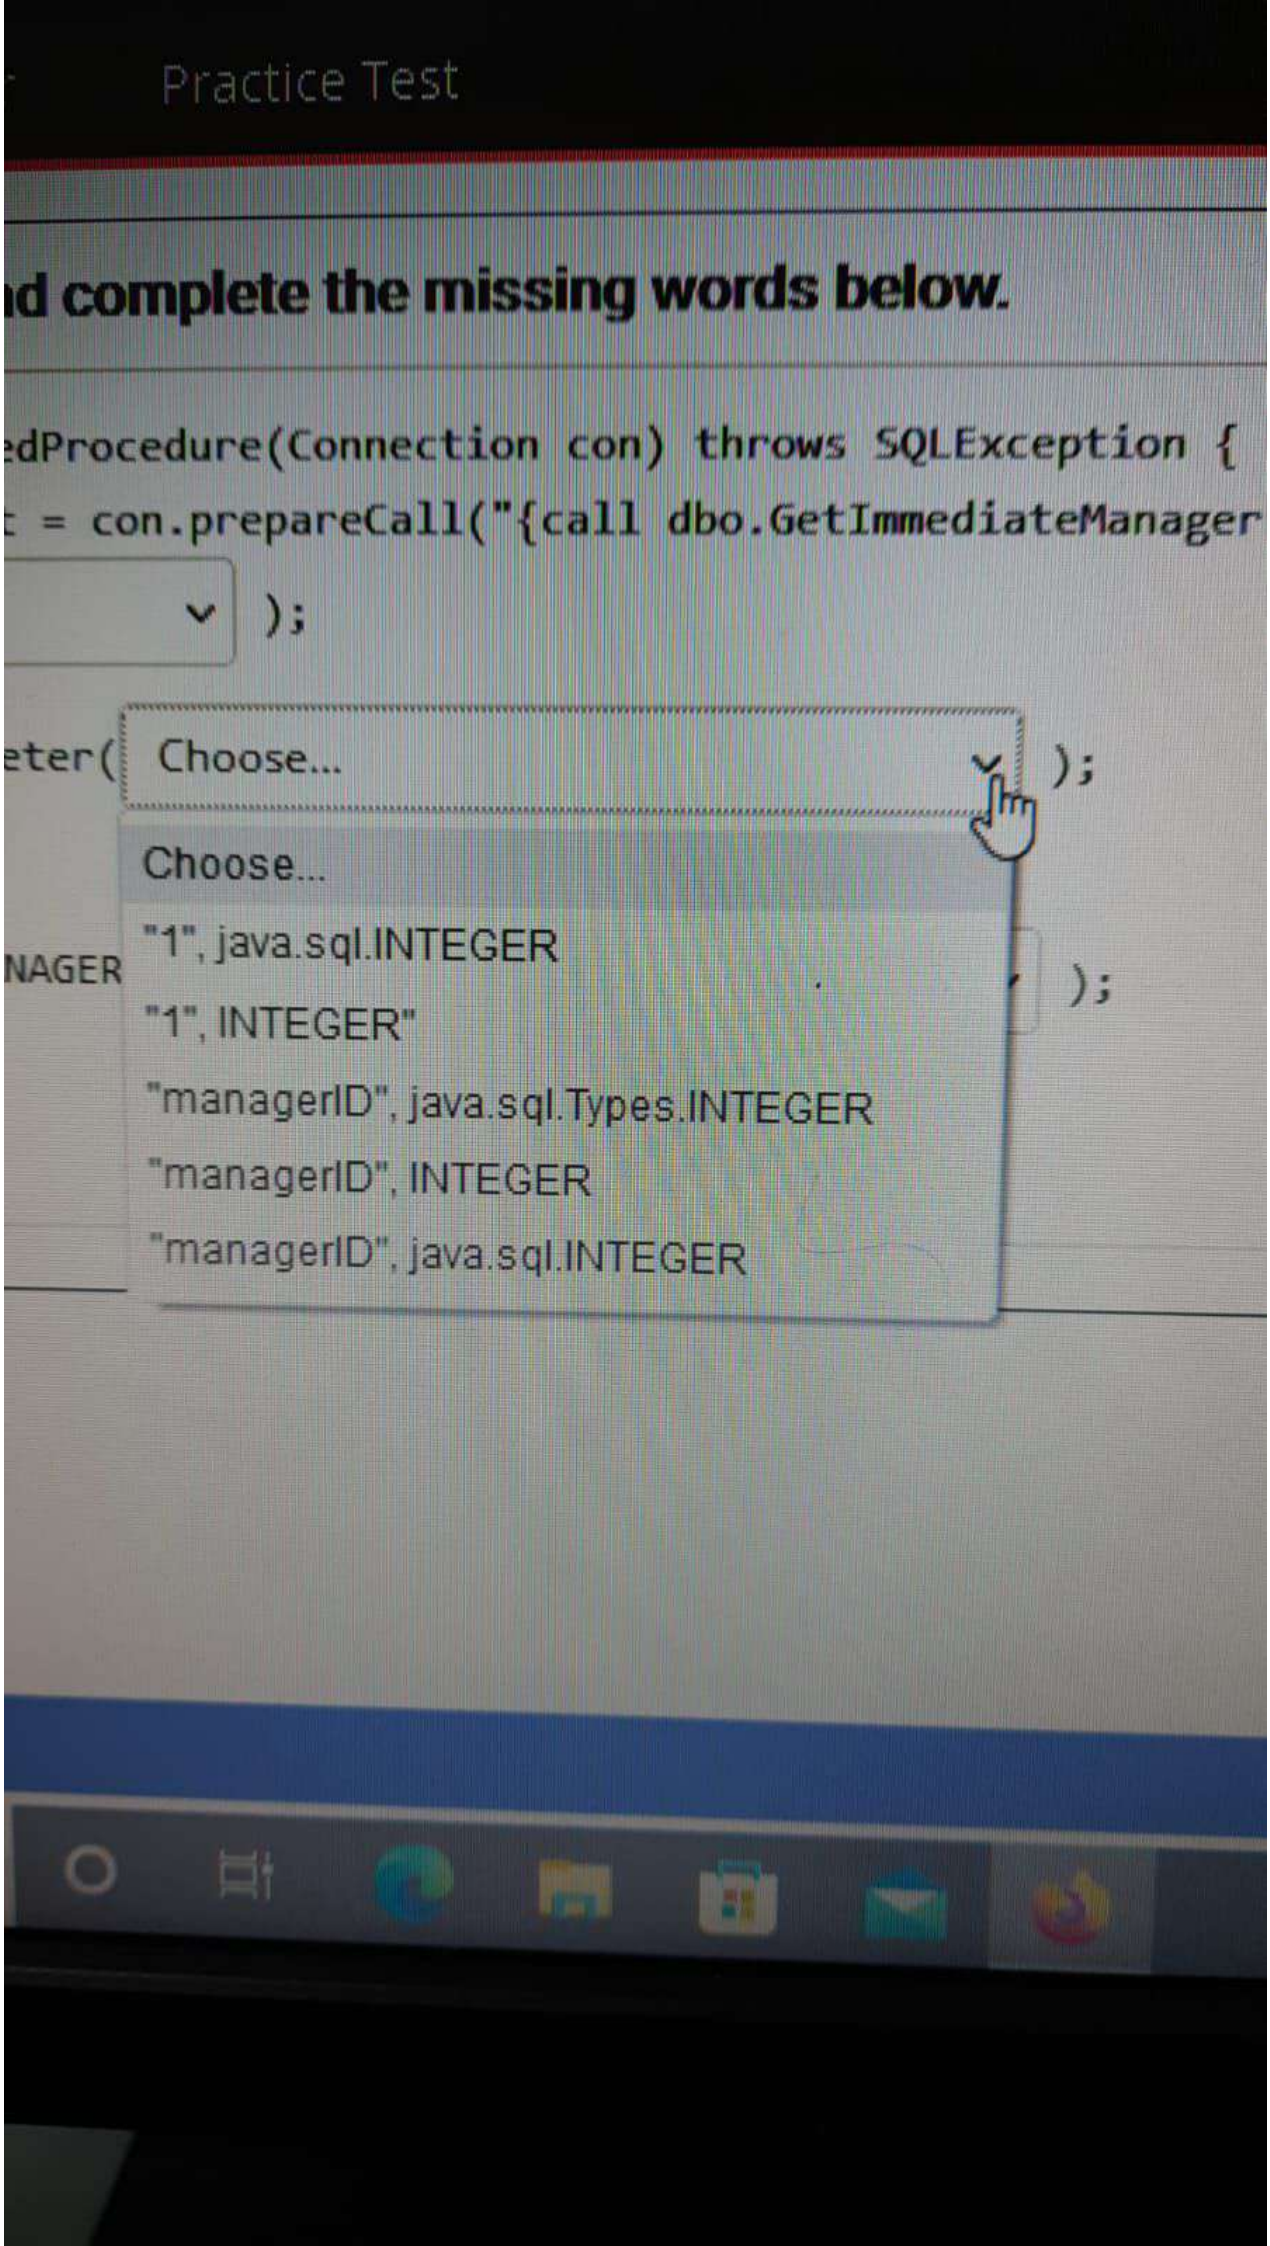


Practice Test
d complete the missing words below.
edProcedure(Connection con) throws SQLException {
t = con.prepareCall("{call dbo.GetImmediateManager
);
eter(Choose...);
Choose...
"1", java.sql.INTEGER
"1", INTEGER"
"managerID", java.sql.Types.INTEGER
"managerID", INTEGER
"managerID", java.sql.INTEGER
NAGER
);

wered

of

stion

Consider the following code segment. Which is/are true related to the PreparedStatement ?

```
PreparedStatement ps = con.prepareStatement("insert into Customer (custID, lastName) values (?,?)");
```

Select one or more:

- [ ] a. The value will be set by calling the setter methods of PreparedStatement
- [ ] b. The (?) mark is used to pass parameters into the insert command
- [ ] c. You cannot have more than one parameter in the PreparedStatement
- [ ] d. Once a PreparedStatement is prepared, it cannot be reused after execution
- [ ] e. In the PreparedStatement you cannot provide insert fields

wered

of

stion

Consider the following code segment. Which is/are true related to the PreparedStatement ?

```
PreparedStatement ps = con.prepareStatement("insert into Customer (custID, lastName) values (?,?)");
```

Select one or more:

- [ ] a. The value will be set by calling the setter methods of PreparedStatement
- [ ] b. The (?) mark is used to pass parameters into the insert command
- [ ] c. You cannot have more than one parameter in the PreparedStatement
- [ ] d. Once a PreparedStatement is prepared, it cannot be reused after execution
- [ ] e. In the PreparedStatement you cannot provide insert fields

Question 11

Not yet answered

Marked out of 1.00

Flag question

Consider the following code and complete the missing words below.

```
public static void executeStoredProcedure(Connection con) throws SQLException {
    try(CallableStatement cstmt = con.prepareCall("{call dbo.GetImmediateManager(?, ?)}"); ) {
        cstmt.setInt( Choose... );

        cstmt.registerOutParameter( Choose... );

        cstmt.execute();
        System.out.println("MANAGER ID: " + Choose... );

    }
}
```

Which of the following statements are true?

Select one or more:

- [ ] a. In type 3 driver shows the highest performance among the drivers
- [ ] b. Type 2 driver converts the JDBC calls into database-specific calls
- [ ] c. Driver manager might keep track of multiple drivers
- [ ] d. A Java application retrieving data from SQL server communicates with the database using a driver
- [ ] e. Type 1 driver uses database native protocol

Consider the following code segment. Which is/are true related to the PreparedStatement ?

```
PreparedStatement ps = con.prepareStatement("insert into Customer (custID, lastName) values (?,?)");
```

Select one or more:

- [ ] a. The value will be set by calling the setter methods of PreparedStatement
- [ ] b. The (?) mark is used to pass parameters into the insert command
- [ ] c. You cannot have more than one parameter in the PreparedStatement
- [ ] d. Once a PreparedStatement is prepared, it cannot be reused after execution
- [ ] e. In the PreparedStatement you cannot provide insert fields

Consider the following code and complete the missing words below.

```
public static void executeStoredProcedure(Connection con) throws SQLException {
    try(CallableStatement cstmt = con.prepareCall("{call dbo.GetImmediateManager(?, ?)}"); ) {
        cstmt.setInt( Choose... );

        cstmt.registerOutParameter( Choose... );

        cstmt.execute();
        System.out.println("MANAGER ID: " + Choose... );

    }
}
```

Which method is used for an SQL statement that is executed frequently?

Select one:

- a. executeStatement
- b. callStatement
- c. prepareCall
- d. prepareStatement
- e. createStatement

Which of the following statements are true?

Select one or more:

- [ ] a. In type 3 driver shows the highest performance among the drivers
- [ ] b. Type 2 driver converts the JDBC calls into database-specific calls
- [ ] c. Driver manager might keep track of multiple drivers
- [ ] d. A Java application retrieving data from SQL server communicates with the database using a driver
- [ ] e. Type 1 driver uses database native protocol

Marked out of 1.00

Flag question

```
import java.sql.*;
public class Example1 {
   static final String URL= "jdbc:sqlserver://localhost:1433;databaseName=SampleDB";
   static final String USER = "user1";
   static final String PASS = "user";
   static final String QUERY = "SELECT DISTINCT loan_type FROM bank_loans WHERE bank_name=?";
   public static void main(String[] args) {
      try
      {
         Class.forName("com.microsoft.sqlserver.jdbc.SQLServerDriver");
         Connection conn = DriverManager.getConnection( Choose... , Choose... , ... );

         PreparedStatement stmt = conn.prepareStatement( Choose... );

         Choose...

         ResultSet rs = stmt.executeQuery();
         while (rs.next()) {
                  Choose...

                }
      }
        catch (SQLException e) {
                e.printStackTrace();
      }
   }
}
```

Finish attempt

Time left 0:0

1 2

8 9

15 16

Question 9

Not yet answered

Marked out of 1.00

Flag question

Consider the following code segment. What is/are false related to CallableStatement ?

```
CallableStatement cstmt = null;
try {
   String SQL = "{call getEmpName (?, ?)}";
   cstmt = conn.prepareCall (SQL);
   . . .
}
catch (SQLException e) {
   . . .
}
finally {
   . . .
}
```

Select one or more:

- [ ] a. String variable SQL, represents the stored procedure, with parameter placeholders
- [ ] b. Bind values to all the parameters before executing the statement, or will receive an SQLException
- [ ] c. The callable statement is prepated by calling the conn.prepareCall ()
- [ ] d. SQLException is handled by introducing a try catch block
- [ ] e. The SQLException is occured when prepareCall () is connected

Quiz navigation

Finish attempt ...

Time left 0:04:03

1 2 3 4 5

8 9 10 11 12

15 16 17 18 19

Type here to search

Question 12

Not yet answered

Marked out of 1.00

Flag question

Which method is used for an SQL statement that is executed frequently?

Select one:

- a. executeStatement
- b. callStatement
- c. prepareCall
- d. prepareStatement
- e. createStatement

Previous page

Marked out of 1.00

Flag question

```
import java.sql.*;
public class Example1 {
   static final String URL= "jdbc:sqlserver://localhost:1433;databaseName=SampleDB";
   static final String USER = "user1";
   static final String PASS = "user";
   static final String QUERY = "SELECT DISTINCT loan_type FROM bank_loans WHERE bank_name=?";
   public static void main(String[] args) {
      try
      {
         Class.forName("com.microsoft.sqlserver.jdbc.SQLServerDriver");
         Connection conn = DriverManager.getConnection( Choose... , Choose... ,  );

         PreparedStatement stmt = conn.prepareStatement( Choose... );

         Choose...

         ResultSet rs = stmt.executeQuery();
         while (rs.next()) {
                Choose...

               }
      }
        catch (SQLException e) {
               e.printStackTrace();
      }
   }
}
```

Finish attemp

Time left 0:0

1 2

8 9

15 16

Question 9

Not yet answered

Marked out of 1.00

Flag question

Consider the following code segment. What is/are false related to CallableStatement ?

```
CallableStatement cstmt = null;
try {
   String SQL = "{call getEmpName (?, ?)}";
   cstmt = conn.prepareCall (SQL);
   . . .
}
catch (SQLException e) {
   . . .
}
finally {
   . . .
}
```

Select one or more:

- [ ] a. String variable SQL, represents the stored procedure, with parameter placeholders
- [ ] b. Bind values to all the parameters before executing the statement, or will receive an SQLException
- [ ] c. The callable statement is prepated by calling the conn.prepareCall ()
- [ ] d. SQLException is handled by introducing a try catch block
- [ ] e. The SQLException is occured when prepareCall () is connected

Quiz navigation

Finish attempt ...

Time left 0:04:03

Type here to search

Question 9

Not yet answered

Marked out of 1.00

Flag question

Consider the following code segment. What is/are false related to CallableStatement ?

```
CallableStatement cstmt = null;
try {
   String SQL = "{call getEmpName (?, ?)}";
   cstmt = conn.prepareCall (SQL);
   . . .
}
catch (SQLException e) {
   . . .
}
finally {
   . . .
}
```

Select one or more:

- [ ] a. String variable SQL, represents the stored procedure, with parameter placeholders
- [ ] b. Bind values to all the parameters before executing the statement, or will receive an SQLException
- [ ] c. The callable statement is prepated by calling the conn.prepareCall ()
- [ ] d. SQLException is handled by introducing a try catch block
- [ ] e. The SQLException is occured when prepareCall () is connected

Quiz navigation

Finish attempt ...

Time left 0:04:03

Type here to search