

The kinshipsymbols package*

Alejandro Ochoa

<https://ochoalab.github.io/>

February 14, 2019

Abstract

This package defines consistent mathematical symbols for statistical genetics, particularly relating to the kinship model and F_{ST} . In addition to providing a long list of symbols, the package has two options that alter the behavior of some of the most common symbols. Option `color` highlights genotypes (blue), kinship coefficients (dark green), and the standard ancestral allele frequency estimator (red), which is useful for Beamer presentations. Option `noT` removes the ancestral population T superscript from all symbols that contain it (for simpler presentations).

Contents

| | | |
|----------|---|-----------|
| 1 | Introduction | 2 |
| 2 | Implementation | 5 |
| 2.1 | Dependencies | 5 |
| 2.2 | Initializing variables, modify depending on options | 5 |
| 2.3 | Commands for math operators | 8 |
| 2.4 | Genotypes | 9 |
| 2.5 | Ancestral allele frequencies | 9 |
| 2.6 | Wright's F_{ST} | 10 |
| 2.7 | Inbreeding coefficients | 10 |
| 2.8 | Kinship coefficients | 11 |
| 2.9 | Review of previous work | 12 |
| 2.10 | Convergence arrows | 13 |
| 2.11 | F_{ST} estimators for independent subpopulations | 14 |
| 2.12 | Estimators based on the standard kinship | 14 |
| 2.13 | New kinship and F_{ST} estimators | 16 |
| 2.14 | Estimates from Beagle | 17 |
| 2.15 | Cartoon genotype matrix | 18 |
| 3 | Acknowledgments | 19 |

*This document corresponds to kinshipsymbols v1.0, dated 2019/02/01.

| Command | Symbol | Description |
|--------------------|------------------|----------------------------|
| <code>\xij</code> | x_{ij} | Genotype |
| <code>\pit</code> | p_i^T | Ancestral allele frequency |
| <code>\pith</code> | \hat{p}_i^T | Sample p_i^T estimator |
| <code>\kt</code> | φ_{jk}^T | Kinship coefficient |
| <code>\ft</code> | f_j^T | Inbreeding coefficient |
| <code>\Fst</code> | F_{ST} | (Wright's) Fixation index |

Table 1: Commands for the most common statistical genetics quantities.

| Command | Symbol | Description |
|-----------------------|-------------------------|---|
| <code>\f{A}{B}</code> | f_B^A | Inbreeding of pop. B relative to pop. A |
| <code>\fl</code> | $f_j^{L_j}$ | Local inbreeding coefficient |
| <code>\fs</code> | $f_{L_j}^T$ | Structural inbreeding coefficient |
| <code>\kl</code> | $\varphi_{jk}^{L_{jk}}$ | Local kinship coefficient |
| <code>\ks</code> | $f_{L_{jk}}^T$ | Structural kinship coefficient |
| <code>\fpw</code> | $f_{L_j}^{L_{jk}}$ | Individual pairwise F_{ST} component |
| <code>\mav</code> | $p(1-p)^T$ | Mean ancestral variance |

Table 2: Commands for more rare statistical genetics quantities.

1 Introduction

This package provides macros for many common symbols involving the genotypes, kinship coefficients, and F_{ST} . Each of Tables 1 to 5 pairs a command to its symbol and its common description in the field. Note that these symbols work even when not in math mode, so it is not necessary to write `\Fst` inline, `\Fst` works! This is achieved through use of `\ensuremath{\dots}\xspace` in each of these definitions.

Some of these symbols accept arguments for limited flexibility. For example, `\xij` produces x_{ij} , but `\xij[k]` produces x_{ik} . Similarly, `\kt` produces φ_{jk}^T , but `\kt[l]` produces φ_{jl}^T . See the implementation section below for details for each command.

Additionally, Tables 6 and 7 lists some math operators and convergence arrows defined by this package (absent in `amsmath`). These commands do require math mode to work.

Lastly, the package provides `\sampleGenMat`, which generates the cartoon genotype table shown in Fig. 1. Note that this technically generates a “tabular” table. It is meant to be used in Beamer presentations, but works in standard documents too.

The effects of the package options `color` and `noT` are visualized in Figs. 2 to 5. Each of those figures generated the symbols with a particular combination of options:

| Command | Symbol | Description |
|-----------------------------------|---|--|
| <code>\ktHatNamed{example}</code> | $\hat{\varphi}_{jk}^{T,\text{example}}$ | Named kinship estimator |
| <code>\ftHatNamed{example}</code> | $\hat{f}_j^{T,\text{example}}$ | Named inbreeding estimator |
| <code>\ktHat</code> | $\hat{\varphi}_{jk}^{T,\text{std}}$ | Standard kinship estimator |
| <code>\ftHat</code> | $\hat{f}_j^{T,\text{std}}$ | Standard inbreeding estimator (I) |
| <code>\ftHatII</code> | $\hat{f}_j^{T,\text{stdII}}$ | Alternate inbreeding estimator (II) |
| <code>\ftHatIII</code> | $\hat{f}_j^{T,\text{stdIII}}$ | Alternate inbreeding estimator (III) |
| <code>\ktHatPreadj</code> | $\hat{\varphi}_{jk}^{T,\text{preadj}}$ | Preadjusted kinship estimator |
| <code>\ktHatPreadjMin</code> | $\hat{\varphi}_{\min}^{T,\text{preadj}}$ | Asymptotic minimum value of $\hat{\varphi}_{jk}^{T,\text{preadj}}$ |
| <code>\ktHatNew</code> | $\hat{\varphi}_{jk}^{T,\text{new}}$ | New kinship estimator |
| <code>\ftHatNew</code> | $\hat{f}_j^{T,\text{new}}$ | New inbreeding estimator |
| <code>\klHatBeagle</code> | $\hat{\varphi}_{jk}^{L_{jk},\text{beagle}}$ | Beagle-based kinship estimator |
| <code>\flHatBeagle</code> | $\hat{f}_j^{L_j,\text{beagle}}$ | Beagle-based inbreeding estimator |
| <code>\Ajk</code> | A_{jk} | New kinship-related statistic |
| <code>\AMin</code> | A_{\min} | Asymptotic minimum value of A_{jk} |
| <code>\AMinHat</code> | \hat{A}_{\min} | Estimator of A_{\min} |

Table 3: Commands for miscellaneous kinship and inbreeding estimators.

| Command | Symbol | Description |
|------------------------------------|----------------------------------|---|
| <code>\FstHatSample</code> | $\hat{F}_{ST,i}^{\text{sample}}$ | Sample F_{ST} estimator (one locus) |
| <code>\FstHatNamed{example}</code> | $\hat{F}_{ST}^{\text{example}}$ | Named F_{ST} estimator |
| <code>\FstHatWc</code> | \hat{F}_{ST}^{WC} | Weir-Cockerham F_{ST} estimator |
| <code>\FstHatHudson</code> | $\hat{F}_{ST}^{\text{Hudson}}$ | Hudson Pairwise F_{ST} estimator |
| <code>\FstHatHudsonK</code> | $\hat{F}_{ST}^{\text{HudsonK}}$ | Generalized Hudson F_{ST} estimator |
| <code>\FstHatIs</code> | $\hat{F}_{ST}^{\text{indep}}$ | Asymptotic F_{ST} estimator for indep. subpops. |
| <code>\FstHat</code> | $\hat{F}_{ST}^{\text{std}}$ | Standard F_{ST} estimator (based on $\hat{\varphi}_{jk}^{T,\text{std}}$) |
| <code>\FstHatPrime</code> | \hat{F}_{ST}' | Standard F_{ST} estimator adjusted 1 |
| <code>\FstHatPrimeDb1</code> | \hat{F}_{ST}'' | Standard F_{ST} estimator adjusted 2 |
| <code>\FstHatNew</code> | $\hat{F}_{ST}^{\text{new}}$ | New F_{ST} estimator |

Table 4: Commands for miscellaneous F_{ST} estimators.

| Command | Symbol | Description |
|------------------------|-------------|--|
| <code>\Fit</code> | F_{IT} | Wright's total inbreeding |
| <code>\Fis</code> | F_{IS} | Wright's local inbreeding |
| <code>\Gst</code> | G_{ST} | Nei's genetic diversity measure |
| <code>\GstPrime</code> | G'_{ST} | Normalized G_{ST} |
| <code>\Rst</code> | R_{ST} | F_{ST} estimator for microsatellites |
| <code>\PhiSt</code> | ϕ_{ST} | AMOVA-based differentiation measure |

Table 5: Commands for historical quantities in statistical genetics.

| Command | Symbol | Description |
|---------------------|--------|-------------------|
| <code>\E</code> | E | Expectation |
| <code>\Var</code> | Var | Variance |
| <code>\Cov</code> | Cov | Covariance |
| <code>\round</code> | round | Rounding function |
| <code>\sgn</code> | sgn | Sign function |
| <code>\logit</code> | logit | Logit function |

Table 6: Commands for math operators.

| Command | Symbol | Description |
|----------------------|---|--|
| <code>\toas</code> | $\xrightarrow[m \rightarrow \infty]{a.s.}$ | Almost sure convergence as m goes to ∞ |
| <code>\toN</code> | $\xrightarrow[n \rightarrow \infty]{} $ | Limit as n goes to ∞ |
| <code>\toasNM</code> | $\xrightarrow[n, m \rightarrow \infty]{a.s.}$ | Almost sure convergence as both m and n go to ∞ |

Table 7: Commands for math convergence arrows.

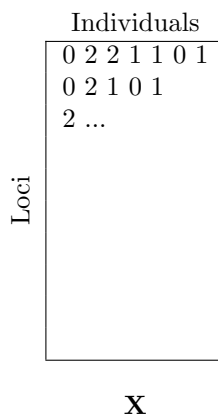


Figure 1: The cartoon genotype matrix generated by `\sampleGenMat`

- Fig. 2: `\usepackage{kinshipsymbols}` "vanilla" version (no options). This version shows symbols completely (without omitting the ancestral population T from superscripts) and without color.
- Fig. 3: `\usepackage[color]{kinshipsymbols}` version. Same as the vanilla version except a few common symbols gain colors:
 - The genotypes (x_{ij}) become blue (and also the cartoon genotype matrix drawn by `\sampleGenMat`). Highlighted since this is the observed data from which inferences are drawn.
 - The kinship coefficients (φ_{jk}^T) become dark green. Highlighted since these are the main unknown parameters we wish to estimate.
 - The standard ancestral allele frequency estimator (\hat{p}_i^T) becomes red. Highlighted since this is a particularly problematic estimator that leads to biases in common approaches.
- Fig. 4: `\usepackage[noT]{kinshipsymbols}` version. Same as the vanilla version except the ancestral population T is omitted in the superscript of several symbols ($p_i^T, \hat{p}_i^T, f_j^T, f_{L_j}^T, \varphi_{jk}^T, f_{L_{jk}}^T, \hat{\varphi}_{jk}^{T,\text{std}}, \hat{f}_j^{T,\text{std}}, \hat{f}_j^{T,\text{stdII}}, \hat{f}_j^{T,\text{stdIII}}, \hat{\varphi}_{jk}^{T,\text{preadj}}, \hat{\varphi}_{\min}^{T,\text{preadj}}, \hat{\varphi}_{jk}^{T,\text{new}}, \hat{f}_j^{T,\text{new}}$, and $\overline{p(1-p)}^T$). This option is provided to simplify the heavy notation in a context where T is implicit or fixed.
- Fig. 5: `\usepackage[color,noT]{kinshipsymbols}` version. A straightforward combination of the `color` and `noT` options described above.

2 Implementation

2.1 Dependencies

This package requires `amsmath` to define the various math symbols and operators, `xspace` to allow inline math symbols to have appropriate spacings when used outside math mode, `xcolor` for color management and tricks, and `colortbl` and `multirow` for the cartoon genotype matrix.

```

1 \RequirePackage{amsmath}
2 \RequirePackage{xspace}
3 \RequirePackage{xcolor}
4 \RequirePackage{colortbl}
5 \RequirePackage{multirow}

```

2.2 Initializing variables, modify depending on options

Then we define the special colors we want to use (in a way that is easy to tweak later if needed).

```

\ifcolor LaTeX boolean for whether color option is on or off.
6 \newif\ifcolor%
7 \colorfalse% default is false

```

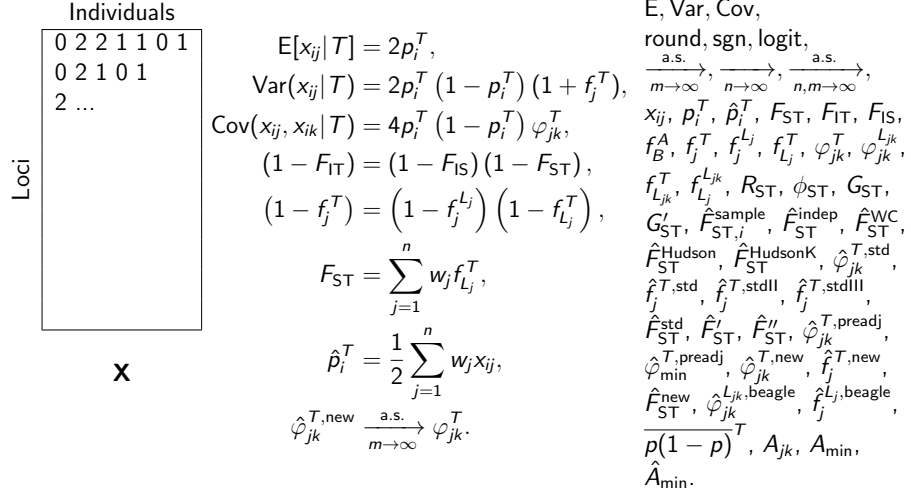


Figure 2: The vanilla version of the symbols (no colors and no omission of ancestral population T in superscripts)

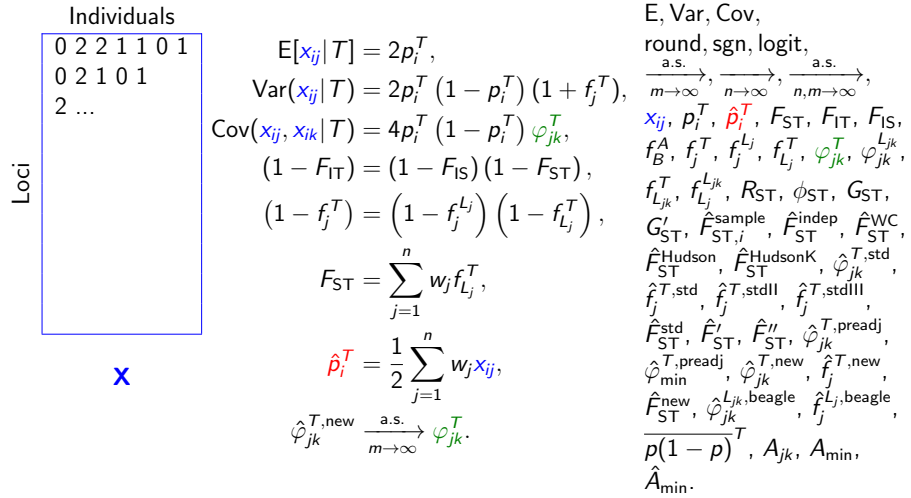


Figure 3: The color version of the symbols (with no omission of ancestral population T in superscripts)

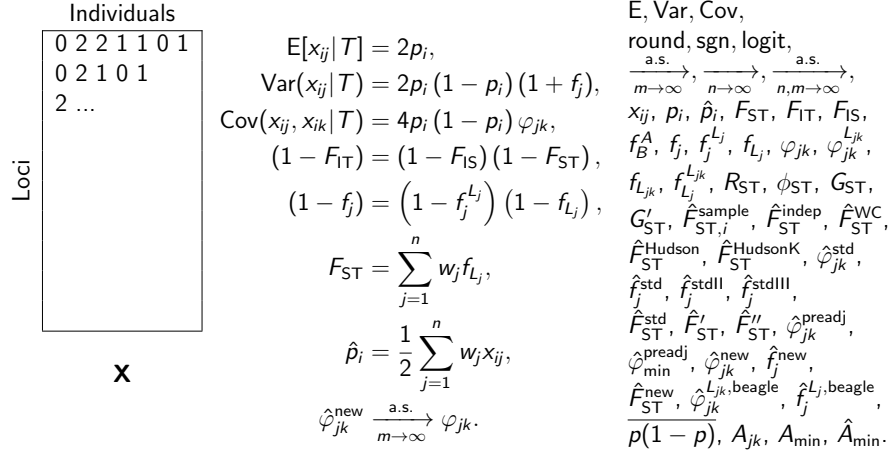


Figure 4: The noT version of the symbols (no color, with omission of ancestral population T in superscripts as appropriate)

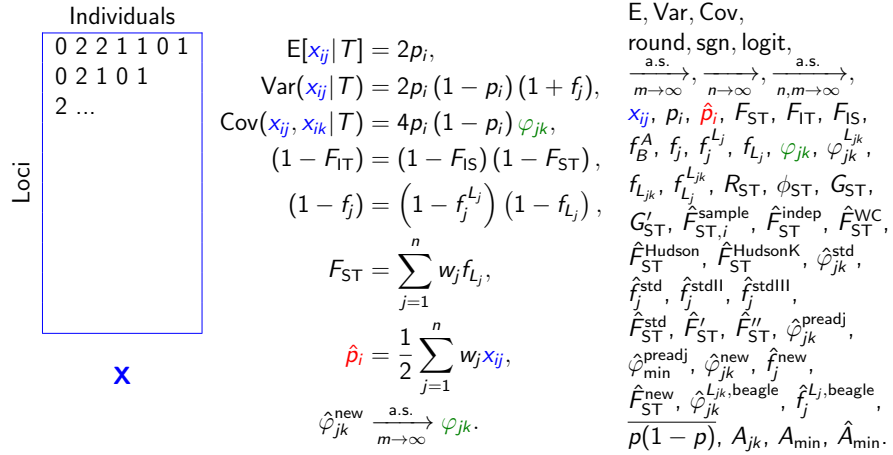


Figure 5: The color,noT version of the symbols (with color and omission of ancestral population T in superscripts as appropriate)

genColor The hardcoded “genotype color” is blue, applied if the `color` package option is set.

```
8 \colorlet{genColor}{blue}
```

kinColor The hardcoded “kinship color” is a dark green, applied if the `color` package option is set.

```
9 \colorlet{kinColor}{green!50!black}
```

pithColor The hardcoded “\pith color” is red, applied if the `color` package option is set.

```
10 \colorlet{pithColor}{red}
```

We also define two tricky commands to handle the ancestra population T superscript that we want to optionally omit. Note that these are internal commands not meant to be used directly outside the package.

\kinshipsymbols@T This is a basic superscript T that becomes blank if the `noT` package option is set.

```
11 \newcommand{\kinshipsymbols@T}{^T}
```

\kinshipsymbols@Ts This is a second superscript T which takes a mandatory argument that is shown next to it as text. Only the T becomes blank if the `noT` package option is set (the argument is shown alone as a text superscript in that case).

```
12 \newcommand{\kinshipsymbols@Ts}[1]{^T,\text{#1}}
```

This turns on colors if the `color` package option is set.

```
13 \DeclareOption{color}{
14   \colortrue
15 }
```

Similarly, this updates the commands to omit the T superscript if the `noT` package option is set. Note that the second command still emits the additional text passed as argument in the superscript.

```
16 \DeclareOption{noT}{
17   \renewcommand{\kinshipsymbols@T}{}
18   \renewcommand{\kinshipsymbols@Ts}[1]{^{\text{#1}}}
19 }
```

This creates a warning if any additional options are passed, then processes the options.

```
20 \DeclareOption*{\PackageWarning{examplepackage}{Unknown ‘\CurrentOption’}}
21 \ProcessOptions\relax
```

2.3 Commands for math operators

Here we define some trivial widely-used operators, which are not specific to statistical genetics but which are absent from the standard `amsmath` package.

\E Expectation of a random variable.

```
22 \DeclareMathOperator{\E}{E}
```


`\Var` Variance of a random variable.
23 `\DeclareMathOperator{\Var}{Var}`

`\Cov` Covariance of a random variable.
24 `\DeclareMathOperator{\Cov}{Cov}`

`\round` The rounding function.
25 `\DeclareMathOperator{\round}{round}`

`\sgn` The sign function.
26 `\DeclareMathOperator{\sgn}{sgn}`

`\logit` The logit function.
27 `\DeclareMathOperator{\logit}{logit}`

2.4 Genotypes

`\xij` x_{ij} : Genotype variable at locus i of individual j (default). The optional argument allows setting other individuals (`\xij[k]` gives x_{ik} for individual k). If the package option `color` is passed, then this symbol turns the color `genColor` (default blue).

```

28 \newcommand{\xij}[1][j]{%
29   \ensuremath{%
30     \ifcolor \textcolor{genColor}{\fi%
31       x_{i#1}%
32     \ifcolor } \fi%
33   }%
34   \xspace%
35 }%
```

2.5 Ancestral allele frequencies

`\pit` p_i^T : The ancestral allele frequency at locus i . This parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```

36 \newcommand{\pit}{%
37   \ensuremath{%
38     p_i\kinshipsymbols@T%
39   }%
40   \xspace%
41 }%
```

`\pith` \hat{p}_i^T : The sample estimator of the ancestral allele frequency at locus i . The parameter being estimated has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed. If the package option `color` is passed, then this symbol turns the color `pithColor` (default red).

```

42 \newcommand{\pith}{%
```

```

43 \ensuremath{%
44   \ifcolor \textcolor{pithColor}{ \fi%
45     \hat{p}_i\kinshipsymbols@T%
46   \ifcolor } \fi%
47 }%
48 \xspace%
49 }%

```

2.6 Wright's F_{ST}

`\Fst` F_{ST} : Wright's Fixation index. Although the T in the subscript technically refers to the ancestral population T , in this case it is never omitted (even if the package option `noT` is passed) to always match the more traditional and highly recognizable notation.

```

50 \newcommand{\Fst}{%
51   \ensuremath{%
52     F_{\text{ST}}}%
53   }%
54   \xspace%
55 }%

```

`\Fit` F_{IT} : Wright's total inbreeding coefficient. Although the T in the subscript technically refers to the ancestral population T , in this case it is never omitted (even if the package option `noT` is passed) to always match the more traditional and highly recognizable notation.

```

56 \newcommand{\Fit}{%
57   \ensuremath{%
58     F_{\text{IT}}}%
59   }%
60   \xspace%
61 }%

```

`\Fis` F_{IS} : Wright's local inbreeding coefficient.

```

62 \newcommand{\Fis}{%
63   \ensuremath{%
64     F_{\text{IS}}}%
65   }%
66   \xspace%
67 }%

```

2.7 Inbreeding coefficients

`\f` f_B^A : The inbreeding coefficient (of F_{ST}) of population B relative to an ancestral population A . Note that this command has two mandatory arguments.

```

68 \newcommand{\f}[2]{%
69   \ensuremath{%
70     f^{#1}_{#2}%
71   }%

```

```

72 \xspace%
73 }%

\ft  $f_j^T$ : The (total) inbreeding coefficient of individual  $j$  (default). The optional
argument allows setting other individuals (\ft[k] gives  $f_k^T$  for individual  $k$ ). This
parameter has a value that depends on the ancestral population  $T$ , which is by
default denoted in the superscript, but which gets omitted if the package option
noT is passed.
74 \newcommand{\ft}[1][j]{%
75   \ensuremath{%
76     f_{#1}\kinshipsymbols@T%
77   }%
78   \xspace%
79 }%

\fl  $f_j^{L_j}$ : The local inbreeding coefficient of individual  $j$  (default). The optional argu-
ment allows setting other individuals (\fl[k] gives  $f_k^{L_k}$  for individual  $k$ ).
80 \newcommand{\fl}[1][j]{%
81   \ensuremath{%
82     f_{#1}^{L_{#1}}%
83   }%
84   \xspace%
85 }%

\fs  $f_{L_j}^T$ : The structural inbreeding coefficient of individual  $j$  (default). The optional
argument allows setting other individuals (\fs[k] gives  $f_{L_k}^T$  for individual  $k$ ). This
parameter has a value that depends on the ancestral population  $T$ , which is by
default denoted in the superscript, but which gets omitted if the package option
noT is passed.
86 \newcommand{\fs}[1][j]{%
87   \ensuremath{%
88     f_{L_{#1}}\kinshipsymbols@T%
89   }%
90   \xspace%
91 }%

```

2.8 Kinship coefficients

```

\kt  $\varphi_{jk}^T$ : The (total) kinship coefficient between the pair of individuals  $j$  and  $k$  (de-
fault). The optional argument allows setting another second individual (\kt[l]
gives  $\varphi_{jl}^T$  for a second individual  $l$ ). This parameter has a value that depends on
the ancestral population  $T$ , which is by default denoted in the superscript, but
which gets omitted if the package option noT is passed. If the package option
color is passed, then this symbol turns the color kinColor (default dark green).
92 \newcommand{\kt}[1][k]{%
93   \ensuremath{%
94     \ifcolor \textcolor{kinColor}{\fi%

```

```

95      \varphi_{j\#1}\kinshipsymbols@T%
96      \ifcolor } \fi%
97    }%
98    \xspace%
99 }%

\kl  $\varphi_{jk}^{L_{jk}}$ : The local kinship coefficient between the pair of individuals  $j$  and  $k$ .
100 \newcommand{\kl}{%
101   \ensuremath{%
102     \varphi_{jk}^{L_{jk}}}%
103   }%
104   \xspace%
105 }%

\ks  $f_{L_{jk}}^T$ : The structural kinship coefficient between the pair of individuals  $j$  and  $k$ .
This parameter has a value that depends on the ancestral population  $T$ , which
is by default denoted in the superscript, but which gets omitted if the package
option noT is passed.
106 \newcommand{\ks}{%
107   \ensuremath{%
108     f_{L_{jk}}\kinshipsymbols@T}%
109   }%
110   \xspace%
111 }%

\fpw  $f_{L_j}^{L_{jk}}$ : A component of the pairwise  $F_{ST}$  between a pair of individuals  $j$  and  $k$ 
(default). The optional argument changes the individual in the subscript only (so
\fpw[k] gives  $f_{L_k}^{L_{jk}}$ , and is obviously intended to be used for  $k$  only). Note that
the actual pairwise  $F_{ST}$  between  $j$  and  $k$  is given by the average of  $f_{L_j}^{L_{jk}}$  and  $f_{L_k}^{L_{jk}}$ .
112 \newcommand{\fpw}[1][j]{%
113   \f{L_{jk}}{L_{#1}}}%
114 }%

```

2.9 Review of previous work

```

\Rst  $R_{ST}$ : An  $F_{ST}$  estimator developed for microsatellites.
115 \newcommand{\Rst}{%
116   \ensuremath{%
117     R_{\text{ST}}}%
118   }%
119   \xspace%
120 }%

\PhiSt  $\phi_{ST}$ : An  $F_{ST}$ -like estimate based on AMOVA.
121 \newcommand{\PhiSt}{%
122   \ensuremath{%
123     \phi_{\text{ST}}}%
124   }%

```

```

125 \xspace%
126 }%

\Gst  $G_{ST}$ : Nei's genetic diversity measure.
127 \newcommand{\Gst}{%
128 \ensuremath{%
129 G_{\text{ST}}}%
130 }%
131 \xspace%
132 }%

\GstPrime  $G'_{ST}$ : A normalized  $G_{ST}$  statistic.
133 \newcommand{\GstPrime}{%
134 \ensuremath{%
135 G_{\text{ST}}'%
136 }%
137 \xspace%
138 }%

\FstHatSample  $\hat{F}_{ST,i}^{\text{sample}}$ : A sample  $F_{ST}$  estimator for a single locus  $i$ .
139 \newcommand{\FstHatSample}{%
140 \ensuremath{%
141 \hat{F}_{\text{ST},i}^{\text{sample}}}%
142 }%
143 \xspace%
144 }%

```

2.10 Convergence arrows

```

\toas  $\xrightarrow[m \rightarrow \infty]{\text{a.s.}}$ : Almost sure convergence as  $m$  goes to  $\infty$ .
145 \newcommand{\toas}{%
146 \xrightarrow[m \rightarrow \infty]{\text{a.s.}}%
147 }%

\toN  $\xrightarrow[n \rightarrow \infty]{}:$  The limit as  $n$  goes to  $\infty$ . Optional argument changes the variable name
( $\$ \toN[m] \$$  gives  $\xrightarrow[m \rightarrow \infty]{}).$ 
148 \newcommand{\toN}[1][n]{%
149 \xrightarrow[#1 \rightarrow \infty]{}%
150 }%

\toasNM  $\xrightarrow[n,m \rightarrow \infty]{\text{a.s.}}$ : Almost sure convergence as both  $n$  and  $m$  go to  $\infty$ .
151 \newcommand{\toasNM}{%
152 \xrightarrow[n,m \rightarrow \infty]{\text{a.s.}}%
153 }%

```

2.11 F_{ST} estimators for independent subpopulations

`\FstHatNamed` $\hat{F}_{ST}^{\text{example}}$: Base command for a named F_{ST} estimator. Takes on one mandatory argument—the name of the estimator—which is rendered as text.

```

154 \newcommand{\FstHatNamed}[1]{%
155   \ensuremath{%
156     \hat{F}_{\text{ST}}^{\text{\text{\#1}}}%
157   }%
158   \xspace%
159 }%

\FstHatIs  $\hat{F}_{ST}^{\text{indep}}$ : Asymptotic  $F_{ST}$  estimator for independent subpopulations.
160 \newcommand{\FstHatIs}{\FstHatNamed{indep}}

\FstHatWc  $\hat{F}_{ST}^{\text{WC}}$ : Weir-Cockerham  $F_{ST}$  estimator.
161 \newcommand{\FstHatWc}{\FstHatNamed{WC}}

\FstHatHudson  $\hat{F}_{ST}^{\text{Hudson}}$ : Hudson pairwise  $F_{ST}$  estimator.
162 \newcommand{\FstHatHudson}{\FstHatNamed{Hudson}}

\FstHatHudsonK  $\hat{F}_{ST}^{\text{HudsonK}}$ : Generalized Hudson  $F_{ST}$  estimator (for  $K$  subpopulations).
163 \newcommand{\FstHatHudsonK}{\FstHatNamed{HudsonK}}
```

2.12 Estimators based on the standard kinship

`\ktHatNamed` $\hat{\varphi}_{jk}^{T,\text{example}}$: A generic named kinship estimator for individuals j and k (default). Mandatory argument is the name, rendered as text. The optional argument allows setting another second individual (`\ktHatNamed[1]{example}` gives $\hat{\varphi}_{jl}^{T,\text{example}}$ for a second individual l). The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```

164 \newcommand{\ktHatNamed}[2][k]{%
165   \ensuremath{%
166     \hat{\varphi}_{\text{\#1}}^{\text{kinshipsymbols@Ts\#2}}%
167   }%
168   \xspace%
169 }%

\ktHat  $\hat{\varphi}_{jk}^{T,\text{std}}$ : Standard kinship estimator for individuals  $j$  and  $k$  (default). The optional argument allows setting another second individual (\ktHat[1] gives  $\hat{\varphi}_{jl}^{T,\text{std}}$  for a second individual  $l$ ). The estimated parameter has a value that depends on the ancestral population  $T$ , which is by default denoted in the superscript, but which gets omitted if the package option noT is passed.
170 \newcommand{\ktHat}[1][k]{\ktHatNamed[\#1]{std}}

\ftHatNamed  $\hat{f}_j^{T,\text{example}}$ : Named inbreeding coefficient estimator for individual  $j$  (default). Mandatory argument is the name, rendered as text. The optional argument allows setting another individual (\ftHatNamed[k]{example} gives  $\hat{f}_k^{T,\text{example}}$  for
```

individual k). The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
171 \newcommand{\ftHatNamed}[2][j]{%
172   \ensuremath{%
173     \hat{f}_{\text{\#1}}\kinshipsymbols@Ts{\text{\#2}}%
174   }%
175   \xspace%
176 }
```

`\ftHat` $\hat{f}_j^{T,\text{std}}$: Standard inbreeding coefficient estimator (I) for individual j . The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
177 \newcommand{\ftHat}{\ftHatNamed{std}}
```

`\ftHatII` $\hat{f}_j^{T,\text{stdII}}$: Alternate inbreeding coefficient estimator (II) for individual j . The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
178 \newcommand{\ftHatII}{\ftHatNamed{stdII}}
```

`\ftHatIII` $\hat{f}_j^{T,\text{stdIII}}$: Alternate inbreeding coefficient estimator (III) for individual j . The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
179 \newcommand{\ftHatIII}{\ftHatNamed{stdIII}}
```

`\FstHat` $\hat{F}_{\text{ST}}^{\text{std}}$: Standard F_{ST} estimator (based on the standard kinship estimator).

```
180 \newcommand{\FstHat}{\FstHatNamed{std}}
```

`\FstHatPrime` \hat{F}_{ST}' : Standard F_{ST} estimator adjusted 1.

```
181 \newcommand{\FstHatPrime}{%
182   \ensuremath{%
183     \hat{F}_{\text{\text{ST}}}'%
184   }%
185   \xspace%
186 }
```

`\FstHatPrimeDb1` \hat{F}_{ST}'' : Standard F_{ST} estimator adjusted 2.

```
187 \newcommand{\FstHatPrimeDb1}{%
188   \ensuremath{%
189     \hat{F}_{\text{\text{ST}}}''%
190   }%
191   \xspace%
192 }
```

2.13 New kinship and F_{ST} estimators

`\ktHatPreadj` $\hat{\varphi}_{jk}^{T, \text{preadj}}$: Preadjusted kinship estimator for the pair of individuals j and k (default). The optional argument allows setting another second individual (`\ktHatPreadj[1]` gives $\hat{\varphi}_{jl}^{T, \text{preadj}}$ for a second individual l). The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
193 \newcommand{\ktHatPreadj}[1][k]{\ktHatNamed[#1]{preadj}}
```

`\ktHatPreadjMin` $\hat{\varphi}_{\min}^{T, \text{preadj}}$: Minimum value of $\hat{\varphi}_{jk}^{T, \text{preadj}}$ across pairs of individuals and in the limit of infinite loci.

```
194 \newcommand{\ktHatPreadjMin}{%
195   \ensuremath{%
196     \hat{\varphi}_{\text{min}}\kinshipsymbols@Ts{preadj}%
197   }%
198   \xspace%
199 }
```

`\ktHatNew` $\hat{\varphi}_{jk}^{T, \text{new}}$: New kinship estimator for the pair of individuals j and k (default). The optional argument allows setting another second individual (`\ktHatNew[1]` gives $\hat{\varphi}_{jl}^{T, \text{new}}$ for a second individual l). The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
200 \newcommand{\ktHatNew}[1][k]{\ktHatNamed[#1]{new}}
```

`\ftHatNew` $\hat{f}_j^{T, \text{new}}$: New inbreeding estimator for individual j (default). The optional argument allows setting other individuals (`\ftHatNew[k]` gives $\hat{f}_k^{T, \text{new}}$ for individual k). The estimated parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
201 \newcommand{\ftHatNew}[1][j]{\ftHatNamed[#1]{new}}
```

`\FstHatNew` $\hat{F}_{ST}^{\text{new}}$: New F_{ST} estimator.

```
202 \newcommand{\FstHatNew}{\FstHatNamed{new}}
```

`\Ajk` A_{jk} : A new statistic proportional in expectation to $\varphi_{jk}^T - 1$ for the pair of individuals j and k (default). The optional argument allows setting another second individual (`\Ajk[1]` gives A_{jl} for a second individual l).

```
203 \newcommand{\Ajk}[1][k]{%
204   \ensuremath{%
205     A_{\text{j\#1}}%
206   }%
207   \xspace%
208 }
```


`\AMin` A_{\min} : Minimum value of the expectation of A_{jk} across all pairs of individuals.

```
209 \newcommand{\AMin}{%
210   \ensuremath{%
211     A_{\text{min}}}%
212   }%
213   \xspace%
214 }
```

`\AMinHat` \hat{A}_{\min} : Estimator of A_{\min} .

```
215 \newcommand{\AMinHat}{%
216   \ensuremath{%
217     \hat{A}_{\text{min}}}%
218   }%
219   \xspace%
220 }
```

`\mav` $\overline{p(1-p)^T}$: Mean ancestral variance. This parameter has a value that depends on the ancestral population T , which is by default denoted in the superscript, but which gets omitted if the package option `noT` is passed.

```
221 \newcommand{\mav}{%
222   \ensuremath{%
223     \overline{p(1-p)}}\kinshipsymbols@T%
224   }%
225   \xspace%
226 }
```

2.14 Estimates from Beagle

`\klHatBeagle` $\hat{\varphi}_{jk}^{L_{jk}, \text{beagle}}$: Local kinship estimator based on Beagle, for the pair of individuals j and k .

```
227 \newcommand{\klHatBeagle}{%
228   \ensuremath{%
229     \hat{\varphi}_{jk}^{L_{jk}, \text{beagle}}}%
230   }%
231   \xspace%
232 }
```

`\flHatBeagle` $\hat{f}_j^{L_j, \text{beagle}}$: Local inbreeding estimator based on Beagle, for individual j (default). The optional argument allows setting other individuals (`\flHatBeagle[k]` gives $\hat{f}_k^{L_k, \text{beagle}}$ for individual k).

```
233 \newcommand{\flHatBeagle}[1][j]{%
234   \ensuremath{%
235     \hat{f}_{\text{\#1}}^{L_{\text{\#1}}, \text{beagle}}}%
236   }%
237   \xspace%
238 }
```

2.15 Cartoon genotype matrix

I use this cartoon genotype matrix often in Beamer presentations. Unfortunately I also use the `color kinshipsymbols` package option in my presentations, but due to a strange bug the colors do not show up in Beamer. This solution was found online: <https://tex.stackexchange.com/questions/159378/cline-disappears-in-beamer>

```

239 % after package colortbl is loaded
240 \makeatletter
241 \@ifclassloaded{beamer}{%
242   \patchcmd\@cline
243     {\arrayrulewidth\hfill}% search
244     {\arrayrulewidth\hfill\kern\z@}% replace
245     {}% success
246     {\errmessage{Patching \@cline\space failed}}% failure
247 }{%
248   % nothing to do here?
249 }
250 \makeatother

```

`\sampleGenMat` This is the bulky code used to generate the cartoon genotype matrix shown in Fig. 1.

```

251 \newcommand{\sampleGenMat}{%
252   \begin{tabular}{cc}%
253     & Individuals \\
254     \ifcolor \arrayrulecolor{genColor} \fi % gets applied to whole table
255     \cline{2-2}%
256     \multirow{10}{*}{\rotatebox[origin=c]{90}{Loci}}%
257     & \multicolumn{1}{|l|}{0 2 2 1 1 0 1} \\
258     & \multicolumn{1}{|l|}{0 2 1 0 1 } \\
259     & \multicolumn{1}{|l|}{2 ... } \\
260     & \multicolumn{1}{|l|}{ } \\
261     & \multicolumn{1}{|l|}{ } \\
262     & \multicolumn{1}{|l|}{ } \\
263     & \multicolumn{1}{|l|}{ } \\
264     & \multicolumn{1}{|l|}{ } \\
265     & \multicolumn{1}{|l|}{ } \\
266     & \multicolumn{1}{|l|}{ } \\
267     \cline{2-2}%
268     & \\
269     & $\mathbf{X}$ \\
270     \ifcolor \textcolor{genColor}{ } \fi \\
271     X \\
272     \ifcolor } \fi \\
273     }$ \\
274   \end{tabular}%
275 }%

```

3 Acknowledgments

The symbols in this package were originally designed with John D. Storey (Alex Ochoa's postdoctoral adviser and coauthor of several papers about kinship and F_{ST}).

The package was written following Scott Pakin's guide How to Package Your L^AT_EX package.

Change History

v1.0

General: Initial version 1

Index

Numbers written in *italic* refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in *roman* refer to the code lines where the entry is used.

| | | | | |
|--|--|---|---|--|
| A | | <code>\FstHatIs</code> <u>160</u> | <code>\kinshipsymbols@T</code> | |
| <code>\Ajk</code> <u>203</u> | | <code>\FstHatNamed</code> <u>154</u> , | . <u>11</u> , 17, 38, 45, | |
| <code>\AMin</code> <u>209</u> | | 160–163, 180, 202 | 76, 88, 95, 108, 223 | |
| <code>\AMinHat</code> <u>215</u> | | <code>\FstHatNew</code> <u>202</u> | <code>\kinshipsymbols@Ts</code> | |
| C | | <code>\FstHatPrime</code> <u>181</u> | <u>12</u> , 18, 166, 173, 196 | |
| | | <code>\FstHatPrimeDbl</code> <u>187</u> | <code>\kl</code> <u>100</u> | |
| <code>\colorfalse</code> 7 | | <code>\FstHatSample</code> <u>139</u> | <code>\klHatBeagle</code> <u>227</u> | |
| <code>\colortrue</code> 14 | | <code>\FstHatWc</code> <u>161</u> | <code>\ks</code> <u>106</u> | |
| <code>\Cov</code> <u>24</u> | | <code>\ft</code> <u>74</u> | <code>\kt</code> <u>92</u> | |
| E | | <code>\ftHat</code> <u>177</u> | <code>\ktHat</code> <u>170</u> | |
| | | <code>\ftHatII</code> <u>178</u> | <code>\ktHatNamed</code> | |
| <code>\E</code> <u>22</u> | | <code>\ftHatIII</code> <u>179</u> | . <u>164</u> , 170, 193, 200 | |
| F | | <code>\ftHatNamed</code> | <code>\ktHatNew</code> <u>200</u> | |
| | | . <u>171</u> , 177–179, 201 | <code>\ktHatPreadj</code> <u>193</u> | |
| <code>\f</code> <u>68</u> , 113 | | <code>\ftHatNew</code> <u>201</u> | <code>\ktHatPreadjMin</code> <u>194</u> | |
| <code>\fi</code> 30, 32, 44, 46, | | G | | |
| 94, 96, 254, 270, 272 | | <code>\genColor</code> <u>8</u> | L | |
| <code>\Fis</code> <u>62</u> | | <code>\Gst</code> <u>127</u> | <code>\logit</code> <u>27</u> | |
| <code>\Fit</code> <u>56</u> | | <code>\GstPrime</code> <u>133</u> | M | |
| <code>\fl</code> <u>80</u> | | I | | |
| <code>\flHatBeagle</code> <u>233</u> | | <code>\ifcolor</code> | <code>\mav</code> <u>221</u> | |
| <code>\fpw</code> <u>112</u> | | <u>6</u> , 30, 32, 44, 46, | N | |
| <code>\fs</code> <u>86</u> | | 94, 96, 254, 270, 272 | <code>\newif</code> 6 | |
| <code>\Fst</code> <u>50</u> | | K | | |
| <code>\FstHat</code> <u>180</u> | | <code>\kinColor</code> 9 | P | |
| <code>\FstHatHudson</code> <u>162</u> | | <code>\PhiSt</code> <u>121</u> | | |
| <code>\FstHatHudsonK</code> <u>163</u> | | | | |

| | | | | |
|------------------|------------|---------------------|------------|------------|
| \pit | <u>36</u> | S | \toN | <u>148</u> |
| \pith | <u>42</u> | \sampleGenMat | <u>251</u> | |
| \pithColor | <u>10</u> | \sgn | <u>26</u> | V |
| | | | \Var | <u>23</u> |
| R | | T | | |
| \round | <u>25</u> | \toas | <u>145</u> | X |
| \Rst | <u>115</u> | \toasNM | <u>151</u> | \xij |
| | | | | <u>28</u> |