

BELAY ACTION



Tired of wasting CI/CD minutes on useless builds?



Meet **Belay Action** — lightweight,
signal-based workflow control for
GitHub Actions

[Overview](#) · [Problem](#) · [Solution](#) · [Code](#) · [Try it](#)



Native [skip ci] is great, but...

...what if you need more flexible, custom logic?

- ✗ Duplicating complex bash scripts across 10 different workflows to handle conditional skips is a nightmare.
- ✓ You need a centralized way to skip or abort pipelines based on PR labels, custom tags, or structured regex patterns.

Centralized Signal Detection



Belay evaluates incoming commits and PR data against 3 types of parallel signals:

1. **Tags:** Fast substring matching for everyday flags (e.g., [docs-only]).
2. **Patterns:** Standard regular expressions for advanced, anchored rules.
3. **Labels:** Automated workflow gating based on Pull Request labels.

Clean & Simple Integration

➤ Cancel Mode

```
# 1. Abort the run immediately
- name: "Evaluate Pipeline Signals"
  uses: OctalMesh/belay-action@v1
  with:
    signal_tags: "[abort-run]"
    on_match: "cancel" # Safe termination
```




➤ Report Mode

```
# 1. Evaluate signals and set output
- name: "Evaluate Pipeline Signals"
  id: belay
  uses: OctalMesh/belay-action@v1
  with:
    signal_patterns: "^chore\\(deps\\)"
    on_match: "report" # Logs & proceeds

# 2. Downstream job gating condition
if: needs.job.outputs.matched != 'true'
```



Give your CI/CD pipelines a «belay»!

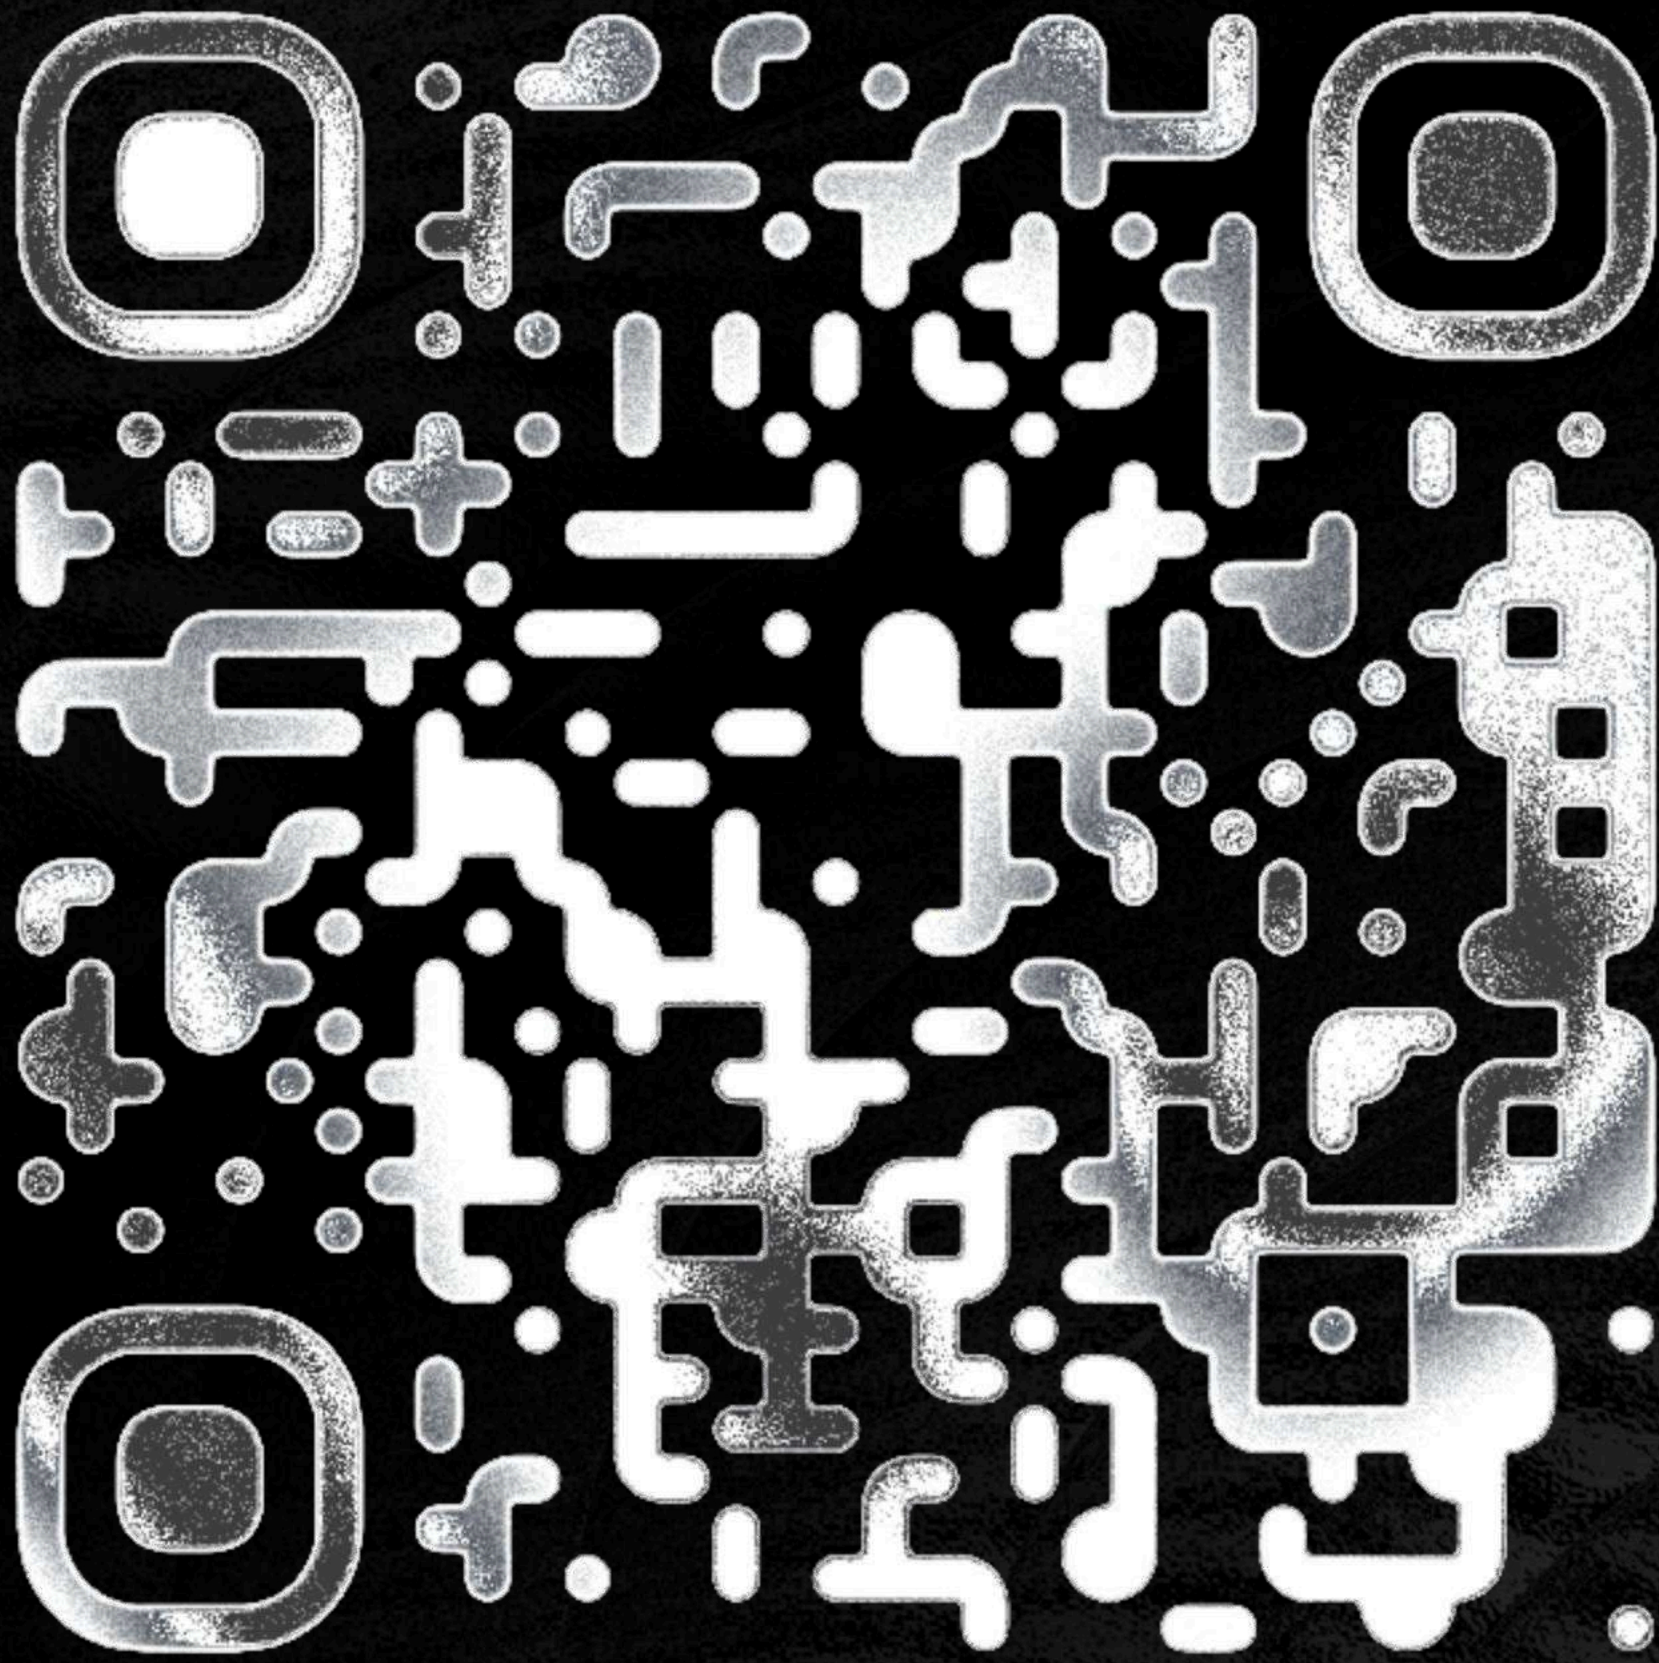

Lightweight, flexible, and ready to protect your build budget.

[Overview](#) · [Problem](#) · [Solution](#) · [Code](#) · [Try it](#)

