


Hubtel API Integration Flow

Project: LiG Store (E-commerce Platform)

Requirement: Hubtel UAT Requirement #5

1. Visual Integration Flow

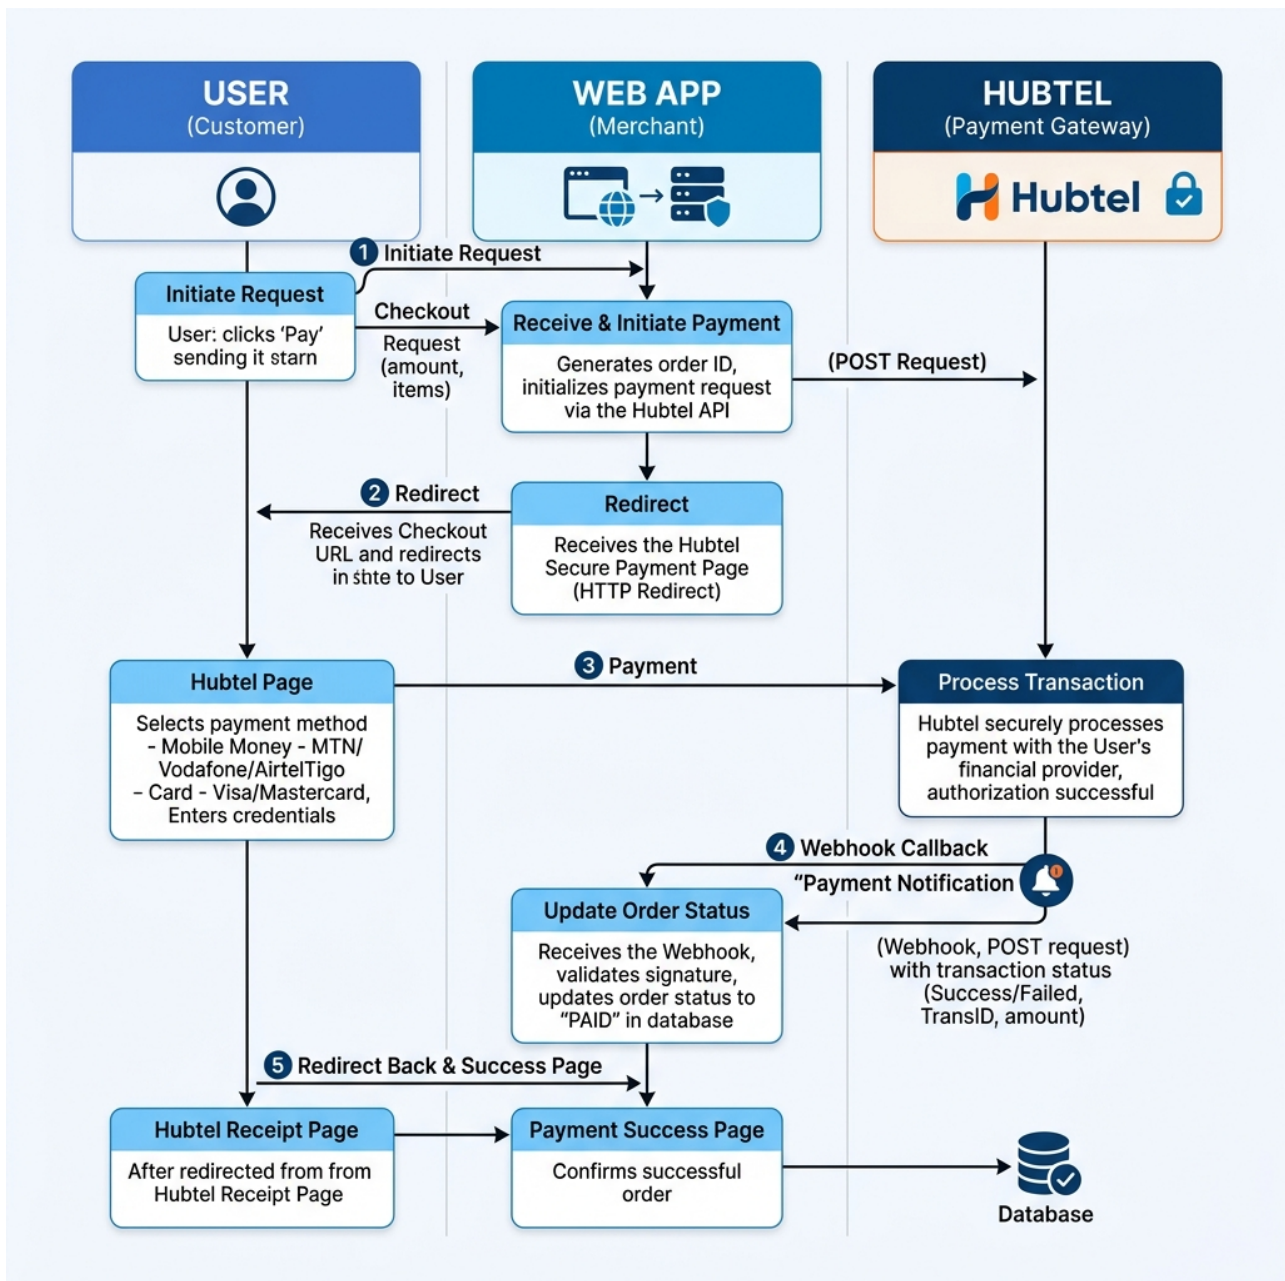

2. Technical Step-by-Step

The LiG Store integrates with Hubtel using a secure, server-side redirection model. Below are the technical stages of a single transaction:

- Initiation:** When a user checks out, the LiG backend calls Hubtel's `/items/initiate` endpoint with the order amount and a unique client reference.

- **Redirection:** Hubtel returns a secure Checkout URL. The user is redirected from LiG to this page to choose their payment method (Momo or Card).
- **Asynchronous Callback (Webhook):** Upon successful payment, Hubtel sends a POST request to LiG's webhook endpoint. This ensures the order is marked as paid even if the user closes their browser.
- **Final Verification:** When the user is redirected back to LiG, the system performs a final real-time status check via the /transactions/status API for maximum security.

Security Note: All communication is encrypted via TLS 1.2+, and transactions are verified using server-to-server status checks to prevent client-side tampering.

3. API Endpoints

Function	Method	Endpoint
Initiate Checkout	POST	payproxyapi.hubtel.com/items/initiate
Status Verification	GET	rmsc.hubtel.com/v1/merchantaccount/merchants/{ID}/transactions
Webhook Endpoint	POST	lig-store.com/payment/hubtel-webhook/