

CSS

Rare Use Case Properties



Swipe




Joe Harrison
@frontendjoe



letter-spacing

Useful on capitalized fonts

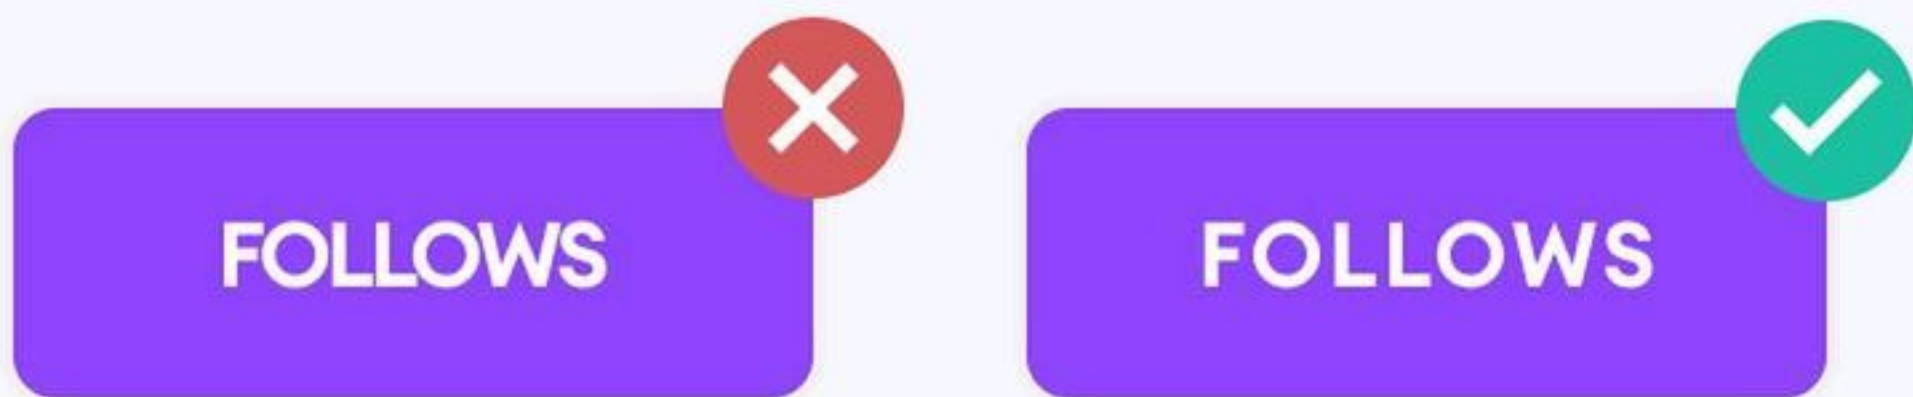

```
.text { letter-spacing: 3px; }
```




Joe Harrison
@frontendjoe




line-height

Display text at the correct height



Page Title

Lorem ipsum dolor sit amet, consectetur adipiscing elit.



Page Title

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

```
p { line-height: 1.25; }
```



Joe Harrison
@frontendjoe



vertical-align

Position inline elements inside table cells

User	Age
<input type="radio"/> John Smith Developer	32
<input type="radio"/> Elvis Harris Designer	21


User	Age
<input type="radio"/> John Smith Developer	32
<input type="radio"/> Elvis Harris Designer	21

```
td.left { vertical-align: top; }  
td.right { vertical-align: middle; }
```



content

Required when using empty psuedo elements

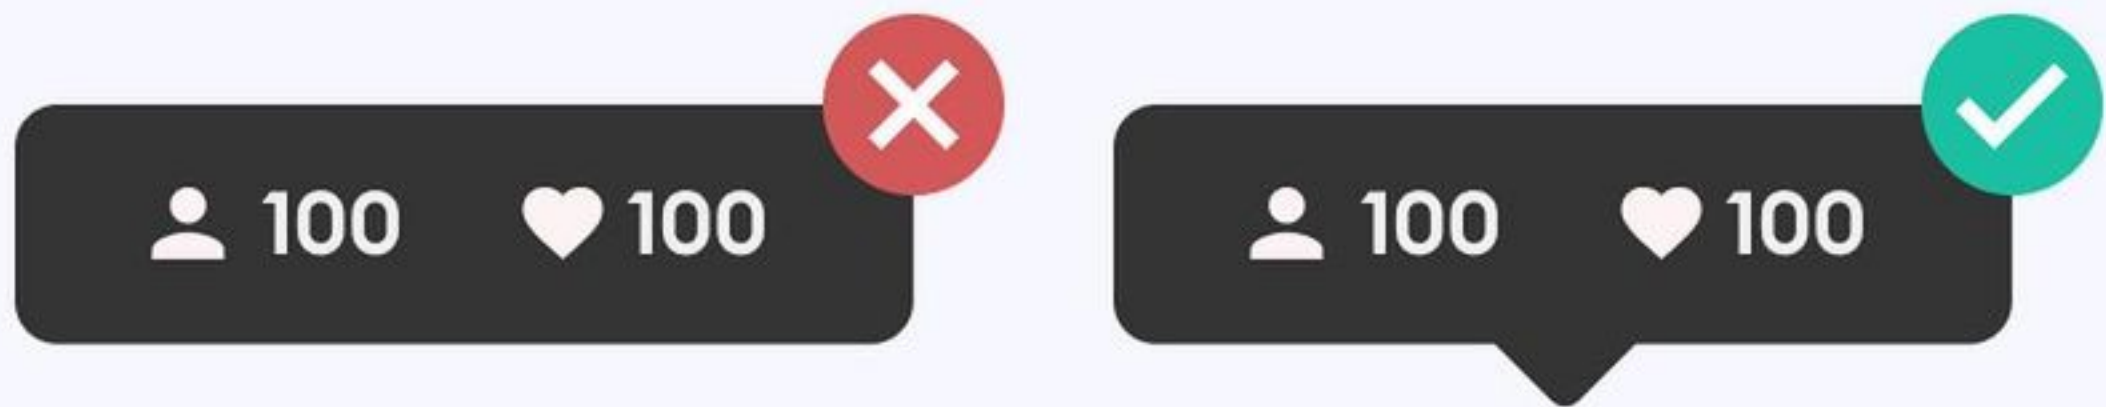

```
.bubble::after { content: ""; }
```




Joe Harrison
@frontendjoe



outline

Implement your own focused styling

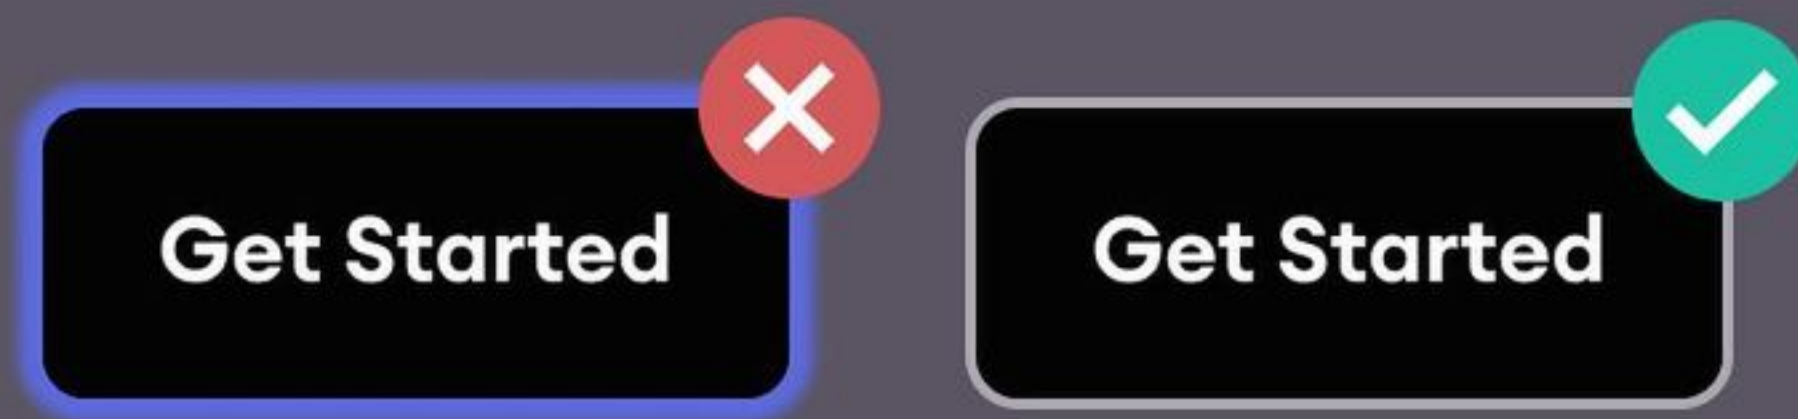

```
button, input { outline: none; }
```




Joe Harrison
@frontendjoe



white-space

Prevent wrapping inside elements

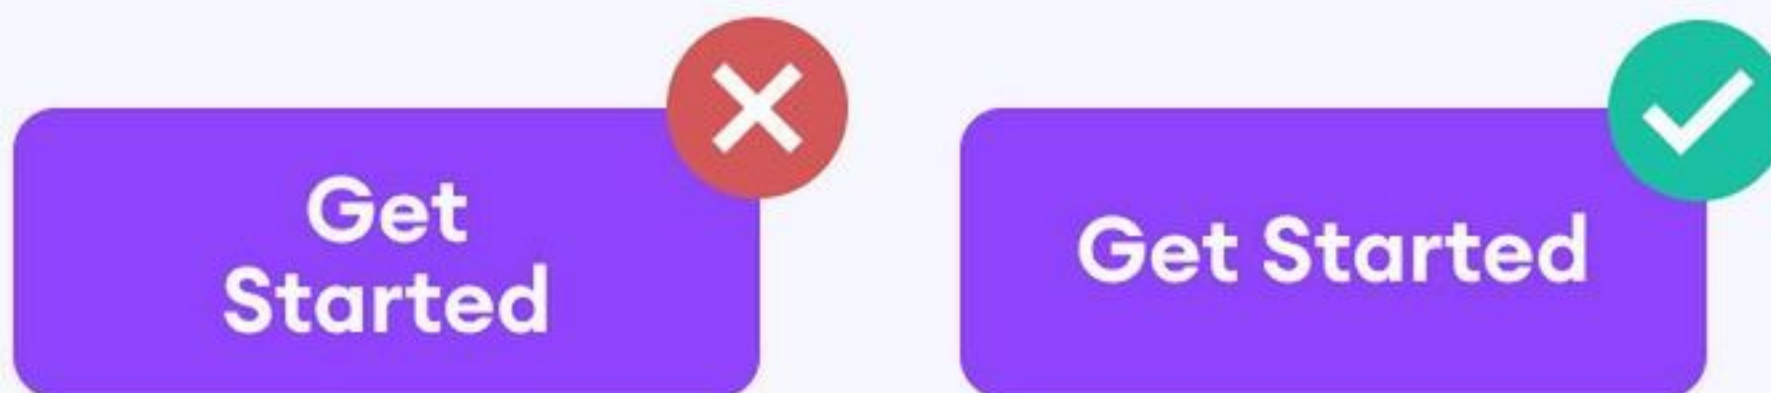

```
button { white-space: nowrap; }
```




Joe Harrison
@frontendjoe



pointer-events

Allow clicking through a floating element

The button can
still be clicked
even if ribbon
overlaps

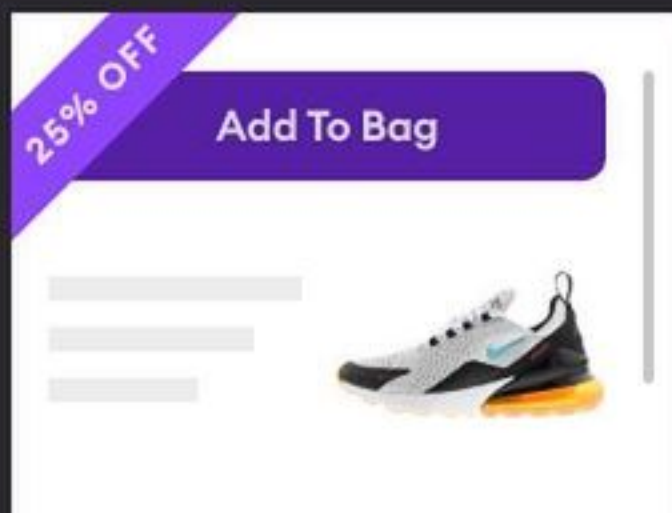

```
.ribbon { pointer-events: none; }
```



Joe Harrison
@frontendjoe



user-select

Text/labels that can't be selected



Home Dashboard

```
label { user-select: none; }
```

