

# 第 1 讲: 测试

姓名: 张三 学号: 998244353  
评阅: \_\_\_\_\_ 评分: \_\_\_\_\_

2024 年 2 月 31 日

这是适用于问题求解作业的 Typst 模板,  
同时也可用于写作实验报告等。  
但该模板仍在进行测试中,  
**请谨慎使用。**

# 1 作业 (必做部分)

## Problem 1 (AC 1.2-3)

**Solution:**

### 1 Lorem ipsum dolor.

a) when  $\min(\|x\|_2)$ ,  $x = x^*$  is the solution to the problem, which is  $x^* = \begin{pmatrix} \frac{1}{\sqrt{3}} \\ \frac{1}{\sqrt{3}} \\ \frac{1}{\sqrt{3}} \end{pmatrix}$

b) We have a matrix  $A = \begin{pmatrix} 1 & 1 \\ 1 & 1 \\ 1 & 0 \end{pmatrix}$ , the projection operator is

$$P = A(A^T A)^{-1} A^T = \begin{pmatrix} \frac{1}{2} & \frac{1}{2} & 0 \\ \frac{1}{2} & \frac{1}{2} & 0 \\ 0 & 0 & 1 \end{pmatrix},$$

hence,

$$x^* = Pv = \begin{pmatrix} \frac{1}{2} \\ \frac{1}{2} \\ 1 \end{pmatrix}.$$

### 2 Lorem ipsum dolor sit amet.

c) We have a matrix  $A = \begin{pmatrix} 1 & -1 \\ -1 & 1 \\ 2 & 2 \end{pmatrix}$ , the projection operator is

$$P = A(A^T A)^{-1} A^T = \begin{pmatrix} \frac{1}{2} & -\frac{1}{2} & 0 \\ -\frac{1}{2} & \frac{1}{2} & 0 \\ 0 & 0 & 1 \end{pmatrix},$$

hence,

$$x^* = Pv = \begin{pmatrix} \frac{1}{2} \\ -\frac{1}{2} \\ 0 \end{pmatrix}.$$

---

## Problem 2

**Solution:**

1. we know that:

$$\text{prox}_\varphi(z) = \arg \min_{x \in \mathbb{R}} \left\{ \frac{1}{2} \|x - z\|^2 + \phi(x - c) \right\}.$$

let  $x' = x - c$

$$\text{prox}_\varphi(z) = \arg \min_{x \in \mathbb{R}} \left\{ \frac{1}{2} \|x' - (z - c)\|^2 + \phi(x' + c - c) \right\} + c = \text{prox}_\phi(z - c) + c.$$

2. if we want to  $f(x) = \frac{1}{2} \|x - z\|^2 + \phi(x)$  to be minimized, we need to find the  $x$  that makes the derivative of the function equal to zero.

we know

$$\partial f(x) = \begin{cases} x - z + \lambda & \text{when } x > 0 \\ [x - z - \lambda, x - z + \lambda] & \text{when } x = 0 \\ x - z - \lambda & \text{when } x < 0 \end{cases}$$

. Hence, let

$$\partial f(x) = 0$$

, we have

$$\text{prox}_{\phi(z)} = x^* = \begin{cases} z - \lambda & \text{when } z > \lambda \\ [z - \lambda, z + \lambda] & \text{when } z \in [-\lambda, \lambda] \\ z + \lambda & \text{when } z < -\lambda \end{cases}$$

3. if  $\varphi(x) = \lambda|x - c|$ , where  $c \in \mathbb{R}$  and  $\lambda > 0$ . Use the result from part a.

$$\text{prox}_{\varphi(z)} = \text{prox}_{\phi(z-c)} + c = \begin{cases} z - \lambda & \text{when } z > \lambda + c \\ [z - \lambda, z + \lambda] & \text{when } z \in [-\lambda + c, \lambda + c] \\ z + \lambda & \text{when } z < -\lambda + c \end{cases}$$

### Problem 3

**Solution:**

1. If we take the derivative of  $\frac{1}{2} \|x - x^{t-1}\|^2 + \gamma g(x)$ , we have

$$x^t = \text{prox}_{\gamma g}(x^{t-1}) = x^{t-1} - \gamma \nabla g(x^t)$$

2. By the convexity of  $g$ , we know that  $g(x^t) + \nabla g(x^t)^T (x^{t-1} - x^t) \leq g(x^{t-1})$ . Hence, we have

$$g(x^t) \leq g(x^{t-1}) - \nabla g(x^t)^T (x^{t-1} - x^t) = g(x^{t-1}) - \gamma \nabla \|g(x^t)\|_2^2$$

3. because  $x^t = x^{t-1} - \gamma \nabla g(x^t)$  which is a gradient descent method, so

$$-\infty < g(x^t) \leq g(x^{t-1})$$

and we have

$$g(x^t) \leq g(x^{t-1}) - \gamma \nabla \|g(x^t)\|_2^2$$

hence

$$0 \leq \gamma \nabla \|g(x^t)\|_2^2 \leq 0$$

if

$$t \rightarrow +\infty$$

### Problem 4 (ST 5.5-5)

**Proof:**

1. because

$$\partial f(x) = \{v \in \mathbb{R}^n : f(y) \geq f(x) + v^T(y - x), \forall y \in \mathbb{R}^n\}$$

if  $g(x) = \theta f(x)$ ,

$$\partial g(x) = \{v \in \mathbb{R}^n : g(y) \geq g(x) + v^T(y - x), \forall y \in \mathbb{R}^n\}$$

$$\partial g(x) = \{v \in \mathbb{R}^n : \theta f(y) \geq \theta f(x) + v^T(y - x), \forall y \in \mathbb{R}^n\}$$

$$\partial g(x) = \left\{ v \in \mathbb{R}^n : f(y) \geq f(x) + \frac{v^T}{\theta}(y - x), \forall y \in \mathbb{R}^n \right\}$$

$$\partial g(x) = \theta \{v \in \mathbb{R}^n : f(y) \geq f(x) + v^T(y - x), \forall y \in \mathbb{R}^n\} = \theta \partial f(x)$$

2.

$$\partial h(x) = \{v \in \mathbb{R}^n : f(y) + g(y) \geq f(x) + g(x) + v^T(y - x), \forall y \in \mathbb{R}^n\}$$

all of the elements that satisfy

$$f(y) \geq f(x) + v^T(y - x), \forall y \in \mathbb{R}^n$$

and

$$g(y) \geq g(x) + v^T(y - x), \forall y \in \mathbb{R}^n$$

are in the set

$$\partial h(x)$$

hence

$$\partial f(x) + \partial g(x) \subseteq \partial h(x)$$

3. we know that

$$\partial \|x\|_1 = \begin{cases} 1 & \text{when } x > 0 \\ [-1, 1] & \text{when } x = 0 \\ -1 & \text{when } x < 0 \end{cases}$$

.

hence  $\text{sgn}(x) \in \partial \|x\|_1$ .

### Problem 5

**Solution:**

indent 中文排印测试:

Here's a test sentence, "I can eat glass, it does not hurt me."

这是一条测试语句：“我能吞下玻璃而不伤身体。”

這是一條測試語句：「我能吞下玻璃而不傷身體。」

默認使用 “IBM Plex Serif”, “Source Han Serif SC”, “Noto Serif CJK SC” 字形，並且設置語言為 “zh”，地區為 “cn”。

目前的效果是，當引號“兩邊有 CJK 字符，引號將以半角顯示”，否則正常顯示英文引號。

測試：“中文引號”，“quotation marks”。

**Problem 6****Solution:**

indent This a test for code blocks.

For rust:

```
1 pub fn main() {
2     println!("Hello, world!");
3 }
```

rust

For haskell:

```
1 zipWith' :: (a -> b -> c) -> [a] -> [b] -> [c]
2 zipWith' _ [] _ = []
3 zipWith' _ _ [] = []
4 zipWith' f (x:xs) (y:ys) = f x y : zipWith' f xs ys
```

haskell

Select only a range of lines to show:

```
3 def fibonacci(n):
4     if n <= 1:
5         return n
6     else:
7         return(fibonacci(n-1) + fibonacci(n-2))
```

python

Disable line numbers:

```
int main() {
    cout << "Hello, World!"; // 你好, 世界
    return 0;
}
```

cpp

Then pseudocodes.

---

### Algorithm 1: The Euclidean algorithm

---

**input:** integers  $a$  and  $b$   
**output:** greatest common divisor of  $a$  and  $b$

```

1 while  $a \neq b$  do
2   if  $a > b$  then
3      $a \leftarrow a - b$ 
4   else
5      $b \leftarrow b - a$ 
6   end
7 end
8 return  $a$ 
```

▷ comment test

▷ another comment test

---

### Algorithm 1

indent In Line 1, we have a while loop.


The algorithm figure's breakable.

---

## Problem 7 ()

This is a test for CeTZ.

**Solution:**

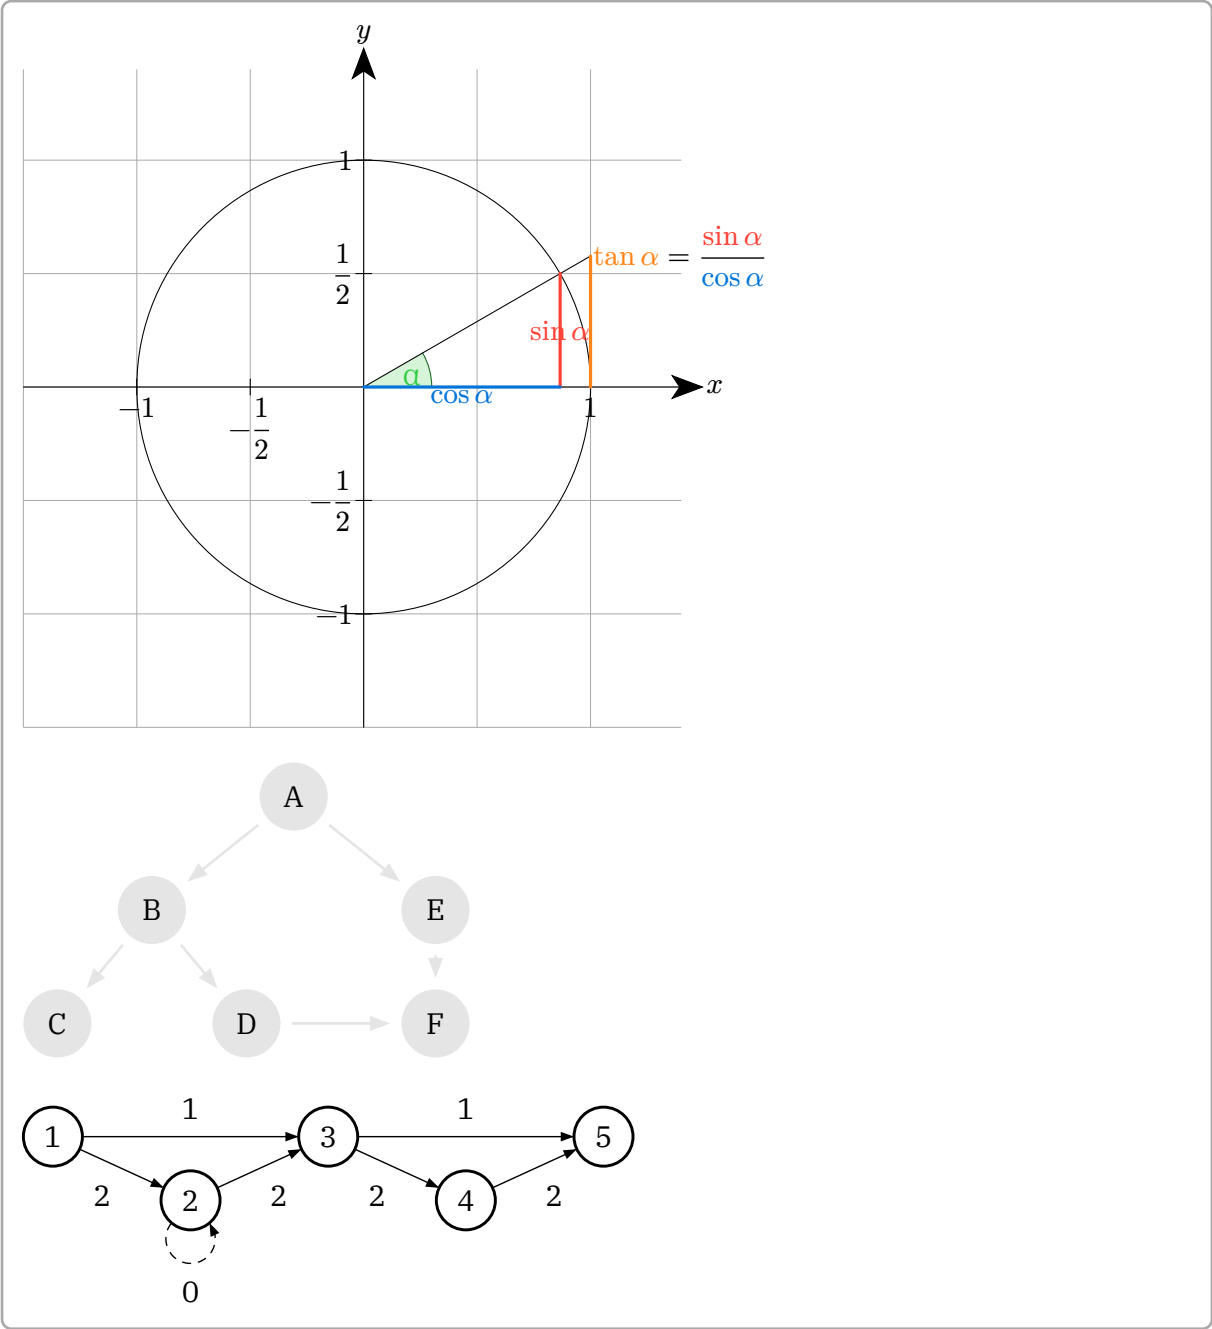

## 2 作业 (选做部分)

**Problem 1 (EoSD 9961)**

indent How to pass 「レッドマジック」?

**Solution:**

indent Practice more.