Recurrence $h_t = a_t h_{t-1} + b_t$ → combine two steps: $(a_1, b_1) \circ (a_2, b_2) = (a_2 a_1,\ a_2 b_1 + b_2)$

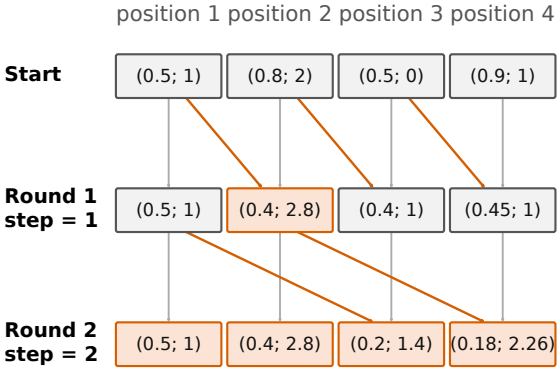

Layer 10: L = 400 (padded to 512)

399	9
serial steps (sequential)	rounds (parallel)
399	4,097
combines per sequence → total work O(L log L), about 67 million per image	