

SafeShift WebAPI

1. /api/Auth/register

The screenshot displays a REST client interface for the endpoint `POST /api/Auth/register`. The description states: "Registers a new user account. The email must be unique. Passwords are hashed before being stored." The request body is a JSON object: `{ "name": "Jane Safety", "email": "jane.safety@company.com", "password": "StrongPass123", "role": "User" }`. The response is a 200 status code with a JSON body: `{ "success": true, "message": "Registration successful.", "userId": 1, "email": "jane.safety@company.com", "role": "User" }`. The response headers include `content-type: application/json; charset=utf-8`, `date: Fri, 17 Apr 2020 01:47:54 GMT`, and `server: Restful`.

```
Auth
POST /api/Auth/register Registers a new user account.
The email must be unique. Passwords are hashed before being stored.

Parameters
No parameters

Request body
application/json

{
  "name": "Jane Safety",
  "email": "jane.safety@company.com",
  "password": "StrongPass123",
  "role": "User"
}

Execute Clear

Responses

Curl
curl -X 'POST' \
  'http://localhost:5196/api/Auth/register' \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "name": "Jane Safety",
    "email": "jane.safety@company.com",
    "password": "StrongPass123",
    "role": "User"
  }'

Request URL
http://localhost:5196/api/Auth/register

Server response
Code Details
200
Response body
{
  "success": true,
  "message": "Registration successful.",
  "userId": 1,
  "email": "jane.safety@company.com",
  "role": "User"
}
Download
Response headers
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2020 01:47:54 GMT
server: Restful
```

2. /api/Auth/login

The screenshot displays a REST client interface for the endpoint `POST /api/Auth/login`. The description states: "Logs in an existing user. Login succeeds only when the supplied email and password match a stored user." The request body is a JSON object: `{ "email": "jane.safety@company.com", "password": "StrongPass123" }`. The response is a 200 status code with a JSON body: `{ "success": true, "message": "Login successful.", "userId": 1, "email": "jane.safety@company.com", "role": "User" }`. The response headers include `content-type: application/json; charset=utf-8`, `date: Fri, 17 Apr 2020 01:50:20 GMT`, `server: Restful`, and `transfer-encoding: chunked`.

```
Auth
POST /api/Auth/login Logs in an existing user.
Login succeeds only when the supplied email and password match a stored user.

Parameters
No parameters

Request body
application/json

{
  "email": "jane.safety@company.com",
  "password": "StrongPass123"
}

Execute Clear

Responses

Curl
curl -X 'POST' \
  'http://localhost:5196/api/Auth/login' \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "email": "jane.safety@company.com",
    "password": "StrongPass123"
  }'

Request URL
http://localhost:5196/api/Auth/login

Server response
Code Details
200
Response body
{
  "success": true,
  "message": "Login successful.",
  "userId": 1,
  "email": "jane.safety@company.com",
  "role": "User"
}
Download
Response headers
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2020 01:50:20 GMT
server: Restful
transfer-encoding: chunked
```

3. Get /api/Incidents

Name	Description
severity	high
string (query)	
userid	1
integer (int32) (query)	
date	date
string (datetime) (query)	

[Execute](#) [Clear](#)

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:3196/api/incidents?severity=high&userid=1' \
  -H 'accept: text/plain'
```

Request URL

<http://localhost:3196/api/incidents?severity=high&userid=1>

Server response

Code Details

200

Response body

[Download](#)

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 01:56:54 GMT
server: Restful
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links

Media type

text/plain

Controls Accept header.

Example Value Schema

```
{
  "incidentId": 1,
  "description": "string",
  "date": "2026-04-17T01:56:55.448Z",
  "severity": "string",
  "userId": 1
}
```

4. Post /api/Incidents

POST /api/Incidents. Create a new incident record.

[Cancel](#) [Reset](#)

Parameters

No parameters

Request body

[application/json](#)

```
{
  "description": "string",
  "date": "2026-04-17T02:02:16.993Z",
  "severity": "high",
  "userId": 1
}
```

[Execute](#) [Clear](#)

Responses

Curl

```
curl -X 'POST' \
  'http://localhost:3196/api/incidents' \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "description": "string",
    "date": "2026-04-17T02:02:16.993Z",
    "severity": "high",
    "userId": 1
  }'
```

Request URL

<http://localhost:3196/api/incidents>

Server response

Code Details

201

Response body

[Download](#)

```
{
  "incidentId": 1,
  "description": "string",
  "date": "2026-04-17T02:02:16.993Z",
  "severity": "high",
  "userId": 1
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:02:16 GMT
location: http://localhost:3196/api/incidents/1
server: Restful
transfer-encoding: chunked
```

Responses

Code	Description	Links
------	-------------	-------

5. /api/Incidents/{incidentId}

GET /api/Incidents/{incidentId} Returns a single incident by identifier.

Parameters

Name	Description
incidentId *required integer(int32) (path)	2

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:5196/api/Incidents/2' \
  -H 'accept: text/plain'
```

Request URL

http://localhost:5196/api/Incidents/2

Server response

Code Details

200

Response body

```
{
  "incidentId": 2,
  "description": "string",
  "date": "2026-04-17T02:02:16.993",
  "severity": "high",
  "userId": 3
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:03:34 GMT
server: Kestrel
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links

Media type: text/plain

Controls: Accept header

Example Value Schema

```
{
  "incidentId": 0,
  "description": "string",
  "date": "2026-04-17T02:03:35.253Z",
  "severity": "string",
  "userId": 0
}
```

6. /api/Incidents/{incidentId}

PUT /api/Incidents/{incidentId} Updates an existing incident record.

Parameters

Name	Description
incidentId *required integer(int32) (path)	2

Request body

application/json

```
{
  "description": "string",
  "date": "2026-04-17T02:04:04.643Z",
  "severity": "low",
  "userId": 3
}
```

Execute Clear

Responses

Curl

```
curl -X 'PUT' \
  'http://localhost:5196/api/Incidents/2' \
  -H 'accept: text/plain' \
  -H 'content-type: application/json' \
  -d '{
    "description": "string",
    "date": "2026-04-17T02:04:04.643Z",
    "severity": "low",
    "userId": 3
  }'
```

Request URL

http://localhost:5196/api/Incidents/2

Server response

Code Details

200

Response body

```
{
  "incidentId": 2,
  "description": "string",
  "date": "2026-04-17T02:04:04.643Z",
  "severity": "low",
  "userId": 3
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:04:31 GMT
server: Kestrel
transfer-encoding: chunked
```

7. /api/Incidents/{incidentId}

DELETE

/api/Incidents/{incidentId} Deletes an incident by identifier.

Cancel

Parameters

Name	Description
incidentId ^{required}	
Integer(int32)	3
(path)	

Execute Clear

Responses

Curl

curl -X 'DELETE' \n'http://localhost:5196/api/Incidents/3' \n-H 'accept: */*'

Request URL

http://localhost:5196/api/Incidents/3

Server response

Code	Details
204	Response headers date: Fri, 17 Apr 2026 02:06:18 GMT server: Restlet

Responses

Code	Description	Links
204	No Content	No links

8. /api/Inspections

GET

/api/Inspections Returns inspections with an optional date filter.

Cancel

Parameters

Name	Description
date	
string(datetime)	
(query)	

Execute Clear

Responses

Curl

curl -X 'GET' \n'http://localhost:5196/api/Inspections' \n-H 'accept: text/plain'

Request URL

http://localhost:5196/api/Inspections

Server response

Code	Details
200	Response body Download Response headers Content-Type: application/json; charset=utf-8 date: Fri, 17 Apr 2026 02:07:47 GMT server: Restlet transfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

Media type

text/plain

Content Accept header

Example Value: Schema

{\n \"inspectionId\": 0,\n \"asset\": \"2026-04-17T02:07:48.580Z\",\n \"notes\": \"string\",\n \"userId\": 0\n}

9. /api/Inspections

POST /api/Inspections Creates a new inspection record.

Parameters: No parameters

Request body: application/json

```
{
  "date": "2026-04-17T02:08:10.004Z",
  "notes": "string",
  "userId": 3
}
```

Execute Clear

Responses

Curl

```
curl -X 'POST' \
  'http://localhost:5196/api/Inspections' \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "date": "2026-04-17T02:08:10.004Z",
    "notes": "string",
    "userId": 3
  }'
```

Request URL: http://localhost:5196/api/Inspections

Server response

Code: 201 Details

Response body

```
{
  "inspectionId": 2,
  "date": "2026-04-17T02:08:10.004Z",
  "notes": "string",
  "userId": 3
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:08:10 GMT
location: http://localhost:5196/api/Inspections/2
server: Kestrel
transfer-encoding: chunked
```

Responses

Code	Description	Links
201		

10. /api/Inspections/{inspectionId}

GET /api/Inspections/{inspectionId} Returns a single inspection by identifier.

Parameters

Name	Description
inspectionId • required	Integer (int32) (path)

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:5196/api/Inspections/2' \
  -H 'accept: text/plain'
```

Request URL: http://localhost:5196/api/Inspections/2

Server response

Code: 200 Details

Response body

```
{
  "inspectionId": 2,
  "date": "2026-04-17T02:08:10.004Z",
  "notes": "string",
  "userId": 3
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:08:10 GMT
server: Kestrel
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links

Media type: text/plain

Example Value Schema

```
{
  "inspectionId": 0,
  "date": "2026-04-17T02:08:59.556Z",
  "notes": "string",
  "userId": 0
}
```

11. /api/Inspections/{inspectionId}

PUT /api/Inspections/{inspectionId} Updates an existing inspection record.

Parameters

Name	Description
inspectionId *required	
integer(sint32)	
(path)	

Request body

application/json

```
{
  "data": "2026-04-17T02:09:11.323Z",
  "notes": "not bad",
  "userId": 3
}
```

Execute Clear

Responses

Curl

```
curl -X 'PUT' \
  'http://localhost:5196/api/Inspections/2' \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "data": "2026-04-17T02:09:11.323Z",
    "notes": "not bad",
    "userId": 3
  }'
```

Request URL

http://localhost:5196/api/Inspections/2

Server response

Code Details

200

Response body

```
{
  "inspectionId": 2,
  "data": "2026-04-17T02:09:11.323Z",
  "notes": "not bad",
  "userId": 3
}
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:09:29 GMT
server: Restrel
transfer-encoding: chunked
```

12. /api/Inspections/{inspectionId}

DELETE /api/Inspections/{inspectionId} Deletes an inspection by identifier.

Parameters

Name	Description
inspectionId *required	
integer(sint32)	
(path)	

Execute Clear

Responses

Curl

```
curl -X 'DELETE' \
  'http://localhost:5196/api/Inspections/2' \
  -H 'accept: */*' \
  -d ''
```

Request URL

http://localhost:5196/api/Inspections/2

Server response

Code Details

204

Response headers

```
date: Fri, 17 Apr 2026 02:09:54 GMT
server: Kestrel
```

Responses

Code	Description	Links
204	No Content	No links

13. /api/Shifts

POST /api/Shifts Creates a new shift record.

Parameters: No parameters

Request body: application/json

```
{
  "startTime": "2026-04-17T02:18:23.885Z",
  "endTime": "2026-05-17T02:18:23.885Z",
  "userId": 3
}
```

Execute Clear

Responses

Curl

```
curl -X 'POST' \
  "http://localhost:5196/api/Shifts" \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "startTime": "2026-04-17T02:18:23.885Z",
    "endTime": "2026-05-17T02:18:23.885Z",
    "userId": 3
  }'
```

Request URL: http://localhost:5196/api/Shifts

Server response

Code Details

201

Response body

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:18:23.885Z",
  "endTime": "2026-05-17T02:18:23.885Z",
  "userId": 3
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:18:51 GMT
location: http://localhost:5196/api/Shifts/2
server: RestKit
transfer-encoding: chunked
```

Responses

Code	Description	Links
201	Created	No links
	Media type	

14. /api/shifts

GET /api/Shifts Returns shifts with optional user and date filters.

Parameters

Name	Description
userId integer(int32) (query)	3
date string(date-time) (query)	date

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  "http://localhost:5196/api/Shifts?userId=3" \
  -H 'accept: text/plain'
```

Request URL: http://localhost:5196/api/Shifts?userId=3

Server response

Code Details

200

Response body

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:18:23.885",
  "endTime": "2026-05-17T02:18:23.885",
  "userId": 3
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:11:28 GMT
server: RestKit
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links
	Media type	
	text/plain	
	Controls Accept header:	
	Example Value: Schema	

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:11:29.282Z",
  "endTime": "2026-05-17T02:11:29.282Z",
  "userId": 3
}
```

15. /api/Shifts/{shiftId}

GET /api/Shifts/{shiftId} Returns a single shift by identifier

Parameters

Name	Description
shiftId • required	Integer (int32)

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  "http://localhost:5196/api/Shifts/2" \
  -H 'accept: text/plain'
```

Request URL

http://localhost:5196/api/Shifts/2

Server response

Code Details

200

Response body

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:18:23.885",
  "endTime": "2026-05-17T02:18:23.885",
  "userId": 1
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:11:51 GMT
server: Restful
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links

Media type

text/plain

Controls Accept header

Example Value Schema

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:11:51.5752",
  "endTime": "2026-04-17T02:11:51.5752",
  "userId": 1
}
```

PUT /api/Shifts/{shiftId} Updates an existing shift record.

16. /api/Shifts/{shiftId}

PUT /api/Shifts/{shiftId} Updates an existing shift record.

Parameters

Name	Description
shiftId • required	Integer (int32)

Request body

application/json

```
{
  "startTime": "2026-04-17T02:12:05.5932",
  "endTime": "2026-05-17T02:12:05.5932",
  "userId": 2
}
```

Execute Clear

Responses

Curl

```
curl -X 'PUT' \
  "http://localhost:5196/api/Shifts/2" \
  -H 'accept: text/plain' \
  -H 'Content-Type: application/json' \
  -d '{
    "startTime": "2026-04-17T02:12:05.5932",
    "endTime": "2026-05-17T02:12:05.5932",
    "userId": 2
  }'
```

Request URL

http://localhost:5196/api/Shifts/2

Server response

Code Details

200

Response body

```
{
  "shiftId": 2,
  "startTime": "2026-04-17T02:12:05.5932",
  "endTime": "2026-05-17T02:12:05.5932",
  "userId": 2
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:12:37 GMT
server: Restful
transfer-encoding: chunked
```

Responses

17. /api/Shifts/{shiftId}

DELETE /api/Shifts/{shiftId} Deletes a shift by identifier.

Parameters

Name	Description
shiftId ^{required}	
integer(int32)	2
(path)	

Execute Clear

Responses

Curl

```
curl -X 'DELETE' \
  'http://localhost:3396/api/Shifts/2' \
  -H 'accept: */*'
```

Request URL

http://localhost:3396/api/Shifts/2

Server response

Code Details

204

Response headers

```
date: Fri, 17 Apr 2026 02:12:57 GMT
server: Restful
```

Responses

Code	Description	Links
204	No Content	No links

18. /api/Users

GET /api/Users Returns all users.

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:3396/api/Users' \
  -H 'accept: text/plain'
```

Request URL

http://localhost:3396/api/Users

Server response

Code Details

200

Response body

```
{
  "users": [
    {
      "name": "API Test User",
      "email": "apitest.179339549@example.com",
      "role": "User"
    },
    {
      "name": "API Test User",
      "email": "apitest.179339549@example.com",
      "role": "User"
    },
    {
      "name": "API Test User",
      "email": "apitest.179339549@example.com",
      "role": "User"
    }
  ]
}
```

Response headers

```
content-type: application/json; charset=utf-8
date: Fri, 17 Apr 2026 02:13:25 GMT
server: Restful
transfer-encoding: chunked
```

Responses

Code	Description	Links
200	OK	No links

Media type


text/plain

Content Accept header

Example Value Schema

```
{
  "users": [
    {
      "name": "API Test User",
      "email": "apitest.179339549@example.com",
      "role": "User"
    }
  ]
}
```

19. /api/Users/{userId}

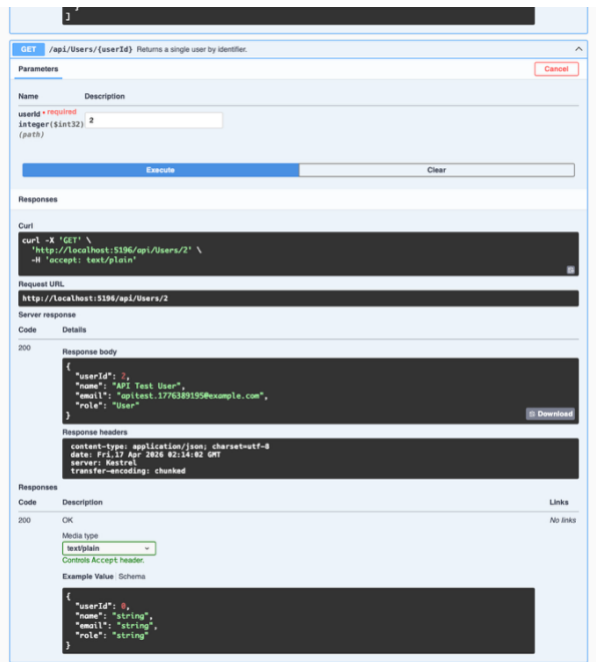

GET /api/Users/{userId} Returns a single user by identifier.

Parameters

Name	Description
userId ^{required}	
integer(int32)	2 (path)

Execute **Clear**

Responses

Curl

```
curl -X 'GET' \
'http://localhost:5196/api/Users/2' \
-H 'accept: text/plain'
```

Request URL

```
http://localhost:5196/api/Users/2
```

Server response

Code	Details
200	Response body <pre>{ "userId": 2, "name": "API Test User", "email": "apitest.176389195@example.com", "role": "User" }</pre> Response headers <pre>content-type: application/json, charset=utf-8 date: Fri, 17 Apr 2026 02:14:02 GMT server: Mastrel transfer-encoding: chunked</pre>

Responses

Code	Description	Links
200	OK	No links

Media type


text/plain

Content Accept header

Example Value: Schema

```
{
  "userId": 2,
  "name": "string",
  "email": "string",
  "role": "string"
}
```

20. /api/Users/{userId}

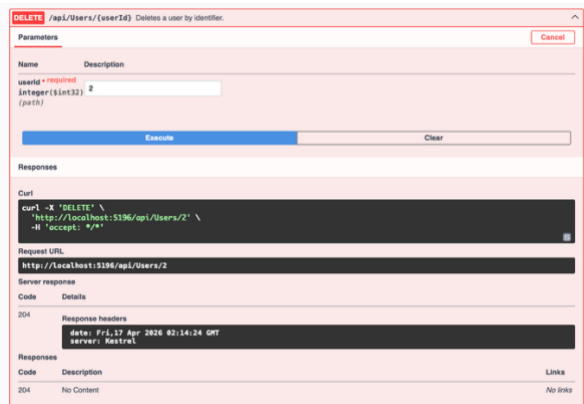

DELETE /api/Users/{userId} Deletes a user by identifier.

Parameters

Name	Description
userId ^{required}	
integer(int32)	2 (path)

Execute **Clear**

Responses

Curl

```
curl -X 'DELETE' \
'http://localhost:5196/api/Users/2' \
-H 'accept: */*'
```

Request URL

```
http://localhost:5196/api/Users/2
```

Server response

Code	Details
204	Response headers <pre>date: Fri, 17 Apr 2026 02:14:24 GMT server: Mastrel</pre>

Responses

Code	Description	Links
204	No Content	No links

