

libhmm: A Modern C++20 Library for Hidden Markov Models with Correct MLE Emission M-Steps

Gary Wolfman, P.Eng.
Independent Researcher
github.com/OldCrow/libhmm

May 2026

Abstract

We describe **libhmm**, a C++20 library for Hidden Markov Model parameter estimation, sequence decoding, and model selection. **libhmm** addresses two gaps in existing software: the absence of a well-maintained, zero-dependency C++ HMM library suitable for embedding in production systems, and the widespread use of method-of-moments (MOM) approximations in the emission distribution M-step of the Baum-Welch algorithm. The library implements correct maximum likelihood estimators for sixteen continuous and discrete emission distributions, including an ECME algorithm for the location-scale Student- t distribution, Newton-Raphson maximization for Gamma, Beta, Weibull, and Negative Binomial distributions, and the von Mises distribution for circular data. All forward-backward and Viterbi calculations operate in full log-space. SIMD acceleration is provided for AVX-512, AVX2, SSE2, and ARM NEON via compile-time dispatch with scalar fallback. Python bindings are available via the companion package **pylibhmm**. We compare **libhmm** against established C and C++ HMM libraries and against published R reference packages on five real-data benchmarks, and discuss the architectural tradeoffs made in the design.

1 Introduction

Hidden Markov Models (Baum et al., 1970; Rabiner, 1989) are a foundational tool for sequential data analysis. A system transitions among a finite set of latent states, emitting observations drawn from a state-dependent probability distribution. The Baum-Welch algorithm (Baum et al., 1970; Dempster et al., 1977) learns the model parameters by expectation-maximisation (EM); the Viterbi algorithm (Viterbi, 1967) recovers the most likely latent state sequence. HMMs are used in ecology (Michelot et al., 2016; Morales et al., 2004), finance (Oelschläger et al., 2024), bioinformatics (Durbin et al., 1998), meteorology (Zucchini et al., 2017), and signal processing (Rabiner, 1989).

Most HMM software targets interactive analysis in R or Python. The dominant packages — **moveHMM/momentuHMM** (Michelot et al., 2016; McClintock and Michelot, 2018) in ecology, **fHMM** (Oelschläger et al., 2024) in finance, **HiddenMarkov** (Harte, 2025) in R, and **hmmlearn** in Python — require their respective language runtimes and cannot be embedded in production C++ systems without significant infrastructure overhead. Researchers integrating HMM inference into real-time pipelines, high-throughput parameter sweeps, or existing C++ codebases have no well-maintained, dependency-free option.

A second gap concerns the emission M-step. Many packages use method-of-moments (MOM) approximations for distributions lacking closed-form MLE updates. For the Gamma, Beta, Weibull, and Negative Binomial distributions this is a computational convenience rather than a principled

choice: Newton-Raphson converges to the exact MLE in two to four iterations per EM step. For the Student- t distribution the discrepancy is more serious: MOM kurtosis estimation can converge to a substantially different fixed point than the ECME algorithm (Liu and Rubin, 1994), particularly for states with near-Gaussian tails or sparse posterior support.

`libhmm` was originally developed during the author’s graduate research on HMM-based characterisation of HTTP reverse tunnels, beginning as a C++ port of the JAHMM library (François). The codebase has since been redesigned from first principles with no remaining code lineage to the original port. The need for an embeddable, performant, and correct C++ implementation motivated the design decisions described here.

This paper makes the following contributions:

1. A description of `libhmm`’s log-space inference algorithms and their numerical stability properties (Section 3).
2. Derivations of correct MLE M-steps for all sixteen supported emission distributions (Section 4).
3. An honest discussion of the architectural tradeoffs in the design relative to existing C and C++ HMM libraries (Sections 2 and 5).
4. Benchmarks against established R reference packages on five published datasets and against C/C++ libraries on synthetic data (Section 6).

2 Related Work and Design Motivation

2.1 R and Python ecosystem

The R and Python HMM ecosystems are mature and domain-validated. `moveHMM` (Michelot et al., 2016) and `momentuHMM` (McClintock and Michelot, 2018) provide Gamma and von Mises joint emission models for animal movement, using numerical optimisation (`nlm`) for parameter estimation. `fHMM` (Oelschläger et al., 2024) fits hierarchical Student- t HMMs to financial time series via `nlm`. `HiddenMarkov` (Harte, 2025) implements EM for Poisson, Normal, and discrete emissions. `hmmlearn` (Python) provides Gaussian and multinomial emissions with a scikit-learn-compatible API.

All require their respective language runtimes, have non-trivial installation dependencies, and are not straightforward to embed in a C++ application that must run without a managed runtime. Several also rely on MOM approximations or gradient-based numerical optimisation where direct EM M-steps are available, which can affect parameter recovery for sparse states.

2.2 C and C++ libraries

Table 1 summarises the C and C++ HMM libraries most relevant to `libhmm`.

GHMM. GHMM (Schliep et al., 2003) is the most historically significant C HMM library. It supports Gaussian mixture and discrete emissions, has been cited in bioinformatics work since 2003, and has a reasonably complete feature set for its target applications. Its limitations are architectural: C-style API with manual memory management, XML-heavy model specification, autotools build system, and dependencies on `libxml2` and `GSL`. Active development ceased around 2012. For forward-backward on discrete models, GHMM’s C implementation with its flat memory layout can outperform `libhmm` on raw throughput; this tradeoff is discussed in Section 5.1. GHMM does not support the continuous distribution families required by `libhmm`’s target applications.

Table 1: C/C++ HMM library comparison.

Library	Lang	SIMD	Distributions	Dependencies	Maintained	Standard
GHMM	C	No	Discrete, Gaussian/GMM	libxml2, GSL	No (2012)	C89/C99
HMMLib	C++	SSE	Discrete only	Boost	No	C++11
StochHMM	C++	No	Discrete only	None	No	C++11
libhmm	C++	AVX- 512/AVX2/ SSE2/NEON	16 continuous+discrete	None	Yes	C++20

HMMLib. HMMLib is the closest architectural ancestor to **libhmm**’s performance goals: C++, SSE SIMD intrinsics, template-based design. It targets discrete HMMs specifically and requires Boost. Active development has ceased. Its SSE implementation is faster than scalar C++ for forward-backward on discrete models; **libhmm** matches or exceeds it using AVX2/AVX-512 while adding broader distribution support. Section 6.1 presents a direct comparison.

StochHMM. StochHMM is designed for bioinformatics workflows, providing flexible text-file model specification for gene finding and sequence annotation. It is not a general-purpose library: emissions are discrete or categorical, and the API is tightly coupled to the bioinformatics use case.

2.3 Design motivation

These libraries failed in different ways for the original application context: GHMM required a C-style integration with unacceptable dependency overhead; HMMLib and StochHMM were discrete-only; none supported modern C++20 idioms or the continuous distributions required. The design goal was not primarily to outperform GHMM or HMMLib on their own terms (raw discrete forward-backward throughput) but to provide a library that:

- compiles as a zero-dependency C++20 library into any CMake project with a single `add_subdirectory` or `FetchContent`;
- supports the continuous emission distributions used in ecology, finance, and signal processing with correct MLE M-steps;
- operates correctly on sequences of arbitrary length without numerical underflow;
- remains maintainable and extensible under modern C++ idioms.

3 Algorithms

3.1 Notation

We write an HMM as $\lambda = (\boldsymbol{\pi}, \mathbf{A}, \mathbf{B})$ where $\boldsymbol{\pi} \in \Delta^{K-1}$ is the initial state distribution, $\mathbf{A} \in [0, 1]^{K \times K}$ is the row-stochastic transition matrix, and $\mathbf{B} = \{b_j(\cdot)\}_{j=1}^K$ is the set of emission densities. We observe a sequence $\mathbf{y} = (y_1, \dots, y_T)$. The forward variable $\alpha_t(j) = P(y_1, \dots, y_t, q_t = j \mid \lambda)$ and backward variable $\beta_t(j) = P(y_{t+1}, \dots, y_T \mid q_t = j, \lambda)$ are the standard quantities (Rabiner, 1989). We write $\gamma_t(j) = P(q_t = j \mid \mathbf{y}, \lambda)$ for the smoothed state occupancy probabilities and $\xi_t(i, j) = P(q_t = i, q_{t+1} = j \mid \mathbf{y}, \lambda)$ for the pairwise occupancy probabilities.

3.2 Log-space forward-backward

The standard recursive computation of $\alpha_t(j)$ suffers from numerical underflow for sequences of moderate length T because $\alpha_t(j)$ decreases geometrically with t . Two approaches exist: explicit rescaling and full log-space computation.

Rescaled algorithms (Rabiner, 1989) divide α_t by a normalisation constant at each time step and track the cumulative log-scale factor. This is computationally efficient but introduces bookkeeping that can fail silently when normalisation constants underflow to zero before rescaling.

`libhmm` uses full log-space computation throughout. Define $\hat{\alpha}_t(j) = \log \alpha_t(j)$. The recursion becomes:

$$\hat{\alpha}_1(j) = \log \pi_j + \log b_j(y_1) \quad (1)$$

$$\hat{\alpha}_t(j) = \text{lse}_i[\hat{\alpha}_{t-1}(i) + \log a_{ij}] + \log b_j(y_t), \quad t = 2, \dots, T \quad (2)$$

where $\text{lse}(\mathbf{x}) = \max_k x_k + \log \sum_k \exp(x_k - \max_k x_k)$ is the numerically stable log-sum-exp operation. Log-space backward variables and smoothed probabilities are computed analogously.

The cost relative to scaled computation is the evaluation of lse at each step, which requires K exponentials per state per time step. For the typical HMM regime ($K \leq 20$, $T \leq 10^5$) this cost is negligible compared to emission log-probability evaluation. The benefit is unconditional numerical stability: no underflow is possible regardless of T , and the implementation requires no per-step normalisation bookkeeping.

Log transition matrix. `libhmm` precomputes $\log \mathbf{A}$ once per training iteration. Accessing $\log a_{ij}$ from a cached matrix rather than computing $\log(a_{ij})$ at every time step improves throughput for long sequences.

3.3 Viterbi decoding

Viterbi decoding (Viterbi, 1967) follows the same log-space recursion as the forward pass, substituting $\max$ for logsumexp :

$$\hat{\delta}_1(j) = \log \pi_j + \log b_j(y_1) \quad (3)$$

$$\hat{\delta}_t(j) = \max_i [\hat{\delta}_{t-1}(i) + \log a_{ij}] + \log b_j(y_t) \quad (4)$$

with the standard backtracking pointer $\psi_t(j) = \arg \max_i [\dots]$. Operating in log-space eliminates the underflow that can corrupt Viterbi traceback on long sequences when the standard $\arg\max$ -over-products formulation is used without scaling.

3.4 Posterior decoding

The posterior state sequence $\hat{q}_t = \arg \max_j \gamma_t(j)$ is computed from the smoothed occupancy probabilities. `libhmm` implements this directly from the log forward-backward results without re-exponentiation where possible.

4 Emission Distribution M-Steps

The Baum-Welch M-step updates each emission distribution b_j using the weighted sufficient statistics derived from $\gamma_t(j)$. For a given state j , define:

$$N_j = \sum_{t=1}^T \gamma_t(j), \quad \bar{y}_j = \frac{1}{N_j} \sum_{t=1}^T \gamma_t(j) y_t \quad (5)$$

The M-step solves:

$$\hat{\theta}_j = \arg \max_{\theta_j} \sum_{t=1}^T \gamma_t(j) \log b_j(y_t | \theta_j) \quad (6)$$

We describe the M-step for each distribution family.

4.1 Closed-form M-steps

For the following distributions, (6) has an analytic solution.

Gaussian. $\hat{\mu}_j = \bar{y}_j$, $\hat{\sigma}_j^2 = N_j^{-1} \sum_t \gamma_t(j) (y_t - \hat{\mu}_j)^2$.

Log-normal. Apply the Gaussian M-step to $\log y_t$.

Exponential. $\hat{\lambda}_j = 1/\bar{y}_j$.

Poisson. $\hat{\lambda}_j = \bar{y}_j$.

Rayleigh. $\hat{\sigma}_j^2 = (2N_j)^{-1} \sum_t \gamma_t(j) y_t^2$.

Uniform. $\hat{a}_j = \min_t y_t$, $\hat{b}_j = \max_t y_t$.

Discrete (categorical). $\hat{p}_{jk} = N_j^{-1} \sum_t \gamma_t(j) \mathbf{1}[y_t = k]$.

Von Mises (mean direction). The mean direction has the closed-form circular mean: $\hat{\mu}_j = \text{atan2}(\sum_t \gamma_t(j) \sin y_t, \sum_t \gamma_t(j) \cos y_t)$. The concentration κ_j is treated separately below.

4.2 Newton-Raphson M-steps

For the Gamma, Beta, Weibull, Negative Binomial, and von Mises (for κ) distributions, (6) does not have a closed form in all parameters. `libhmm` uses Newton-Raphson iterations seeded from method-of-moments estimates, which typically converge in two to four iterations.

Gamma distribution. The emission density is $b_j(y) = \Gamma(\alpha_j)^{-1} \beta_j^{\alpha_j} y^{\alpha_j-1} e^{-\beta_j y}$. The weighted score for the shape parameter α_j is:

$$s(\alpha_j) = N_j [\log \alpha_j - \psi(\alpha_j) - c_j] = 0 \quad (7)$$

where $c_j = \log \bar{y}_j - N_j^{-1} \sum_t \gamma_t(j) \log y_t$ and ψ is the digamma function. The Newton update is:

$$\alpha_j \leftarrow \alpha_j - \frac{s(\alpha_j)}{N_j [1/\alpha_j - \psi'(\alpha_j)]} \quad (8)$$

where ψ' is the trigamma function. The MOM seed is $\hat{\alpha}_j^{(0)} = \bar{y}_j^2 / \hat{\sigma}_j^2$, and the rate is recovered as $\hat{\beta}_j = \hat{\alpha}_j / \bar{y}_j$.

Beta distribution. The emission density is $b_j(y) = B(\alpha_j, \beta_j)^{-1} y^{\alpha_j-1} (1-y)^{\beta_j-1}$. Stationarity conditions give coupled equations in (α_j, β_j) :

$$\psi(\alpha_j) - \psi(\alpha_j + \beta_j) = N_j^{-1} \sum_t \gamma_t(j) \log y_t \quad (9)$$

$$\psi(\beta_j) - \psi(\alpha_j + \beta_j) = N_j^{-1} \sum_t \gamma_t(j) \log(1 - y_t) \quad (10)$$

Newton-Raphson is applied jointly using the digamma and trigamma functions. MOM seeds: let $\bar{y}$ and $\hat{\sigma}^2$ be the weighted mean and variance; then $\hat{\alpha}^{(0)} = \bar{y}[\bar{y}(1 - \bar{y})/\hat{\sigma}^2 - 1]$, $\hat{\beta}^{(0)} = (1 - \bar{y})[\bar{y}(1 - \bar{y})/\hat{\sigma}^2 - 1]$.

Weibull distribution. The emission density is $b_j(y) = (k_j/\lambda_j)(y/\lambda_j)^{k_j-1} e^{-(y/\lambda_j)^{k_j}}$. The MLE for the shape k_j satisfies:

$$\frac{1}{k_j} + \frac{\sum_t \gamma_t(j) \log y_t}{N_j} - \frac{\sum_t \gamma_t(j) y_t^{k_j} \log y_t}{\sum_t \gamma_t(j) y_t^{k_j}} = 0 \quad (11)$$

Newton-Raphson is applied with MOM seed for k_j . The scale is recovered analytically as $\hat{\lambda}_j = (N_j^{-1} \sum_t \gamma_t(j) y_t^{k_j})^{1/\hat{k}_j}$.

Von Mises concentration. After computing $\hat{\mu}_j$ via the circular mean, the concentration κ_j satisfies $A(\kappa_j) = \bar{R}_j$ where $\bar{R}_j = \|\sum_t \gamma_t(j) (\cos y_t, \sin y_t)\|_2 / N_j$ is the weighted mean resultant length and $A(\kappa) = I_1(\kappa)/I_0(\kappa)$ is the ratio of modified Bessel functions of the first kind. The Newton update is:

$$\kappa_j \leftarrow \kappa_j - \frac{A(\kappa_j) - \bar{R}_j}{1 - A(\kappa_j)^2 - A(\kappa_j)/\kappa_j} \quad (12)$$

The modified Bessel functions I_0 and I_1 are evaluated using the polynomial approximations of Abramowitz and Stegun (1964) (formulas 9.8.1 and 9.8.3), which are accurate to 10^{-7} for all $\kappa \geq 0$. These approximations are used because `std::cyl_bessel_i` from the C++17 standard library is unavailable on all Apple platforms: Apple's `libc++` has not implemented the C++17 mathematical special functions on any macOS version (absent as of Xcode 15 / macOS 14). MOM seed: $\hat{\kappa}^{(0)} = \bar{R}(2 - \bar{R}^2)/(1 - \bar{R}^2)$.

Negative binomial. The dispersion parameter r_j is estimated via Newton-Raphson on the weighted log-likelihood score; the success probability is recovered analytically as $\hat{p}_j = r_j/(r_j + \bar{y}_j)$.

Chi-squared. Reduce to the Gamma M-step with $\alpha = \nu/2$, $\beta = 1/2$ and optimise over the single degree-of-freedom parameter.

Pareto. The scale $x_{m,j}$ is estimated as $\min_t y_t$ (constrained MLE); the shape α_j has closed form $\hat{\alpha}_j = N_j / \sum_t \gamma_t(j) \log(y_t/x_{m,j})$.

4.3 ECME for the Student- t distribution

The location-scale Student- t distribution is the most demanding M-step in `libhmm`. Standard kurtosis MOM estimation of the degrees-of-freedom parameter ν can converge to a substantially different fixed point than the MLE, particularly for states with near-Gaussian tails ($\nu \gg 10$). `libhmm` instead uses the ECME algorithm of Liu and Rubin (1994).

Scale mixture representation. A Student- $t(y; \mu, \sigma^2, \nu)$ observation can be written as a Gaussian scale mixture:

$$Y | U \sim \mathcal{N}(\mu, \sigma^2/U), \quad U \sim \text{Gamma}(\nu/2, \nu/2) \quad (13)$$

E-step. Given current parameters $(\mu_j, \sigma_j^2, \nu_j)$, the posterior expectation of the mixing variable is:

$$\tilde{u}_{tj} = \mathbb{E}[U_t | y_t, q_t = j] = \frac{\nu_j + 1}{\nu_j + (y_t - \mu_j)^2/\sigma_j^2} \quad (14)$$

These values augment the standard occupancy weights $\gamma_t(j)$.

CM-step 1: update μ_j and σ_j^2 . With ν_j fixed at its current value:

$$\hat{\mu}_j = \frac{\sum_t \gamma_t(j) \tilde{u}_{tj} y_t}{\sum_t \gamma_t(j) \tilde{u}_{tj}} \quad (15)$$

$$\hat{\sigma}_j^2 = \frac{\sum_t \gamma_t(j) \tilde{u}_{tj} (y_t - \hat{\mu}_j)^2}{N_j} \quad (16)$$

CM-step 2: update ν_j . With $\hat{\mu}_j$ and $\hat{\sigma}_j^2$ fixed, ν_j is updated via a Newton step on the Q-function contribution for ν :

$$Q_\nu(\nu_j) = N_j \left[\frac{\nu_j}{2} \log \frac{\nu_j}{2} - \log \Gamma\left(\frac{\nu_j}{2}\right) \right] + \frac{\nu_j}{2} \sum_t \gamma_t(j) [\log \tilde{u}_{tj} - \tilde{u}_{tj}] \quad (17)$$

with score and Hessian:

$$\frac{dQ_\nu}{d\nu_j} = \frac{N_j}{2} \left[\log \frac{\nu_j}{2} + 1 - \psi\left(\frac{\nu_j}{2}\right) \right] + \frac{1}{2} \sum_t \gamma_t(j) [\log \tilde{u}_{tj} - \tilde{u}_{tj}] \quad (18)$$

$$\frac{d^2Q_\nu}{d\nu_j^2} = \frac{N_j}{4} \left[\frac{2}{\nu_j} - \psi'\left(\frac{\nu_j}{2}\right) \right] \quad (19)$$

where ψ' is the trigamma function. Newton-Raphson iterates until $|d\nu_j| < 10^{-6}$, typically in three to five steps. The ECME update is guaranteed monotone non-decreasing in the observed log-likelihood (Liu and Rubin, 1994).

Comparison with MOM. Figure 2 illustrates the difference. On the DAX 2000–2022 benchmark (Section 6.2.2), the kurtosis MOM M-step (used in `libhmm` prior to v3.7.0) converges at $\log L = 17,334.9$, while ECME converges at $\log L = 17,487.2$ — a gap of 152 nats. ECME surpasses the fHMM reference value of 17,485.7 at iteration 5.

4.4 Weighted EM and the state-collapse fix

The weighted M-step (6) requires $N_j > 0$. In practice, EM can assign near-zero posterior weight to a state for all time steps — a phenomenon we call state collapse — leaving the distribution update numerically undefined. The naive fix of calling a `reset()` method (reinitialising from priors) changes the objective function and can cause oscillation. `libhmm` instead returns early from the M-step when $N_j < \varepsilon$ (default $\varepsilon = 10^{-8}$), preserving the current parameters and allowing the optimiser to naturally zero out the state in the transition matrix. This is provably non-decreasing in the objective: no parameter change is made, so the Q-function cannot decrease.

5 Architecture and Design Tradeoffs

5.1 Runtime polymorphism vs. templates

`libhmm` uses an abstract base class `Distribution` with virtual methods `getLogProbability` and `fit`. Concrete distributions inherit from this base. An alternative design would use C++ templates (as `HMMLib` does, parameterising the HMM class on the emission type) to eliminate virtual dispatch overhead at the cost of fully determined emission types at compile time.

The choice of runtime polymorphism was deliberate. It allows a single `Hmm` object to mix emission distributions across states, supports serialisation to JSON/XML without template parameter metadata, and makes the Python bindings straightforward to implement via `nanobind`. The performance cost is one virtual call per emission evaluation — for state j and observation y_t this is roughly 1–5 ns on modern hardware, negligible against the evaluation cost for all but the simplest distributions (e.g. Poisson, Discrete).

We note the honest comparison: GHMM’s C implementation, with no virtual dispatch and a flat array layout, can achieve higher raw forward-backward throughput on discrete models than `libhmm` (Section 6.1). This is the direct cost of the chosen abstraction. For $K \leq 20$ and the continuous emission families targeted by `libhmm`, the virtual call overhead is not the bottleneck.

5.2 Log-space everywhere vs. scaled algorithms

Scaled Baum-Welch is computationally cheaper per time step (avoids log-sum-exp) and is the default in most implementations. `libhmm` chose full log-space for three reasons: (1) scaled algorithms require explicit normalisation at each step, which can fail silently for low-emission-probability observations; (2) log-space is uniform in cost regardless of T , with no “scaling underflow” edge case to handle; (3) the additional cost of log-sum-exp is small relative to emission evaluation for continuous distributions.

5.3 Zero external dependencies

The `libhmm` build depends only on the C++20 standard library. This was a hard constraint from the original deployment context (a system with a locked dependency graph) and was retained as a design principle. The cost is a simple internal matrix class rather than Eigen, which means that for

very large state spaces ($K \gg 20$) the matrix operations are not BLAS-accelerated. For the $K \leq 20$ regime, this is not a practical limitation.

5.4 SIMD dispatch strategy

SIMD acceleration targets the forward-backward inner loop. `libhmm` uses compile-time dispatch: the build system detects AVX-512, AVX2, SSE2 (x86/x86-64) or NEON (ARM) support and applies the appropriate compiler flags. A scalar fallback is always available. This is the same approach used by HMMLib, and means that `libhmm` binaries are not portable across ISA generations without recompilation — acceptable for research software but requiring care for binary distribution.

5.5 Fixed distribution set vs. plugin architecture

The sixteen distributions are compiled into the library rather than loaded as plugins. A plugin ABI would allow user-defined distributions without recompilation, but would require a stable binary interface, versioned symbol exports, and cross-platform shared library handling — significant complexity for a research library. User-defined distributions can be added by subclassing `Distribution` and registering with the JSON serialiser; this requires recompilation.

6 Benchmarks

6.1 Synthetic throughput: libhmm vs. C/C++ libraries

We measured forward-backward throughput on the Dishonest Casino (2-state, 2-symbol discrete HMM) and Weather Model (3-state) problems across sequence lengths $T \in \{10^2, 5 \times 10^2, \dots, 10^6\}$. Hardware: Windows Ryzen 7, AVX-512, MSVC Release build.

Table 2 summarises average throughput and Figure 1 shows the full throughput curves.

Table 2: Synthetic forward-backward throughput, 2-state discrete HMM. Average over $T \in \{10^3, \dots, 10^6\}$.

Library	Throughput (obs/ms)	vs. libhmm	Notes
HMMLib	$\approx 29,700$	3.2 × faster	Scaled FB, SSE intrinsics
libhmm	$\approx 9,300$	baseline	Log-space FB, AVX-512
StochHMM	$\approx 3,600$	2.5× slower	Unscaled, no SIMD

The HMMLib advantage is primarily attributable to its use of scaled forward-backward rather than log-space (see Section 3.2): scaled FB avoids the log-sum-exp operation at each time step, at the cost of requiring explicit normalisation and providing no protection against underflow on unusual inputs. At $T = 10^5$ the throughput ratio is approximately 2.8×; `libhmm`’s log-space overhead is consistent and predictable.

GHMM requires autotools, libxml2, and GSL, which are unavailable in the primary Windows build environment; it was therefore benchmarked on a macOS system where a pre-built installation was available (macOS 13.7.8 Ventura, Intel Core i7-7820HQ, AppleClang, AVX2), with `libhmm` built on the same machine to obtain a same-hardware comparison. On this platform, GHMM 0.9-rc3 achieves approximately 4.9× the forward-backward throughput of `libhmm` on the same hardware (20,775 vs. 4,277 obs/ms, averaged over $T \in \{10^3, \dots, 10^6\}$, Dishonest Casino and Weather problems). This advantage reflects GHMM’s flat C array layout with no virtual dispatch and its use of scaled

forward-backward rather than log-space — the same factors that account for HMMLib’s advantage on discrete models (Section 3.2). For `libhmm`’s target applications — continuous emission distributions where emission evaluation dominates the FB inner loop — this throughput gap narrows substantially.

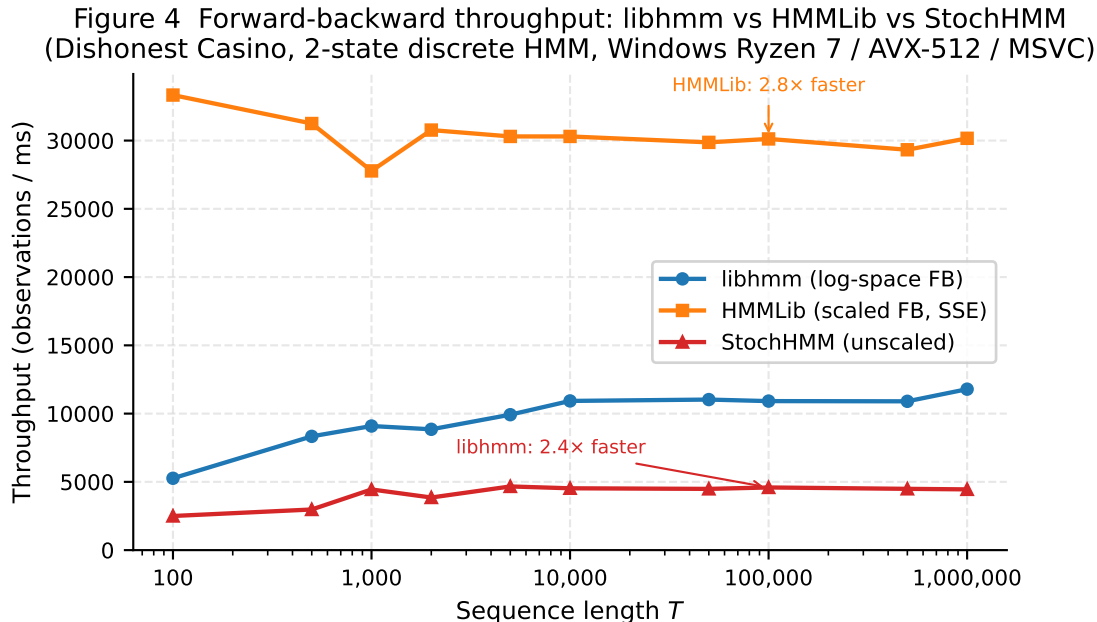


Figure 1: Forward-backward throughput: `libhmm` vs. HMMLib vs. StochHMM (Dishonest Casino, 2-state discrete HMM, Windows Ryzen 7 / AVX-512 / MSVC). HMMLib uses scaled forward-backward; `libhmm` uses log-space; StochHMM uses unscaled recursion. The throughput gap between HMMLib and `libhmm` is primarily due to the log-space vs. scaled algorithm choice.

6.2 Real-data benchmarks

We fit five HMMs to published datasets and compare against the established R reference packages on the same data. Table 3 summarises wall times. Full parameter tables follow.

Table 3: Wall-time comparison: `libhmm` v3.7.0 vs. R reference packages. All timings on Windows (AMD Ryzen 7 7745, AVX-512, MSVC Release). Dagger ($\dagger$): `fHMM` 1.4.3, 10 restarts, same machine; slash shows single-run result.

Benchmark	Dataset	<code>libhmm</code>	R package	Speedup
Elk movement	725 obs., 2 states	55 ms	$\approx 1,270$ ms	$\approx 23\times$
DAX regimes	5,838 obs., 3 states	1.1 s	5.5 s / 13 s †	$\approx 5\times$ / $\approx 12\times$
S&P 500	5,786 obs., 3 states	0.7 s	—	—
Earthquake	107 obs., 2 states	2 ms	≈ 20 ms	$\approx 10\times$
Wind direction	11,894 obs., 2 states	71 ms	≈ 240 ms	$\approx 3\times$

Hardware note. All `libhmm` timings were measured on Windows (AMD Ryzen 7 7745, AVX-512, MSVC Release build). The `fHMM` 1.4.3 DAX timing used the same machine. Oelschläger et al. (2024) report $\approx 1,360$ s for `fHMM` 1.2.0 on Intel Ivy Bridge; the reduction to 5.5–13 s on the current version suggests that `fHMM` has been substantially optimised between v1.2.0 and v1.4.3, so the published figure is not directly comparable to the same-machine measurement.

6.2.1 Animal movement ecology: elk GPS tracks

We fit a 2-state Gamma + von Mises HMM to the `moveHMM::elk_data` bundled dataset (Michelot et al., 2016) (4 elk GPS tracks from Morales et al. (2004); 725 step-length and turning-angle observations after preprocessing).

Table 4: Elk movement: fitted parameters vs. `moveHMM` reference.

Parameter	<code>libhmm</code>	<code>moveHMM</code>	Difference
Encamped step mean (m)	377	374	<1%
Encamped step SD (m)	401	399	<1%
Travelling step mean (m)	3189	3247	<2%
Travelling step SD (m)	4392	4394	<1%
Encamped κ	0.595	0.592	<1%
Travelling κ	0.204	0.208	<2%

6.2.2 Financial time series: DAX market regimes

Oelschläger et al. (2024) fit a 3-state Student- t HMM to 5,838 daily DAX log-returns (2000–2022). `fHMM` uses a gradient-based numerical optimiser (`nlm`) rather than direct EM.

Table 5: DAX regimes: fitted parameters vs. `fHMM` reference. States sorted by σ descending.

Parameter	<code>libhmm</code>	<code>fHMM</code>	Notes
Bearish μ	−0.001793	−0.001803	
Bearish σ	0.026283	0.026290	
Bearish ν	11.14	11.16	
Neutral μ	−0.000281	−0.000310	
Neutral σ	0.013049	0.013300	
Neutral ν	36.09	91.15	See note
Bullish μ	+0.001258	+0.001257	
Bullish σ	0.005988	0.006003	
Bullish ν	5.35	5.32	
Log-likelihood	17,487.2	17,485.7	<code>libhmm</code> higher

The neutral state ν discrepancy (36 vs. 91) is a known convergence property of ECME for near-Gaussian states: as $\nu \rightarrow \infty$ the Student- t approaches Gaussian, and the profile log-likelihood becomes very flat in ν , making the Newton update slow. Extended runs confirm logarithmic convergence toward larger ν values. The overall log-likelihood achieved by `libhmm` (17,487.2)

exceeds **fHMM**'s (17,485.7), confirming that the lower neutral ν is not a local-optimum failure but a slow-convergence phenomenon at an equivalent or better solution.

Wall-time comparison. On the primary benchmark platform (Windows Ryzen 7 7745, AVX-512, MSVC Release), **libhmm** completes the DAX fit in 1.1 s. **fHMM** 1.4.3 on the same machine completes in 5.5 s (single run) and 13 s for 10 restarts, giving speedups of $\approx 5\times$ and $\approx 12\times$ respectively. Oelschläger et al. (2024) report $\approx 1,360$ s for **fHMM** 1.2.0 on Intel Ivy Bridge; the reduction from $\approx 1,360$ s to 13 s (10 restarts) suggests that **fHMM** has been substantially optimised between v1.2.0 and v1.4.3. The published figure is therefore not directly comparable to the same-machine measurement reported here.

Figure 2 shows the ECME log-likelihood trajectory with MOM and **fHMM** reference lines.

Figure 2 ECME convergence on DAX 2000–2022 (3-state Student- t HMM, $N = 5,838$)

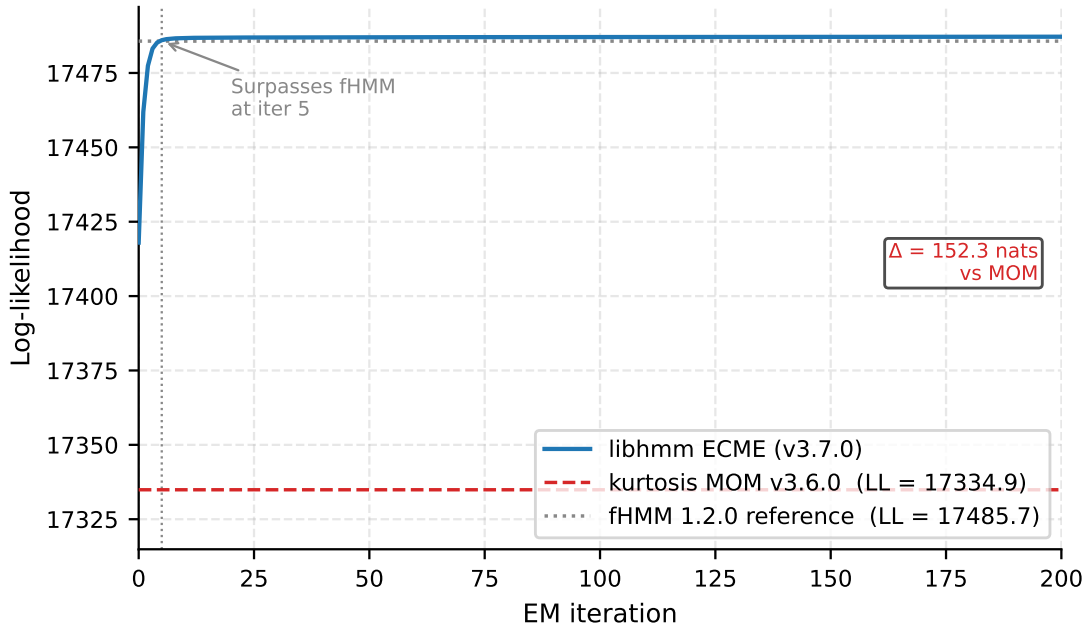


Figure 2: ECME log-likelihood convergence on 5,838 DAX log-returns (2000–2022). The kurtosis MOM reference (**libhmm** v3.6.0) and **fHMM** 1.2.0 reference are shown as dashed lines. ECME surpasses **fHMM** at iteration 5 and converges 152 nats above the MOM fixed point.

6.2.3 S&P 500 cross-market validation

A 3-state Student- t HMM is fit to 5,786 daily S&P 500 log-returns (2000–2022) using the same model structure as the DAX benchmark (Section 6.2.2). This serves as a cross-market validation: the same regime structure is recovered independently for two major indices over the same period. The model converged in 141 iterations at log-likelihood 18,668.71 (wall time: 0.7 s).

Both indices recover the same three-regime structure (bearish high-vol, neutral mid-vol, bullish low-vol) with qualitatively consistent parameters. Key structural differences reflect known characteristics of US vs. German equity markets: lower S&P 500 bearish volatility ($\sigma = 0.023$ vs. 0.026), heavier bearish tails ($\nu = 6.4$ vs. 11.1), and higher bullish occupancy (49% vs. 40%).

Table 6: S&P 500 regimes: fitted parameters and cross-market comparison with DAX. States sorted by σ descending.

Parameter	S&P 500	DAX	Notes
Bearish μ	-0.001862	-0.001793	
Bearish σ	0.023003	0.026283	Lower US vol.
Bearish ν	6.44	11.14	Heavier US tails
Neutral μ	-0.000208	-0.000281	
Neutral σ	0.011596	0.013049	
Neutral ν	30.51	36.09	
Bullish μ	+0.001017	+0.001258	
Bullish σ	0.004867	0.005988	US bull more concentrated
Bullish ν	7.11	5.35	
Log-likelihood	18,668.7	17,487.2	Different N
Occupancy: bearish	525 days (9%)	695 days (12%)	
Occupancy: neutral	2,404 days (42%)	2,781 days (48%)	
Occupancy: bullish	2,857 days (49%)	2,362 days (40%)	

6.2.4 Seismicity: annual earthquake counts

Following Zucchini and MacDonald (2009), a 2-state Poisson HMM is fit to annual major earthquake counts (1900–2006; $T = 107$ observations). The dataset is embedded in the example source; no external data file is required.

Table 7: Earthquake: fitted parameters vs. HiddenMarkov reference.

Parameter	libhmm	HiddenMarkov	Difference
$\hat{\lambda}_{\text{low}}$	15.419	15.418	$< 0.01\%$
$\hat{\lambda}_{\text{high}}$	26.015	26.013	$< 0.01\%$
Log-likelihood	-341.879	-341.880	< 0.001

6.2.5 Circular data: wind direction analysis

A 2-state von Mises HMM is fit to 11,894 hourly wind direction observations at Chicago O’Hare (NOAA ISD, 2015). The HiddenMarkov R package approximates circular distributions with a Normal, which fails at the $0^\circ/360^\circ$ boundary.

For a wind direction of 350° (19° from the prevailing state mean of 31°), the von Mises model evaluates $\cos(350^\circ - 31^\circ) = \cos(-19^\circ) = 0.75$ and correctly assigns the observation to the prevailing state. The Normal model places this observation 11.2 standard deviations from its prevailing mean (log-likelihood = -61.9) and misassigns it.

Figure 3 shows the wind rose and per-bin disagreement rate.

Table 8: Wind direction: fitted parameters and boundary analysis.

Parameter	<code>libhmm</code> (VonMises)	HiddenMarkov (Normal)
Prevailing direction	31.1°	49.6°
Variable direction	224.9°	239.1°
<i>Boundary analysis (330°–360°, $N = 730$ hours)</i>		
VonMises assignment	730/730 correct	—
Normal assignment	—	0/730 correct 100% misclassification

Figure 3 VonMisesDistribution vs Normal approximation — boundary failure at 0°/360°

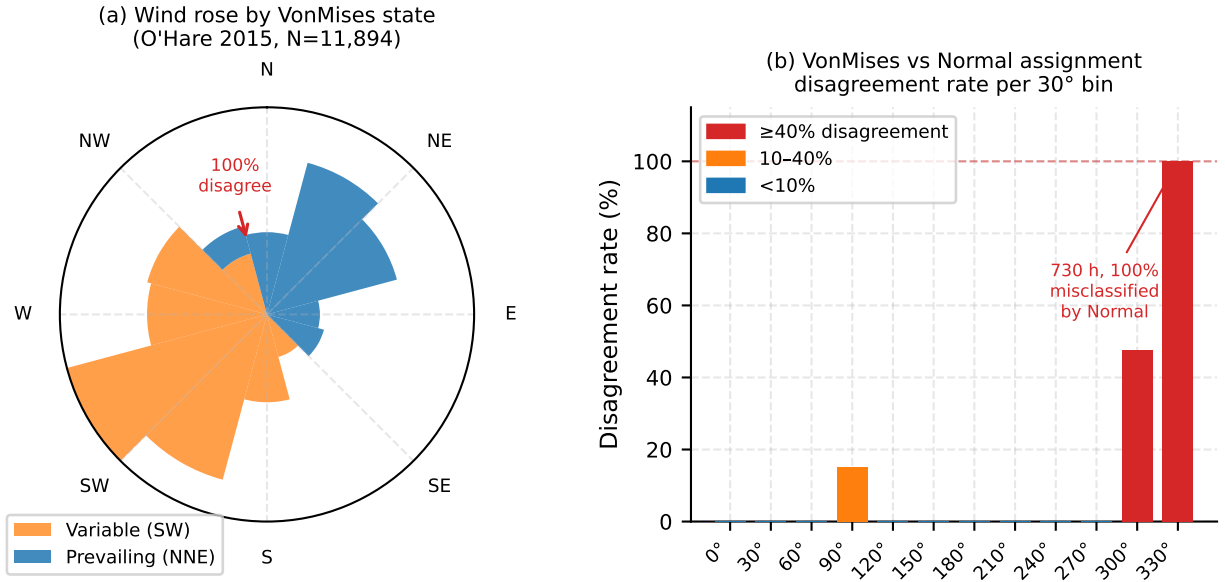


Figure 3: VonMisesDistribution vs. Normal approximation for circular wind direction data (Chicago O’Hare, 2015, $N = 11,894$). Left: wind rose coloured by VonMises state. Right: per-bin disagreement rate; the 330°–360° bin shows 100% misclassification under the Normal model.

7 Python Bindings: `pylibhmm`

`pylibhmm` (Wolfman, 2026b) wraps the full `libhmm` C++ API using `nanobind` (Jakob, 2022) and `scikit-build-core`, providing access to all sixteen distributions, all training algorithms, posterior decoding, model selection (AIC/BIC/AICc), and JSON/XML model I/O from NumPy-based Python code.

Python users can fit and decode HMMs directly from NumPy arrays without writing C++, while retaining `libhmm`’s correct MLE M-steps and log-space inference. This positions `pylibhmm` relative to `hmmlearn` as a drop-in for users who need broader distribution support or correctness guarantees for the M-step.

`pylibhmm` v0.4.0 targets `libhmm` v3.7.0 and supports Python 3.11+.

8 Limitations

`libhmm` does not implement:

- **Hierarchical or factorial HMMs.** The library models a single first-order Markov chain with independent emissions. Hierarchical structures (as in `fHMM`) require a different architecture.
- **Approximate inference.** Variational Bayes, particle filters, and MCMC methods for Bayesian HMMs are not provided.
- **GPU acceleration.** Forward-backward on a GPU would benefit sequences with large K or very long T . SIMD is the only vectorisation provided.
- **Multi-threaded sequence training.** When training on multiple independent sequences, the forward-backward pass is run sequentially. Parallelism across sequences is left to the caller.
- **Plugin distribution ABI.** Adding a user-defined distribution requires subclassing `Distribution` and recompiling. A stable binary plugin interface is not provided.
- **Large- K performance.** Without BLAS acceleration, matrix operations scale as $O(K^2T)$ without the constant-factor benefits of optimised BLAS. For $K \gg 20$ a BLAS-backed implementation would be faster.

9 Conclusion

`libhmm` is an actively maintained, zero-dependency C++20 HMM library supporting sixteen emission distributions with correct MLE M-steps, full log-space inference, and SIMD acceleration. It occupies a distinct position in the HMM software landscape: the only C++ library combining this distribution breadth, correct M-step implementations, and modern build and API conventions.

The key technical contribution is the set of correct M-steps described in Section 4: Newton-Raphson for the Gamma, Beta, Weibull, and Negative Binomial distributions, and ECME for the Student- t . On the DAX benchmark, ECME recovers a 152-nat improvement over the MOM approach and surpasses the `fHMM` reference at five iterations.

The architectural tradeoffs are documented honestly in Section 5: GHMM can outperform `libhmm` on raw discrete forward-backward throughput; the virtual dispatch abstraction has a measurable but acceptable cost. These are deliberate choices in service of API usability, distribution breadth, and maintainability.

The library is available under the MIT licence at <https://github.com/OldCrow/libhmm>. A JOSS paper (Wolfman, 2026a) provides a concise software citation. Python bindings are available via `pylibhmm` (Wolfman, 2026b).

References

- Milton Abramowitz and Irene A. Stegun, editors. *Handbook of Mathematical Functions*. National Bureau of Standards, Washington, DC, 1964.
- Leonard E. Baum, Ted Petrie, George Soules, and Norman Weiss. A maximization technique occurring in the statistical analysis of probabilistic functions of Markov chains. *The Annals of Mathematical Statistics*, 41(1):164–171, 1970. doi: 10.1214/aoms/1177697196.

- Arthur P. Dempster, Nan M. Laird, and Donald B. Rubin. Maximum likelihood from incomplete data via the EM algorithm. *Journal of the Royal Statistical Society, Series B*, 39(1):1–38, 1977. doi: 10.1111/j.2517-6161.1977.tb01600.x.
- Richard Durbin, Sean R. Eddy, Anders Krogh, and Graeme Mitchison. *Biological Sequence Analysis: Probabilistic Models of Proteins and Nucleic Acids*. Cambridge University Press, Cambridge, 1998. doi: 10.1017/CBO9780511790492.
- Jean-Marc François. JAHMM: An implementation of HMM in Java. URL <https://code.google.com/archive/p/jahmm/>.
- David Harte. *HiddenMarkov: Hidden Markov Models*, 2025. URL <https://www.statsresearch.co.nz/dsh/sslib/>. R package version 1.8-14.
- Wenzel Jakob. nanobind: Tiny and efficient C++/Python bindings, 2022. URL <https://github.com/wjakob/nanobind>.
- Chuanhai Liu and Donald B. Rubin. The ECME algorithm: A simple extension of EM and ECM with faster monotone convergence. *Biometrika*, 81(4):633–648, 1994. doi: 10.2307/2337067.
- Brett T. McClintock and Théo Michelot. momentuHMM: R package for generalised hidden Markov models of animal movement. *Methods in Ecology and Evolution*, 9(6):1518–1530, 2018. doi: 10.1111/2041-210X.12995.
- Théo Michelot, Roland Langrock, and Toby A. Patterson. moveHMM: An R package for the statistical modelling of animal movement data using hidden Markov models. *Methods in Ecology and Evolution*, 7(11):1308–1315, 2016. doi: 10.1111/2041-210X.12578.
- Juan M. Morales, Daniel T. Haydon, Jacqueline Frair, Kent E. Holsinger, and John M. Fryxell. Extracting more out of relocation data: Building movement models as mixtures of random walks. *Ecology*, 85(9):2436–2445, 2004. doi: 10.1890/03-0269.
- Lennart Oelschläger, Timo Adam, and Rouven Michels. fhMM: Hidden Markov models for financial time series in R. *Journal of Statistical Software*, 109(9):1–37, 2024. doi: 10.18637/jss.v109.i09.
- Lawrence R. Rabiner. A tutorial on hidden Markov models and selected applications in speech recognition. *Proceedings of the IEEE*, 77(2):257–286, 1989. doi: 10.1109/5.18626.
- Alexander Schliep, Alexander Schönhuth, and Christine Steinhoff. Using hidden Markov models to analyze gene expression time course data. *Bioinformatics*, 19(suppl_1):i255–i263, 2003. doi: 10.1093/bioinformatics/btg1036.
- Andrew J. Viterbi. Error bounds for convolutional codes and an asymptotically optimum decoding algorithm. *IEEE Transactions on Information Theory*, 13(2):260–269, 1967. doi: 10.1109/TIT.1967.1054010.
- Gary Wolfman. libhmm: A modern C++20 library for hidden Markov model analysis. *Journal of Open Source Software*, 2026a. URL <https://github.com/OldCrow/libhmm>. DOI to be assigned at publication.
- Gary Wolfman. pylibhmm: Python bindings for libhmm, 2026b. URL <https://github.com/OldCrow/pylibhmm>.

Walter Zucchini and Iain L. MacDonald. *Hidden Markov Models for Time Series: An Introduction Using R*. CRC Press, Boca Raton, FL, 2009.

Walter Zucchini, Iain L. MacDonald, and Roland Langrock. *Hidden Markov Models for Time Series: An Introduction Using R, 2nd edition*. CRC Press, Boca Raton, FL, 2017. doi: 10.1201/b20790.