

Output :

```
Problems  Output  Debug Console  Terminal
big@hell-na:~/Kishor/TOC/python$ python3 1_substring_position.py
Enter the string
kishor
Enter the starting position of the substring
1
Enter the ending position of the substring
8
Enter the starting position of the substring
1
Enter the ending position of the substring
3
The substring is
kis
big@hell-na:~/Kishor/TOC/python$
```


Output :

```
Problems  Output  Debug Console  Terminal
big@hell-na:~/Kishor/TOC/python$ python3 2_substring_count.py
Enter the string
kishor
Enter the starting position of the substring
2
Enter the number of symbol to be extracted
5
The substring is
ishor
big@hell-na:~/Kishor/TOC/python$
```

Output :

```
big@hell-na:~/Kishor/TOC/python$ python3 4_prefix_suffix_remove.py
Enter the string
aeroplane
Enter the number of trailing symbol to be removed
4
The prefix is
aerop
Enter the number of leading symbol to be removed
5
The suffix is
lane
big@hell-na:~/Kishor/TOC/python$
```

Output :

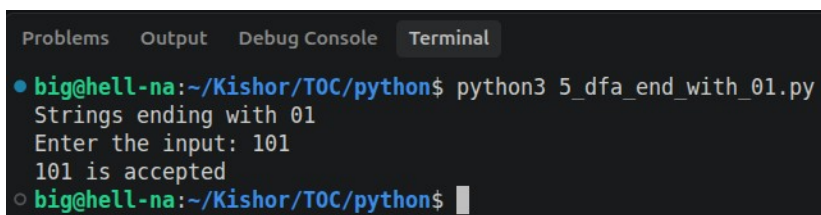

The screenshot shows a terminal window with a dark background. At the top, there are four tabs: 'Problems', 'Output', 'Debug Console', and 'Terminal'. The 'Terminal' tab is active. The terminal content shows a prompt 'big@hell-na:~/Kishor/TOC/python\$' followed by the command 'python3 5_dfa_end_with_01.py'. The script's output is displayed: 'Strings ending with 01', 'Enter the input: 101', and '101 is accepted'. A second prompt 'big@hell-na:~/Kishor/TOC/python\$' is shown at the bottom with a cursor.

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/python$ python3 5_dfa_end_with_01.py
Strings ending with 01
Enter the input: 101
101 is accepted
○ big@hell-na:~/Kishor/TOC/python$
```

Output :

```
• big@hell-na:~/Kishor/TOC/python$ python3 6_dfa_contains_101.py
String has substring 101
Enter the input: 01011
01011 accepted
○ big@hell-na:~/Kishor/TOC/python$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/python$ python3 7_dfa_c_identifier.py
Enter string: myVar1
myVar1 : Valid Identifier
○ big@hell-na:~/Kishor/TOC/python$
```


Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/python$ python3 8_nfa_end_with_01.py
Enter string: 1100101
1100101 is accepted
○ big@hell-na:~/Kishor/TOC/python$
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/python$ python3 9_nfa_contains_001.py
Enter string: 111100010
111100010 is accepted
○ big@hell-na:~/Kishor/TOC/python$
```

Output :

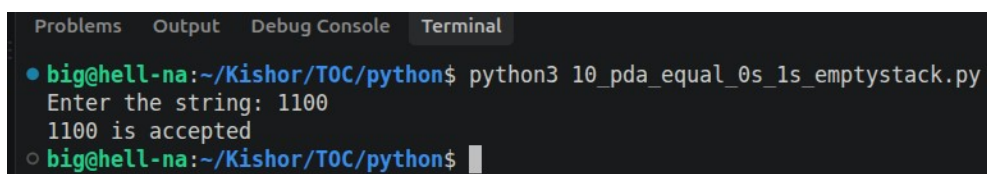

The screenshot shows a terminal window with a dark background. At the top, there are four tabs: 'Problems', 'Output', 'Debug Console', and 'Terminal', with 'Terminal' being the active tab. The terminal content shows a command prompt where a Python script is executed. The prompt is 'big@hell-na:~/Kishor/T0C/python\$'. The command entered is 'python3 10_pda_equal_0s_1s_emptystack.py'. The output of the script is 'Enter the string: 1100' followed by '1100 is accepted' on the next line. The prompt returns to 'big@hell-na:~/Kishor/T0C/python\$' with a cursor at the end.

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/T0C/python$ python3 10_pda_equal_0s_1s_emptystack.py
  Enter the string: 1100
    1100 is accepted
○ big@hell-na:~/Kishor/T0C/python$
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/python$ python3 11_pda_0s_followed_1s_finalstate.py
Enter string: 000111
000111 is accepted
○ big@hell-na:~/Kishor/TOC/python$
```

Problems Output Debug Console Terminal

● big@hell-na:~/Kishor/TOC/python\$ python3 12_turing_machine_anbn.py

Enter a binary string: 000111

The string is accepted

○ big@hell-na:~/Kishor/TOC/python\$

Output :

```
Problems  Output  Debug Console  Terminal
o big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 1_substring_position.cpp
./prog
Enter the string
kishor
Enter the starting position of the substring
1
Enter the ending position of the substring
8
Enter the starting position of the substring
1
Enter the ending position of the substring
3
The substring is
kis
```

Output :

```
Problems  Output  Debug Console  Terminal
o big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 2_substring_count.cpp && ./prog
Enter the string
kishor
Enter the starting position of the substring
2
Enter the number of symbol to be extracted
5
The substring is
ishor
█
```

Output :

```
Problems  Output  Debug Console  Terminal
o big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 3_prefix_suffix_all.cpp && ./prog
Enter the string
kishor
The possible prefixes are
kishor
kisho
kish
kis
ki
k
The possible suffixes are
kishor
ishor
shor
hor
or
r
█
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 4_prefix_suffix_remove.cpp && ./prog
Enter the string
aeroplane
Enter the number of trailing symbol to be removed
4
The prefix is
aerop
Enter the number of leading symbol to be removed
5
The suffix is
lane
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 5_dfa_end_with_01.cpp && ./prog
Strings ending with 01
Enter the input: 101
101 is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 6_dfa_contains_101.cpp && ./prog
String has substring 101
Enter the input: 01011
01011 accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 7_dfa_c_identifier.cpp && ./prog
Enter string: myVar1
myVar1 : Valid Identifier
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 8_nfa_end_with_01.cpp && ./prog
  Enter string: 1100101
    1100101 is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 9_nfa_contains_001.cpp && ./prog
Enter string: 111100010
111100010 is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 10_pda_equal_0s_1s_emptystack.cpp && ./prog
  Enter the string: 1100
    1100 is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
● big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 11_pda_0s_followed_1s_finalstate.cpp && ./prog
Enter string: 000111
000111 is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output :

```
Problems  Output  Debug Console  Terminal
• big@hell-na:~/Kishor/TOC/c$ g++ -std=c++11 -o prog 12_turing_machine_anbn.cpp && ./prog
Enter a binary string: 000111
The string is accepted
○ big@hell-na:~/Kishor/TOC/c$
```

Output:

```
big@hell-na:~/Kishor/TOC/python$ python3 3_prefix_suffix_all.py
Enter the string
kishor
The possible prefixes are
kishor
kisho
kish
kis
ki
k
The possible suffixes are
kishor
ishor
shor
hor
or
r
```