

AIAA 3111 - 数据挖掘导论

第4讲：模式挖掘：高级方法

Dr. Zhidan Liu

AIAA 3111 - Introduction  
to Data Mining

**Lec-4: Pattern Mining:  
Advanced Methods**

Dr. Zhidan Liu

# 第3讲回顾：我们挖掘什么

| 概念   | 所回答的问题           | 关键条件              |
|------|------------------|-------------------|
| 频繁项集 | 哪些项会同时出现？        | 支持度 $\geq$ minsup |
| 关联规则 | 给定 x, y 有多常随之出现？ | 置信度与提升度           |
| 闭模式  | 扩展后支持度能否保持？      | 无等支持度超集           |
| 最大模式 | 模式扩展后能否仍频繁？      | 无频繁超集             |

支持度衡量普遍程度；置信度是条件性的；提升度将规则与独立性比较。

# Lecture 3 Recap: What We Mine

| Concept          | Question answered                                | Key condition             |
|------------------|--------------------------------------------------|---------------------------|
| Frequent itemset | Which items co-occur?                            | support $\geq$ minsup     |
| Association rule | Given X, how often does Y follow?                | confidence and lift       |
| Closed pattern   | Can support be preserved after extension?        | no equal-support superset |
| Maximal pattern  | Can the pattern remain frequent after extension? | no frequent superset      |

Support measures *prevalence*; confidence is *conditional*; lift compares the rule with *independence*.

# 模式挖掘：高级方法

---

- ❑ 挖掘多层与多维模式
- ❑ 基于约束的模式挖掘
- ❑ 挖掘序列模式
- ❑ 挖掘子图模式
- ❑ 小结

# Pattern Mining: Advanced Methods

---

- ❑ Mining Multi-level and multi-dimension Patterns
- ❑ Constraint-based Pattern Mining
- ❑ Mining Sequential Patterns
- ❑ Mining Subgraph Patterns
- ❑ Summary

# 第4讲路线图

## 第1部分：更广泛的模式与约束

- 多层与多维关联
- 稀有模式与负相关模式
- 约束性质与剪枝策略

## 第2部分：有序模式与结构化模式

- 序列模式与 GSP
- 基于投影数据库的模式增长
- 频繁子图与闭子图挖掘

第3讲聚焦频繁项集；  
第4讲扩展模式语言与搜索空间。

# Lecture 4 Roadmap

## Part 1: Broader Patterns and Constraints

- Multi-level and multi-dimensional associations
- Rare and negatively correlated patterns
- Constraint properties and pruning strategies

## Part 2: Ordered and Structured Patterns

- Sequential patterns and GSP
- Pattern growth with projected databases
- Frequent and closed subgraph mining

Lecture 3 focused on **frequent itemsets**;  
Lecture 4 expands the **pattern language** and **search space**.

# 为什么需要高级模式挖掘？

## 基本购物篮假设

- ❑ 单一扁平的项空间
- ❑ 单一支持度阈值
- ❑ 无序事务
- ❑ 挖掘全部合格模式

## 真实数据

- ❑ 项属于层次与维度
- ❑ 稀有事件可能价值很高
- ❑ 顺序与图结构可能重要
- ❑ 用户常常指定约束

高级方法改变模式表示、兴趣度度量或搜索策略。

# Why **Advanced** Pattern Mining?

## Basic market-basket assumptions

- ❑ One *flat* item universe
- ❑ One support threshold
- ❑ Unordered transactions
- ❑ Mine all qualifying patterns

## Real data

- ❑ Items belong to *hierarchies and dimensions*
- ❑ *Rare events* can carry high value
- ❑ Order and graph structure may matter
- ❑ Users often specify *constraints*

Advanced methods change the **pattern representation**, the **interestingness measure**, or the **search strategy**.

# 挖掘多层频繁模式


## 项常常形成层次

- 牛奶: Dairyland 2% 牛奶
- 面包: Wonder 小麦面包

### 统一支持度

第1层  
min\_sup = 5%

第2层  
min\_sup = 5%

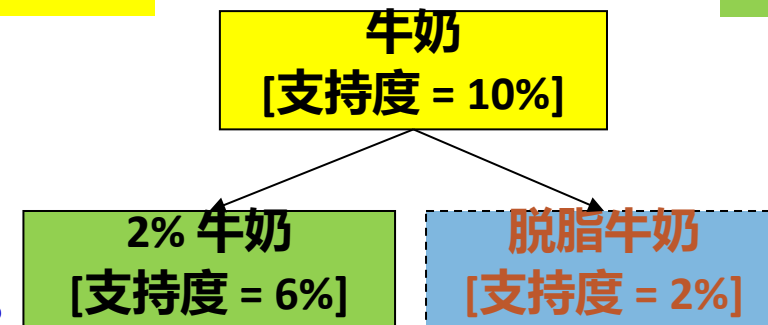

### 递减支持度

第1层  
min\_sup = 5%

第2层  
min\_sup = 1%

## 遵循概念层次的项的最小支持度阈值

- 多层统一最小支持度
  - 层次递减最小支持度: 较低层的项预期支持度更低
- ## 高效挖掘: 共享多层挖掘
- 用最低最小支持度向下传递候选集

# Mining Multiple-Level Frequent Patterns


## Items often form hierarchies

- Milk: Dairyland 2% milk
- Bread: Wonder wheat bread

### Uniform support

Level 1  
min\_sup = 5%

Level 2  
min\_sup = 5%

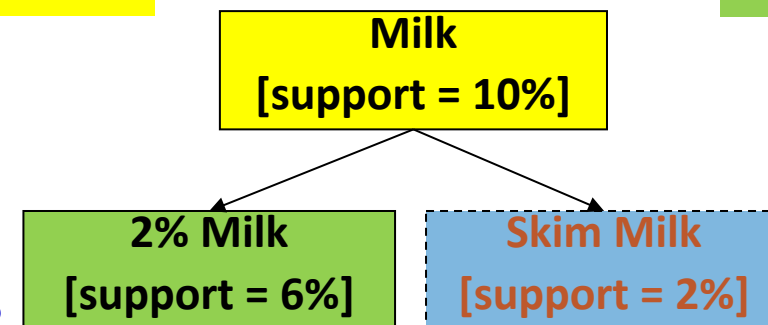

### Reduced support

Level 1  
min\_sup = 5%

Level 2  
min\_sup = 1%

## Min-support thresholds for items following concept hierarchies

- Uniform min-support across multiple levels
  - Level-reduced min-support: Items at the lower level are expected to have lower support
- ## Efficient mining: Shared multi-level mining
- Use the lowest min-support to pass down the set of candidates

# 挖掘多层关联时的冗余过滤

## ❑ 冗余过滤：因“祖先”关系而冗余

- ❑ 规则 (1): 牛奶  $\Rightarrow$  小麦面包 [支持度 = 8%, 置信度 = 70%]
- ❑ 规则 (2): 2% 牛奶  $\Rightarrow$  小麦面包 [支持度 = 2%, 置信度 = 72%]
  - ❑ 设售出的 2% 牛奶约占按加仑计牛奶销量的  $\frac{1}{4}$
  - ❑ 规则 (2) 很大程度上可由规则 (1) 及 2% 牛奶的普遍程度解释。

- ❑ 一般而言：若某规则的支持度接近按其“祖先”规则得到的“期望”值，且置信度与其“祖先”相近，则该规则冗余

问：若规则 (1) 是规则 (2) 的祖先，应剪掉哪一条？

# Redundancy Filtering at Mining Multi-Level Associations

## ❑ Redundancy filtering: redundant due to “**ancestor**” relationships

- ❑ Rule (1): milk  $\Rightarrow$  wheat bread [support = 8%, confidence = 70%]
- ❑ Rule (2): 2% milk  $\Rightarrow$  wheat bread [support = 2%, confidence = 72%]
  - ❑ Suppose the 2% milk sold is about  $\frac{1}{4}$  of milk sold in gallons
  - ❑ Rule (2) is largely explained by Rule (1) and the prevalence of 2% milk.

- ❑ In general: A rule is *redundant* if its **support is close** to the “expected” value, according to its “ancestor” rule, and it has a **similar confidence** as its “ancestor”

Q: If rule (1) is an ancestor of rule (2), which one to prune?

# 概念层次间的冗余

祖先信息为更具体的规则提供基线。

1. 祖先规则牛奶  $\Rightarrow$  小麦面包的支持度为 8%，置信度为 70%。
2. 设 2% 牛奶占全部牛奶销量的四分之一。
3. 2% 牛奶  $\Rightarrow$  小麦面包的期望支持度约为  $8\% \times 1/4 = 2\%$ 。
4. 观测支持度 2% 与置信度 72% 相对祖先规则几乎不增加信息。

当后裔规则明显偏离从祖先继承的期望时，它才有趣。

# Redundancy Across Concept Levels

Ancestor information gives a baseline for the more specific rule.

1. The ancestor rule *milk  $\Rightarrow$  wheat bread* has support 8% and confidence 70%.
2. Suppose 2% milk accounts for one quarter of all milk sales.
3. The expected support of *2% milk  $\Rightarrow$  wheat bread* is about  $8\% \times 1/4 = 2\%$ .
4. Observed support 2% and confidence 72% add little information beyond the ancestor rule.

A descendant rule becomes interesting when it deviates clearly from the expectation inherited from its ancestor.

# 为不同种类的项定制最小支持度

- 在每次关联挖掘中，我们对所有待挖掘的项或项集使用同一最小支持度阈值
- 现实中，有些项（如钻石、手表等）价值高但出现较少
- 因此需要为不同种类的项设置定制的最小支持度
- 一种方法：使用基于分组的“个性化”最小支持度
  - 例如，{钻石, 手表}: 0.05%; {面包, 牛奶}: 5%; ...
  - 如何高效挖掘这类规则？
    - 现有可扩展挖掘算法可以很容易扩展以覆盖这类情形

# Customized Min-Supports for Different Kinds of Items

- We have used the **same min-support threshold** for all the items or item sets to be mined in each association mining
- In reality, some items (e.g., diamond, watch, ...) are valuable but less frequent
- It is necessary to have **customized min-support** settings for different kinds of items
- One Method: Use **group-based “individualized” min-support**
  - E.g., {diamond, watch}: 0.05%; {bread, milk}: 5%; ...
  - How to mine such rules efficiently?
    - Existing scalable mining algorithms can be easily extended to cover such cases

# 挖掘多维关联

- ❑ 单维规则（例如，项都在“商品”维）
  - ❑  $\text{buys}(X, \text{"milk"}) \Rightarrow \text{buys}(X, \text{"bread"})$
- ❑ 多维规则（即项位于  $\geq 2$  个维或谓词中）
  - ❑ 维间关联规则（谓词不重复）
    - ❑  $\text{age}(X, \text{"18-25"}) \wedge \text{occupation}(X, \text{"student"}) \Rightarrow \text{buys}(X, \text{"coke"})$
  - ❑ 混合维关联规则（谓词可重复）
    - ❑  $\text{age}(X, \text{"18-25"}) \wedge \text{buys}(X, \text{"popcorn"}) \Rightarrow \text{buys}(X, \text{"coke"})$
- ❑ 属性可为类别型或数值型
  - ❑ 类别属性（如职业、商品：取值之间无序）：用数据立方体做维间关联
  - ❑ 数值属性：数值型，取值间有隐式顺序——离散化、聚类与梯度方法

# Mining Multi-Dimensional Associations

- ❑ Single-dimensional rules (e.g., items are all in “product” dimension)
  - ❑  $\text{buys}(X, \text{"milk"}) \Rightarrow \text{buys}(X, \text{"bread"})$
- ❑ Multi-dimensional rules (i.e., items in  $\geq 2$  dimensions or predicates)
  - ❑ Inter-dimension association rules (*no repeated predicates*)
    - ❑  $\text{age}(X, \text{"18-25"}) \wedge \text{occupation}(X, \text{"student"}) \Rightarrow \text{buys}(X, \text{"coke"})$
  - ❑ Hybrid-dimension association rules (*repeated predicates*)
    - ❑  $\text{age}(X, \text{"18-25"}) \wedge \text{buys}(X, \text{"popcorn"}) \Rightarrow \text{buys}(X, \text{"coke"})$
- ❑ Attributes can be *categorical* or *numerical*
  - ❑ Categorical Attributes (e.g., *profession*, *product*: no ordering among values): Data cube for inter-dimension association
  - ❑ Quantitative Attributes: Numeric, implicit ordering among values—discretization, clustering, and gradient approaches

# 关联规则的三种形式

| 规则类型 | 谓词       | 示例                                                                                          |
|------|----------|---------------------------------------------------------------------------------------------|
| 单维   | 一个重复的维   | $\text{buys}(\text{milk}) \Rightarrow \text{buys}(\text{bread})$                            |
| 维间   | 无重复谓词    | $\text{age}(18-25) \wedge \text{student} \Rightarrow \text{buys}(\text{coke})$              |
| 混合维  | 至少一个重复谓词 | $\text{age}(18-25) \wedge \text{buys}(\text{popcorn}) \Rightarrow \text{buys}(\text{coke})$ |

- 维间规则：每个谓词至多出现一次
- 混合维规则：至少一个谓词出现多于一次

# Three Forms of Association Rules

| Rule type          | Predicates                      | Example                                                                                     |
|--------------------|---------------------------------|---------------------------------------------------------------------------------------------|
| Single-dimensional | One repeated dimension          | $\text{buys}(\text{milk}) \Rightarrow \text{buys}(\text{bread})$                            |
| Inter-dimensional  | No repeated predicate           | $\text{age}(18-25) \wedge \text{student} \Rightarrow \text{buys}(\text{coke})$              |
| Hybrid-dimensional | At least one repeated predicate | $\text{age}(18-25) \wedge \text{buys}(\text{popcorn}) \Rightarrow \text{buys}(\text{coke})$ |

- Inter-dimensional rules: each predicate appears at most once
- Hybrid-dimensional rules: at least one predicate appears more than once

# 稀有模式与负模式

## □ 稀有模式

- 支持度极低但有趣（例如购买劳力士手表）
- 如何挖掘？为不同组项设置个性化、基于分组的最小支持度阈值

## □ 负模式

- 负相关：不太可能同时发生
- 例：同一顾客不太可能既买 Ford Expedition（一款 SUV）又买 Ford Fusion（一款混合动力车），因此购买二者很可能是负相关模式
- 如何定义负模式？

# Rare Patterns vs. Negative Patterns

## □ Rare patterns

- Very low support but [interesting](#) (e.g., buying Rolex watches)
- How to mine them? *Setting individualized, group-based min-support thresholds for different groups of items*

## □ Negative patterns

- Negatively correlated: Unlikely to happen together
- Ex.: Since it is unlikely that the same customer buys both a [Ford Expedition](#) (an SUV car) and a [Ford Fusion](#) (a hybrid car), buying a [Ford Expedition](#) and buying a [Ford Fusion](#) are likely negatively correlated patterns
- How to define negative patterns?

# 定义负相关模式

- 基于支持度的定义
  - 若项集 A 与 B 都频繁，但很少同时出现，即
    - $\text{sup}(A \cup B) \ll \text{sup}(A) \times \text{sup}(B)$
  - 则 A 与 B 负相关
- 这对大型事务数据集是好定义吗？
  - 例：设商店两种针线包 A 与 B 各售出 100 次，但只有一笔事务同时包含 A 与 B
    - 当事务总数为 200 时，有
      - $s(A \cup B) = 0.005, s(A) \times s(B) = 0.25, s(A \cup B) \ll s(A) \times s(B)$
    - 加入 19,800 笔零事务后 ( $N = 20,000$ )：
      - $s(A \cup B) = 0.00005, s(A) \times s(B) = 0.000025$ ，于是结论反转
- 这里的问题是什么？  
**零事务会改变结果：该定义不是零事务不变的**

这是否让你想起提升度的定义？

# Defining Negative Correlated Patterns

- A support-based definition
  - If itemsets A and B are both frequent but rarely occur together, i.e.,
    - $\text{sup}(A \cup B) \ll \text{sup}(A) \times \text{sup}(B)$
  - Then A and B are negatively correlated
- Is this a good definition for large transaction datasets?
  - Ex.: Suppose a store sold two needle packages A and B 100 times each, but only one transaction contained both A and B
    - When there are in total 200 transactions, we have
      - $s(A \cup B) = 0.005, s(A) \times s(B) = 0.25, s(A \cup B) \ll s(A) \times s(B)$
    - After adding 19,800 null transactions ( $N = 20,000$ ):
      - $s(A \cup B) = 0.00005, s(A) \times s(B) = 0.000025$ , so the conclusion reverses
- What is the problem here?  
**Null transactions change the result: this definition is not null-invariant**

Does this remind you the definition of *lift*?

# 定义负相关：定义中需要零事务不变性

- 有用的负相关度量应当是零事务不变的
  - 直觉：两个项集 A 与 B 是否负相关，不应受零事务数量的影响
- 基于 Kulczynski 度量的定义
  - 若项集 A 与 B 频繁，但  $(s(A \cup B)/s(A) + s(A \cup B)/s(B))/2 < \epsilon$ ，则 A 与 B 负相关
- 对同一针线包问题：
  - 该值在  $N = 200$  与  $N = 20,000$  时不变
    - 若  $\epsilon = 0.02$ ，则有
$$\text{Kulc}(A,B) = (0.01 + 0.01)/2 = 0.01 < \epsilon$$

$\epsilon$  是负  
模式阈值

# Defining Negative Correlation: Need **Null-Invariance** in Definition

- A useful negative-correlation measure should be **null-invariant**
  - Intuition: Whether two itemsets A and B are negatively correlated should not be influenced by the number of null-transactions
- A Kulczynski measure-based definition
  - If itemsets A and B are frequent but  $(s(A \cup B)/s(A) + s(A \cup B)/s(B))/2 < \epsilon$  then A and B are negatively correlated
- For the same needle package problem:
  - The value is unchanged for  $N = 200$  and  $N = 20,000$ 
    - If  $\epsilon = 0.02$ , we have
$$\text{Kulc}(A,B) = (0.01 + 0.01)/2 = 0.01 < \epsilon$$

$\epsilon$  is a negative  
pattern threshold

# 快速检查：哪种度量是零事务不变的？

问题：加入 10,000 笔既不含 A 也不含 B 的事务。哪种度量保持不变？

|              |               |
|--------------|---------------|
| A. 相对支持度(A)  | B. 提升度(A,B)   |
| C. Kulc(A,B) | D. 相对支持度(AUB) |

答案：C. Kulc(A,B)

# Quick Check: Which Measure Is Null-Invariant?

Question: We add 10,000 transactions that contain neither A nor B. Which measure remains unchanged?

|                        |                          |
|------------------------|--------------------------|
| A. Relative Support(A) | B. Lift(A,B)             |
| C. Kulc(A,B)           | D. Relative Support(AUB) |

Answer: C. Kulc(A,B)

# 为何进行基于约束的挖掘？

- 实践中的模式挖掘：常常是用户引导的交互过程
  - 用户用数据挖掘查询语言（或图形界面）指定挖掘内容，并给出各类约束
- 基于约束的挖掘：连同用户给出的约束一起挖掘
- 为何要基于约束挖掘？
  - 用户灵活性：用户对挖掘内容给出约束
  - 优化：系统利用这些约束提高挖掘效率
    - 例如，将约束深入推进到挖掘过程中

# Why Constraint-Based Mining?

- Pattern mining in practice: Often a **user-guided, interactive process**
  - User directs what to be mined using a **data mining query language** (or a graphical user interface), **specifying various kinds of constraints**
- **Constraint-based mining: Mine together with user-provided constraints**
- Why constraint-based mining?
  - **User flexibility**: User provides constraints on what to be mined
  - **Optimization**: System explores such constraints for mining efficiency
    - E.g., Push constraints deeply into the mining process

# 基于约束的挖掘流程

同一约束既可以指导结果，也可以指导搜索。

1. 用户指定目标数据、模式形式和兴趣度条件。
2. 系统将查询转换为对模式和数据的约束。
3. 挖掘算法把可安全使用的约束推进到候选生成或投影中。
4. 系统检验剩余候选，只返回合格模式。

只有系统能在最终输出之前实施约束，该约束才能提高效率。

# Constraint-Based Mining Workflow

The same constraint can guide both the result and the search.

1. The user specifies the target data, pattern form, and interestingness conditions.
2. The system converts the query into constraints on patterns and data.
3. The mining algorithm pushes safe constraints into candidate generation or projection.
4. The system verifies the remaining candidates and returns only qualifying patterns.

A constraint improves efficiency only when the system can enforce it before the final output stage.

# 模式挖掘中的用户约束

| 约束类型  | 示例                | 控制        |
|-------|-------------------|-----------|
| 数据    | 今年的纽约门店           | 哪些记录进入挖掘  |
| 维 / 层 | 品牌与顾客类别           | 哪些属性出现    |
| 兴趣度   | 支持度 $\geq 0.02$   | 哪些模式合格    |
| 模式形式  | 包含牛奶; 长度 $\leq 4$ | 模式必须呈现的形式 |

本讲聚焦模式约束，因为其数学性质可用于剪枝。

# User Constraints in Pattern Mining

| Constraint type   | Example                        | Controls                        |
|-------------------|--------------------------------|---------------------------------|
| Data              | NY stores this year            | Which records enter mining      |
| Dimension / level | brand and customer category    | Which attributes appear         |
| Interestingness   | support $\geq 0.02$            | Which patterns qualify          |
| Pattern form      | contains milk; length $\leq 4$ | What the pattern must look like |

This lecture focuses on pattern constraints because their mathematical properties enable pruning.

# 用模式反单调性剪枝模式空间

| TID | 事务               |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| 项 | 价格  | 利润  |
|---|-----|-----|
| a | 100 | 40  |
| b | 40  | 0   |
| c | 150 | -20 |
| d | 35  | -15 |
| e | 55  | -30 |
| f | 45  | -10 |
| g | 80  | 20  |
| h | 10  | 5   |

■ 约束 c 是反单调的

■ 若项集 S 违反约束 c，则其任意超集也违反

■ 因此，对项集 S 的挖掘可以终止

■ 例 1:  $c_1: \text{sum}(S.\text{price}) \leq v$  是反单调的

■ 例 2:  $c_2: \text{range}(S.\text{profit}) \leq 15$  是反单调的

■ 项集 ab 违反  $c_2$  ( $\text{range}(ab) = 40$ )

■ ab 的每个超集也都违反

■ 例 3.  $c_3: \text{sum}(S.\text{Price}) \geq v$  不是反单调的

■ 例 4.  $c_4: \text{support}(S) \geq \sigma$  是反单调的吗？

■ 是！Apriori 剪枝本质上就是用反单调约束进行剪枝！

注: item.price > 0  
利润可以为负

$$\text{range}(S.\text{profit}) = \max(S.\text{profit}) - \min(S.\text{profit})$$

# Pattern Space Pruning with **Pattern Anti-Monotonicity**

| TID | Transaction      |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| Item | Price | Profit |
|------|-------|--------|
| a    | 100   | 40     |
| b    | 40    | 0      |
| c    | 150   | -20    |
| d    | 35    | -15    |
| e    | 55    | -30    |
| f    | 45    | -10    |
| g    | 80    | 20     |
| h    | 10    | 5      |

■ A constraint c is **anti-monotone**

■ If an itemset S violates constraint c, so does any of its superset

■ That is, mining on itemset S can be terminated

■ Ex. 1:  $c_1: \text{sum}(S.\text{price}) \leq v$  is **anti-monotone**

■ Ex. 2:  $c_2: \text{range}(S.\text{profit}) \leq 15$  is **anti-monotone**

■ Itemset ab violates  $c_2$  ( $\text{range}(ab) = 40$ )

■ So does every superset of ab

■ Ex. 3.  $c_3: \text{sum}(S.\text{Price}) \geq v$  is **not anti-monotone**

■ Ex. 4. Is  $c_4: \text{support}(S) \geq \sigma$  anti-monotone?

■ Yes! Apriori pruning is essentially pruning with an anti-monotonic constraint!

Note: item.price > 0  
Profit can be negative

$$\text{range}(S.\text{profit}) = \max(S.\text{profit}) - \min(S.\text{profit})$$

# 面向模式反单调约束的 Apriori

# Apriori for Pattern Anti-Monotone Constraint

| 项 | 价格 |
|---|----|
| 1 | 1  |
| 2 | 2  |
| 3 | 3  |
| 4 | 4  |
| 5 | 5  |

Min\_sup=2

约束:

Sum{S.price} < 5

数据库 D

| TID | Items   |
|-----|---------|
| 10  | 1 3 4   |
| 20  | 2 3 5   |
| 30  | 1 2 3 5 |
| 40  | 2 5     |

扫描 D

| itemset | sup. |
|---------|------|
| {1}     | 2    |
| {2}     | 3    |
| {3}     | 3    |
| {4}     | 1    |
| {5}     | 3    |

F1

| itemset        | sup.         |
|----------------|--------------|
| {1}            | 2            |
| {2}            | 3            |
| {3}            | 3            |
| <del>{4}</del> | <del>1</del> |
| <del>{5}</del> | <del>3</del> |

可提前剪枝

C2

| itemset          | sup          |
|------------------|--------------|
| {1 2}            | 1            |
| {1 3}            | 2            |
| <del>{1 5}</del> | <del>1</del> |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

扫描 D

C2

| itemset          | sup          |
|------------------|--------------|
| {1 2}            | 1            |
| {1 3}            | 2            |
| <del>{1 5}</del> | <del>1</del> |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

F2

| itemset          | sup          |
|------------------|--------------|
| {1 3}            | 2            |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

C3

| itemset            | sup          |
|--------------------|--------------|
| <del>{2 3 5}</del> | <del>2</del> |

扫描 D

F3

| itemset            | sup          |
|--------------------|--------------|
| <del>{2 3 5}</del> | <del>2</del> |

| Item | Price |
|------|-------|
| 1    | 1     |
| 2    | 2     |
| 3    | 3     |
| 4    | 4     |
| 5    | 5     |

Min\_sup=2

Constraint:

Sum{S.price} < 5

Database D

| TID | Items   |
|-----|---------|
| 10  | 1 3 4   |
| 20  | 2 3 5   |
| 30  | 1 2 3 5 |
| 40  | 2 5     |

Scan D

| itemset | sup. |
|---------|------|
| {1}     | 2    |
| {2}     | 3    |
| {3}     | 3    |
| {4}     | 1    |
| {5}     | 3    |

F1

| itemset        | sup.         |
|----------------|--------------|
| {1}            | 2            |
| {2}            | 3            |
| {3}            | 3            |
| <del>{4}</del> | <del>1</del> |
| <del>{5}</del> | <del>3</del> |

Can be chopped early

C2

| itemset          | sup          |
|------------------|--------------|
| {1 2}            | 1            |
| {1 3}            | 2            |
| <del>{1 5}</del> | <del>1</del> |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

Scan D

C2

| itemset          | sup          |
|------------------|--------------|
| {1 2}            | 1            |
| {1 3}            | 2            |
| <del>{1 5}</del> | <del>1</del> |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

F2

| itemset          | sup          |
|------------------|--------------|
| {1 3}            | 2            |
| <del>{2 3}</del> | <del>2</del> |
| <del>{2 5}</del> | <del>3</del> |
| <del>{3 5}</del> | <del>2</del> |

C3

| itemset            | sup          |
|--------------------|--------------|
| <del>{2 3 5}</del> | <del>2</del> |

Scan D

F3

| itemset            | sup          |
|--------------------|--------------|
| <del>{2 3 5}</del> | <del>2</del> |

# 快速检查：是否反单调？

问题：假设所有价格为正。哪个约束是反单调的？

|                                        |                                            |
|----------------------------------------|--------------------------------------------|
| A. $\text{sum}(\text{price}) \geq 100$ | B. $\text{average}(\text{profit}) \geq 20$ |
| C. $\text{sum}(\text{price}) \leq 100$ | D. $\text{length} \geq 3$                  |

答案：C.  $\text{sum}(\text{price}) \leq 100$

# Quick Check: Anti-Monotone or Not?

Question: Assume all prices are positive. Which constraint is anti-monotone?

|                                        |                                            |
|----------------------------------------|--------------------------------------------|
| A. $\text{sum}(\text{price}) \geq 100$ | B. $\text{average}(\text{profit}) \geq 20$ |
| C. $\text{sum}(\text{price}) \leq 100$ | D. $\text{length} \geq 3$                  |

Answer: C.  $\text{sum}(\text{price}) \leq 100$

# 模式单调性及其作用

| TID | 事务               |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| 项 | 价格  | 利润  |
|---|-----|-----|
| a | 100 | 40  |
| b | 40  | 0   |
| c | 150 | -20 |
| d | 35  | -15 |
| e | 55  | -30 |
| f | 45  | -10 |
| g | 80  | 20  |
| h | 10  | 5   |

- 约束  $c$  为单调: 若项集  $S$  满足约束  $c$ , 则其任一超集也满足
  - 即后续挖掘中无需再检查  $c$
  - 收益不如反单调
- 例 1:  $c_1: \text{sum}(S.\text{Price}) \geq v$  为单调
- 例 2:  $c_2: \text{min}(S.\text{Price}) \leq v$  为单调
- 例 3:  $c_3: \text{range}(S.\text{profit}) \geq 15$  为单调
  - 项集  $ab$  满足  $c_3$
  - $ab$  的每个超集也满足

# Pattern Monotonicity and Its Roles

| TID | Transaction      |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| Item | Price | Profit |
|------|-------|--------|
| a    | 100   | 40     |
| b    | 40    | 0      |
| c    | 150   | -20    |
| d    | 35    | -15    |
| e    | 55    | -30    |
| f    | 45    | -10    |
| g    | 80    | 20     |
| h    | 10    | 5      |

- A constraint  $c$  is *monotone*: If an itemset  $S$  **satisfies** the constraint  $c$ , so does any of its superset
  - That is, we do not need to check  $c$  in subsequent mining
  - Not as beneficial as anti-monotone
- E.g. 1:  $c_1: \text{sum}(S.\text{Price}) \geq v$  is **monotone**
- E.g. 2:  $c_2: \text{min}(S.\text{Price}) \leq v$  is **monotone**
- E.g. 3:  $c_3: \text{range}(S.\text{profit}) \geq 15$  is **monotone**
  - Itemset  $ab$  satisfies  $c_3$
  - So does every superset of  $ab$

# 单调约束与反单调约束

| 性质   | 反单调                               | 单调                                |
|------|-----------------------------------|-----------------------------------|
| 继承   | 不满足传递给超集                          | 满足传递给超集                           |
| 搜索用途 | 失败后剪枝                             | 满足后停止复查                           |
| 价格为正 | $\text{sum}(\text{price}) \leq v$ | $\text{sum}(\text{price}) \geq v$ |
| 支持度  | $\text{support} \geq \sigma$      | $\text{support} \leq \sigma$      |

反单调约束通常在前缀增长搜索中提供 stronger 的早期剪枝。

# Monotone vs. Anti-Monotone Constraints

| Property        | Anti-monotone                     | Monotone                           |
|-----------------|-----------------------------------|------------------------------------|
| Inheritance     | Failure passes to supersets       | Satisfaction passes to supersets   |
| Search use      | Prune after failure               | Stop rechecking after satisfaction |
| Positive prices | $\text{sum}(\text{price}) \leq v$ | $\text{sum}(\text{price}) \geq v$  |
| Support         | $\text{support} \geq \sigma$      | $\text{support} \leq \sigma$       |

Anti-monotone constraints usually provide stronger early pruning in prefix-growth search.

# 可转换约束:对事务中的数据排序

| TID | 事务                  |
|-----|---------------------|
| 10  | a, b, c, d, f, h    |
| 20  | a, b, c, d, f, g, h |
| 30  | b, c, d, f, g       |
| 40  | a, c, e, f, g       |

min\_sup = 2

| 项 | 价格  | 利润  |
|---|-----|-----|
| a | 100 | 40  |
| b | 40  | 0   |
| c | 150 | -20 |
| d | 35  | -15 |
| e | 55  | -30 |
| f | 45  | -5  |
| g | 80  | 30  |
| h | 10  | 5   |

- 通过对事务中的项适当排序, 将困难约束转换为(反)单调
- 考察  $c_1: \text{avg}(S.\text{profit}) > 20$ 
  - 按 (profit) 值降序排列各项
    - $\langle a, g, h, b, f, d, c, e \rangle$
  - 项集  $ab$  违反  $c_1$  ( $\text{avg}(ab) = 20$ )
    - $ab^*$  (即  $ab$  投影数据库) 同样违反
    - 因此  $c_1$  并非全局反单调, 但在利润降序下为可转换反单调。

# Convertible Constraints: Ordering Data in Transactions

| TID | Transaction         |
|-----|---------------------|
| 10  | a, b, c, d, f, h    |
| 20  | a, b, c, d, f, g, h |
| 30  | b, c, d, f, g       |
| 40  | a, c, e, f, g       |

min\_sup = 2

| Item | Price | Profit |
|------|-------|--------|
| a    | 100   | 40     |
| b    | 40    | 0      |
| c    | 150   | -20    |
| d    | 35    | -15    |
| e    | 55    | -30    |
| f    | 45    | -5     |
| g    | 80    | 30     |
| h    | 10    | 5      |

- Convert tough constraints into (anti-)monotone by proper ordering of items in transactions
- Examine  $c_1: \text{avg}(S.\text{profit}) > 20$ 
  - Order items in (profit) *value-descending order*
    - $\langle a, g, h, b, f, d, c, e \rangle$
  - An itemset  $ab$  violates  $c_1$  ( $\text{avg}(ab) = 20$ )
    - So does  $ab^*$  (i.e.,  $ab$ -projected DB)
    - Then  $c_1$  is **not globally anti-monotone**, but it is **convertible anti-monotone under descending-profit order**.

# 可转换约束依赖于增长顺序

- ❑ 平均利润在任意集合扩展下既非单调也非反单调
- ❑ 按利润降序排列各项，且只增长遵守顺序的前缀
- ❑ 当前缀平均值低于阈值后，后续更低利润的项无法将其恢复
- ❑ 此剪枝对前缀增长有效，但对任意 Apriori 子集生成无效

排序规则是证明的一部分。没有它，剪枝判定就不安全。

# Convertible Constraints Depend on **Growth Order**


- ❑ Average profit is neither monotone nor anti-monotone under arbitrary set extension
- ❑ Sort items by decreasing profit and grow only order-respecting prefixes
- ❑ Once a prefix average falls below the threshold, later lower-profit items cannot restore it
- ❑ This pruning is valid for prefix growth, but not for arbitrary Apriori subset generation

The ordering rule is part of the proof. Without it, the pruning decision is unsafe.

# 项重排序对 Apriori 有效吗?

| TID | 事务                  |
|-----|---------------------|
| 10  | a, b, c, d, f, h    |
| 20  | a, b, c, d, f, g, h |
| 30  | b, c, d, f, g       |
| 40  | a, c, e, f, g       |

Min\_sup=2; 约束:  $\text{avg}(S.\text{profit}) > 20$

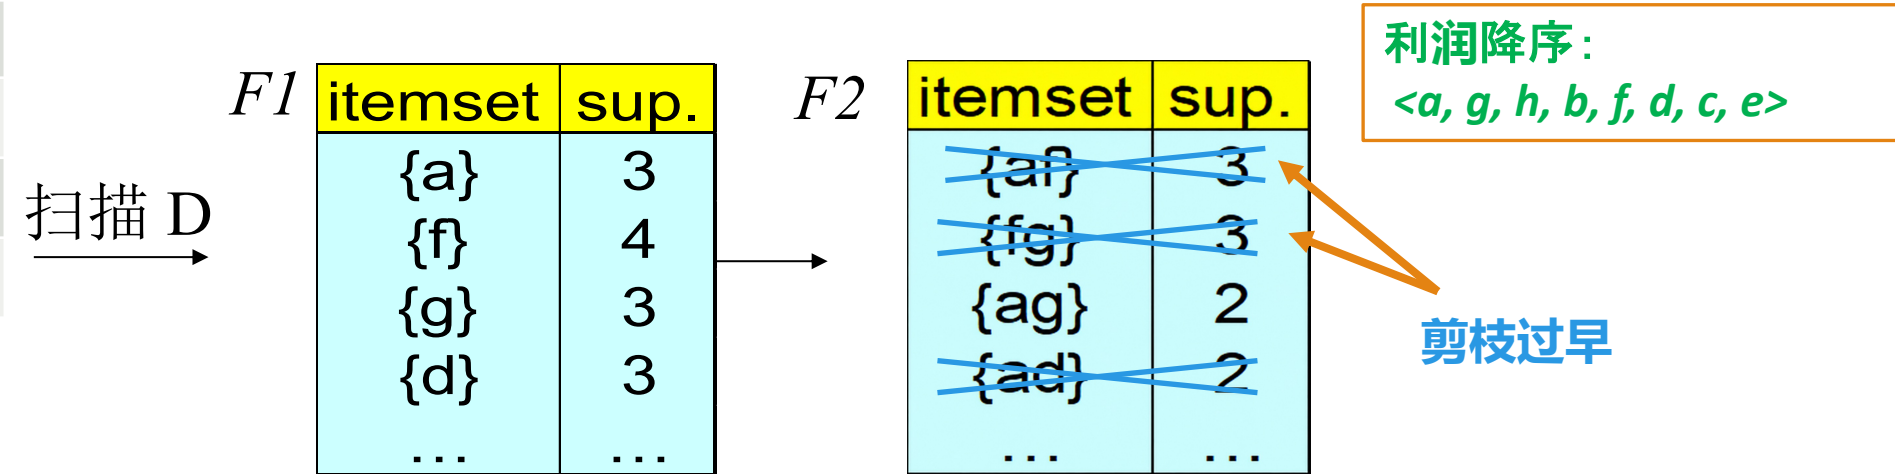

| 项 | 价格  | 利润  |
|---|-----|-----|
| a | 100 | 40  |
| b | 40  | 0   |
| c | 150 | -20 |
| d | 35  | -15 |
| e | 55  | -30 |
| f | 45  | -5  |
| g | 80  | 30  |
| h | 10  | 5   |


- $\text{avg}(gf) = 12.5 < 20$ ,  $\text{avg}(af) = 17.5 < 20$ ,  $\text{avg}(ag) = 35 > 20$
- 但  $\text{avg}(agf) = 21.7 > 20$
- Apriori 不会将 "agf" 生成为候选

重排序使前缀剪枝安全, 但不能使 Apriori 的全子集剪枝安全。

# Can item-reordering work for Apriori?

| TID | Transaction         |
|-----|---------------------|
| 10  | a, b, c, d, f, h    |
| 20  | a, b, c, d, f, g, h |
| 30  | b, c, d, f, g       |
| 40  | a, c, e, f, g       |

Min\_sup=2; constraint:  $\text{avg}(S.\text{profit}) > 20$

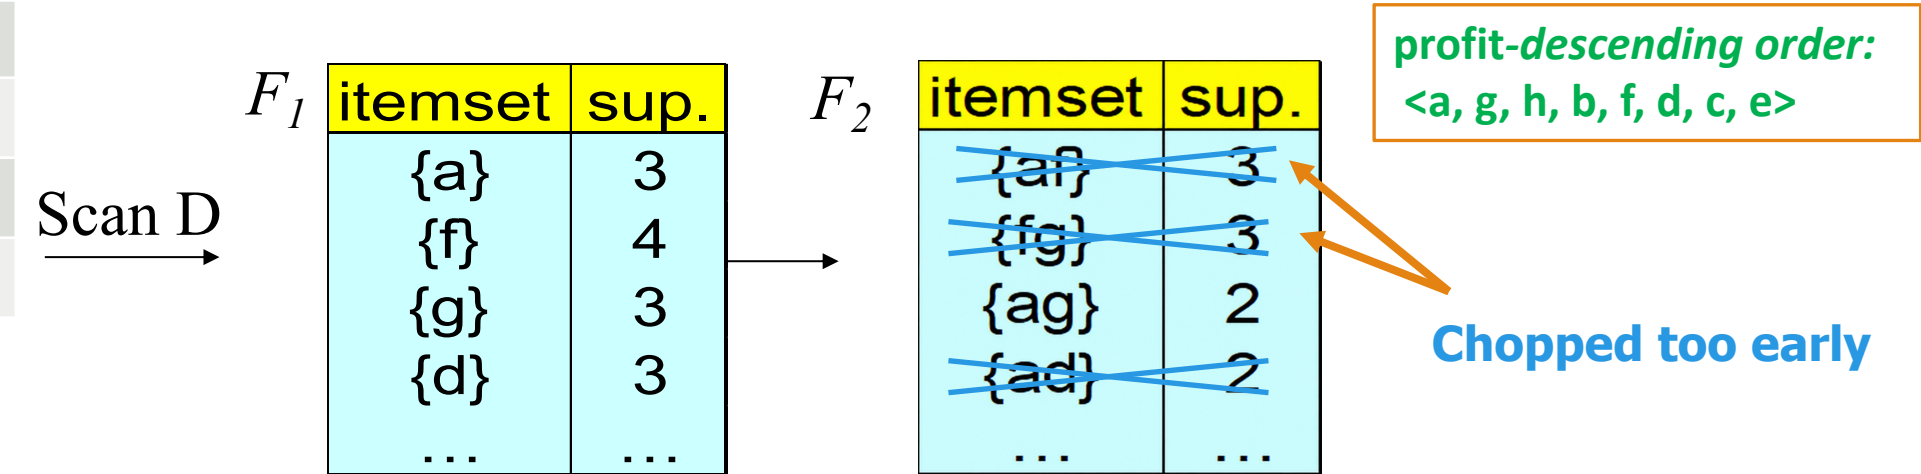

| Item | Price | Profit |
|------|-------|--------|
| a    | 100   | 40     |
| b    | 40    | 0      |
| c    | 150   | -20    |
| d    | 35    | -15    |
| e    | 55    | -30    |
| f    | 45    | -5     |
| g    | 80    | 30     |
| h    | 10    | 5      |

- $\text{avg}(gf) = 12.5 < 20$ ,  $\text{avg}(af) = 17.5 < 20$ ,  $\text{avg}(ag) = 35 > 20$
- But  $\text{avg}(agf) = 21.7 > 20$
- Apriori will not generate "agf" as a candidate

Reordering enables safe prefix pruning, but not Apriori's all-subset pruning.

# 基于数据反单调性的数据空间剪枝

| TID | 事务               |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| 项 | 价格  | 利润  |
|---|-----|-----|
| a | 100 | 40  |
| b | 40  | 0   |
| c | 150 | -20 |
| d | 35  | -15 |
| e | 55  | -30 |
| f | 45  | -10 |
| g | 80  | 20  |
| h | 10  | 5   |

- 约束  $c$  为数据反单调：在挖掘过程中，若数据条目  $t$  在  $c$  下不能满足模式  $p$ ，则  $t$  也不能满足  $p$  的超集
  - 数据空间剪枝：可剪去数据条目  $t$
- 例 1：  $c_1: \text{sum}(S.\text{Profit}) \geq v$  为数据反单调
  - 设约束  $c_1$  为：  $\text{sum}(S.\text{Profit}) \geq 25$ 
    - $T_{30}: \{b, c, d, f, g\}$  可删除，因其任意组合都无法构成利润之和  $\geq 25$  的  $S$
- 例 2：  $c_2: \text{min}(S.\text{Price}) \leq v$  为数据反单调
  - 考虑  $v = 5$ ，但某事务（如  $T_{50}$ ）中每一项的价格都高于 10
- 例 3：  $c_3: \text{range}(S.\text{Profit}) > 25$  为数据反单调

# Data Space Pruning with Data Anti-Monotonicity

| TID | Transaction      |
|-----|------------------|
| 10  | a, b, c, d, f, h |
| 20  | b, c, d, f, g, h |
| 30  | b, c, d, f, g    |
| 40  | a, c, e, f, g    |

min\_sup = 2

| Item | Price | Profit |
|------|-------|--------|
| a    | 100   | 40     |
| b    | 40    | 0      |
| c    | 150   | -20    |
| d    | 35    | -15    |
| e    | 55    | -30    |
| f    | 45    | -10    |
| g    | 80    | 20     |
| h    | 10    | 5      |

- A constraint  $c$  is **data anti-monotone**: In the mining process, if a data entry  $t$  cannot satisfy a pattern  $p$  under  $c$ ,  $t$  cannot satisfy  $p$ 's superset either
  - Data space pruning: Data entry  $t$  can be pruned
- Ex. 1:  $c_1: \text{sum}(S.\text{Profit}) \geq v$  is **data anti-monotone**
  - Let constraint  $c_1$  be:  $\text{sum}(S.\text{Profit}) \geq 25$ 
    - $T_{30}: \{b, c, d, f, g\}$  can be removed since none of their combinations can make an  $S$  whose sum of the profit is  $\geq 25$
- Ex. 2:  $c_2: \text{min}(S.\text{Price}) \leq v$  is **data anti-monotone**
  - Consider  $v = 5$  but every item in a transaction, say  $T_{50}$ , has a price higher than 10
- Ex. 3:  $c_3: \text{range}(S.\text{Profit}) > 25$  is **data anti-monotone**

# 数据空间剪枝应递归探索

| TID         | 事务               | 项 | 利润  |
|-------------|------------------|---|-----|
| 10          | a, b, c, d, f, h | a | 40  |
| 20          | b, c, d, f, g, h | b | 0   |
| 30          | b, c, d, f, g    | c | -20 |
| 40          | a, c, e, f, g    | d | -15 |
| min_sup = 2 |                  | e | -30 |
|             |                  | f | -10 |
|             |                  | g | 20  |
|             |                  | h | 5   |

- 例.  $c_3: \text{range}(S.\text{Profit}) > 25$ 
  - 检查 b 的投影数据库
    - 但项 "a" 不频繁 (sup = 1)

- 从 T10 中去掉 "a (40)" 之后
  - T10 不再能满足  $c_3$ 
    - 因为 "b (0)" 以及 "c (-20), d (-15), f (-10), h (5)"
  - 去掉 T10 后, 也可剪去 T20 中的 "h"

b 的投影数据库

| TID | 事务            |
|-----|---------------|
| 10  | a, c, d, f, h |
| 20  | c, d, f, g, h |
| 30  | c, d, f, g    |

b 的投影数据库

| TID           | 事务                       |
|---------------|--------------------------|
| <del>10</del> | <del>a, c, d, f, h</del> |
| 20            | c, d, f, g, <del>h</del> |
| 30            | c, d, f, g               |

# Data Space Pruning Should Be Explored **Recursively**

| TID         | Transaction      | Item | Profit |
|-------------|------------------|------|--------|
| 10          | a, b, c, d, f, h | a    | 40     |
| 20          | b, c, d, f, g, h | b    | 0      |
| 30          | b, c, d, f, g    | c    | -20    |
| 40          | a, c, e, f, g    | d    | -15    |
| min_sup = 2 |                  | e    | -30    |
|             |                  | f    | -10    |
|             |                  | g    | 20     |
|             |                  | h    | 5      |

- Example.  $c_3: \text{range}(S.\text{Profit}) > 25$ 
  - We check b's projected database
    - But item "a" is infrequent (sup = 1)

- After removing "a (40)" from  $T_{10}$ 
  - $T_{10}$  cannot satisfy  $c_3$  any more
    - Since "b (0)" and "c (-20), d (-15), f (-10), h (5)"
  - By removing  $T_{10}$ , we can also prune "h" in  $T_{20}$


b's-proj. DB

| TID | Transaction   |
|-----|---------------|
| 10  | a, c, d, f, h |
| 20  | c, d, f, g, h |
| 30  | c, d, f, g    |

b's-proj. DB


| TID           | Transaction              |
|---------------|--------------------------|
| <del>10</del> | <del>a, c, d, f, h</del> |
| 20            | c, d, f, g, <del>h</del> |
| 30            | c, d, f, g               |

# 递归探索数据空间剪枝（续）

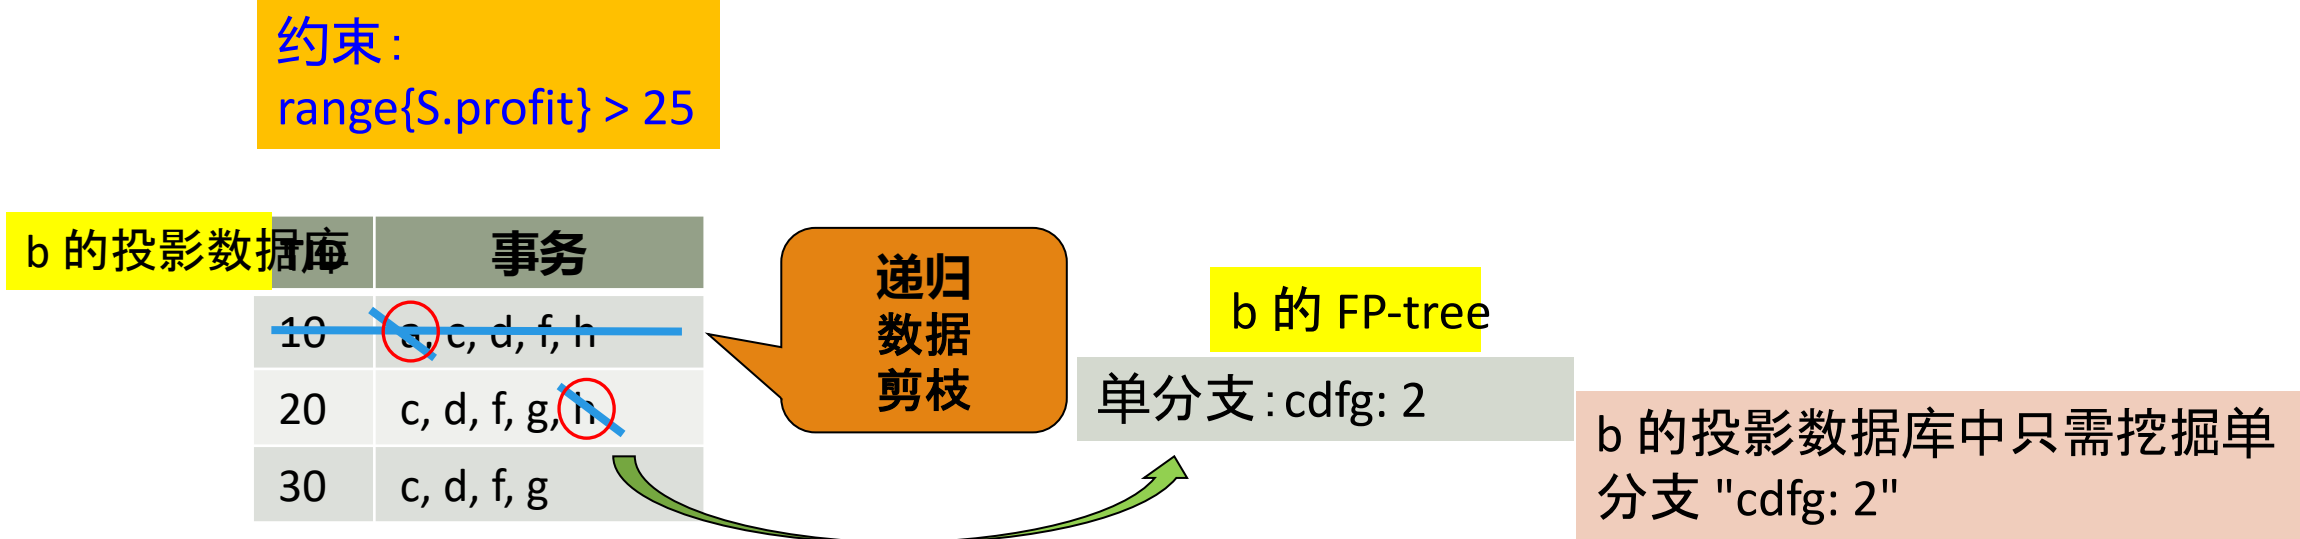

注：仅当在 b 的投影数据库中按 min-sup 剪去 "a" 后，c3 才能有效剪去 T10

# Data Space Pruning Explored **Recursively** (Continued)

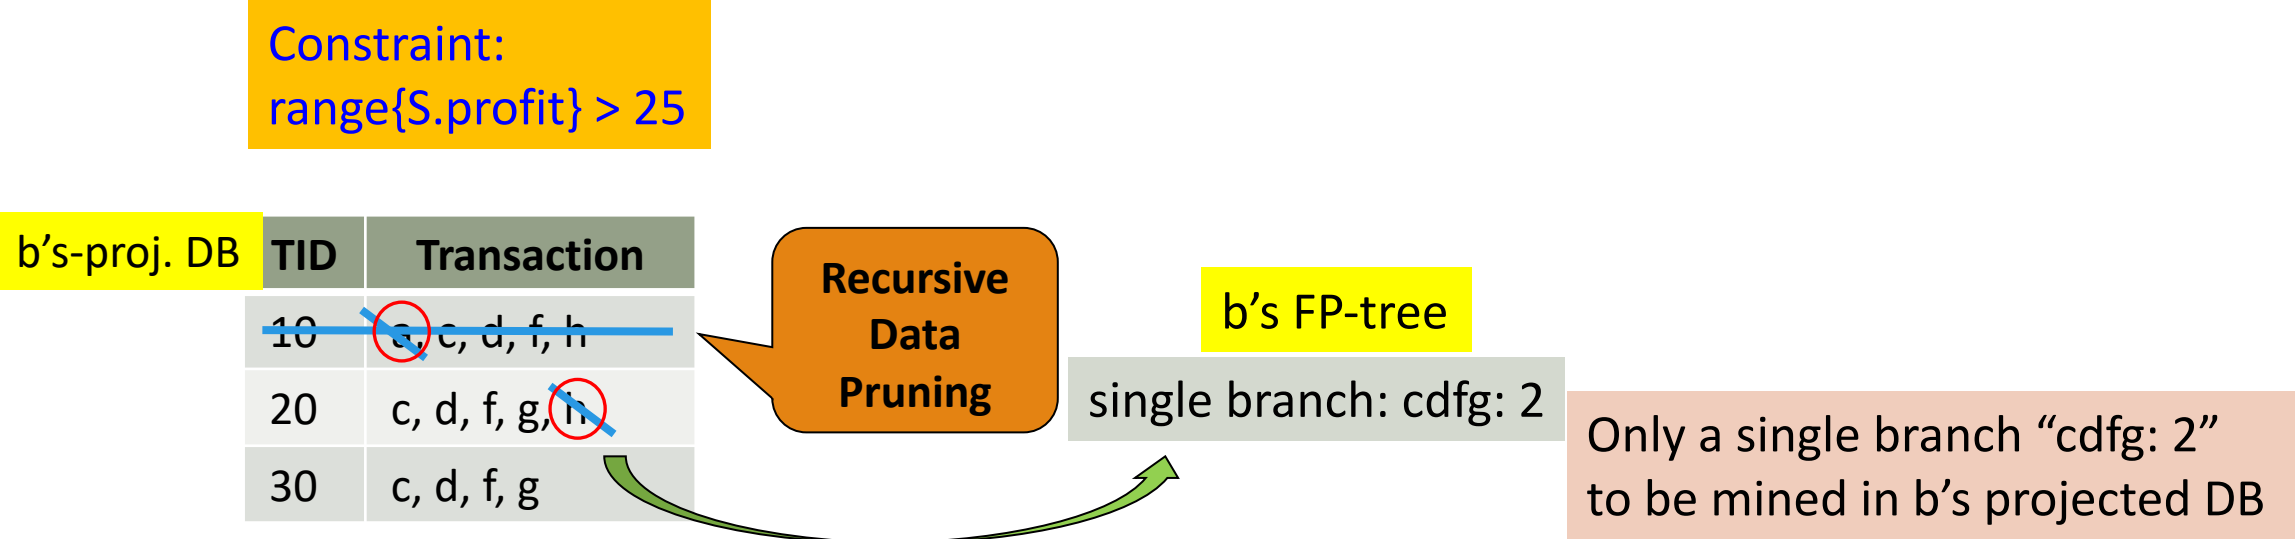

Note:  $c_3$  prunes  $T_{10}$  effectively only after "a" is pruned (by min-sup) in b's projected DB

# 模式空间与数据空间剪枝

| 问题    | 模式空间剪枝       | 数据空间剪枝         |
|-------|--------------|----------------|
| 去掉什么? | 候选模式或分支      | 事务或投影记录        |
| 典型原因  | 任何扩展都无法满足 c  | 该记录无法支持满足约束的扩展 |
| 示例    | 支持度低于 minsup | 可达最大利润低于 v     |
| 收益    | 候选更少         | 支持度计数代价更低      |

强挖掘策略通常同时缩小两个空间，但每一步剪枝都需要各自的安全性论证。

# Pattern-Space and Data-Space Pruning

| Question         | Pattern-space pruning          | Data-space pruning                               |
|------------------|--------------------------------|--------------------------------------------------|
| What is removed? | Candidate patterns or branches | Transactions or projected records                |
| Typical reason   | No extension can satisfy c     | The record cannot support a satisfying extension |
| Example          | support below minsup           | maximum attainable profit below v                |
| Benefit          | Fewer candidates               | Cheaper support counting                         |

A strong mining strategy often reduces both spaces, but each pruning step needs its own **safety argument**.

# 简洁性：同时剪枝数据空间与模式空间

- **简洁性：若约束  $c$  可通过直接操作数据来强制执行**
- 例 1：寻找包含项  $i$  的模式
  - 只挖掘  $i$  投影数据库（数据空间剪枝）
- 例 2：寻找不含项  $i$  的模式
  - 从数据库中删除  $i$  后再挖掘（模式空间剪枝）
- 例 3： $c_3: \min(S.Price) \leq v$  是简洁的
  - 从合格的低价项出发，挖掘其投影数据库；高价项仍可加入
- 例 4： $c_4: \sum(S.Price) \geq v$  不是简洁的
  - 无法事先确定，因为项集  $S$  的价格之和持续增大

# Succinctness: Pruning Both Data and Pattern Spaces

- **Succinctness: If the constraint  $c$  can be enforced by directly manipulating the data**
- E.g. 1: To find those patterns containing item  $i$ 
  - Mine only  $i$ -projected DB (*data space pruning*)
- E.g. 2: To find those patterns without item  $i$ 
  - Remove  $i$  from DB and then mine (*pattern space pruning*)
- E.g. 3:  $c_3: \min(S.Price) \leq v$  is succinct
  - Start from qualifying low-price items and mine their projected databases; high-price items may still join them
- E.g. 4:  $c_4: \sum(S.Price) \geq v$  is not succinct
  - It cannot be determined beforehand since sum of the price of itemset  $S$  keeps increasing

# 简洁约束

## 可在挖掘前强制执行

- ❑ 包含项  $i$
- ❑ 排除项  $i$
- ❑  $\min(\text{price}) \leq v$ , 使用合格锚点与投影数据

## 无法事先判定

- ❑  $\text{sum}(\text{price}) \geq v$
- ❑ 无有效排序时  $\text{average}(\text{profit}) \geq v$
- ❑ 计数出现次数之前  $\text{support} \geq \sigma$

简洁性问的是：直接操作数据能否精确强制该约束。

# Succinct Constraints

## Can be enforced before mining


- ❑ contains item  $i$
- ❑ excludes item  $i$
- ❑  $\min(\text{price}) \leq v$ , using qualifying anchors and projected data

## Cannot be decided in advance


- ❑  $\text{sum}(\text{price}) \geq v$
- ❑  $\text{average}(\text{profit}) \geq v$  without a valid order
- ❑  $\text{support} \geq \sigma$  before counting occurrences

Succinctness asks *whether direct data manipulation can enforce the constraint exactly.*

# 带约束的 FP-Growth: 将简洁约束深入下推

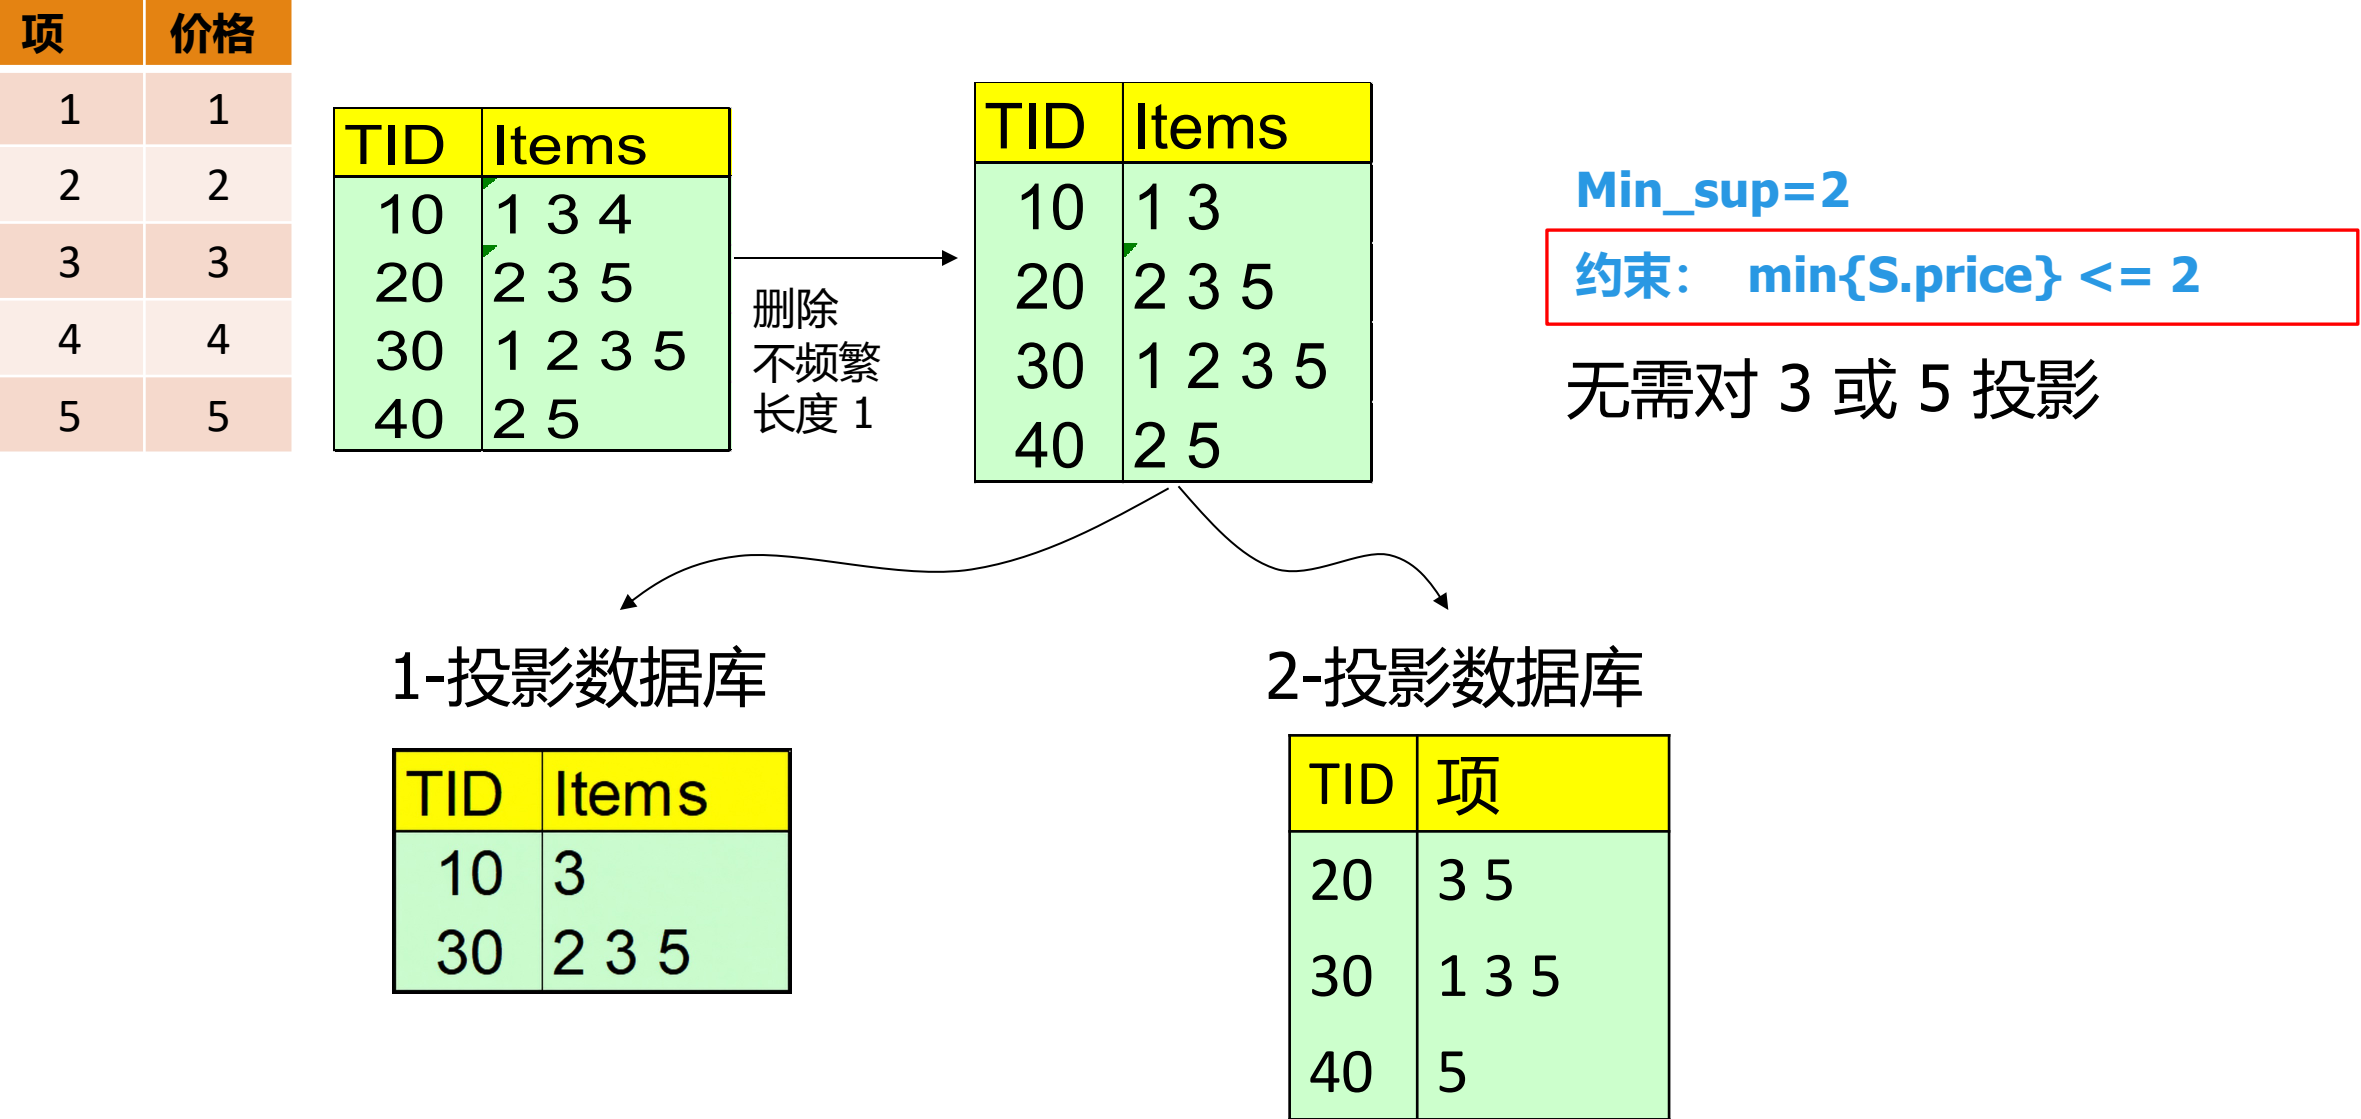

# Constrained FP-Growth: Push a Succinct Constraint Deep

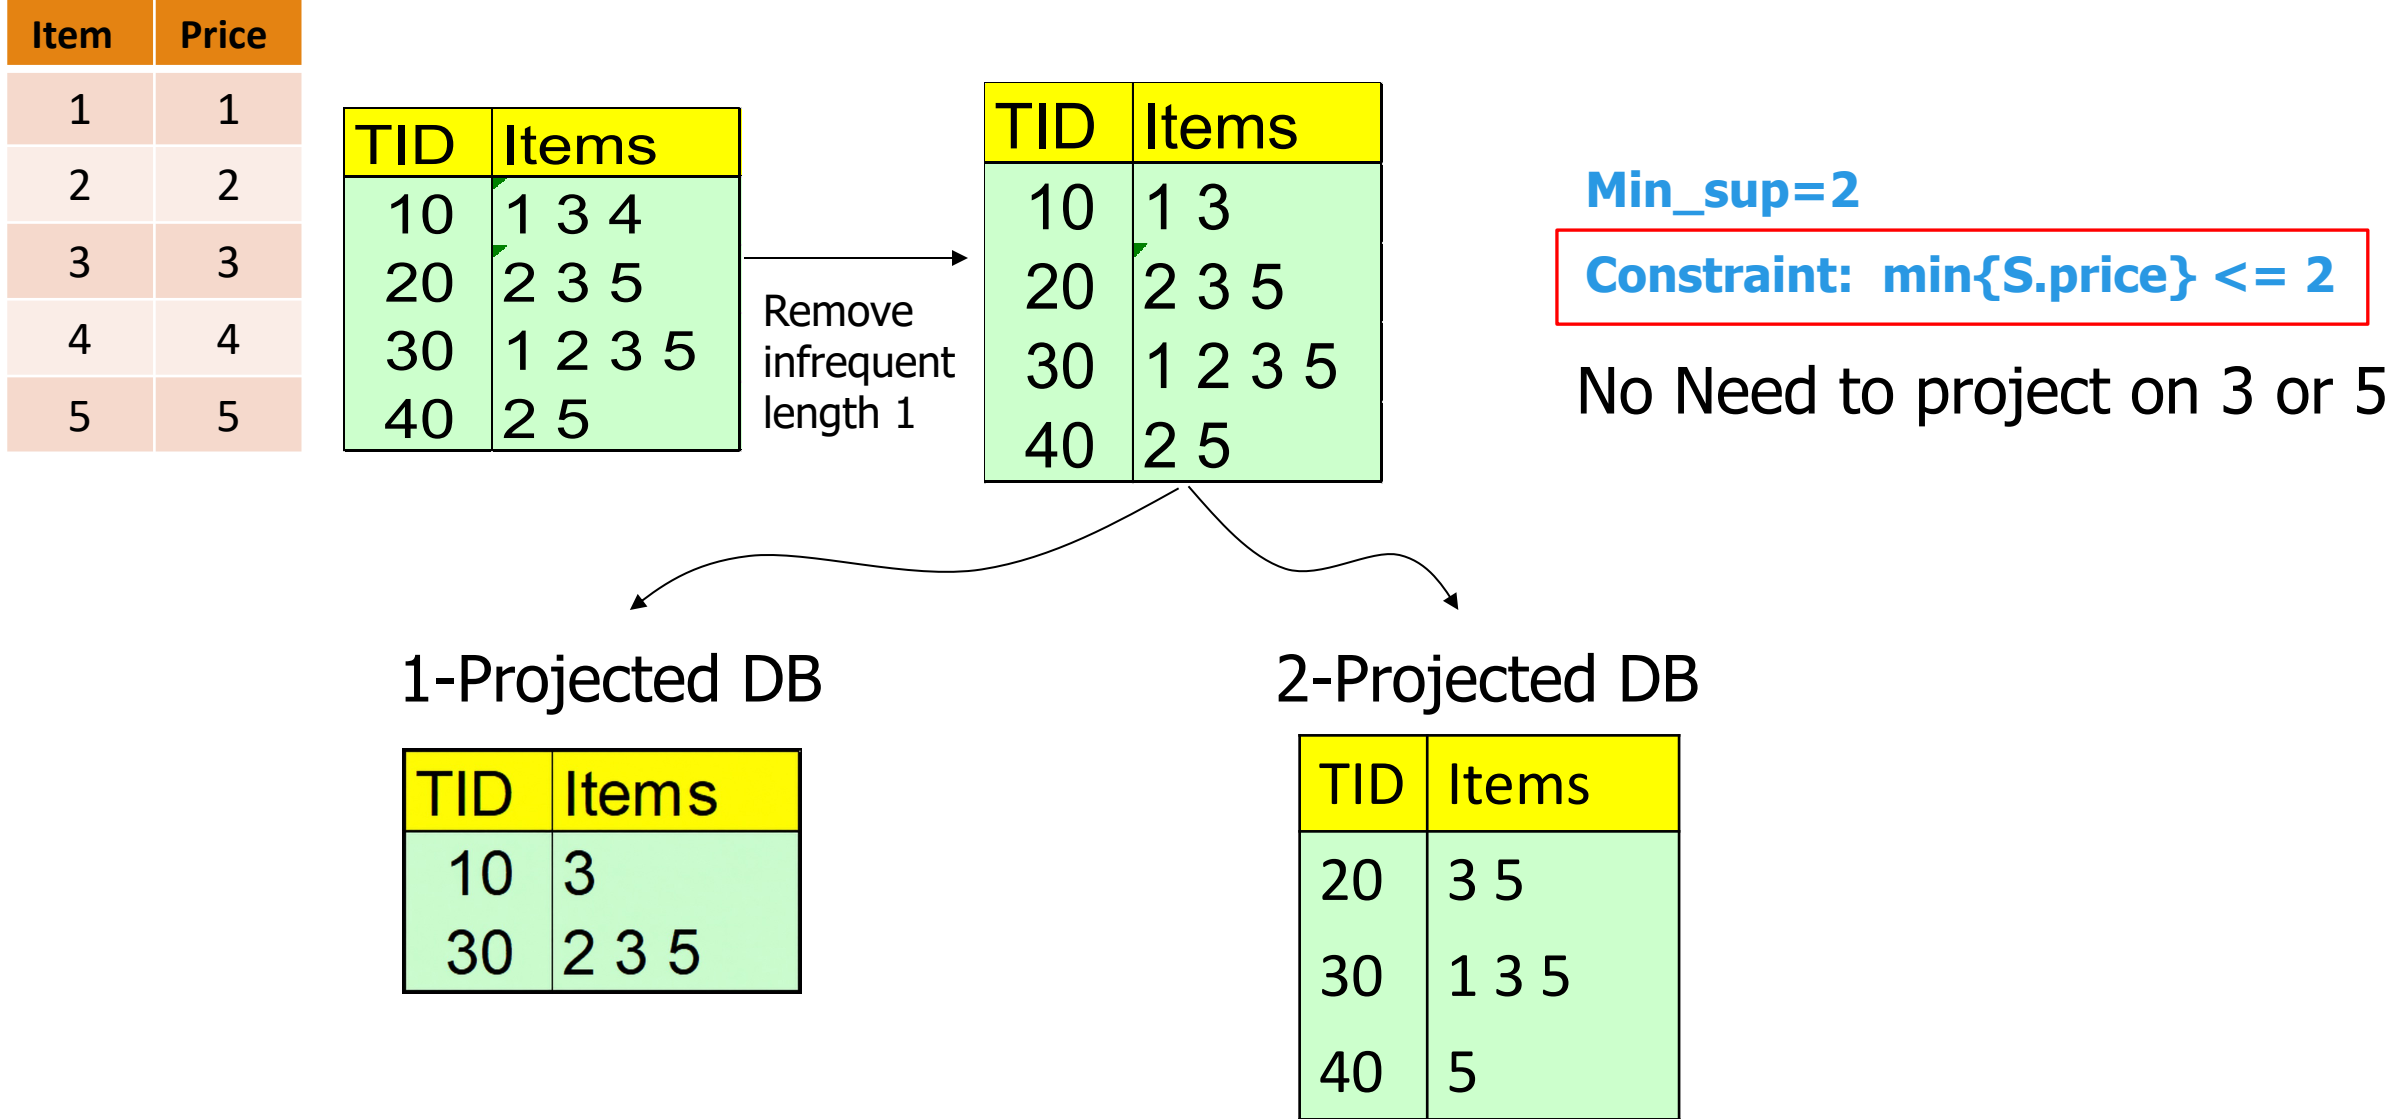

# 不同种类的约束对应不同的剪枝策略

■ 总之，约束可分为模式空间剪枝约束与数据空间剪枝约束

| 模式空间剪枝约束                                                                                                                                                                                                                           | 数据空间剪枝约束                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>■ 反单调: 若违反约束 <math>c</math>, 可终止其后续挖掘</div><div>■ 单调: 若已满足 <math>c</math>, 无需再次检查 <math>c</math></div><div>■ 可转换: 若处理中能对项适当排序, 则 <math>c</math> 可转换为单调或反单调</div><div>■ 简洁: 若约束 <math>c</math> 可通过直接操作数据来强制执行</div></div> | <div><div>■ 数据简洁: 可在模式挖掘初始阶段剪枝数据空间</div><div>■ 数据反单调: 若事务 <math>t</math> 不满足 <math>c</math>, 则可剪去 <math>t</math> 以减少数据处理开销</div></div> |

# Different Kinds of Constraints Lead to Different Pruning Strategies

■ In summary, constraints can be categorized as **pattern space pruning** constraints vs. **data space pruning** constraints

| Pattern space pruning constraints                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Data space pruning constraints                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>■ <b>Anti-monotonic:</b> If constraint <math>c</math> is violated, its further mining can be terminated</div><div>■ <b>Monotonic:</b> If <math>c</math> is satisfied, no need to check <math>c</math> again</div><div>■ <b>Convertible:</b> <math>c</math> can be converted to monotonic or anti-monotonic if items can be properly ordered in processing</div><div>■ <b>Succinct:</b> If the constraint <math>c</math> can be enforced by directly manipulating the data</div></div> | <div><div>■ <b>Data succinct:</b> Data space can be pruned at the initial pattern mining process</div><div>■ <b>Data anti-monotonic:</b> If a transaction <math>t</math> does not satisfy <math>c</math>, then <math>t</math> can be pruned to reduce data processing effort</div></div> |

# 如何处理多个约束？

- 在模式挖掘中使用多个约束是有益的
- 但不同约束可能要求相互冲突的项排序
  - 若  $c_1$  与  $c_2$  的排序存在冲突
    - 尝试先排序数据并强制执行其中一个约束(选哪一个?)
    - 再在挖掘投影数据库时强制执行另一约束
- 例:  $c_1$ :  $\text{avg}(S.\text{profit}) > 20$ , 以及  $c_2$ :  $\text{avg}(S.\text{price}) < 50$ 
  - 假设  $c_1$  的剪枝能力更强
    - 按利润降序排序并先使用  $c_1$
  - 对每个投影数据库, 按价格升序排列各项, 并在挖掘中强制执行  $c_2$

# How to Handle Multiple Constraints?

- It is beneficial to use multiple constraints in pattern mining
- But different constraints may require potentially *conflicting* item-ordering
  - If there exists conflict ordering between  $c_1$  and  $c_2$ 
    - Try to sort data and enforce *one constraint* first (which one?)
    - Then enforce the other constraint when mining the projected databases
- E.g.  $c_1$ :  $\text{avg}(S.\text{profit}) > 20$ , and  $c_2$ :  $\text{avg}(S.\text{price}) < 50$ 
  - Assume  $c_1$  has more pruning power
    - Sort in profit descending order and use  $c_1$  first
  - For each projected DB, sort items by increasing price and enforce  $c_2$  during mining

# 处理多个约束

- 估计哪个约束能去除搜索空间的最大部分
- 尽早应用简洁或强反单调约束
- 保持可转换约束所要求的项排序
- 仅当后续剪枝证明仍然成立时，才在投影数据库内重排
- 输出前验证全部约束，即使其中一些已用于早期剪枝

最佳实施顺序取决于剪枝能力、计算代价与排序兼容性。

# Handling Multiple Constraints

- **Estimate** which constraint removes the largest part of the search space
- **Apply** a succinct or strongly anti-monotone constraint as early as possible
- **Preserve** the item ordering required by a convertible constraint
- **Reorder** within projected databases only when the later pruning proof remains valid
- **Verify** all constraints before output, even when some were used for early pruning

The best enforcement order depends on **pruning power**, **evaluation cost**, and **ordering compatibility**.

# 第1部分综合： 我们可以剪枝什么？

| 情形         | 安全操作       | 原因       |
|------------|------------|----------|
| 模式不满足反单调 c | 停止扩展该分支    | 所有超集均不满足 |
| 模式满足单调 c   | 停止在超集上检查 c | 所有超集均满足  |
| 约束是简洁的     | 先过滤或投影数据   | 直接实施是精确的 |
| 记录无法满足任何扩展 | 删除该记录      | 数据反单调性   |

第2部分将模式表示从无序集合改为序列和图。

# Part 1 Synthesis: What Can We Prune?

| Situation                           | Safe action                  | Reason                      |
|-------------------------------------|------------------------------|-----------------------------|
| Pattern fails anti-monotone c       | Stop growing the branch      | All supersets fail          |
| Pattern satisfies monotone c        | Stop checking c on supersets | All supersets satisfy       |
| Constraint is succinct              | Filter or project data first | Direct enforcement is exact |
| Record cannot satisfy any extension | Remove the record            | Data anti-monotonicity      |

Part 2 changes the pattern representation from unordered sets to *sequences and graphs*.

---

# 附录

## 第1部分备用幻灯片

---

# Appendix

## Backup Slides for Part 1

# 第3讲回顾：Apriori

| 阶段    | 操作                                                          | 原因                   |
|-------|-------------------------------------------------------------|----------------------|
| 1. 连接 | 由 $F_{k-1}$ 中的相容对生成 $C_k$                                   | 只有频繁 $(k-1)$ -项集才能参与 |
| 2. 剪枝 | 若任一 $(k-1)$ -子集不在 $F_{k-1}$ 中，则删除该候选                        | 不频繁子集使每个超集都不频繁       |
| 3. 计数 | 扫描事务数据库，为幸存候选计数                                             | 支持度必须在数据上度量          |
| 4. 选择 | 当 $\text{support}(X) \geq \text{minsup}$ 时保留 $X$ ，以形成 $F_k$ | 重复直到 $F_k$ 为空        |

Apriori 交替进行候选生成与数据库扫描；向下闭包提供剪枝保证。

# Lecture 3 Recap: Apriori

| Stage     | Operation                                                          | Reason                                               |
|-----------|--------------------------------------------------------------------|------------------------------------------------------|
| 1. Join   | Generate $C_k$ from compatible pairs in $F_{k-1}$                  | Only frequent $(k-1)$ -itemsets can contribute       |
| 2. Prune  | Remove a candidate if any $(k-1)$ -subset is absent from $F_{k-1}$ | An infrequent subset makes every superset infrequent |
| 3. Count  | Scan the transaction database for the surviving candidates         | Support must be measured on the data                 |
| 4. Select | Keep $X$ when $\text{support}(X) \geq \text{minsup}$ to form $F_k$ | Repeat until $F_k$ is empty                          |

Apriori alternates candidate generation and database scans; downward closure provides the pruning guarantee.

# 第3讲回顾：Apriori 的优化与替代方法

| 方法        | 变化之处          | 效率思路                  |
|-----------|---------------|-----------------------|
| DHP       | Apriori 候选过滤  | 对 k-项集哈希并剪掉低计数桶；缩减事务  |
| Partition | Apriori 数据库访问 | 挖掘局部频繁集，再在第二次扫描中验证其并集 |
| ECLAT     | 垂直 TID 列表表示   | 在深度优先搜索中对 TID 集合求交    |
| FP-growth | 压缩前缀树表示       | 挖掘条件模式基，无需显式候选        |

DHP 与 Partition 优化 Apriori；ECLAT 与 FP-growth 重组数据与搜索。

# Lecture 3 Recap: Apriori Optimizations and Alternatives

| Method    | What changes                          | Efficiency idea                                                    |
|-----------|---------------------------------------|--------------------------------------------------------------------|
| DHP       | Apriori candidate filtering           | Hash k-itemsets and prune low-count buckets; reduce transactions   |
| Partition | Apriori database access               | Mine local frequent sets, then verify their union in a second scan |
| ECLAT     | Vertical TID-list representation      | Intersect TID sets in a depth-first search                         |
| FP-growth | Compressed prefix-tree representation | Mine conditional pattern bases without explicit candidates         |

DHP and Partition optimize Apriori; ECLAT and FP-growth reorganize the data and the search.

# 第1部分学习目标

---

**更广的模式空间需要对所挖掘内容有更强控制。**

- 为层次化与异质项选择支持度阈值
- 区分稀有模式与负相关模式
- 将约束分为反单调、单调、可转换或简洁
- 判断约束能剪枝模式、数据，还是两者

# Part 1 Learning Goals

---

**Broader pattern spaces require stronger control over what we mine.**

- Choose **support thresholds** for hierarchical and heterogeneous items
- Distinguish **rare patterns** from negatively correlated patterns
- Classify **constraints** as anti-monotone, monotone, convertible, or succinct
- **Decide** whether a constraint can prune patterns, data, or both

# 统一支持度与逐层降低支持度

| 策略           | 示例                 | 优点      | 风险       |
|--------------|--------------------|---------|----------|
| 统一 minsup    | 每层均为 5%            | 简单且可比   | 漏掉具体的低层项 |
| 逐层降低的 minsup | 乳制品 5%;<br>牛奶种类 1% | 发现更细的模式 | 产生更多候选   |

低层项分摊父项支持度，因此往往需要更低的阈值。

# Uniform vs. Level-Reduced Support

| Policy               | Example                            | Strength                | Risk                            |
|----------------------|------------------------------------|-------------------------|---------------------------------|
| Uniform minsup       | 5% at every level                  | Simple and comparable   | Misses specific low-level items |
| Level-reduced minsup | 5% for dairy;<br>1% for milk types | Finds detailed patterns | Produces more candidates        |

Lower-level items divide the parent support, so they often need a lower threshold.

# 稀有模式与负模式

| 性质   | 稀有模式       | 负模式               |
|------|------------|-------------------|
| 主要问题 | 该模式是否很少出现？ | A 与 B 的共现是否少于预期？  |
| 所需边际 | 非核心        | A 与 B 各自都应出现得足够频繁 |
| 典型度量 | 带自定义阈值的支持度 | 一种零事务不变的相关度量      |
| 示例   | Rolex 购买   | 两种替代商品            |

仅凭较低的联合支持度，无法区分稀有与负关联。

# Rare Patterns and Negative Patterns

| Property           | Rare pattern                         | Negative pattern                        |
|--------------------|--------------------------------------|-----------------------------------------|
| Main question      | Does the pattern occur infrequently? | Do A and B co-occur less than expected? |
| Required marginals | Not central                          | A and B should each occur often enough  |
| Typical measure    | Support with a customized threshold  | A null-invariant correlation measure    |
| Example            | Rolex purchase                       | Two substitute products                 |

Low joint support alone cannot distinguish rarity from negative association.

# 数据挖掘中各类用户指定约束

- 知识类型约束 — 指定要挖掘的知识类型
  - 例如：分类、关联、聚类、离群点发现.....
- 数据约束 — 使用类 SQL 查询
  - 例如：找出今年纽约商店中一起售出的商品
- 维度/层次约束 — 类似于关系数据库中的投影
  - 例如：与地区、价格、品牌、顾客类别相关
- 兴趣度约束 — 各类阈值
  - 例如：强规则：  $\text{min\_sup} \geq 0.02$ ,  $\text{min\_conf} \geq 0.6$ ,  $\text{min\_correlation} \geq 0.7$
- 规则（或模式）约束  本研究重点
  - 例如：小额销售 ( $\text{price} < \$10$ ) 引发大额销售 ( $\text{sum} > \$200$ )

# Various Kinds of User-Specified Constraints in Data Mining

- Knowledge type constraint — Specifying what kinds of knowledge to mine
  - E.g.: Classification, association, clustering, outlier finding, ...
- Data constraint — using SQL-like queries
  - E.g.: Find products sold together in NY stores this year
- Dimension/level constraint — similar to projection in relational database
  - E.g.: In relevance to region, price, brand, customer category
- Interestingness constraint — various kinds of thresholds
  - E.g.: Strong rules:  $\text{min\_sup} \geq 0.02$ ,  $\text{min\_conf} \geq 0.6$ ,  $\text{min\_correlation} \geq 0.7$
- Rule (or pattern) constraint  The focus of this study
  - E.g.: Small sales ( $\text{price} < \$10$ ) triggers big sales ( $\text{sum} > \$200$ )

## Kulczynski 度量是零事务不变的

**Kulc 对两个条件共现概率取平均。**

1. 使用  $\text{count}(A)=100$ 、 $\text{count}(B)=100$  与  $\text{count}(A \cup B)=1$ 。
2.  $P(B|A)=1/100=0.01$ ，且  $P(A|B)=1/100=0.01$ 。
3.  $\text{Kulc}(A,B)=[P(B|A)+P(A|B)]/2=(0.01+0.01)/2=0.01$ 。
4. 加入零事务会改变  $N$ ，但不改变这些条件概率。

**当负相关阈值  $\epsilon = 0.02$  时， $\text{Kulc} = 0.01$  表示负关联。**

## Kulczynski Measure Is Null-Invariant

**Kulc averages the two conditional co-occurrence probabilities.**

1. Use  $\text{count}(A)=100$ ,  $\text{count}(B)=100$ , and  $\text{count}(A \cup B)=1$ .
2.  $P(B|A)=1/100=0.01$  and  $P(A|B)=1/100=0.01$ .
3.  $\text{Kulc}(A,B)=[P(B|A)+P(A|B)]/2=(0.01+0.01)/2=0.01$ .
4. Adding null transactions changes  $N$  but does not change these conditional probabilities.

**With a negative-correlation threshold  $\epsilon = 0.02$ ,  $\text{Kulc} = 0.01$  indicates a negative association.**

# 约束性质及其用途

| 性质    | 安全推断        | 主要用途     |
|-------|-------------|----------|
| 反单调   | 失败在扩展下持续    | 剪枝模式分支   |
| 单调    | 满足在扩展下持续    | 停止重复检查   |
| 可转换   | 排序产生上述性质之一  | 实现前缀剪枝   |
| 简洁    | 直接选择即可实施该约束 | 缩小初始搜索空间 |
| 数据反单调 | 记录无法支持后续扩展  | 剪枝投影数据   |

一个约束可能具有不止一种有用性质。

# Constraint Properties and Their Uses

| Property           | Safe inference                               | Main use                        |
|--------------------|----------------------------------------------|---------------------------------|
| Anti-monotone      | failure persists under extension             | prune pattern branches          |
| Monotone           | satisfaction persists under extension        | stop repeated checking          |
| Convertible        | ordering creates one of the above properties | enable prefix pruning           |
| Succinct           | direct selection enforces the constraint     | reduce the initial search space |
| Data anti-monotone | a record cannot support later extensions     | prune projected data            |

A constraint may have more than one useful property.

# 三个约束的实例策略

**约束顺序是算法设计决策，而不仅是查询语言细节。**

1. 要求：支持度  $\geq 2$ 。全程保持 Apriori 或 FP-growth 的支持度剪枝。
2. 要求： $\min(\text{price}) \leq 50$ 。从符合条件的低价锚点与投影数据库出发。
3. 要求： $\text{average}(\text{profit}) > 20$ 。在可行时采用经验证的利润降序增长顺序。
4. 输出前对幸存模式计数，并对照全部三个约束加以验证。

**先实施低代价、安全且剪枝力强的约束；推迟无法安全剪枝的高代价检查。**

# Worked Strategy for Three Constraints

**Constraint order is an algorithm-design decision, not only a query-language detail.**

1. Requirement: support  $\geq 2$ . Keep Apriori or FP-growth support pruning active throughout.
2. Requirement:  $\min(\text{price}) \leq 50$ . Start from qualifying low-price anchors and projected databases.
3. Requirement:  $\text{average}(\text{profit}) > 20$ . Use a validated profit-descending growth order where possible.
4. Count and verify the surviving patterns against all three constraints before output.

**Enforce cheap, safe, and high-pruning constraints first; postpone expensive checks that cannot prune safely.**

# 第1部分检查

问题： 某模式违反反单调约束。挖掘算法可以安全地做什么？

|             |              |
|-------------|--------------|
| A. 保留所有超集   | B. 剪枝每个超集    |
| C. 声明其为最大模式 | D. 降低 minsup |

答案： B. 剪枝每个超集

# Part 1 Check

Question: A pattern violates an anti-monotone constraint. What can the miner safely do?

|                       |                         |
|-----------------------|-------------------------|
| A. Keep all supersets | B. Prune every superset |
| C. Declare it maximal | D. Lower minsup         |

Answer: B. Prune every superset

## 第2部分：序列模式与图模式

---

先顺序，后结构

---

## Part 2: Sequential and Graph Patterns

---

Order first, then structure

---

# 模式挖掘：高级方法

---

- ❑ 挖掘多层与多维模式
- ❑ 基于约束的模式挖掘
- ❑ 挖掘序列模式
- ❑ 挖掘子图模式
- ❑ 小结

# Pattern Mining: Advanced Methods

---

- ❑ Mining Multi-level and multi-dimension Patterns
- ❑ Constraint-based Pattern Mining
- ❑ Mining Sequential Patterns
- ❑ Mining Subgraph Patterns
- ❑ Summary

# 序列模式挖掘

- 什么样的模式是序列的？
- 序列：顺序真正重要
  - 不能交换序列中的两项却仍得到同一序列
- 例：英语是序列的：主语 → 动词 → 宾语
- 其他要点：
  - 序列模式使用事件顺序；精确时间戳与时间间隔是可选约束
  - 时间序列分析对按时间索引的测量建模，并常使用实际间隔

# Sequential Pattern Mining

- What kind of patterns are sequential?
- Sequential: The order really matters
  - You cannot swap two items in a sequence and have the same sequence
- Example: The English language is sequential: Subject → Verb → Object
- Other points:
  - Sequential patterns use event order; exact timestamps and time gaps are optional constraints
  - Time-series analysis models measurements indexed by time and often uses the actual intervals

# 项集与序列问的问题不同

| 表示                                       | 等价?                                            | 示例问题        |
|------------------------------------------|------------------------------------------------|-------------|
| 项集 {A,B}                                 | $\{A,B\} = \{B,A\}$                            | 哪些项一起出现?    |
| 序列 $\langle A,B \rangle$                 | $\langle A,B \rangle \neq \langle B,A \rangle$ | 哪个事件倾向于先发生? |
| 事件集 $\langle\langle A\ B \rangle\rangle$ | A 与 B 同属一个事件                                   | 哪些项出现在同一步?  |

序列模式挖掘保留事件之间的顺序，但不保留单个事件集内部的顺序。

# Itemsets and Sequences Ask Different Questions

| Representation                                 | Equivalent?                                    | Example question                    |
|------------------------------------------------|------------------------------------------------|-------------------------------------|
| Itemset {A,B}                                  | $\{A,B\} = \{B,A\}$                            | Which items occur together?         |
| Sequence $\langle A,B \rangle$                 | $\langle A,B \rangle \neq \langle B,A \rangle$ | Which event tends to happen first?  |
| Event set $\langle\langle A\ B \rangle\rangle$ | A and B share one event                        | Which items occur at the same step? |

Sequential pattern mining preserves order between events but not order inside one event set.

# 序列模式示例

- 序列模式挖掘的应用
  - 顾客购物：先买笔记本电脑，再买数码相机，然后买智能手机
  - 医疗过程：看医生、取药、医生监测进展、医生据此应对 → 加药/减药
  - 自然灾害：灾前、灾中、灾后
  - 科学实验：步骤 1、步骤 2、步骤 3
  - 市场事件：上涨、回调与复苏可能形成反复出现的有序模式
  - 生物序列：改变核苷酸或氨基酸顺序会改变所得序列及其功能

# Sequential Pattern Examples

- Application of Sequential pattern Mining
  - **Customer shopping:** Purchase a laptop first, then a digital camera, and then a smartphone
  - **Medical treatments:** Go to see a doctor, get drugs, doctor monitors progress, doctor reacts accordingly → more/less drugs
  - **Natural disasters:** Before the disaster, during the disaster, after the disaster
  - **Scientific Experiments:** Step 1, Step 2, Step 3
  - **Market events:** rise, correction, and recovery may form a recurring ordered pattern
  - **Biological sequences:** changing nucleotide or amino-acid order changes the resulting sequence and function

# 阅读序列记号

括号将同一事件中观察到的项归为一组。

- 1. 从左到右将  $\langle a (bc) d \rangle$  读作三个有序元素。
- 2. 第一个元素包含项  $a$ 。
- 3. 第二个元素同时包含  $b$  和  $c$ ；其内部顺序无关。
- 4. 第三个元素包含  $d$ 。

序列长度通常计项数，序列大小计元素数；应说明算法采用哪种约定。

# Reading Sequence Notation


Parentheses group items observed in the same event.

- 1. Read  $\langle a (bc) d \rangle$  from left to right as three ordered elements.
- 2. The first element contains item  $a$ .
- 3. The second element contains  $b$  and  $c$  together; their internal order does not matter.
- 4. The third element contains  $d$ .

Sequence length usually counts items, while sequence size counts elements; state which convention the algorithm uses.

# 序列模式与序列模式挖掘

序列模式挖掘：给定一组序列，找出全部频繁子序列（即满足 min\_sup 阈值）

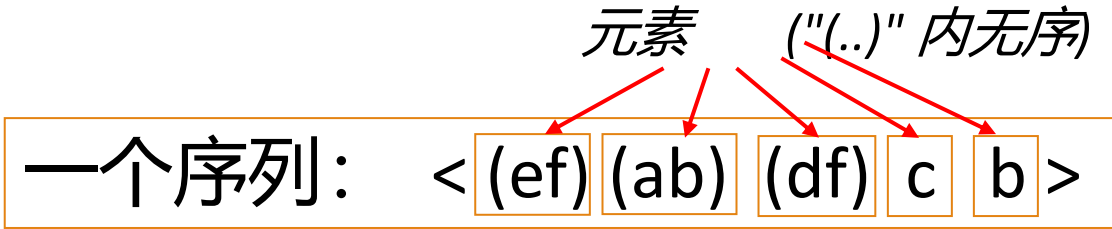


一个元素可以包含一组项（也称为事件）  
\* 元素内的项无序，并按字母顺序列出

一个序列数据库

| SID | 序列                |
|-----|-------------------|
| 10  | <a(abc)(ac)d(cf)> |
| 20  | <(ad)c(bc)(ae)>   |
| 30  | <(ef)(ab)(df)cb>  |
| 40  | <eg(af)cbc>       |

# Sequential Pattern and Sequential Pattern Mining

Sequential pattern mining: Given a set of sequences, find the complete set of frequent subsequences (i.e., satisfying the min\_sup threshold)

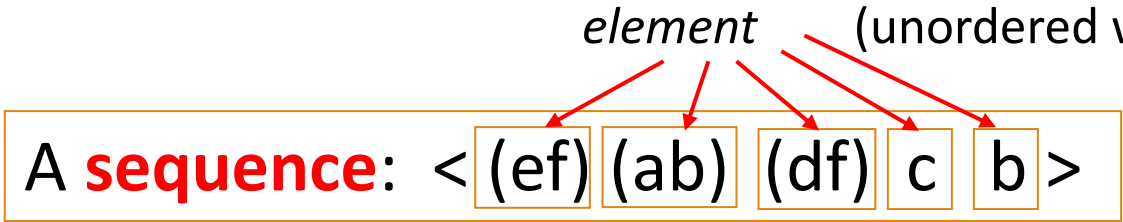

An element may contain a set of items (also called events)  
\* Items within an element are **unordered** and we list them alphabetically

A sequence database

| SID | Sequence                            |
|-----|-------------------------------------|
| 10  | <a( <u>ab</u> c)(a <u>c</u> )d(cf)> |
| 20  | <(ad)c(bc)(ae)>                     |
| 30  | <(ef)( <u>ab</u> )(df) <u>c</u> b>  |
| 40  | <eg(af)cbc>                         |

# 子序列如何匹配

匹配使用有序包含，而不是字符串相等。

1. 目标模式：  $\langle a (bc) d c \rangle$ 。
2. 数据库序列：  $\langle a (abc) (ac) d (cf) \rangle$ 。
3. 将  $a$  匹配到第一个元素，将  $(bc)$  匹配到第二个元素，因为  $\{b,c\} \subseteq \{a,b,c\}$ 。
4. 将  $d$  匹配到第四个元素，将  $c$  匹配到第五个元素；未使用的元素可以跳过。

子序列保持顺序，但不要求元素相邻，也不要求元素完全相等。

# How a Subsequence Matches


Matching uses ordered containment, not string equality.

1. Target pattern:  $\langle a (bc) d c \rangle$ .
2. Database sequence:  $\langle a (abc) (ac) d (cf) \rangle$ .
3. Match  $a$  to the first element and  $(bc)$  to the second element because  $\{b,c\} \subseteq \{a,b,c\}$ .
4. Match  $d$  to the fourth element and  $c$  to the fifth element; unused elements may be skipped.

A subsequence preserves order but does not require adjacent elements or exact element equality.

# 序列模式与序列模式挖掘

序列模式挖掘：给定一组序列，找出全部频繁子序列（即满足 min\_sup 阈值）

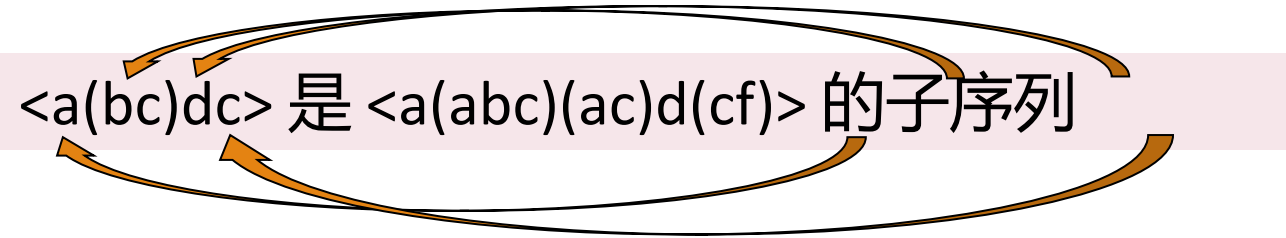


给定支持度阈值 min\_sup = 2, <(ab)c> 是序列模式

一个序列数据库

| SID | 序列                |
|-----|-------------------|
| 10  | <a(abc)(ac)d(cf)> |
| 20  | <(ad)c(bc)(ae)>   |
| 30  | <(ef)(ab)(df)cb>  |
| 40  | <eg(af)cbc>       |

# Sequential Pattern and Sequential Pattern Mining

Sequential pattern mining: Given a set of sequences, find the complete set of frequent subsequences (i.e., satisfying the min\_sup threshold)

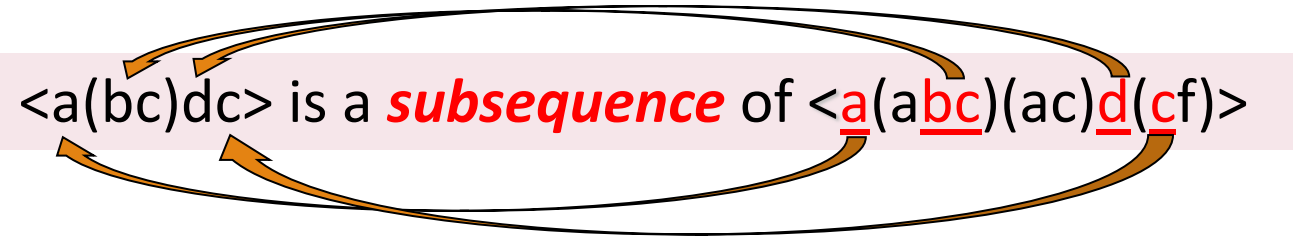

Given support threshold min\_sup = 2, <(ab)c> is a *sequential pattern*

A sequence database

| SID | Sequence          |
|-----|-------------------|
| 10  | <a(abc)(ac)d(cf)> |
| 20  | <(ad)c(bc)(ae)>   |
| 30  | <(ef)(ab)(df)cb>  |
| 40  | <eg(af)cbc>       |

# 序列模式的支持度

- 当  $s$  是某序列的子序列时，该序列支持模式  $s$
- 每个序列 ID 至多计入一次支持计数，即使  $s$  出现多次
- 支持计数( $s$ ) = 包含  $s$  的序列 ID 数
- 相对支持度( $s$ ) = 支持计数( $s$ ) / 序列数

频数统计的是支持该模式的序列数，而不是序列内部的嵌入次数。

# Support of a Sequential Pattern

- A sequence supports pattern  $s$  when  $s$  is a subsequence of that sequence
- Each sequence ID contributes at most one support count, even if  $s$  appears many times
- $\text{support count}(s)$  = number of sequence IDs containing  $s$
- $\text{relative support}(s)$  =  $\text{support count}(s)$  / number of sequences

Frequency counts supporting sequences, not the number of embeddings inside them.

# 序列模式挖掘算法

- ❑ 算法要求：高效、可扩展、找出完整集合、纳入各类用户特定约束
- ❑ Apriori 性质仍然成立：若子序列  $s_1$  不频繁，则  $s_1$  的任何超序列都不可能频繁
- ❑ 代表性算法
  - ❑ GSP (Generalized Sequential Patterns): Srikant & Agrawal, EDBT '96

# Sequential Pattern Mining Algorithms

- ❑ Algorithm requirement: Efficient, scalable, finding complete set, incorporating various kinds of user-specific constraints
- ❑ The Apriori property still holds: If a subsequence  $s_1$  is infrequent, none of  $s_1$ 's super-sequences can be frequent
- ❑ Representative algorithms
  - ❑ GSP (Generalized Sequential Patterns): Srikant & Agrawal, EDBT '96

# GSP: 逐层序列挖掘

Apriori 性质对子序列同样成立。

1. 找出频繁的长度 1 序列。
2. 连接相容的频繁长度  $k$  序列，生成长度  $(k+1)$  候选。
3. 剪掉其必要子序列不频繁的候选。
4. 扫描序列数据库，统计支持度并保留频繁候选。
5. 重复，直到没有候选为止。

GSP 把 Apriori 剪枝从项集推广到有序子序列，但仍需反复生成候选并扫描。

# GSP: Level-Wise Sequential Mining

The Apriori property also holds for subsequences.

1. Find frequent length-1 sequences.
2. Join compatible frequent length- $k$  sequences to generate length- $(k+1)$  candidates.
3. Prune candidates whose required subsequences are infrequent.
4. Scan the sequence database to count support and retain frequent candidates.
5. Repeat until no candidates remain.

GSP transfers Apriori pruning from itemsets to ordered subsequences, but still requires repeated candidate generation and scans.

# GSP: 基于 Apriori 的序列模式挖掘

- 初始候选: 全部 8 个单元素序列
  - <a>, <b>, <c>, <d>, <e>, <f>, <g>, <h>
- 扫描数据库一次, 统计每个候选的支持度

| SID | 序列              |
|-----|-----------------|
| 10  | <(bd)cb(ac)>    |
| 20  | <(bf)(ce)b(fg)> |
| 30  | <(ah)(bf)abf>   |
| 40  | <(be)(ce)d>     |
| 50  | <a(bd)bcb(ade)> |

$min\_sup = 2$

| 候选  | 支持度 |
|-----|-----|
| <a> | 3   |
| <b> | 5   |
| <c> | 4   |
| <d> | 3   |
| <e> | 3   |
| <f> | 2   |
| <g> | 1   |
| <h> | 1   |



GSP (Generalized Sequential Patterns): Srikant & Agrawal @ EDBT'96)

# GSP: Apriori-Based Sequential Pattern Mining

- Initial candidates: All 8-singleton sequences
  - <a>, <b>, <c>, <d>, <e>, <f>, <g>, <h>
- Scan DB once, count support for each candidate

| SID | Sequence        |
|-----|-----------------|
| 10  | <(bd)cb(ac)>    |
| 20  | <(bf)(ce)b(fg)> |
| 30  | <(ah)(bf)abf>   |
| 40  | <(be)(ce)d>     |
| 50  | <a(bd)bcb(ade)> |

$min\_sup = 2$

| Cand. | sup |
|-------|-----|
| <a>   | 3   |
| <b>   | 5   |
| <c>   | 4   |
| <d>   | 3   |
| <e>   | 3   |
| <f>   | 2   |
| <g>   | 1   |
| <h>   | 1   |



GSP (Generalized Sequential Patterns): Srikant & Agrawal @ EDBT'96)

# 三类长度 2 候选

| 候选形式                                 | 含义         | m 个频繁项时的数量    |
|--------------------------------------|------------|---------------|
| $\langle a\ b \rangle$               | a 出现在 b 之前 | $m^2$ , 包括重复项 |
| $\langle b\ a \rangle$               | b 出现在 a 之前 | 已包含在 $m^2$ 中  |
| $\langle\langle a\ b \rangle\rangle$ | a 与 b 同时出现 | $m(m-1)/2$    |

当 m=6 时, GSP 生成  $6^2 + 6 \times 5 / 2 = 51$  个长度 2 候选。

# Three Types of Length-2 Candidates

| Candidate form                       | Meaning                | Count with m frequent items      |
|--------------------------------------|------------------------|----------------------------------|
| $\langle a\ b \rangle$               | a occurs before b      | $m^2$ , including repeated items |
| $\langle b\ a \rangle$               | b occurs before a      | already included in $m^2$        |
| $\langle\langle a\ b \rangle\rangle$ | a and b occur together | $m(m-1)/2$                       |

With m=6, GSP generates  $6^2 + 6 \times 5 / 2 = 51$  length-2 candidates.

# GSP: 基于 Apriori 的序列模式挖掘

示例：生成长度 2 候选序列

单项 × 单项 – 合计：(6 \* 6)

|     | <a>  | <b>  | <c>  | <d>  | <e>  | <f>  |
|-----|------|------|------|------|------|------|
| <a> | <aa> | <ab> | <ac> | <ad> | <ae> | <af> |
| <b> | <ba> | <bb> | <bc> | <bd> | <be> | <bf> |
| <c> | <ca> | <cb> | <cc> | <cd> | <ce> | <cf> |
| <d> | <da> | <db> | <dc> | <dd> | <de> | <df> |
| <e> | <ea> | <eb> | <ec> | <ed> | <ee> | <ef> |
| <f> | <fa> | <fb> | <fc> | <fd> | <fe> | <ff> |

集合（无序）– 合计：(6\*5) / 2

|     | <a> | <b>    | <c>    | <d>    | <e>    | <f>    |
|-----|-----|--------|--------|--------|--------|--------|
| <a> |     | <(ab)> | <(ac)> | <(ad)> | <(ae)> | <(af)> |
| <b> |     |        | <(bc)> | <(bd)> | <(be)> | <(bf)> |
| <c> |     |        |        | <(cd)> | <(ce)> | <(cf)> |
| <d> |     |        |        |        | <(de)> | <(df)> |
| <e> |     |        |        |        |        | <(ef)> |
| <f> |     |        |        |        |        |        |

Apriori 剪枝

无剪枝（含 g 和 h）：

$$8*8 + 8*7/2 = 92$$

长度为 2 的候选

有剪枝：

$$6*6 + 6*5/2 = 51$$

长度为 2 的候选

# GSP: Apriori-Based Sequential Pattern Mining

Example: Generate length-2 candidate sequences

singleton \* singleton – Total: (6 \* 6)

|     | <a>  | <b>  | <c>  | <d>  | <e>  | <f>  |
|-----|------|------|------|------|------|------|
| <a> | <aa> | <ab> | <ac> | <ad> | <ae> | <af> |
| <b> | <ba> | <bb> | <bc> | <bd> | <be> | <bf> |
| <c> | <ca> | <cb> | <cc> | <cd> | <ce> | <cf> |
| <d> | <da> | <db> | <dc> | <dd> | <de> | <df> |
| <e> | <ea> | <eb> | <ec> | <ed> | <ee> | <ef> |
| <f> | <fa> | <fb> | <fc> | <fd> | <fe> | <ff> |

Sets (unordered) – Total: (6\*5) / 2

|     | <a> | <b>    | <c>    | <d>    | <e>    | <f>    |
|-----|-----|--------|--------|--------|--------|--------|
| <a> |     | <(ab)> | <(ac)> | <(ad)> | <(ae)> | <(af)> |
| <b> |     |        | <(bc)> | <(bd)> | <(be)> | <(bf)> |
| <c> |     |        |        | <(cd)> | <(ce)> | <(cf)> |
| <d> |     |        |        |        | <(de)> | <(df)> |
| <e> |     |        |        |        |        | <(ef)> |
| <f> |     |        |        |        |        |        |

Apriori Pruning

w/o pruning  
(includes g and h):

$$8*8 + 8*7/2 = 92$$

length-2 candidates

w/ pruning:

$$6*6 + 6*5/2 = 51$$

length-2 candidates

GSP 挖掘与剪枝

5扫: 1候选, 1个长5模式

4扫: 8候选, 7个长4模式

3扫: 46候选, 20个长3, 20不在库

2扫: 51候选, 19个长2, 10不在库

1扫: 8候选, 6个长1模式

<(bd)cba>

<abba> <(bd)bc> ...

<abb> <aab> <aba> <baa> <bab> ...

<aa> <ab> ... <af> <ba> <bb> ... <ff> <(ab)> ... <(ef)>

<a> <b> <c> <d> <e> <f> <g> <h>

去掉不在库或支持度 < min\_sup 的候选

长度

5

4

3

2

1

$6*6 + 6*5/2 = 51$

GSP 算法

从 k = 1 开始重复, 直到 k <= length

扫描数据库, 找出“长度为 k”的频繁序列

用 Apriori 从“长度为 k”的频繁序列生成“长度为 (k+1)”的候选序列

令 k = k+1

直到找不到频繁序列或候选

$min\_sup = 2$

| SID | 序列              |
|-----|-----------------|
| 10  | <(bd)cb(ac)>    |
| 20  | <(bf)(ce)b(fg)> |
| 30  | <(ah)(bf)abf>   |
| 40  | <(be)(ce)d>     |
| 50  | <a(bd)bcb(ade)> |

64

GSP Mining and Pruning

5<sup>th</sup> scan: 1 cand. 1 length-5 seq. pat.

4<sup>th</sup> scan: 8 cand. 7 length-4 seq. pat.

3<sup>rd</sup> scan: 46 cand. 20 length-3 seq. pat. 20 cand. not in DB at all

2<sup>nd</sup> scan: 51 cand. 19 length-2 seq. pat. 10 cand. not in DB at all

1<sup>st</sup> scan: 8 cand. 6 length-1 seq. pat.

<(bd)cba>

<abba> <(bd)bc> ...

<abb> <aab> <aba> <baa> <bab> ...

<aa> <ab> ... <af> <ba> <bb> ... <ff> <(ab)> ... <(ef)>

<a> <b> <c> <d> <e> <f> <g> <h>

Remove Candidates not in DB or Candidates < min\_sup

length

5

4

3

2

1

$6*6 + 6*5/2 = 51$

The GSP algorithm

Repeat, starting at k = 1 until k <= length

Scan DB to find “length-k” frequent sequences

Generate “length-(k+1)” candidate sequences from “length-k” frequent sequences using **Apriori**

set k = k+1

Until no frequent sequence or no candidate can be found

$min\_sup = 2$

| SID | Sequence        |
|-----|-----------------|
| 10  | <(bd)cb(ac)>    |
| 20  | <(bf)(ce)b(fg)> |
| 30  | <(ah)(bf)abf>   |
| 40  | <(be)(ce)d>     |
| 50  | <a(bd)bcb(ade)> |

64

# GSP 为何代价变高

## 计算

- ❑每个序列长度扫描一次数据库
- ❑早期层次候选集很大
- ❑计数时子序列匹配代价高

## 搜索浪费

- ❑许多候选在数据库中从未出现
- ❑长模式产生大量重叠候选
- ❑稀疏序列几乎无法复用候选

模式增长方法在投影数据库内工作，从而避免生成全局候选。

# Why GSP Becomes Expensive

## Computation

- ❑One database scan per sequence length
- ❑Large candidate sets at early levels
- ❑Costly subsequence matching during counting

## Search waste

- ❑Many candidates never occur in the database
- ❑Long patterns create many overlapping candidates
- ❑Sparse sequences provide little candidate reuse

Pattern-growth methods avoid global candidate generation by working inside projected databases.

## PrefixSpan: 按前缀增长模式

- 选择一个频繁前缀，例如 ⟨a⟩
- 构建前缀投影数据库，只保留该前缀出现之后的后缀
- 在该较小数据库中统计局部频繁的扩展项
- 扩展该前缀并递归，而不生成全局候选集

投影把一个大搜索问题转化为若干更小的条件问题。

## PrefixSpan: Grow Patterns by Prefix

- Choose a frequent prefix, such as ⟨a⟩
- Build the prefix-projected database containing only suffixes after an occurrence of the prefix
- Count locally frequent extension items in that smaller database
- Extend the prefix and recurse without generating a global candidate set

Projection converts one large search problem into smaller conditional problems.

# 一个简单的后缀投影数据库

| SID | 原始序列    | 前缀 <a> 之后的后缀 |
|-----|---------|--------------|
| S1  | <a b c> | <b c>        |
| S2  | <a c b> | <c b>        |
| S3  | <b a c> | <c>          |

在 <a> 投影数据库中，b 出现在两个后缀中，c 出现在三个后缀中。

# A Simple Prefix-Projected Database

| SID | Original sequence | Suffix after prefix <a> |
|-----|-------------------|-------------------------|
| S1  | <a b c>           | <b c>                   |
| S2  | <a c b>           | <c b>                   |
| S3  | <b a c>           | <c>                     |

Within the <a>-projected database, b appears in two suffixes and c appears in three.

# PrefixSpan 中的前缀增长

每次递归调用只挖掘与其前缀相容的序列。

1. 从前缀  $\langle a \rangle$  及其投影数据库开始。
2. 若 minsup 计数为 2, 则  $b$  和  $c$  均可作为扩展。
3. 生成  $\langle a b \rangle$  与  $\langle a c \rangle$ , 并为每个前缀构建新的投影数据库。
4. 继续, 直到不再有局部频繁扩展。

PrefixSpan 仍依赖支持度的反单调性; 它改变的是搜索空间的表示与探索方式。

# Growing Prefixes in PrefixSpan

Each recursive call mines only sequences compatible with its prefix.

1. Start with prefix  $\langle a \rangle$  and its projected database.
2. If minsup count is 2, both  $b$  and  $c$  qualify as extensions.
3. Create  $\langle a b \rangle$  and  $\langle a c \rangle$ , then build a new projected database for each prefix.
4. Continue until no locally frequent extension remains.

PrefixSpan still relies on support anti-monotonicity; it changes how the search space is represented and explored.

# GSP 与 PrefixSpan

| 方面    | GSP     | PrefixSpan |
|-------|---------|------------|
| 搜索    | 广度优先    | 深度优先模式增长   |
| 候选    | 显式全局候选  | 前缀扩展       |
| 数据库访问 | 反复全库扫描  | 递归投影数据库    |
| 主要代价  | 候选生成与匹配 | 投影规模与递归    |

两种方法并非在每个数据集上都占优；序列密度与模式长度决定这一权衡。

# GSP and PrefixSpan

| Aspect          | GSP                               | PrefixSpan                    |
|-----------------|-----------------------------------|-------------------------------|
| Search          | breadth-first                     | depth-first pattern growth    |
| Candidates      | explicit global candidates        | prefix extensions             |
| Database access | repeated full scans               | recursive projected databases |
| Main cost       | candidate generation and matching | projection size and recursion |

Neither method dominates in every dataset; sequence density and pattern length shape the trade-off.

# 模式挖掘：高级方法

- ❑ 挖掘多层与多维模式
- ❑ 基于约束的模式挖掘
- ❑ 挖掘序列模式
- ❑ 挖掘子图模式
- ❑ 小结



# Pattern Mining: Advanced Methods


- ❑ Mining Multi-level and multi-dimension Patterns
- ❑ Constraint-based Pattern Mining
- ❑ Mining Sequential Patterns
- ❑ Mining Subgraph Patterns
- ❑ Summary



# 什么是图模式挖掘?


## 化学信息学:

### 挖掘频繁化合物结构

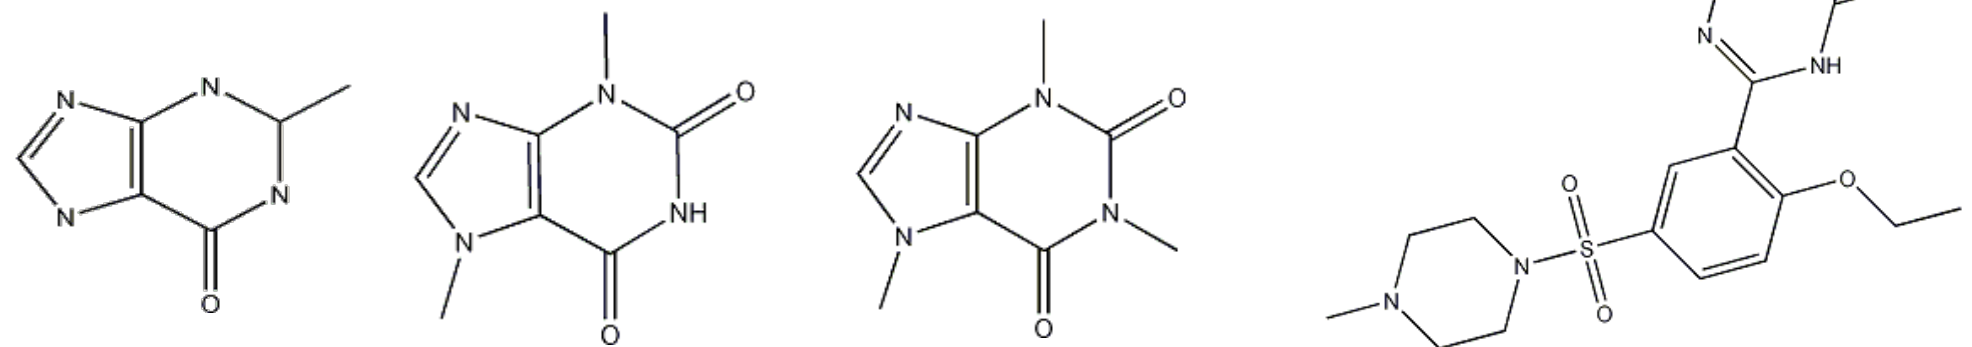

## 社交网络、网络社区、推文.....


### 寻找频繁的科研合作子图

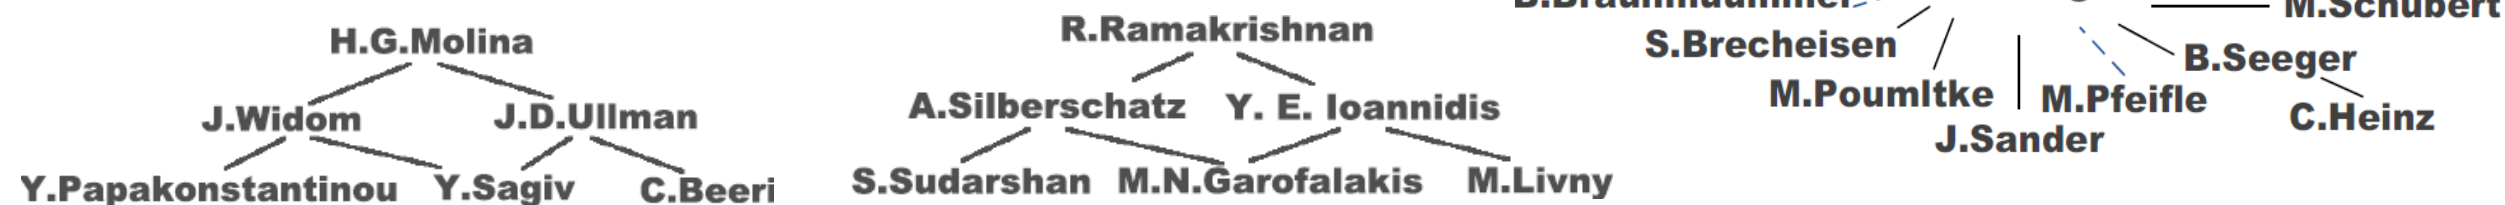

# What Is Graph Pattern Mining?


## Chem-informatics:

### Mining frequent chemical compound structures

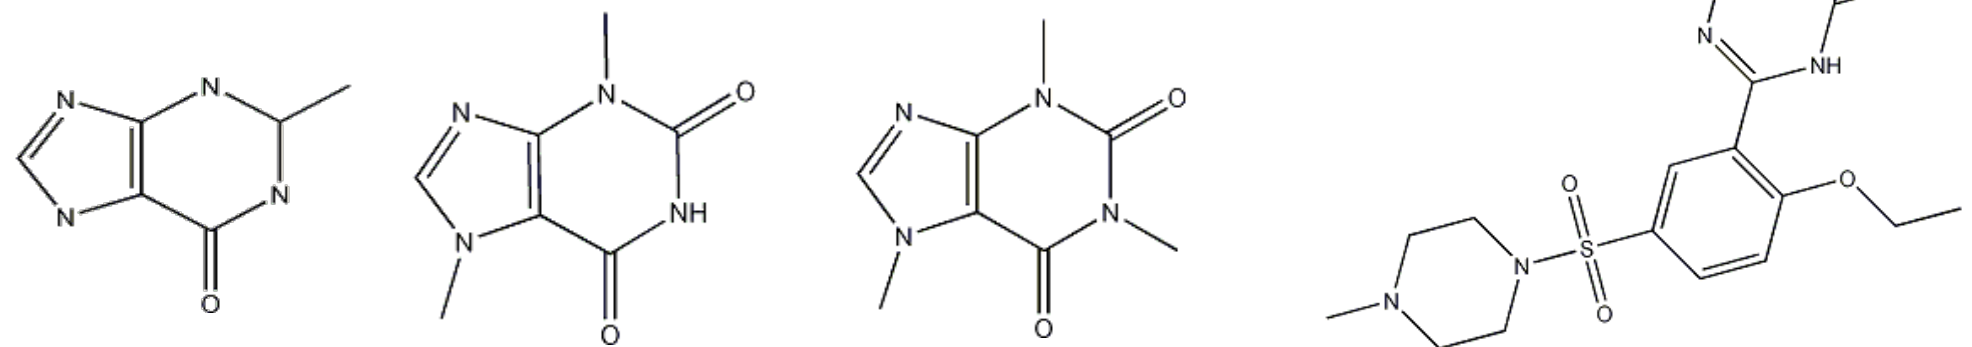

## Social networks, web communities, tweets, ...

### Finding frequent research collaboration subgraphs

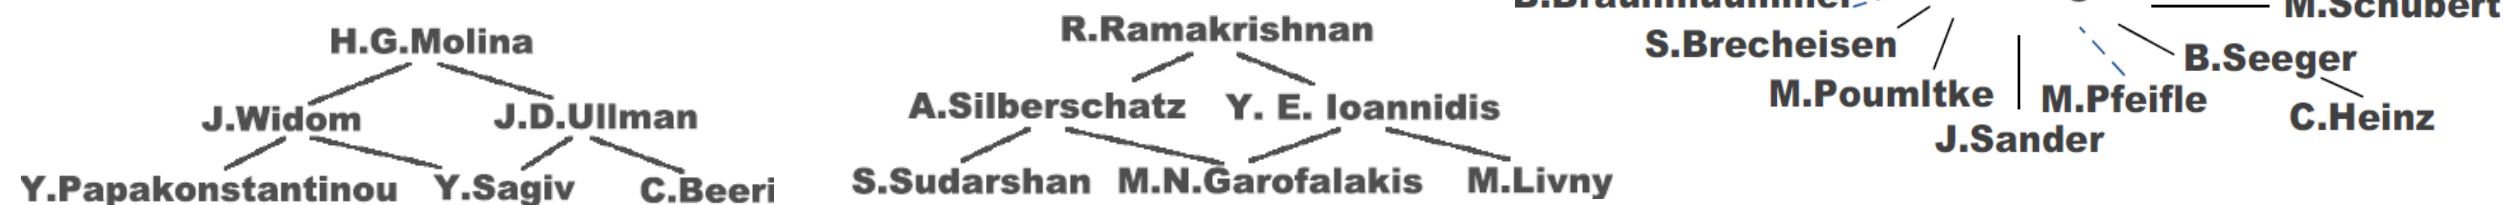

# 带标号图模式

| 术语   | 含义           | 示例       |
|------|--------------|----------|
| 顶点标号 | 实体类型         | 碳原子；用户角色 |
| 边标号  | 关系类型         | 化学键；关注   |
| 子图   | 选定顶点与边，并保持标号 | 官能团      |
| 嵌入   | 模式到图的一次映射    | 一次出现位置   |

图模式挖掘必须同时处理组合增长与图同构。

# Labeled Graph Patterns

| Term         | Meaning                                       | Example                 |
|--------------|-----------------------------------------------|-------------------------|
| Vertex label | type of an entity                             | carbon atom; user role  |
| Edge label   | type of a relation                            | chemical bond; follows  |
| Subgraph     | selected vertices and edges preserving labels | functional group        |
| Embedding    | one mapping of the pattern into a graph       | one occurrence location |

Graph pattern mining must handle both combinatorial growth and graph isomorphism.

# 频繁 (子) 图模式

- 给定带标号图数据集  $D = \{G_1, G_2, \dots, G_n\}$ , 子图  $g$  的支持图集为  $D_g = \{G_i \mid g \subseteq G_i, G_i \in D\}$


$\text{support}(g) = |D_g| / |D|$

- 若  $\text{support}(g) \geq \text{min\_sup}$ , 则 (子) 图  $g$  频繁

- 例: 化学结构

- 另一种做法:

- 从单个大图或网络中挖掘频繁子图模式

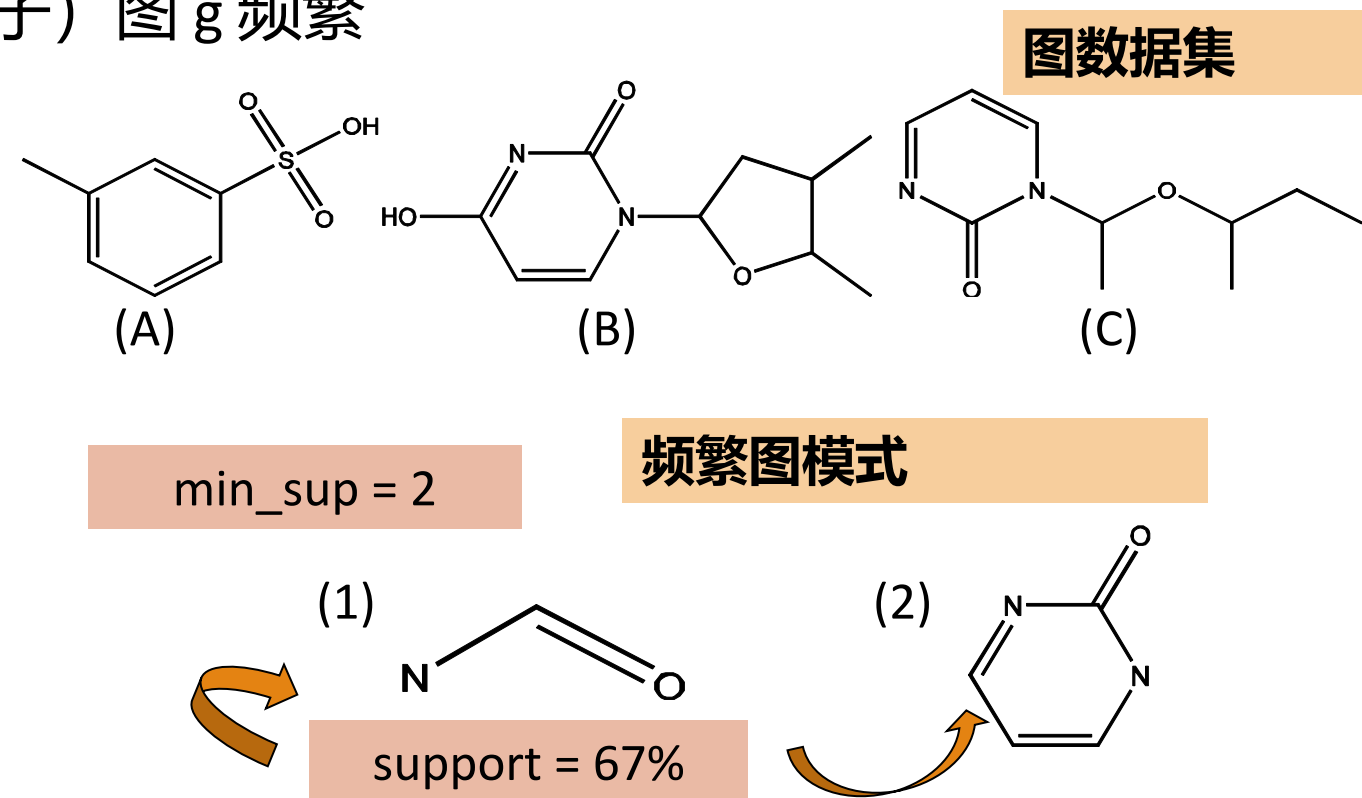

# Frequent (Sub)Graph Patterns

- Given a labeled graph dataset  $D = \{G_1, G_2, \dots, G_n\}$ , the supporting graph set of a subgraph  $g$  is  $D_g = \{G_i \mid g \subseteq G_i, G_i \in D\}$


$\text{support}(g) = |D_g| / |D|$

- A (sub)graph  $g$  is **frequent** if  $\text{support}(g) \geq \text{min\_sup}$

- Ex.: Chemical structures

- Alternative:

- Mining frequent subgraph patterns from a single large graph or network

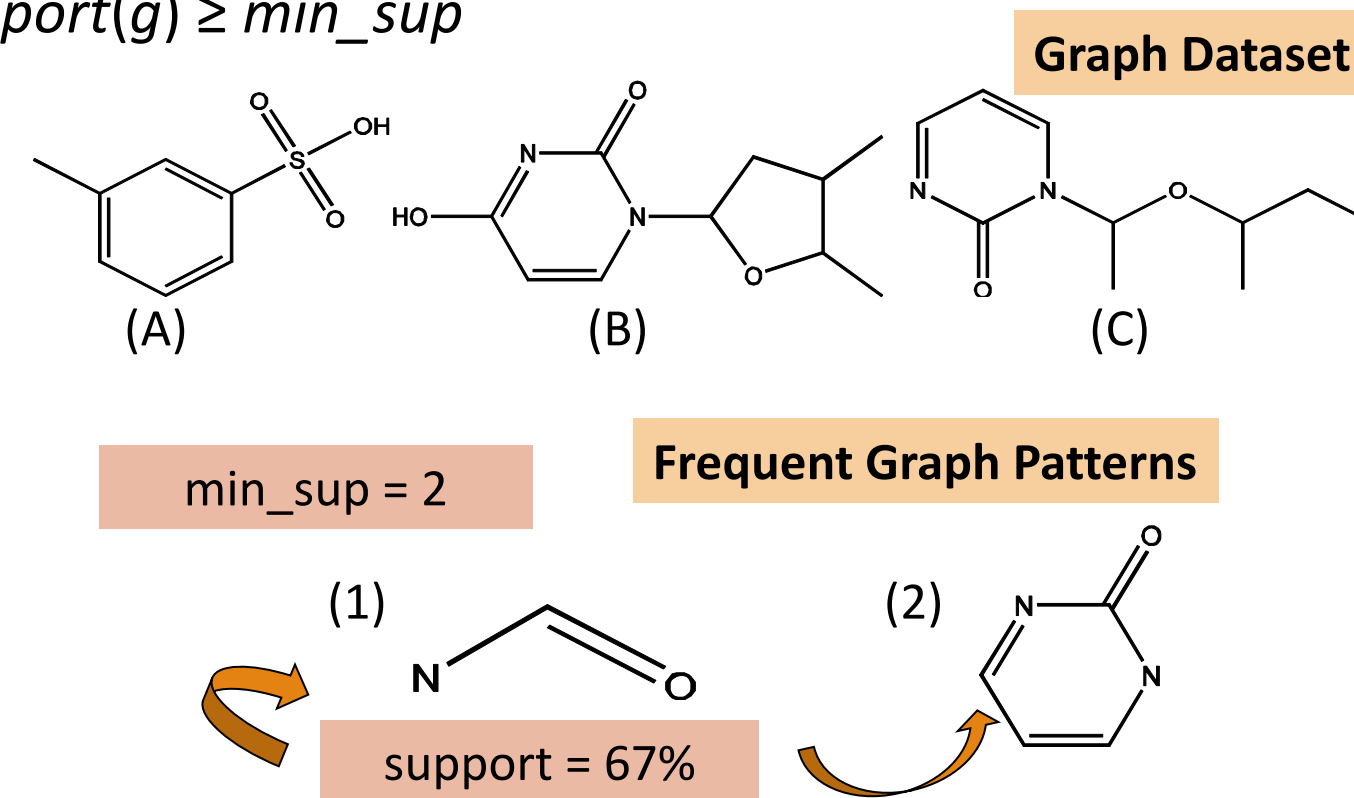

# 支持度按图计数

不要把嵌入次数与图级支持度混淆。

1. 设  $D$  含三个带标号图  $G_1$ 、 $G_2$  和  $G_3$ 。
2. 模式  $g$  在  $G_1$  中出现两次，在  $G_2$  中出现一次，在  $G_3$  中不出现。
3. 支持图集为  $D_g=\{G_1,G_2\}$ 。
4.  $\text{support count}(g)=2$ ，相对  $\text{support}(g)=2/3$ 。

在图事务数据库中，同一图内的多次嵌入仍只计为一个支持图。

# Support Is Counted Across Graphs

Do not confuse embedding count with graph-level support.

1. Let  $D$  contain three labeled graphs  $G_1$ ,  $G_2$ , and  $G_3$ .
2. Pattern  $g$  occurs twice in  $G_1$ , once in  $G_2$ , and not in  $G_3$ .
3. The supporting graph set is  $D_g=\{G_1,G_2\}$ .
4.  $\text{support count}(g)=2$  and  $\text{relative support}(g)=2/3$ .

Multiple embeddings inside one graph still contribute one supporting graph in a graph-transaction database.

# 图的支持度计数为何困难

## 对项集

- 包含判定只是简单的子集检验
- 项的规范次序立即可得
- 支持度计数可用哈希或集合交

## 对图

- 包含判定需要保标号的节点映射
- 同一图有许多等价画法与遍历
- 子图同构主导计数代价

图挖掘既需要剪枝，也需要规范表示。

# Why Support Counting Is Hard for Graphs

## For itemsets

- Containment is a simple subset test
- Canonical item order is immediate
- Support counting can use hashing or set intersection

## For graphs

- Containment requires a label-preserving node mapping
- One graph has many equivalent drawings and traversals
- Subgraph isomorphism dominates the counting cost

A graph miner needs both pruning and a canonical representation.

# 快速检查：图支持度

一个子图在 G1 中出现五次，在 G2 中出现一次，在 G3 中出现零次。它的支持度计数是多少？

|      |      |
|------|------|
| A. 1 | B. 2 |
| C. 5 | D. 6 |

答案：B. 2 个支持图

# Quick Check: Graph Support

A subgraph appears five times in G1, once in G2, and zero times in G3. What is its support count?

|      |      |
|------|------|
| A. 1 | B. 2 |
| C. 5 | D. 6 |

Answer: B. 2 supporting graphs

# 图模式挖掘的应用


- ❑ 生物学
  - ❑ 基因网络、蛋白质相互作用、代谢通路
- ❑ 化学信息学：挖掘化合物结构
- ❑ 社交网络、网络社区、推文.....
- ❑ 手机网络、计算机网络.....
- ❑ Web 图、XML 结构、语义网、信息网络
- ❑ 软件工程：程序执行流分析
- ❑ 图分类、聚类、压缩、比较与相关分析的基本构件
- ❑ 图索引与图相似性搜索

# Applications of Graph Pattern Mining

- ❑ Bioinformatics
  - ❑ Gene networks, protein interactions, metabolic pathways
- ❑ Chem-informatics: Mining chemical compound structures
- ❑ Social networks, web communities, tweets, ...
- ❑ Cell phone networks, computer networks, ...
- ❑ Web graphs, XML structures, Semantic Web, information networks
- ❑ Software engineering: Program execution flow analysis
- ❑ Building blocks for graph classification, clustering, compression, comparison, and correlation analysis
- ❑ Graph indexing and graph similarity search


# 基于 Apriori 的方法

- Apriori 性质：若大小为  $k$  的子图频繁，则其每个子图都频繁；一个不频繁子图即可剪枝该候选
- 连接相容的频繁  $k$ -子图，生成大小为  $(k+1)$  的候选
- 迭代挖掘过程：
  - 候选生成 → 候选剪枝 → 支持度计数 → 候选消除

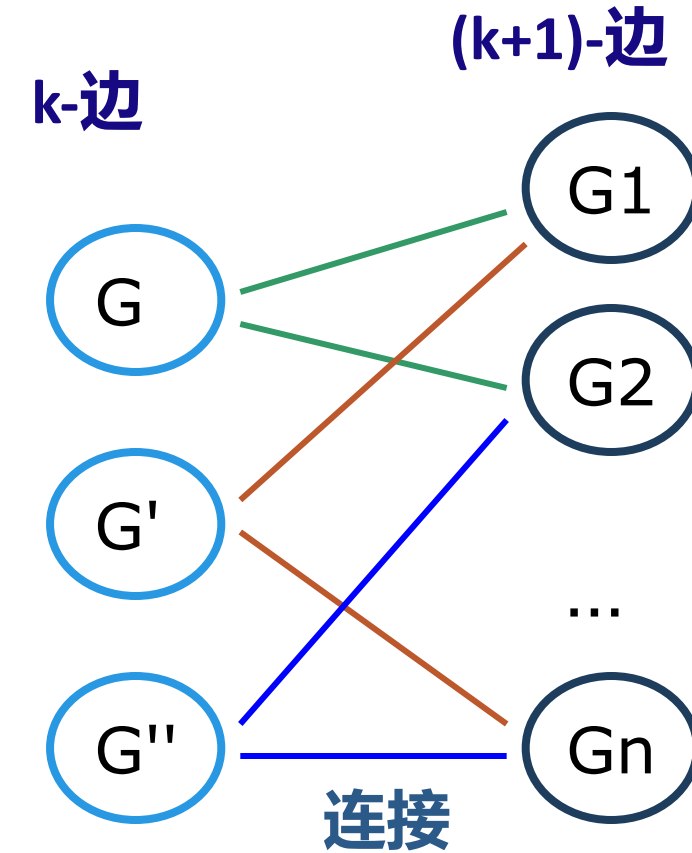

# Apriori-Based Approach

- Apriori property: if a size- $k$  subgraph is frequent, every subgraph is frequent; one infrequent subgraph prunes the candidate
- Generate a size- $(k+1)$  candidate by joining compatible frequent size- $k$  subgraphs
- Iterative mining process:
  - Candidate-generation → candidate pruning → support counting → candidate elimination

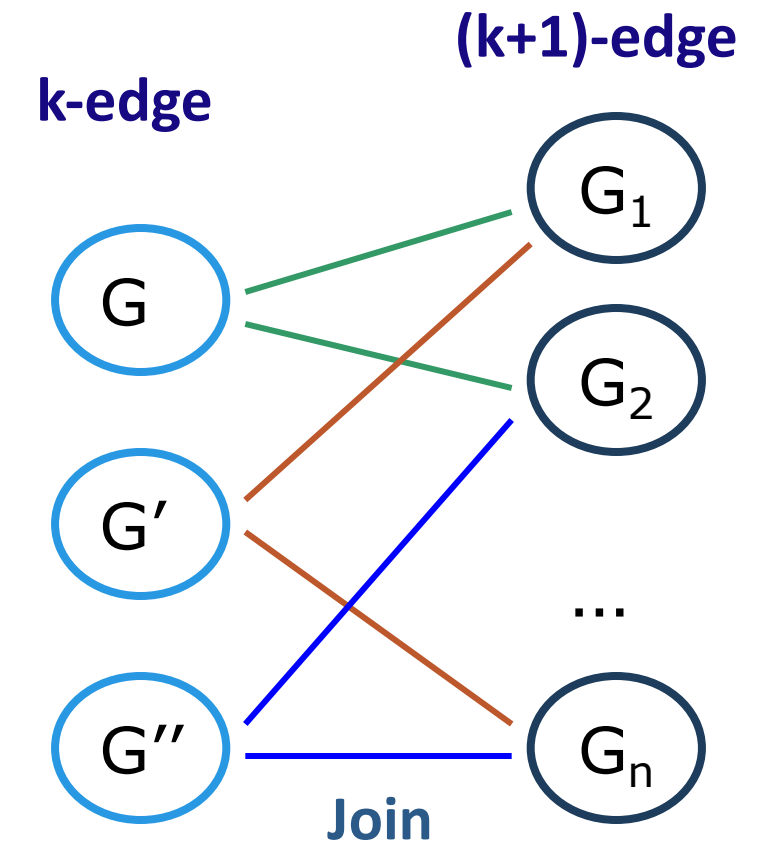

# Apriori 式图挖掘

图的连接比项集连接更复杂，因为共享子图可以有多种映射。

1. 连接相容的频繁  $k$ -子图，生成大小为  $(k+1)$  的候选。
2. 对候选做规范化并去除重复。
3. 若任一必需的  $k$ -子图不频繁，则剪枝该候选。
4. 检验哪些数据库图包含该候选，以计数支持度。

频繁蕴含每个子图都频繁；反之不成立。

# Apriori-Style Graph Mining

Graph joins are more complicated than itemset joins because the shared subgraph can have many mappings.


1. Join compatible frequent size- $k$  subgraphs to create size- $(k+1)$  candidates.
2. Canonicalize candidates and remove duplicates.
3. Prune a candidate if any required size- $k$  subgraph is infrequent.
4. Count support by testing which database graphs contain the candidate.

Frequent implies that every subgraph is frequent; the converse does not hold.

# 候选生成：顶点增长与边增长

- 方法：对大小为  $k$  的图做广度优先搜索与 Apriori 式连接

- 生成大小为  $(k+1)$  的候选图时存在多种可能

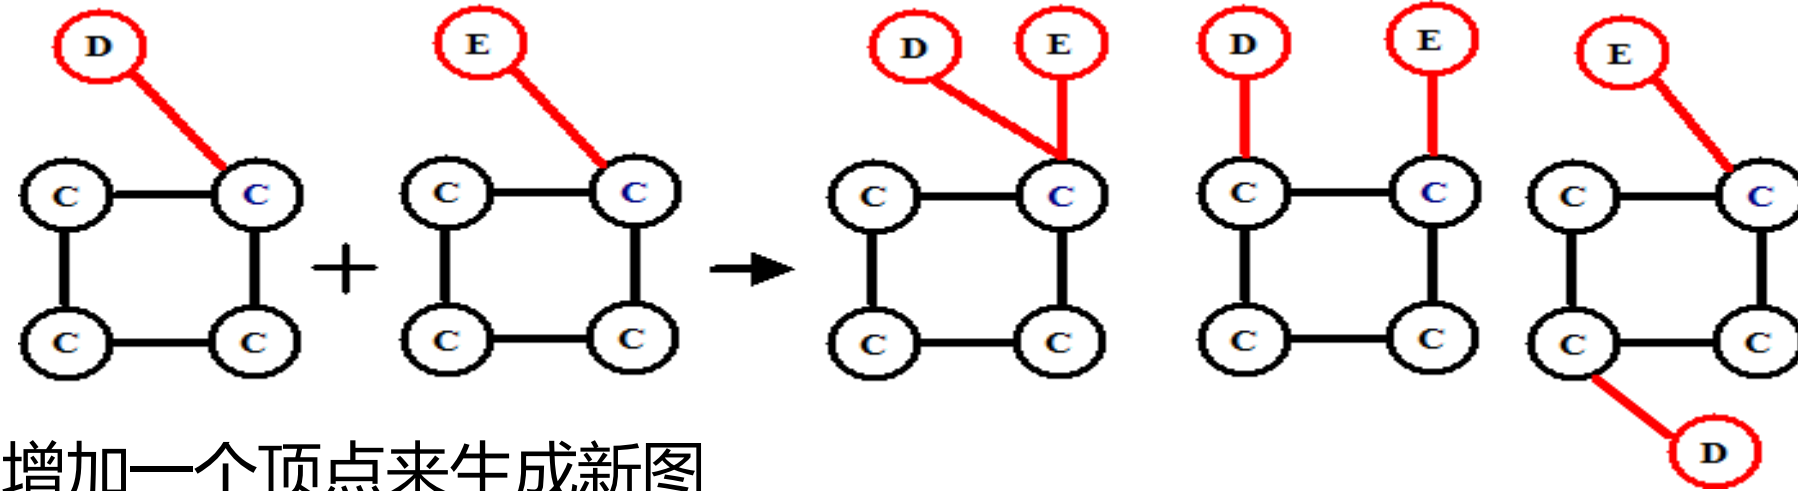

- 每次增加一个顶点来生成新图

- AGM (Inokuchi, Washio, & Motoda, PKDD'00)

- 每次增加一条边来生成新图


- FSG (Kuramochi & Karypis, ICDM'01)

- 边增长通常比顶点增长更能减少候选重复

# Candidate Generation: Vertex Growing vs. Edge Growing

- Methodology: breadth-first search with Apriori-style joins of size- $k$  graphs

- Many possibilities at generating size- $(k+1)$  candidate graphs

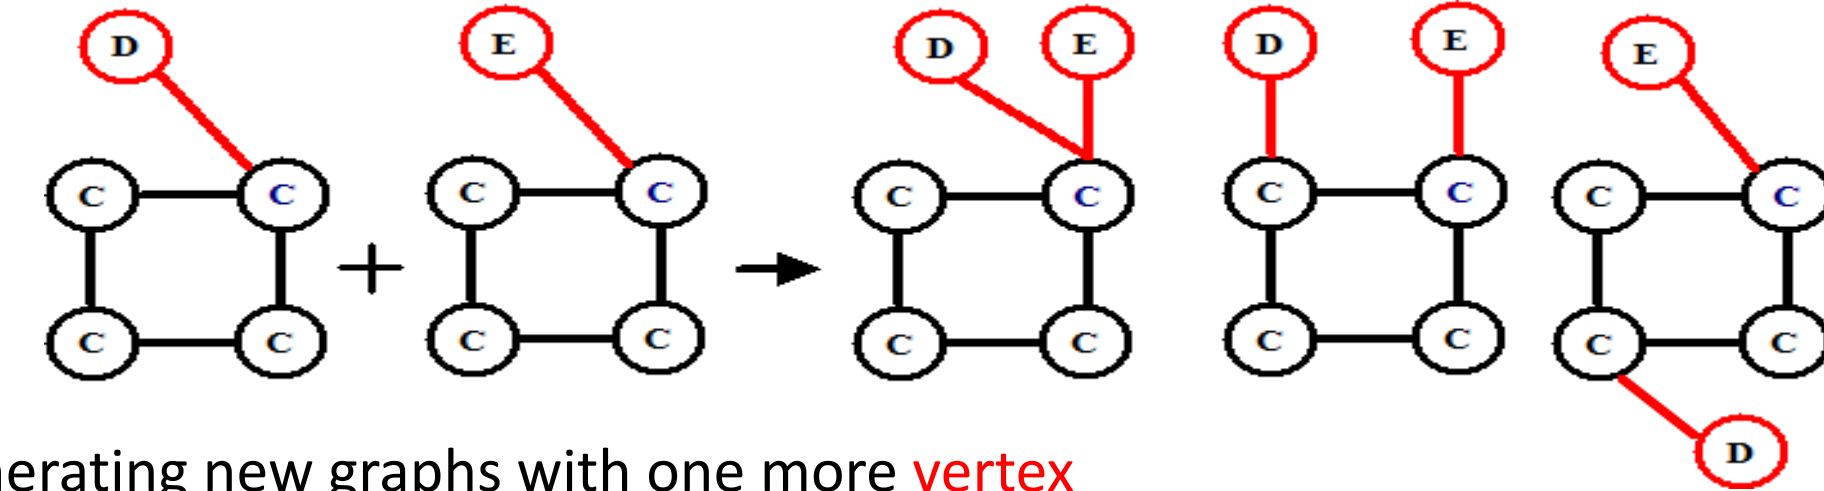

- Generating new graphs with one more **vertex**

- AGM (Inokuchi, Washio, & Motoda, PKDD'00)

- Generating new graphs with one more **edge**

- FSG (Kuramochi & Karypis, ICDM'01)

- Edge growing often reduces candidate duplication compared with vertex growing

# 重复候选问题

- ❑ 同一无标号结构可用不同顶点编号画出
- ❑ 不同增长历史可产生同构候选
- ❑ 朴素去重需要反复做图同构检验
- ❑ 规范编码为每个图同构类指定一个代表

**gSpan 只增长规范 DFS 编码，从而避免大多数重复。**

# The Duplicate-Candidate Problem

- ❑ The same unlabeled structure can be drawn with different vertex numbers
- ❑ Different growth histories can produce isomorphic candidates
- ❑ Naive deduplication requires repeated graph-isomorphism tests
- ❑ A canonical code assigns one representative to every graph isomorphism class

**gSpan avoids most duplicates by growing only canonical DFS codes.**

# 模式增长方法

- 子图从  $k$ -边经深度优先增长到  $(k+1)$ -边，再到  $(k+2)$ -边子图

- 主要挑战


- 生成大量重复子图

- 解决问题的主要思想

- 定义子图的生成顺序

- DFS 生成树：用深度优先搜索把图展平为序列

- gSpan (Yan & Han, ICDM'02)

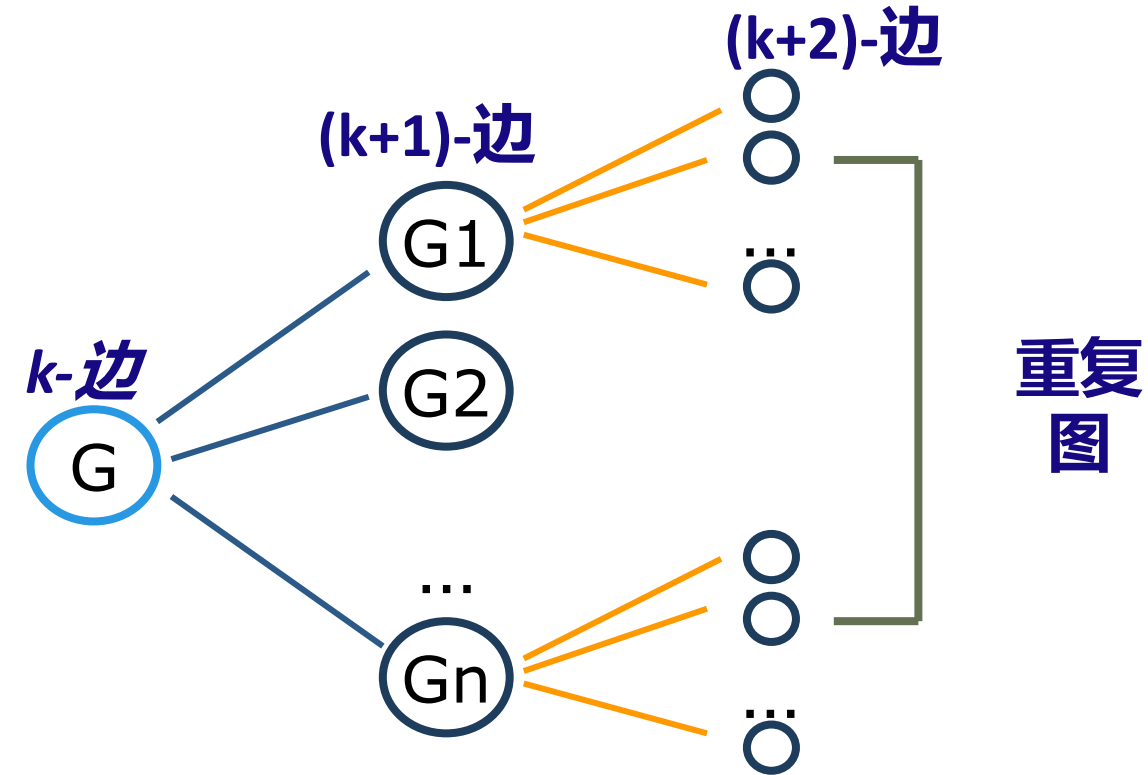

# Pattern-Growth Approach

- Depth-first growth of subgraphs from  $k$ -edge to  $(k+1)$ -edge, then  $(k+2)$ -edge subgraphs

- Major challenge


- Generating many duplicate subgraphs

- Major idea to solve the problem

- Define an order to generate subgraphs

- DFS spanning tree: Flatten a graph into a sequence using depth-first search

- gSpan (Yan & Han, ICDM'02)

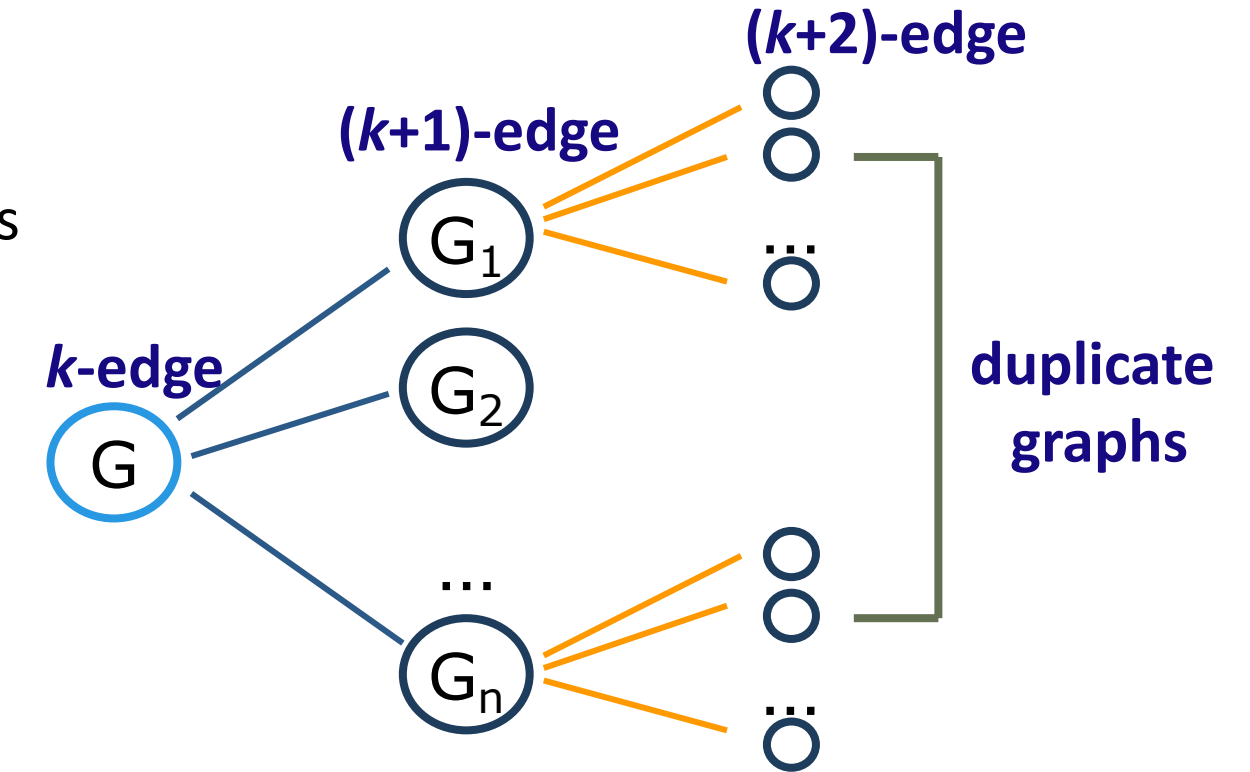

# gSpan 中的规范 DFS 编码

该编码表示结构、标号与遍历顺序。

1. 运行深度优先搜索，记录每条遍历边的端点下标与标号。
2. 一幅图可有许多合法 DFS 编码，因为遍历起点与分支可以不同。
3. 按字典序比较这些编码，保留最小 DFS 编码。
4. 挖掘过程中只有最小编码代表该图。

规范编码把图等价检验转化为增长过程中一致的序比较。

# Canonical DFS Code in gSpan


The code represents structure, labels, and traversal order.

1. Run depth-first search and record each traversed edge with endpoint indices and labels.
2. One graph may have many valid DFS codes because traversal can start and branch differently.
3. Compare the codes lexicographically and keep the minimum DFS code.
4. Only the minimum code represents the graph during mining.

Canonical coding turns graph-equivalence checking into a consistent ordering test during growth.


# gSpan: 按序增长图模式

- **子图模式增长中的最右路径扩展**
  - 最右路径: DFS 树中从根到最近发现顶点的路径
  - 减少重复子图的生成
- **完备性: 用最右路径扩展枚举图是完备的**
- DFS 编码: 用深度优先搜索把图展平为序列

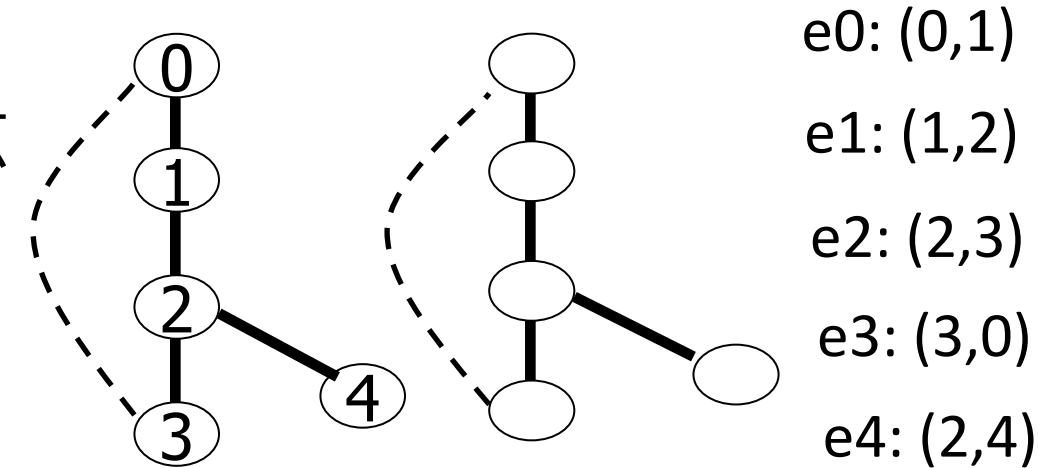

# gSPAN: Graph Pattern Growth in Order

- **Right-most path extension** in subgraph pattern growth
  - Right-most path: the DFS-tree path from the root to the most recently discovered vertex
  - Reduce generation of duplicate subgraphs
- **Completeness:** The enumeration of graphs using right-most path extension is complete
- DFS code: Flatten a graph into a sequence using depth-first search

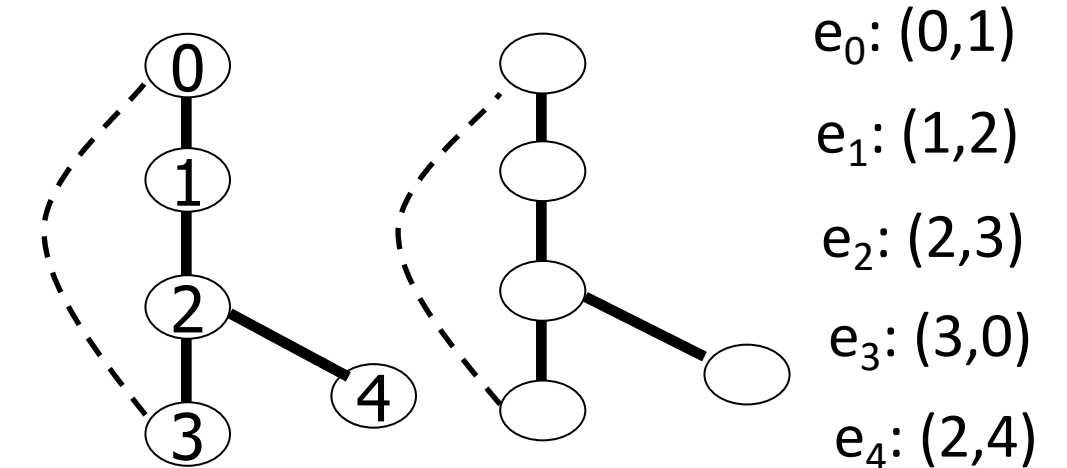

# 最右路径扩展

## 前向扩展

- 从当前最右路径上的一个顶点出发
- 增加一个新顶点与一条新边
- 新顶点成为最新的 DFS 顶点

## 后向扩展

- 从当前最右顶点出发
- 连接到最右路径上的一个祖先
- 不增加顶点而闭合一个环

将扩展限制在最右路径上，可在控制重复的同时保持完备性。

# Right-Most Path Extension

## Forward extension

- Start from a vertex on the current right-most path
- Add a new vertex and one new edge
- The new vertex becomes the latest DFS vertex


## Backward extension

- Start from the current right-most vertex
- Connect to an ancestor on the right-most path
- Close a cycle without adding a vertex

Restricting extensions to the right-most path preserves completeness while controlling duplicates.

# 挖掘闭图模式

- 最多  $2^n$  个边子集  $\rightarrow$  闭频繁子图
- 频繁图  $G$  是闭的，若不存在与  $G$  支持度相同的超图

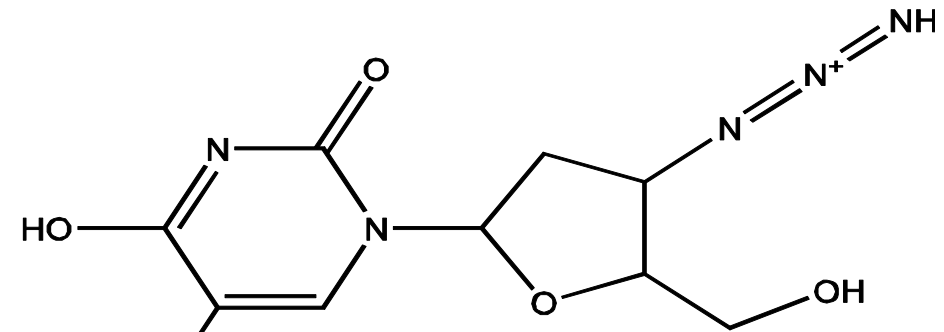


闭意味着不存在支持图集合相同的真频繁超图

- 无损压缩：不包含非闭图，但仍保持完整性
- 算法 CloseGraph：直接挖掘闭图模式

# Mining Closed Graph Patterns

- Up to  $2^n$  edge subsets  $\rightarrow$  closed frequent subgraphs
- A frequent graph  $G$  is *closed* if there exists no supergraph of  $G$  that carries the same support as  $G$

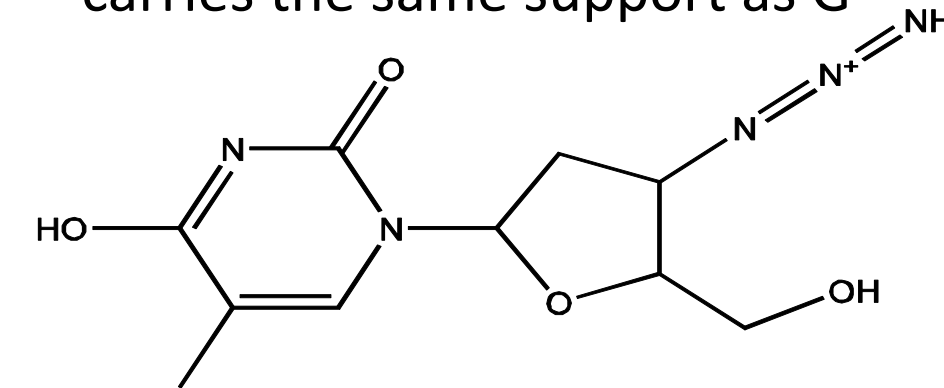

Closed means that no proper frequent supergraph has the same supporting graph set

- Lossless compression*: Does not contain non-closed graphs, but still ensures that the mining result is complete
- Algorithm CloseGraph: Mines closed graph patterns directly

# 闭频繁图

定义与闭项集同一思想，只是用图包含代替集合包含。

1. 图  $G$  频繁，并由  $\{G_1, G_2, G_3\}$  支持。
2. 真超图  $H$  同样由  $\{G_1, G_2, G_3\}$  支持。
3. 因此  $G$  与  $H$  的支持度相等。
4.  $G$  不是闭的，因为  $H$  增加了结构且未失去任何支持图。

闭图模式去除支持度等价的冗余，同时保留精确的支持度信息。

# Closed Frequent Graphs


The definition is the same idea as closed itemsets, with graph containment replacing set containment.

1. Graph  $G$  is frequent and supported by  $\{G_1, G_2, G_3\}$ .
2. A proper supergraph  $H$  is also supported by  $\{G_1, G_2, G_3\}$ .
3.  $G$  and  $H$  therefore have equal support.
4.  $G$  is not closed because  $H$  adds structure without losing any supporting graph.

Closed graph patterns remove support-equivalent redundancy while preserving exact support information.


# CloseGraph: 直接挖掘闭图模式

- CloseGraph: 通过扩展 gSpan 挖掘闭图模式 (Yan & Han, KDD'03)

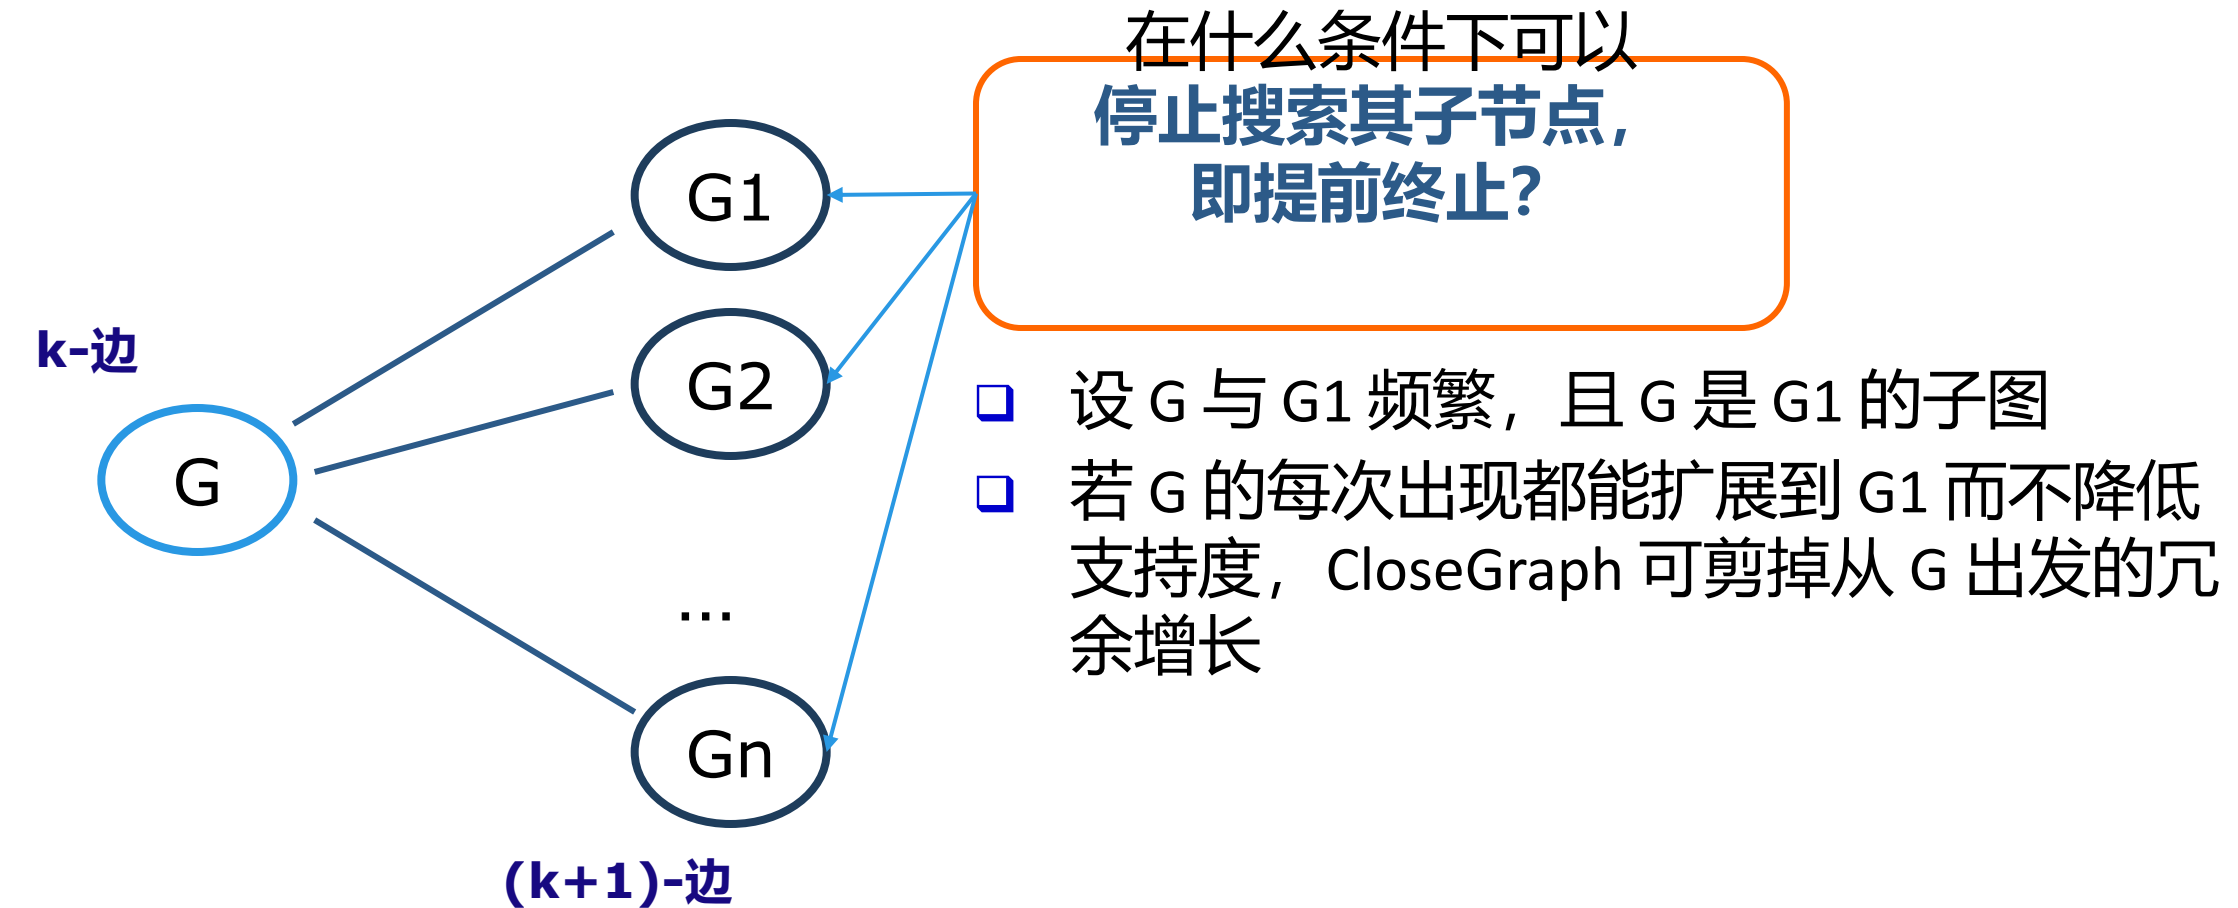

# CloseGraph: Directly Mining Closed Graph Patterns

- CloseGraph: Mining closed graph patterns by extending gSpan (Yan & Han, KDD'03)

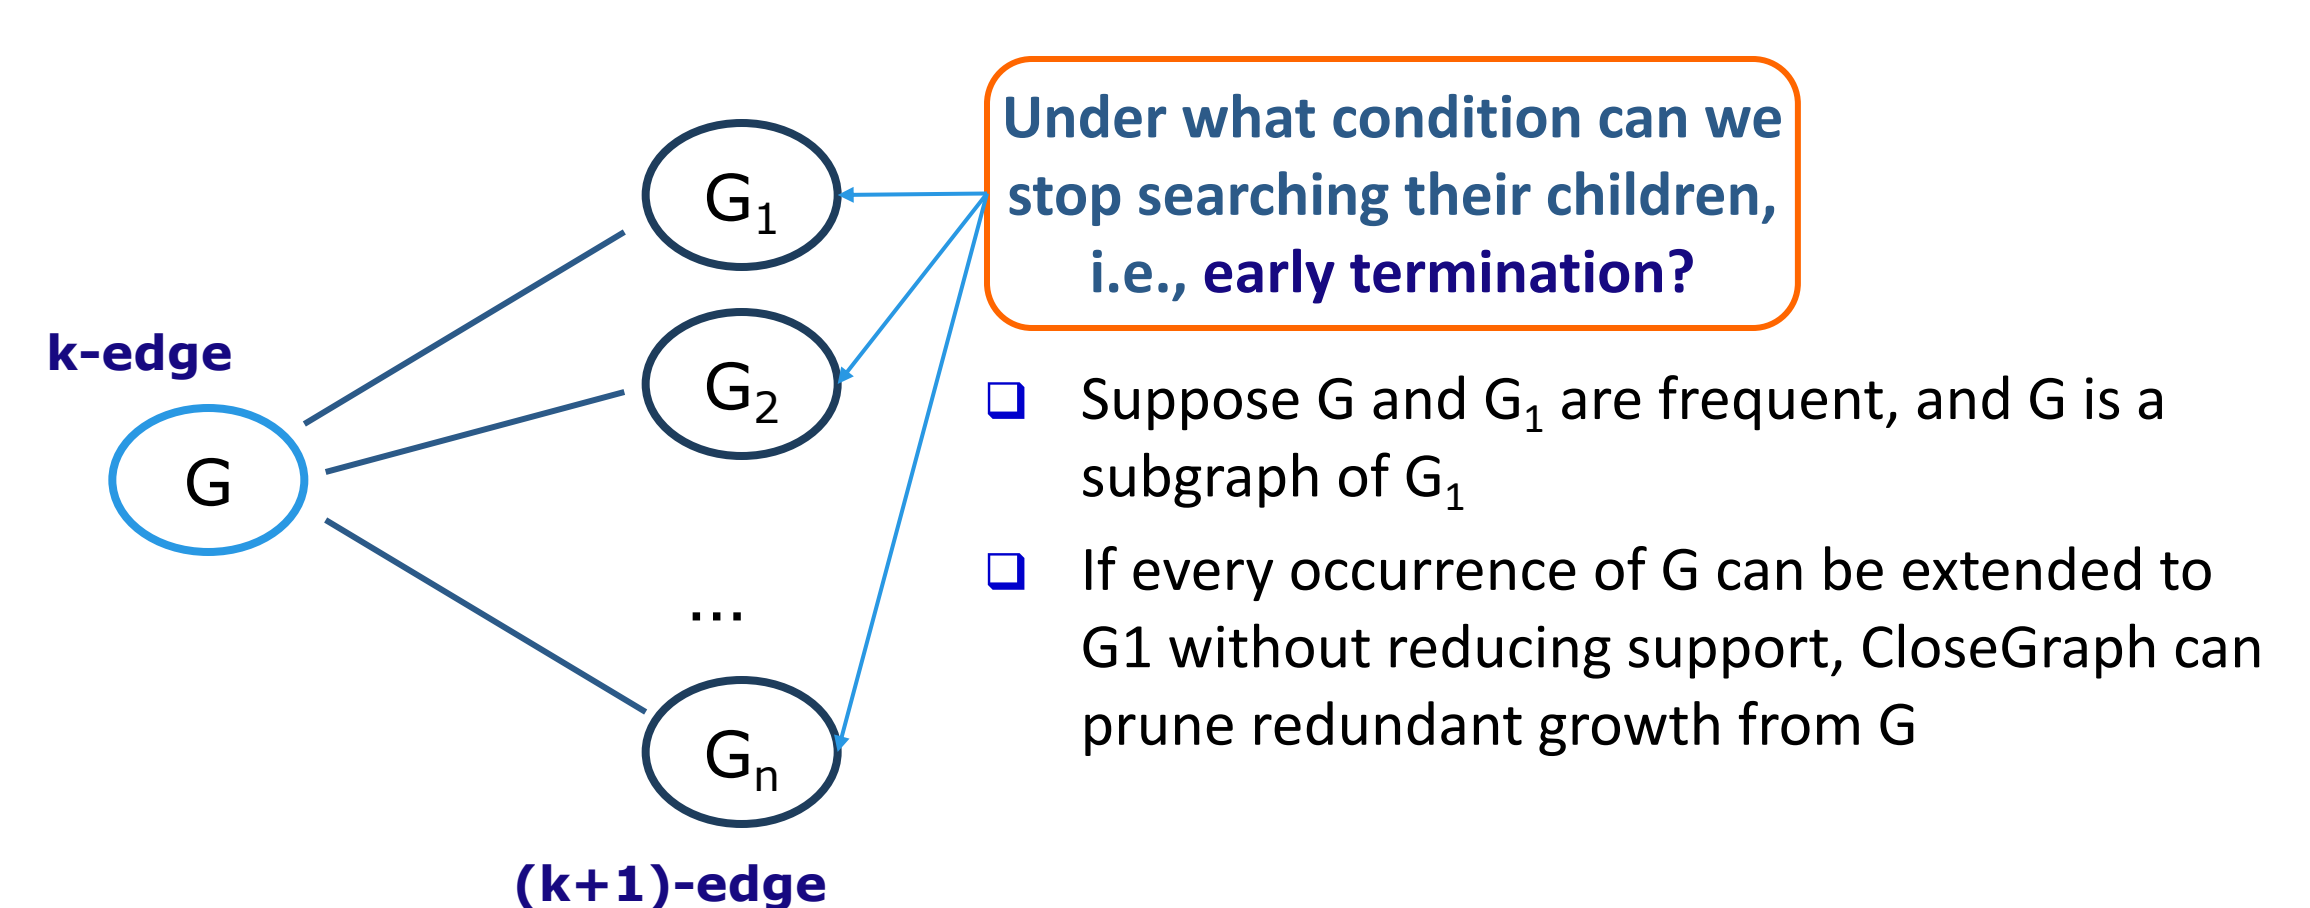

## CloseGraph 提前终止

- 设  $G$  的每次出现都能扩展到更大的图  $H$
- 则  $G$  与  $H$  共享同一支持图集合
- $G$  不可能是闭的，因为  $H$  是支持度相等的真超图
- 从更大的代表继续增长，并在闭包条件安全时剪掉  $G$  的冗余后代

剪枝判断取决于出现级等价，而不只是数值支持度相等。

## CloseGraph Early Termination

- Suppose every occurrence of  $G$  can be extended to a larger graph  $H$
- $G$  and  $H$  then share the same supporting graph set
- $G$  cannot be closed because  $H$  is a proper equal-support supergraph
- Continue growth from the larger representative and prune redundant descendants of  $G$  when the closure condition is safe

The pruning decision depends on occurrence-level equivalence, not only equal numeric support.

# 频繁图挖掘算法

| 方法         | 搜索            | 重复控制      | 输出    |
|------------|---------------|-----------|-------|
| AGM / FSG  | 广度优先候选        | 连接后规范化    | 全部频繁图 |
| gSpan      | 深度优先模式增长      | 最小 DFS 编码 | 全部频繁图 |
| CloseGraph | 基于 gSpan 的闭增长 | 基于闭包的剪枝   | 闭频繁图  |

这些方法的主要差别在于枚举顺序、重复处理与输出压缩。


# Frequent Graph Mining Algorithms

| Method     | Search                     | Duplicate control        | Output                 |
|------------|----------------------------|--------------------------|------------------------|
| AGM / FSG  | breadth-first candidates   | canonicalize after joins | all frequent graphs    |
| gSpan      | depth-first pattern growth | minimum DFS code         | all frequent graphs    |
| CloseGraph | gSpan-based closed growth  | closure-based pruning    | closed frequent graphs |


The methods differ mainly in enumeration order, duplicate handling, and output compression.

# 实验与性能比较


- 来自 NCI/NIH 的 AIDS 抗病毒筛选化合物数据集
- 该数据集包含 43,905 个化合物
- 发现的模式：最小支持度越小，发现的子图模式越大、越有意义

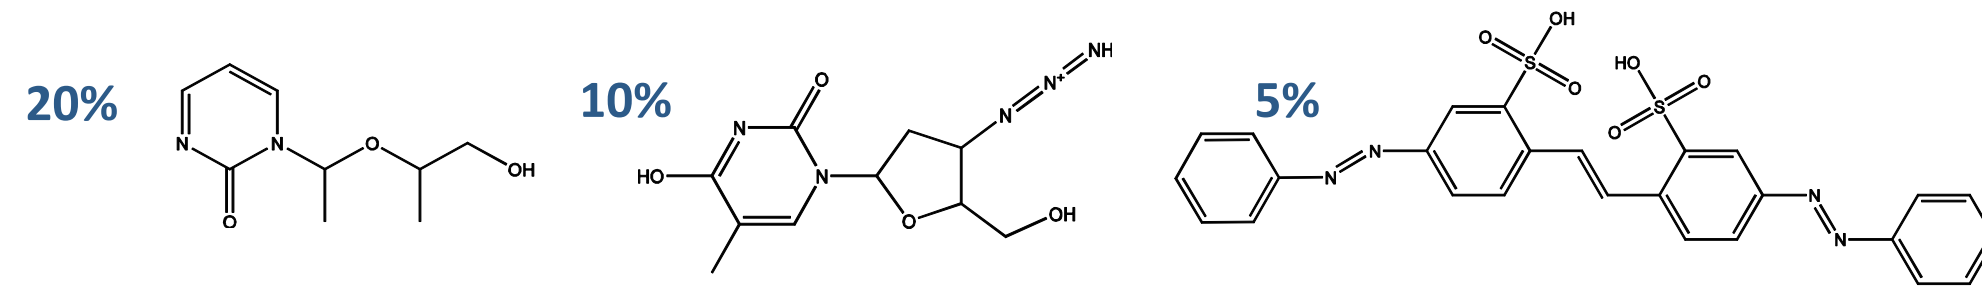

# 模式数：频繁与闭

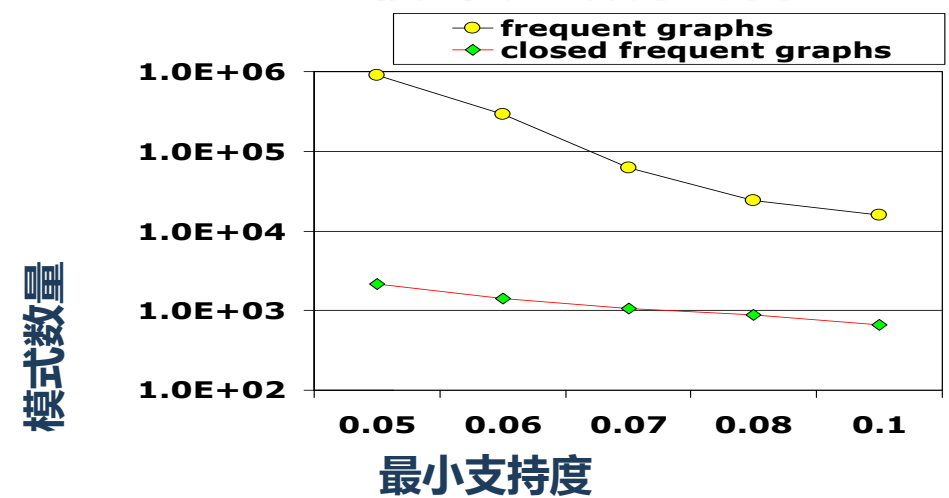


运行时间：频繁与闭

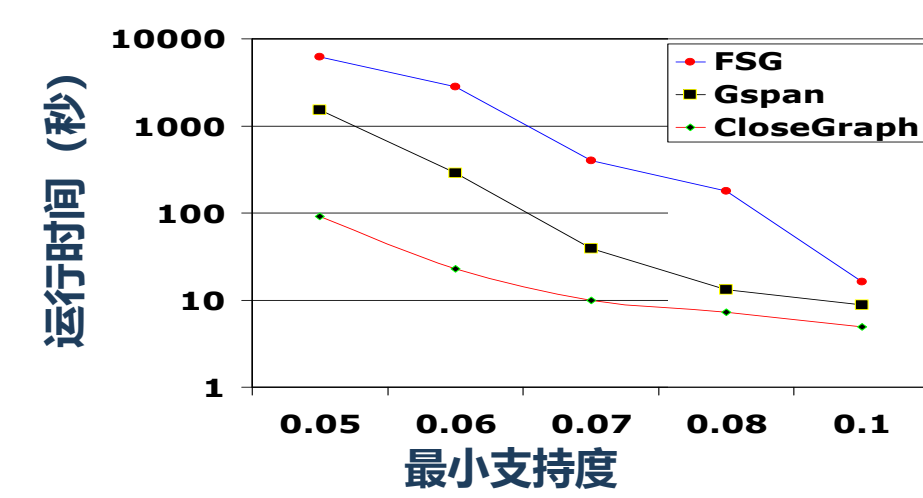


# Experiment and Performance Comparison


- The AIDS antiviral screen compound dataset from NCI/NIH
- The dataset contains 43,905 chemical compounds
- Discovered patterns: The smaller minimum support, the bigger and more interesting subgraph patterns discovered

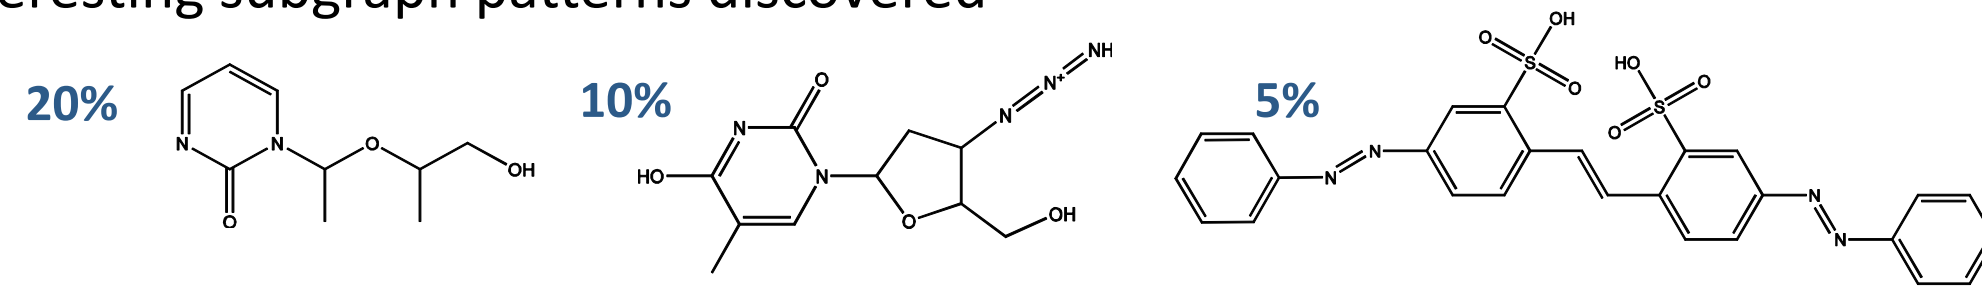

# of Patterns: Frequent vs. Closed

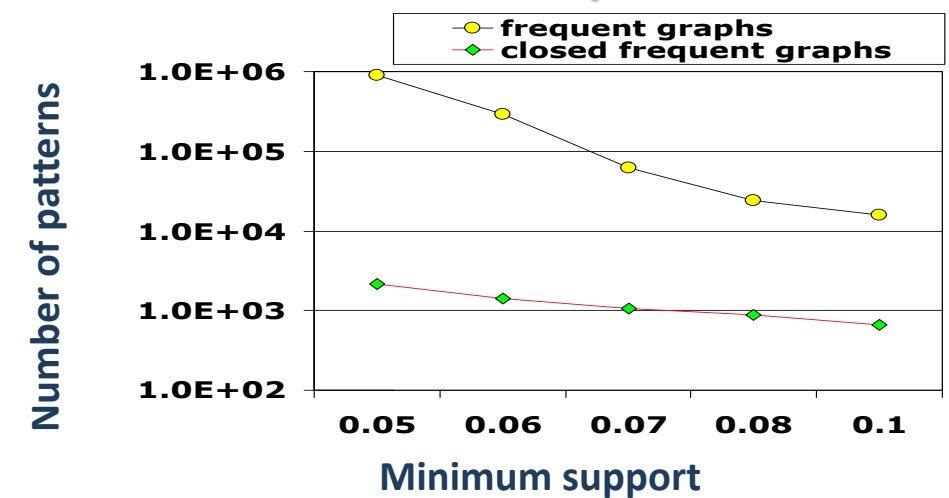

Runtime: Frequent vs. Closed

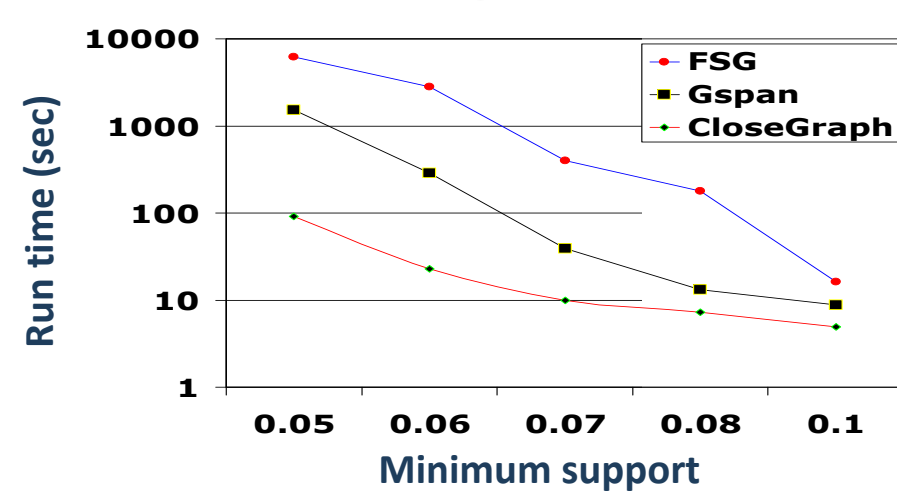


# 应用：支持子结构相似性搜索

- 在图数据库中查找包含与给定查询图相似子结构的图

- 例. 数据：化合物数据库

- 查询图 q:



- 如何高效做相似性搜索?


- 顺序扫描 + 计算子图相似度——代价过高!

- 建立图索引以支持近似搜索?

- 需要爆炸式数量的子图才能覆盖所有相似子图!

- 一个精巧的方案 (Yan, Yu, & Han, SIGMOD'05):

- 保留图索引结构, 但在查询空间中选择特征

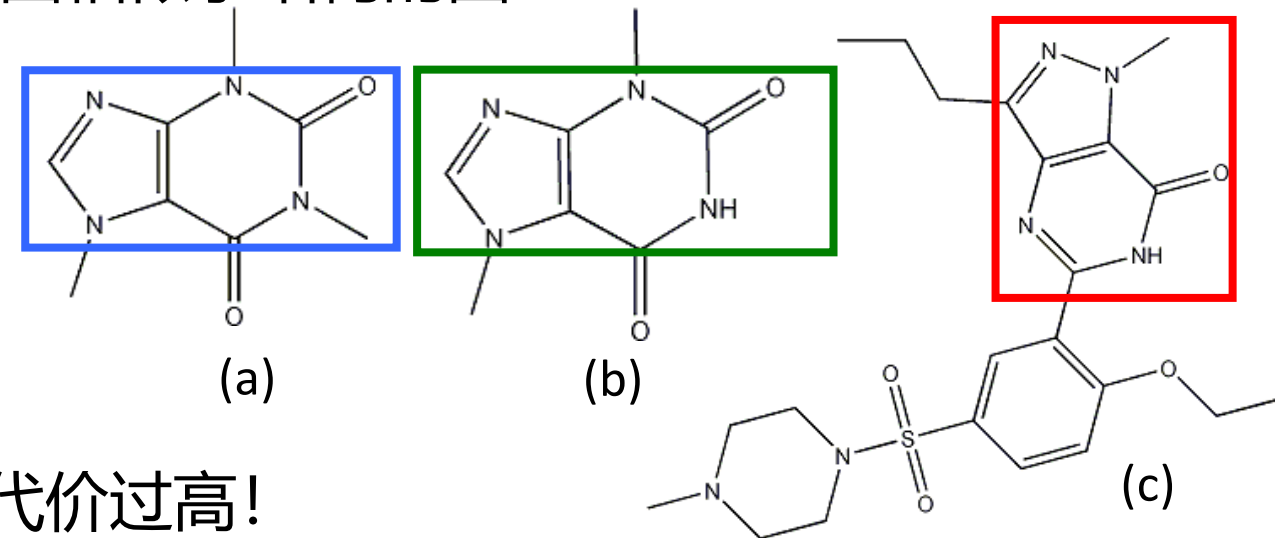


# Application: Support Substructure Similarity Search

- Find graphs in a graph DB containing substructures similar to a given query graph

- Ex. Data: A chemical compound DB

- A query graph q:



- How to do similarity search efficiently?


- Sequential scan + computing subgraph similarity – too costly!

- Build graph indices to support approximate search?

- Need an explosive number of subgraphs to cover all the *similar* subgraphs!

- An elegant solution (Yan, Yu, & Han, SIGMOD'05):

- Keep the graph index structure, but **select features** in the **query space**

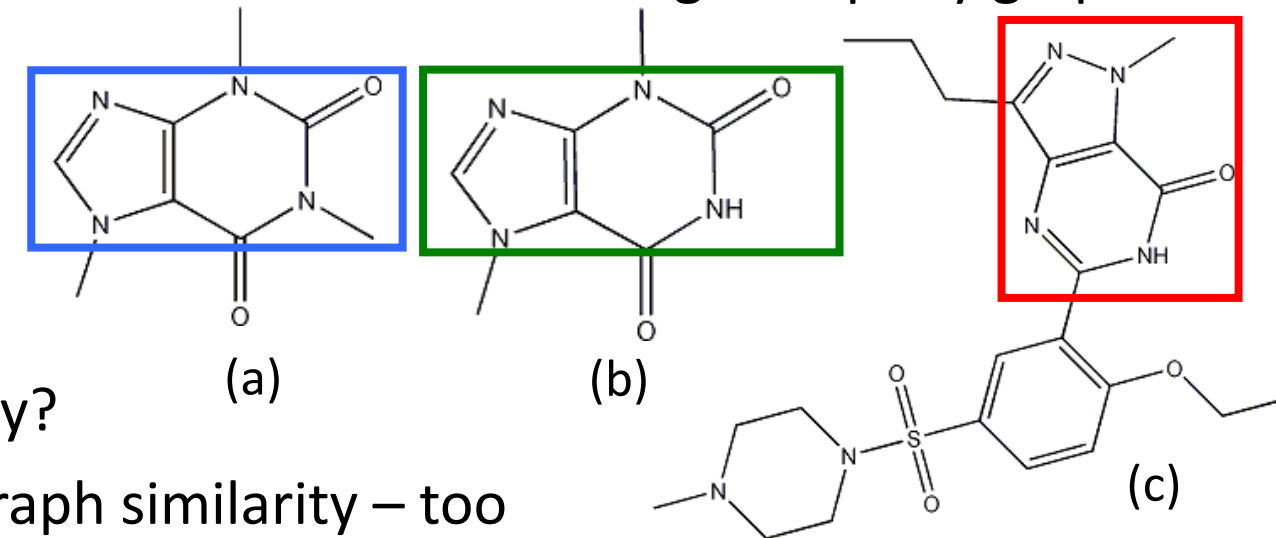

# 第 4 讲综合

| 数据与模式    | 主要挑战     | 代表性思想         |
|----------|----------|---------------|
| 层次 / 多维项 | 阈值与冗余    | 层次感知的支持度与祖先过滤 |
| 基于约束的项集  | 大量无关搜索空间 | 把安全约束推进挖掘     |
| 序列       | 顺序与大量候选  | GSP 或前缀投影增长   |
| 图        | 同构与重复    | 规范 DFS 增长与闭模式 |

在全部四种设定中，表示方式与反单调性决定哪些可以安全剪枝。

# Lecture 4 Synthesis

| Data and pattern                      | Main challenge                | Representative idea                        |
|---------------------------------------|-------------------------------|--------------------------------------------|
| Hierarchical / multidimensional items | thresholds and redundancy     | level-aware support and ancestor filtering |
| Constraint-based itemsets             | large irrelevant search space | push safe constraints into mining          |
| Sequences                             | order and many candidates     | GSP or prefix-projected growth             |
| Graphs                                | isomorphism and duplicates    | canonical DFS growth and closed patterns   |

Across all four settings, representation and anti-monotonicity determine what can be pruned safely.

# 最终快速检查

哪一项陈述正确？

|               |                   |
|---------------|-------------------|
| A. 顺序在序列中从不重要 | B. 含不频繁子图的候选可以被剪枝 |
| C. 每个闭图都是极大的  | D. Lift 是零不变的     |

答案： B

# Final Quick Check

Which statement is correct?

|                                      |                                                          |
|--------------------------------------|----------------------------------------------------------|
| A. Order never matters in a sequence | B. A candidate with an infrequent subgraph can be pruned |
| C. Every closed graph is maximal     | D. Lift is null-invariant                                |

Answer: B