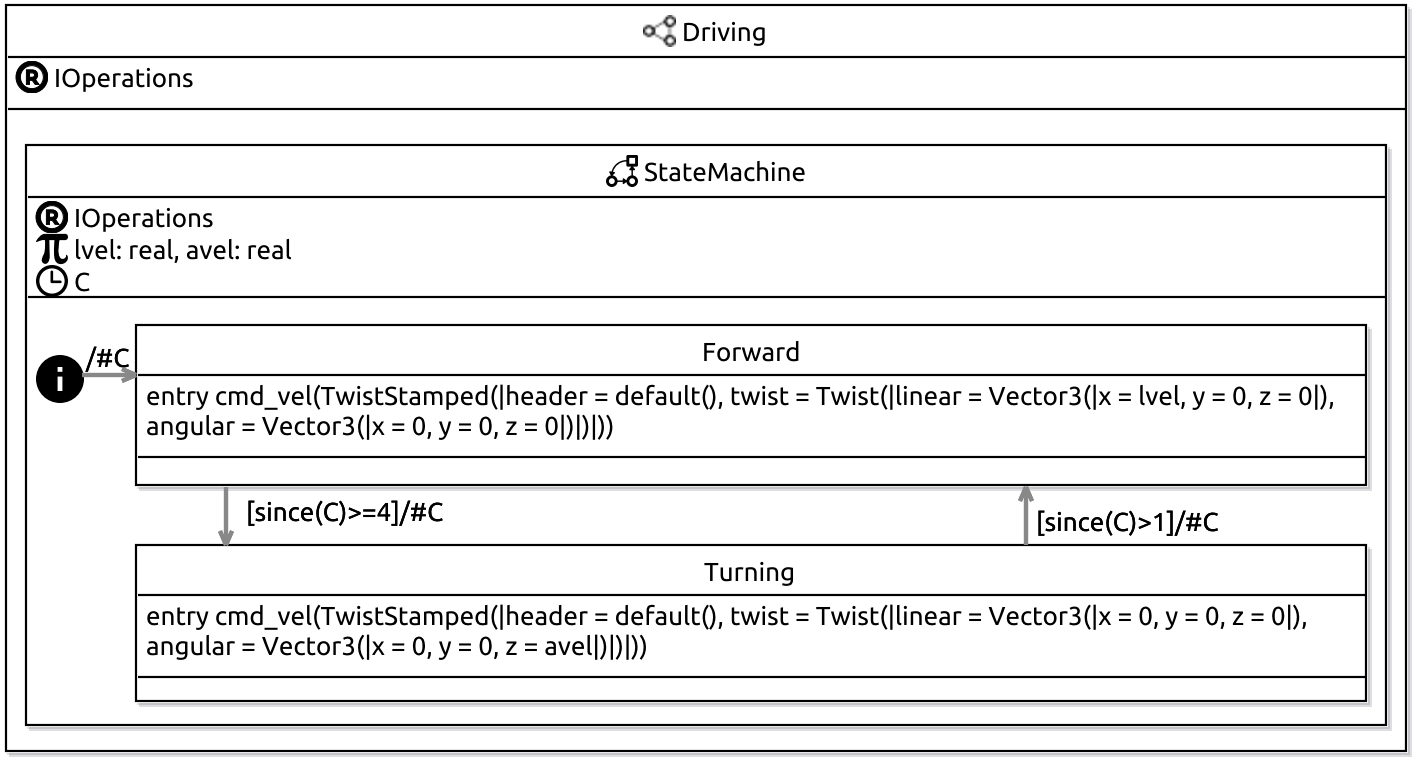

Driving
IOperations
StateMachine
IOperations
lvel: real, avel: real
C
/#C
Forward
entry cmd_vel(TwistStamped(|header = default(), twist = Twist(|linear = Vector3(|x = lvel, y = 0, z = 0|), angular = Vector3(|x = 0, y = 0, z = 0|)|)|))
[since(C)>=4]/#C
[since(C)>1]/#C
Turning
entry cmd_vel(TwistStamped(|header = default(), twist = Twist(|linear = Vector3(|x = 0, y = 0, z = 0|), angular = Vector3(|x = 0, y = 0, z = avel|)|)|))