

# Reducing Intuitive-Physics Prediction Error through Playing

Olivier L. Georgeon<sup>1,2</sup>[0000–0003–4883–8702] and Paul  
Robertson<sup>3</sup>[0000–0002–4477–0379]

<sup>1</sup> UR CONFLUENCE: Sciences et Humanites (EA 1598), UCLy, France  
`oGeorgeon@univ-catholyon.fr`

<sup>2</sup> SyCoSMA, LIRIS, CNRS, Villeurbanne, France

<sup>3</sup> DOLL Labs, Lexington, MA, USA  
`paulr@dollabs.com`

**Abstract.** We present a method for an autonomous robot to generate behaviors to calibrate its intuitive-physics engine also known as the “Game Engine in the Head” (GEITH). At the beginning of each interaction cycle, the robot uses its GEITH to run a simulation to compute predicted sensory signals. For each sensor, prediction error is the difference of the predicted sensory signal minus the actual sensory signal received at the end of the interaction cycle. Results show that over a few tens of interaction cycles, the robot improves its GEITH calibration and decreases its prediction errors. Moreover, the robot generates behaviors that human observers describe as playful.

**Keywords:** Active inference · constructivist learning · enaction · intrinsic motivation · robotics · core knowledge.

## 1 Introduction

It is widely believed that cognitive beings possess some kind of a *world model* that they use to generate intelligent behaviors. How they construct, maintain, and use this world model remains, however, an open question in cognitive science and artificial intelligence.

The Partially Observable Markov Decision Process (POMDP) literature has proposed a broad range of methods to infer a *belief state* in a partially observable process. The belief state amounts to the agent’s world model of the environment that the agent can only partially observe. If the state transition function and the observation function are known *a priori*, the problem of computing the belief state has been mathematically solved [1]. It was, however, also proven that the implementation of the solution becomes intractable as the set of states and observation grows.

Karl Friston and his research group have proposed Active Inference [13, e.g.] as a method to interactively refine the world model by minimizing *free energy*, or equivalently, prediction error and surprise [4]. The world model is represented as the distribution of probability of each possible state of the world. In essence,

at each instant, the agent estimates which states are the most or least likely to be the actual state of the world. This method, however, requires that the set of all world states be known *a priori*, which is not the case of robots in the open world. The relations between states and observations must also be known *a priori*, which we prefer to avoid. Moreover, computing the free energy remains too computationally intensive for our robotics experiment.

The POMDP and active inference literature led us to hypothesize that inferring the world model through experience of interaction requires prior assumptions to reduce complexity [7]. The present study examines how the “Game Engine In The head” (GEITH) can work as a suitable prior assumption that an autonomous robot could use to reduce its prediction errors.

Joshua Tenenbaum and his research group have proposed the GEITH [2] as the capacity of cognitive beings to simulate basic dynamics of physics and interactions. In mammals, the GEITH would rest upon brain structures that are partially predefined by genes and then completed through ontogenetic development. Similarly, it is possible to endow artificial agents and robots with a predefined software game engine, and expect them to refine the parameters of their game engine as they test their predictions in the world.

This paper proposes an approach to designing autonomous agent that can refine their GEITH through their lifetime. The refinement of the game engine is measured through two methods. The first is performed by the robot itself by measuring the prediction error of sensory signals. Decrease in prediction errors shows improvement of the game engine. The second is performed by the experimenter by assessing whether the game engine parameters converge towards a target range that indicates that the robot managed to calibrate its GEITH.

## 2 Our hypothesis

We comply with active inference theory in several regards. Firstly, we do not consider sensory signals to be *representational* of the environment’s state. Different sensory signals may come out of the same environment state depending on the agent’s action. This implies a “conceptual inversion” of the interaction cycle in which action comes first and sensory signal comes second as an *outcome* of action. Secondly, we do not provide the agent with presupposed ontological knowledge about entities in the environment. The agent must infer the existence and properties of entities by itself through patterns of interactive experience. This view can be tracked back to Whitehead’s process philosophy in which phenomenal experience involves abstracting entities out of events [16]. Thirdly, no extrinsic goal is encoded in the agent in the form of goal states that the agent should search based on reward or other criteria. We nonetheless accept to associate some *prior preference valences* with interactions. In short, the agent has no *rewarding world states* but has *rewarding interactions* (positive or negative). For a deeper examination of these principles in relation with the active inference literature, we refer the reader to our previous article [7].

We also adopt *prediction error* as a measure of the quality of the agent’s world model. As introduced in Section 1, however, we are not using gradient descent of prediction error (or surprise) as a motivational principle to drive the learning process. As we will develop, our agent is not always driven by a value optimization process; it may sometimes enact selfless behaviors. For us, prediction-error reduction is not a means to improve the world model but a consequence of its improvement.


We are using a cognitive architecture that we designed previously based on sensorimotor and enactive principles [7]. The present article reports the integration of the new GEITH module within this cognitive architecture as illustrated in Figure 1. The GEITH supports the simulation of interactive behaviors before their selection by the cognitive architecture and their enaction by the robot. At the beginning of each interaction cycle, the simulation computes the *predicted outcome*. At the end of the interaction cycle, the predicted outcome is compared with the *actual outcome* to compute the prediction error. We investigate the core elements of the GEITH that are needed for the agent to reduce prediction error.

We draw inspiration from studies on *core knowledge* in the brain of animals and human infants. For example, Elizabeth Spelke and her colleagues argued for the existence of two core systems of geometry that “evolved before the emergence of the human species”: “The *core navigation system* captures absolute distance and sense [...] but not relative length or angle; the *core form analysis system* does the reverse” [14, p. 2789]. We start by implementing the minimal requirements she deems necessary for both systems, namely the ability to handle points and lines in spatial memory, the foundational elements of Euclidean geometry.

Our cognitive architecture encodes behaviors as *composite interactions* which are sequences of *primitive interactions*. A primitive interaction is a specification of a *control loop* that involves actuator commands, expected sensory feedback, spatio-temporal attributes, termination conditions, termination outcome, and preference valence. Examples are in Section 3. The GEITH may consider some outcomes as resulting from the interaction with “something” in the environment. In this case, the GEITH instantiates a data structure called a *phenomenon*<sup>4</sup> and localizes this phenomenon at the position of the interaction in spatial memory. Next, the GEITH simulates subsequent interactions with phenomena to predict future outcomes. The present study focuses on the simplest possible kind of phenomenon: points on the two-dimensional floor.

We seeded the cognitive architecture with “innate” composite interactions (Fig. 1, top-center) that cause the robot to explore the environment and to interact with points encountered on the floor. Here we do not examine the learning of new composite interactions (we did in other studies [8]) but only the refinement of the GEITH parameters to reduce prediction error. The cognitive architecture uses variables that represent the robot’s *emotional state* to select composite interactions to try to enact.

<sup>4</sup> Common-sense usage of the term *phenomenon*: “something” that a cognitive being perceives in the environment. Technically: “any useful grouping of a subset of spatio-temporal patterns experienced by an agent in an environment” [15, p. 8].

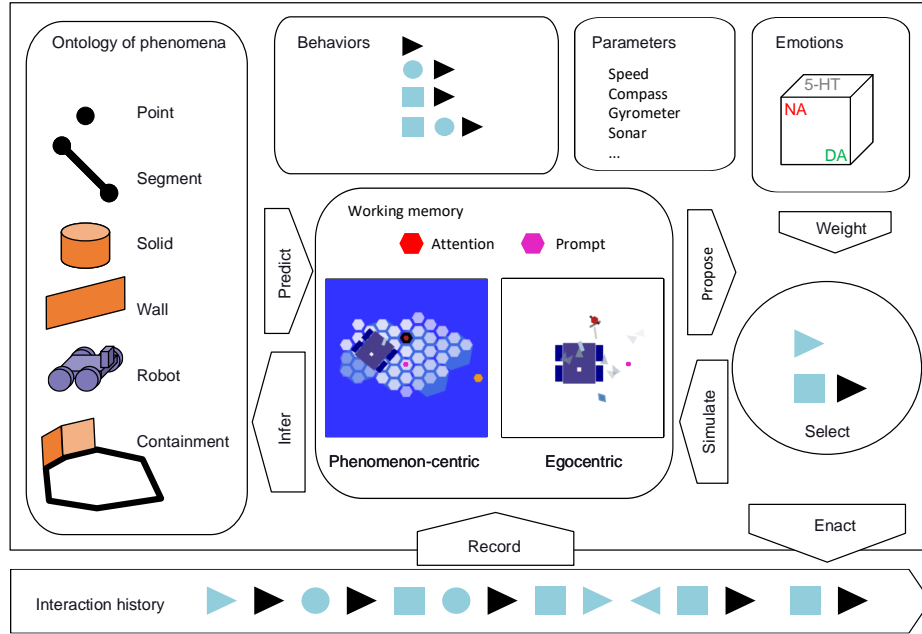

**Fig. 1.** The game engine within the cognitive architecture. Bottom: the history of interactions enacted over time. Leftward triangles: **forward**. Rightward triangles: **backward**. Squares: **swipe**. Circles: **turn**. Light-blue: **no\_tape**. Black: **tape**. Center: the GEITH. Red hexagon: the focus of attention localized at the position of the point phenomenon. Magenta hexagon: the prompt is the localization of the next selected interaction's destination: **swipe** to the right. Left: the types of phenomena inferred through interactive experience. Solid objects, walls, and other robots are detected by the echo-localization sensor but not used in this experiment. Top center: predefined composite interactions. Top right: three-dimensional emotional state based on dopamine (DA), serotonin (5-HT), and nor-adrenaline (NA). Right: the decider selects the next behavior based on the emotional state and the expected outcome predicted by the GEITH.

We use Hugo Lövhelm’s “cube of emotions” [10] as a basic emotional model based on three neurotransmitters: dopamine (DA), serotonin (5-HT), and nor-adrenaline (NA) (Fig. 1, top right). This model associates dopamine with pleasure and reward-seeking behavior, serotonin with well-being and playful behavior, and nor-adrenaline with arousal and stress responses. It has been successfully used for simple emotional robotics. Our robot visually indicates its predominant neurotransmitter level using an intuitive color code developed by Max Talanov and his team: green for dopamine, white for serotonin, red for noradrenaline, and blue when all three neurotransmitter levels are low [3].

The GEITH implements two levels of spatial working memory: *egocentric* and *phenomenon-centric* (Fig. 1, center). The robot’s displacements are tracked in the egocentric reference frame using an Inertial Measurement Unit that plays a similar role as the vestibular system. Using spatial-displacement information, the GEITH updates the position of the recent history of interactions in egocentric memory (Fig. 2, top right). When the robot encounters a new phenomenon, the GEITH instantiates a new reference frame centered on this phenomenon to track the displacement of the robot relative to this phenomenon (Fig. 2, bottom right). This mechanism of coordinate conversion relates to that implemented by Howard Schneider’s in his Causal Cognitive Architecture [12], and to Jeff Hawkins’ thousand brain hypothesis [9] according to which the brain records thousands of small spatial models to memorize interactions with different kinds of objects. We implemented Tenenbaum’s idea to give a *sleep/awake* attribute to phenomena. If the GEITH detects that the phenomenon moves, it switches the attribute to *awake*.

As we shall see in the experiment presented next, prediction errors may have a variety of causes sometimes difficult to untangle. Again, we are looking for core systems of causal explanation that may have evolved in the brain. The literature has pointed out that explanation requires isolating relevant elements of context, and tracking their transformation through series of events [15]. Explanation may also involve a confrontation between proponent and opponent arguments, and further interactions with the world to weigh these arguments.

### 3 Experiment

We designed a robotic platform called Petitcat<sup>5</sup> based on the “robot car” commercialized by Osoyoo [11]. We added an Inertial Measurement Unit (IMU) and an RGB LED as the emotion indicator (Fig. 2).

The C++ software running on the Arduino board controls the enaction of primitive interactions. A personal computer implements the GEITH and the cognitive architecture that remote controls the robot through wifi. The cognitive architecture selects the primitive interaction to try to enact and sends it to the

<sup>5</sup> In this section, we personalize the robot by its name Petitcat and the pronoun “he”. We do not claim that he has a psychology, let alone a gender, but this way if speaking feels more natural to human experimenters.



**Fig. 2.** Screenshot of a video example run [5]. Left: Petitcat playing with a point made of a piece of black tape on the floor. Top right: Petitcat’s egocentric memory. Black segments: black tape detection events. Bottom right: allocentric memory. Black hexagon: the point phenomenon used as a reference frame. Yellow hexagons: echo measured with the sonar. Red hexagon: focus of attention.

robot. The robot tries to enact it and sends the outcome back to the PC. The code is open source and shared online [6].

For this experiment, we defined four possible commands: **forward**, **backward**, **swipe**, and **turn**. **Turn** consists in turning in place. Its spatio-temporal attribute is the target yaw (float), negative when counter-trigonometric. **Swipe** is a lateral translation. Its spatio-temporal attributes are the direction (left or right) and target duration (float). **Forward** and **backward** are longitudinal translations. Their spatio-temporal attribute is the target duration (float).

The control loop monitors the luminosity of the floor, the yaw, and the distance of echo signals during the enaction of interactions. The termination conditions are reaching the target yaw or duration, or detecting a black tape on the floor, making two possible outcomes: **tape** or **no\_tape**, which gives eight primitive interactions (4 commands  $\times$  2 outcomes). Note that Petitcat cannot “see” the tape but only “feel” it through its floor luminosity sensors when he passes over it. All interactions are given a null prior valence except  $\langle \text{forward}, \text{no\_tape} \rangle$  that has a positive one. Additionally, the robot returns the measured spatial attributes to the GEITH: measured duration (float), measured yaw (float), and the direction of the black tape detection if any (none, left, front, right).

When the black tape is detected, a “reflex” movement is performed to withdraw away from the tape by a few centimeters. When the detection is on the side, this withdrawal includes a rotation to the opposite side, which tends to bring the robot back into a position perpendicular to the tape.

We seeded the cognitive architecture with the four composite interactions below, which constitute “innate” manners for Petitcat to interact with points. The GEITH tries to simulate them, computes their spatio-temporal attributes according to the position of the phenomenon in memory, and proposes those that are feasible in the current context.

1.  $\langle\langle\text{forward}, \text{tape}\rangle\rangle$
2.  $\langle\langle\text{turn}, \text{no\_tape}\rangle\langle\text{forward}, \text{tape}\rangle\rangle$
3.  $\langle\langle\text{swipe}, \text{no\_tape}\rangle\langle\text{forward}, \text{tape}\rangle\rangle$
4.  $\langle\langle\text{swipe}, \text{no\_tape}\rangle\langle\text{turn}, \text{no\_tape}\rangle\langle\text{forward}, \text{tape}\rangle\rangle$ .

The levels of the neurotransmitters can vary from 0 to 100 and are initialized at 50. DA prevails in case of equality. Prevalence of DA makes Petitcat initially select the  $\langle\text{forward}, \text{no\_tape}\rangle$  interaction because it has a positive valence. When he detects a point (by surprise), 5-HT increases to its max. Prevalence of 5-HT and the presence of a point phenomenon in memory triggers the selection of the innate interactions with the point. If the prediction errors do not decrease (i.e., prediction does not improve), 5-HT decreases. When 5-HT drops below or equal to DA, the  $\langle\text{forward}, \text{no\_tape}\rangle$  interaction is again selected causing Petitcat to go explore new destinations.

Prediction errors may concern both the outcome of primitive interactions and the spatio-temporal measures. Prediction errors on the outcome (**tape** predicted but **no\_tape** occurred, or the reverse) mean that the selected primitive interaction failed and another interaction was actually enacted instead. Failing primitive interactions cause the composite interaction to which they belong to abort, and the DA level to increase to its max.


The GEITH uses a *focus of attention* point and a *prompt* point to compute the spatio-temporal attributes of interactions (Fig. 1, center). When Petitcat interacts with a point, the GEITH places the focus of attention at the place of the phenomenon. A failure to interact with the point means that the localization of the phenomenon in memory is erroneous. The high DA level that occurs in case of failure causes the GEITH to move the focus of attention to another cell in phenomenon-centric memory in search for the point. Cells compete to catch the focus with preference given to those closer to the last detected position of the phenomenon but having gone the longest period since last being visited. The interactions with the point continue afterward using focus on different cells. DA progressively decreases or is reset to 50 if Petitcat finds the point again.

In addition to the number of failed interactions, we also expect the prediction errors of the yaw and of the forward duration to decrease as the GEITH adjusts its parameters. Our GEITH has about 20 parameters but this experiment only involves FORWARD\_SPEED, WITHDRAWAL\_DISTANCE, and SIDE\_WITHDRAWAL\_YAW. Note that the GEITH has no means to infer the absolute values of these parameters but can only adjust them in relation to one another. The GEITH cannot either predict that the point will be detected on the side of the floor luminosity sensor which will cause a withdrawal with rotation. The GEITH can only make the robot aim straight at the point and thus always predicts straight withdrawal.

Ideally, we would like the GEITH to find by itself the relation of causality from parameters to prediction errors, but in this experiment, we provided this relation.

## 4 Results

Several videos of experiment runs are available online. Here we analyze the representative run recorded in [5].

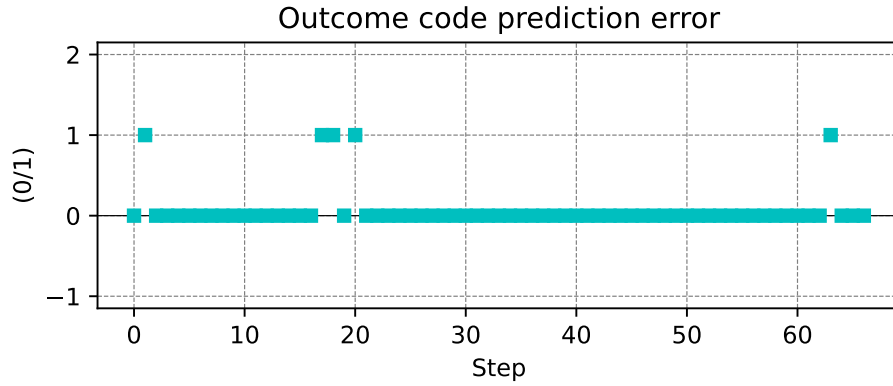

**Fig. 3.** Prediction error of point detection. Step 2: the robot did not expect to detect the point. Steps 17: the robot expected to detect the point while translating forward but missed it. Steps 18: the robot expected to not detect the point while turning around but detected it. Step 20: the robot did not predict detecting the point through simulation but it did. Step 65: The robot did not expect to detect the surrounding arena.


## 5 Conclusion

We are not claiming the robot can actually *experience* emotions let alone have sentience. His internal model of emotions, nonetheless, helps generate behaviors that human observers easily interpret as lifelike. The emotional indicator facilitates this interpretation.


## References

1. Åström, K.J.: Optimal control of markov processes with incomplete state information. *Journal of mathematical analysis and applications* **10**(1), 174–205 (1965)
2. Battaglia, P.W., Hamrick, J.B., Tenenbaum, J.B.: Simulation as an engine of physical scene understanding. *Proceedings of the National Academy of Sciences* **110**(45), 18327–18332 (2013). <https://doi.org/10.1073/pnas.1306572110>




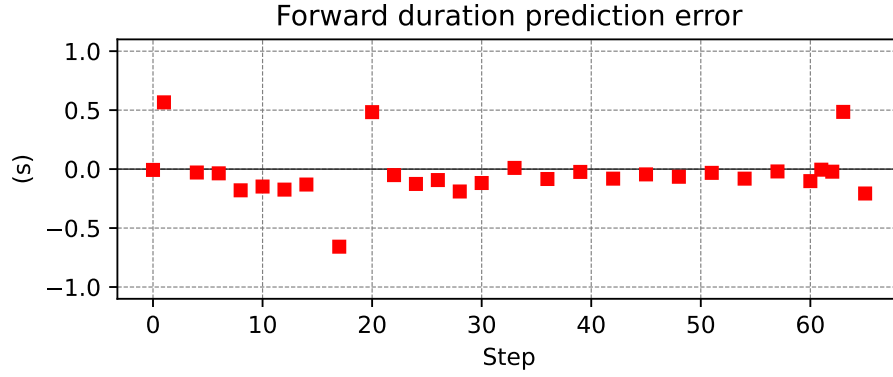


**Fig. 4.** Forward duration prediction error. Step 2 and 20: the forward translation was unexpectedly interrupted by the point detection. Step 17: the forward duration was longer than expected because the robot did not detect the point. From Step 21 to 64: forward duration prediction error slightly decreases. Step 65: the forward translation was unexpectedly interrupted by the detection of the arena border.

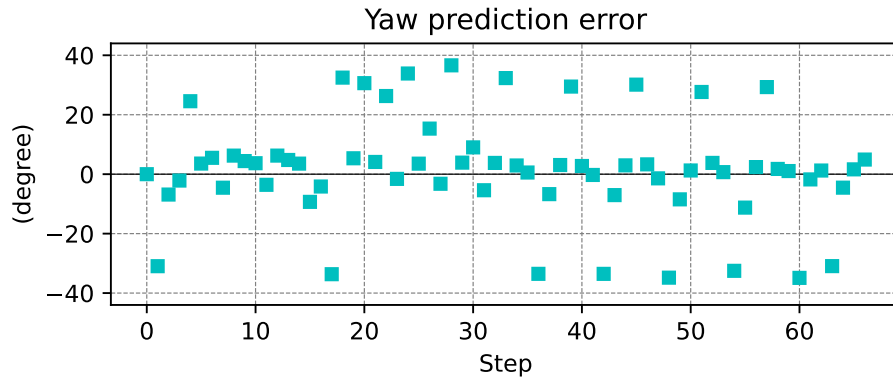

**Fig. 5.** The yaw prediction error shows no significant trend when we do not distinguish between the different kinds of interactions.

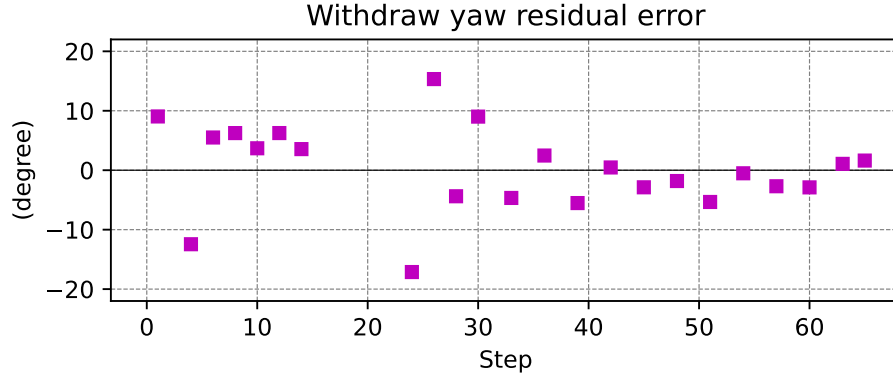

**Fig. 6.** The yaw residual error during interactions in which the robot detects the point decreases significantly after Step 26.

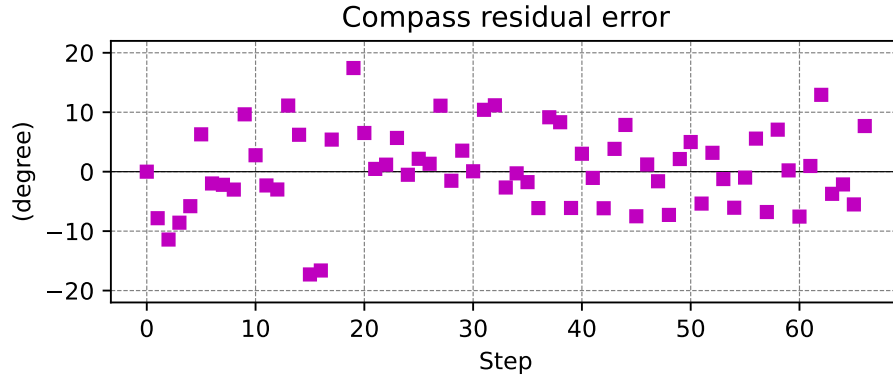

**Fig. 7.** The compass residual error decreases after step 20 when the robot starts circling around the point. It nonetheless remains noisy due to sensor imprecision. The sliding average over 10 interactions tends to  $0.8^\circ$  and the standard deviation to  $7.4^\circ$ .

3. Chebotareva, E., Safin, R., Shafikov, A., Masaev, D., Shaposhnikov, A., Shayakhmetov, I., Magid, E., Zilberman, N., Gerasimov, Y., Talanov, M.: Emotional social robot "emotico". In: 2019 12th International Conference on Developments in eSystems Engineering (DeSE). pp. 247–252. IEEE (2019). <https://doi.org/10.1109/DeSE.2019.00054>
4. Friston, K.: The free-energy principle: a unified brain theory? *Nature Reviews Neuroscience* **11**(2), 127–138 (2010). <https://doi.org/10.1038/nrn2787>
5. Georgeon, O.L.: Petitcat calibrates its intuitive physics engine (2024), <https://youtu.be/4wF-OeYCcYI>
6. Georgeon, O.L.: Petitcat project repository (2024), <https://github.com/UCLy/INIT2/>
7. Georgeon, O.L., Lurie, D., Robertson, P.: Artificial enactive inference in three-dimensional world **86**, 101234 (2024). <https://doi.org/10.1016/j.cogsys.2024.101234>
8. Georgeon, O.L., Riegler, A.: CASH only: Constitutive autonomy through motorsensory self-programming. *Cognitive Systems Research* **58**, 366–374 (Dec 2019). <https://doi.org/10.1016/j.cogsys.2019.08.006>
9. Hawkins, J., Lewis, M., Klukas, M., Purdy, S., Ahmad, S.: A framework for intelligence and cortical function based on grid cells in the neocortex. *Frontiers in Neural Circuits* **12** (2019)
10. Lövhelm, H.: A new three-dimensional model for emotions and monoamine neurotransmitters **78**(2), 341–348 (2024). <https://doi.org/10.1016/j.mehy.2011.11.016>
11. Osoyoo: M2.0 metal chassis mecanum wheel robotic (2022), <https://osoyoo.com/2022/07/05/v2-metal-chassis-mecanum-wheel-robotic-for-arduino-mega2560-introduction-model-2021006600/>
12. Schneider, W.X., Albert, J., Ritter, H.: Enabling cognitive behavior of humans, animals, and machines: A situation model framework. *ZiF-Mitteilungen* **1**, 21–34 (2020)
13. Smith, R., Friston, K.J., Whyte, C.J.: A step-by-step tutorial on active inference and its application to empirical data. *Journal of Mathematical Psychology* **107**, 102632 (2022). <https://doi.org/10.1016/j.jmp.2021.102632>
14. Spelke, E.S., Lee, S.A.: Core systems of geometry in animal minds **367**(1603), 2784–2793 (2012). <https://doi.org/10.1098/rstb.2012.0210>
15. Thórisson, K.R.: The 'Explanation Hypothesis' in general self-supervised Learning. International Workshop in Self-Supervised Learning (2021)
16. Whitehead, A.N.: *Process Philosophy*. Macmillan (1929)