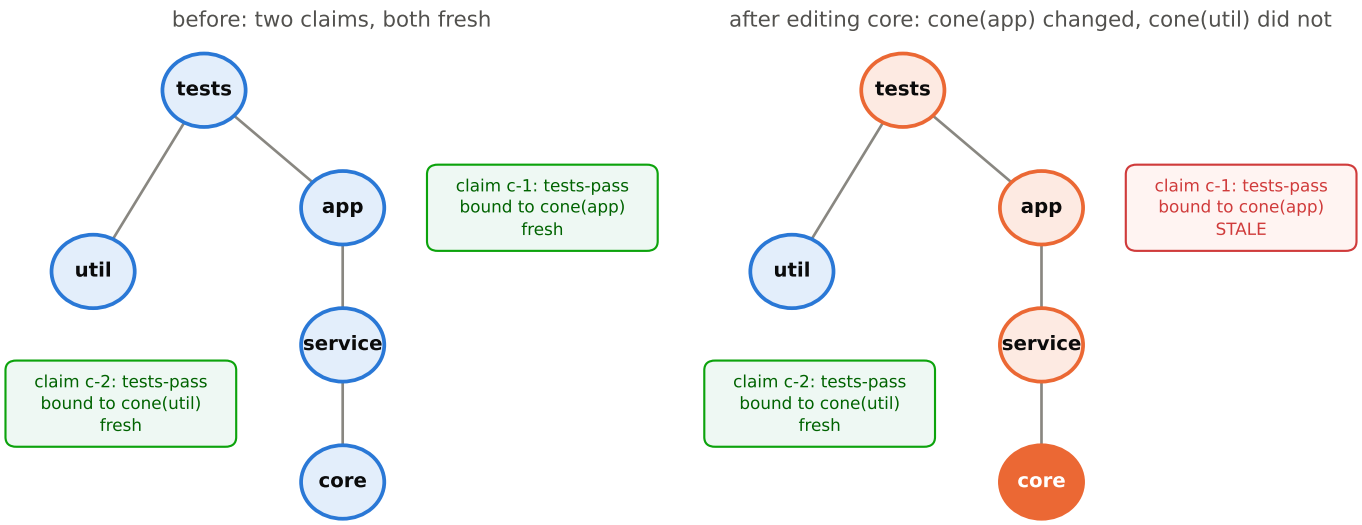

cone(m) = m plus everything it depends on; the cone hash is a Merkle hash over that set. Blast radius of {core} = {core, service, app, tests} = exactly the claims that went stale.