



The Greedy Method and Text Compression

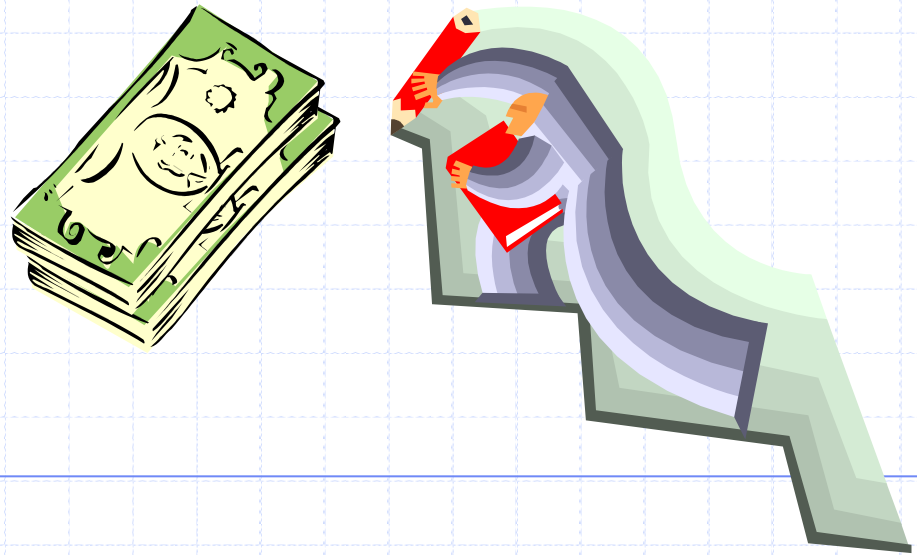

The Greedy Method Technique

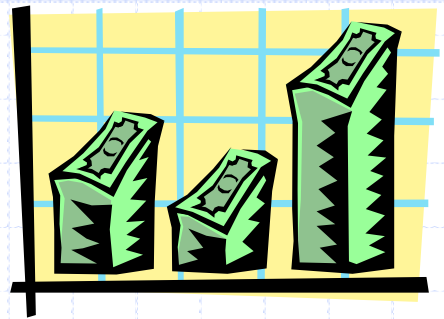

- ◆ **The greedy method** is a general algorithm design paradigm, built on the following elements:
 - **configurations**: different choices, collections, or values to find
 - **objective function**: a score assigned to configurations, which we want to either maximize or minimize
- ◆ It works best when applied to problems with the **greedy-choice** property:
 - a globally-optimal solution can always be found by a series of local improvements from a starting configuration.


Text Compression

- ◆ Given a string X , efficiently encode X into a smaller string Y
 - Saves memory and/or bandwidth
- ◆ A good approach: **Huffman encoding**
 - Compute frequency $f(c)$ for each character c .
 - Encode high-frequency characters with short code words
 - No code word is a prefix for another code
 - Use an optimal encoding tree to determine the code words

Encoding Tree Example



- ◆ A **code** is a mapping of each character of an alphabet to a binary code-word
- ◆ A **prefix code** is a binary code such that no code-word is the prefix of another code-word
- ◆ An **encoding tree** represents a prefix code
 - Each external node stores a character
 - The code word of a character is given by the path from the root to the external node storing the character (0 for a left child and 1 for a right child)

00	010	011	10	11
a	b	c	d	e

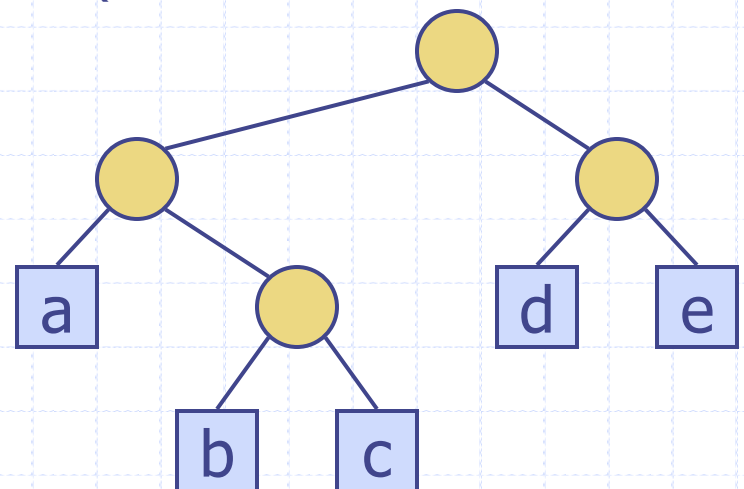

Encoding Tree Optimization

- ◆ Given a text string X , we want to find a prefix code for the characters of X that yields a small encoding for X
 - Frequent characters should have long code-words
 - Rare characters should have short code-words
- ◆ Example
 - $X = \text{abracadabra}$
 - T_1 encodes X into 29 bits
 - T_2 encodes X into 24 bits

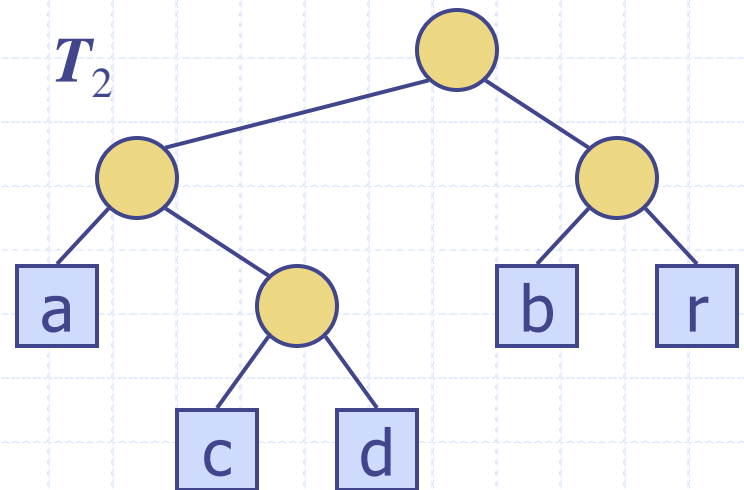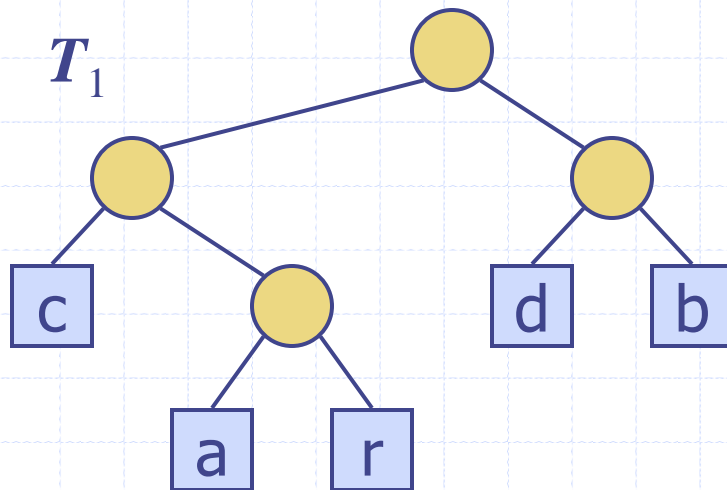

Huffman's Algorithm

- ◆ Given a string X , Huffman's algorithm constructs a prefix code that minimizes the size of the encoding of X
- ◆ It runs in time $O(n + d \log d)$, where n is the size of X and d is the number of distinct characters of X
- ◆ A heap-based priority queue is used as an auxiliary structure

Algorithm *HuffmanEncoding*(X)

Input string X of size n

Output optimal encoding tree for X

$C \leftarrow \text{distinctCharacters}(X)$

$\text{computeFrequencies}(C, X)$

$Q \leftarrow$ new empty heap

for all $c \in C$

$T \leftarrow$ new single-node tree storing c

$Q.\text{insert}(\text{getFrequency}(c), T)$

while $Q.\text{size}() > 1$

$f_1 \leftarrow Q.\text{minKey}()$

$T_1 \leftarrow Q.\text{removeMin}()$

$f_2 \leftarrow Q.\text{minKey}()$

$T_2 \leftarrow Q.\text{removeMin}()$

$T \leftarrow \text{join}(T_1, T_2)$






$Q.\text{insert}(f_1 + f_2, T)$

return $Q.\text{removeMin}()$

Example

$X = \text{abracadabra}$
Frequencies


a	b	c	d	r
5	2	1	1	2

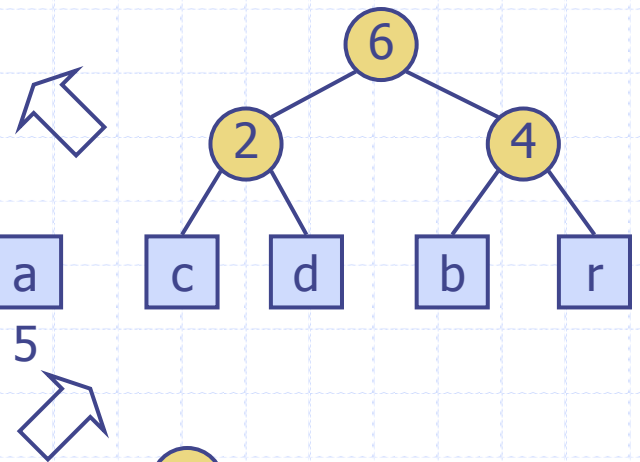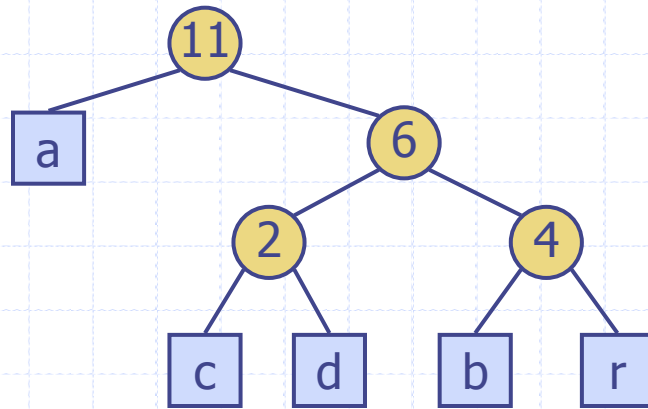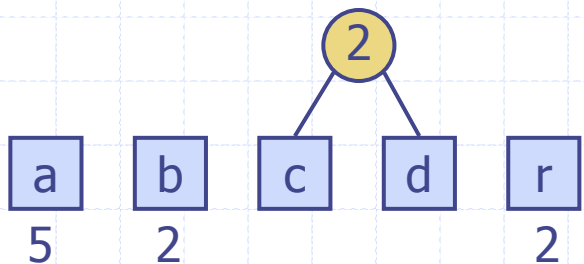


Extended Huffman Tree Example

String: **a fast runner need never be afraid of the dark**

Character		a	b	d	e	f	h	i	k	n	o	r	s	t	u	v
Frequency	9	5	1	3	7	3	1	1	1	4	1	5	1	2	1	1

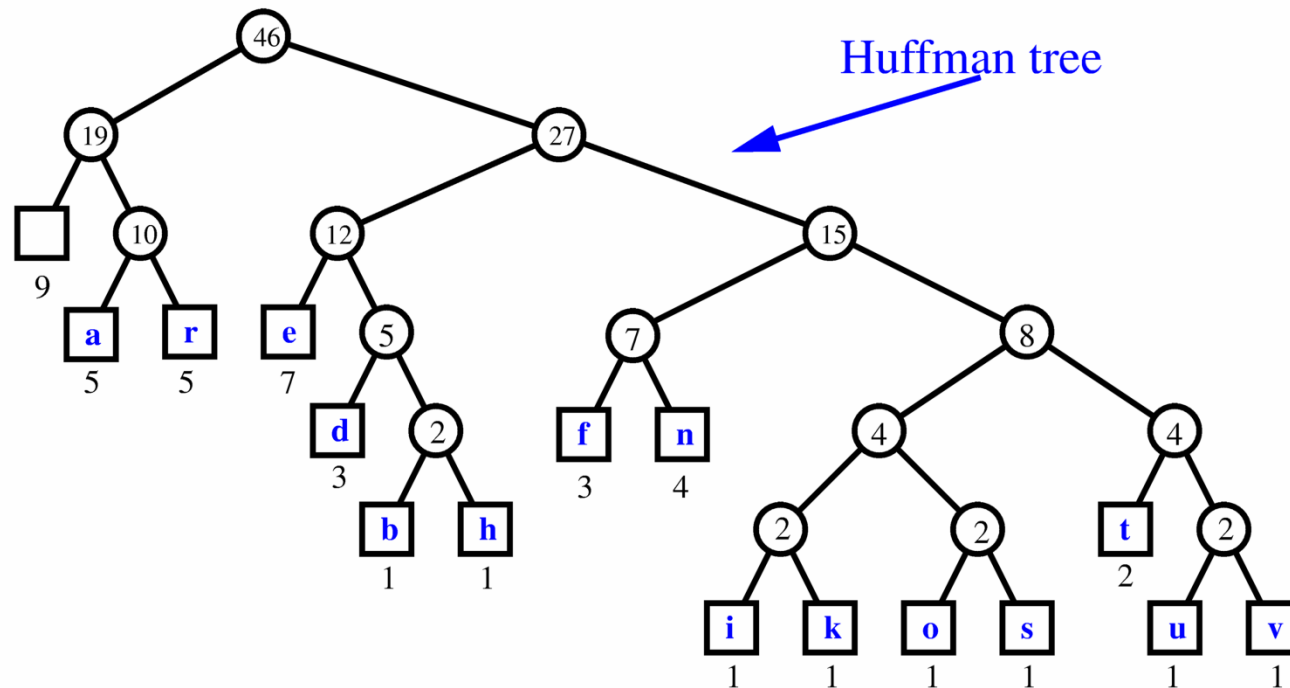

The Fractional Knapsack Problem (not in book)



- ◆ Given: A set S of n items, with each item i having
 - b_i - a positive benefit
 - w_i - a positive weight
- ◆ Goal: Choose items with maximum total benefit but with weight at most W .
- ◆ If we are allowed to take fractional amounts, then this is the **fractional knapsack problem**.
 - In this case, we let x_i denote the amount we take of item i






- Objective: maximize
$$\sum_{i \in S} b_i (x_i / w_i)$$

- Constraint:
$$\sum_{i \in S} x_i \leq W$$

Example



- ◆ Given: A set S of n items, with each item i having
 - b_i - a positive benefit
 - w_i - a positive weight
- ◆ Goal: Choose items with maximum total benefit but with weight at most W .

Items:					
Weight:	4 ml	8 ml	2 ml	6 ml	1 ml
Benefit:	\$12	\$32	\$40	\$30	\$50
Value: (\$ per ml)	3	4	20	5	50



"knapsack"

10 ml

Solution:

- 1 ml of 5
- 2 ml of 3
- 6 ml of 4
- 1 ml of 2

The Fractional Knapsack Algorithm



- ◆ **Greedy choice:** Keep taking item with highest **value** (benefit to weight ratio)
 - Since $\sum_{i \in S} b_i (x_i / w_i) = \sum_{i \in S} (b_i / w_i) x_i$
 - Run time: $O(n \log n)$. Why?
- ◆ **Correctness:** Suppose there is a better solution
 - there is an item i with higher value than a chosen item j , but $x_i < w_i$, $x_j > 0$ and $v_i < v_j$
 - If we substitute some i with j , we get a better solution
 - How much of i : $\min\{w_i - x_i, x_j\}$
 - Thus, there is no better solution than the greedy one

Algorithm *fractionalKnapsack*(S, W)

Input: set S of items w/ benefit b_i and weight w_i ; max. weight W

Output: amount x_i of each item i to maximize benefit w/ weight at most W

for each item i in S

$x_i \leftarrow 0$

$v_i \leftarrow b_i / w_i$ {value}

$w \leftarrow 0$ {total weight}


while $w < W$

remove item i w/ highest v_i


$x_i \leftarrow \min\{w_i, W - w\}$

$w \leftarrow w + \min\{w_i, W - w\}$


Task Scheduling (not in book)

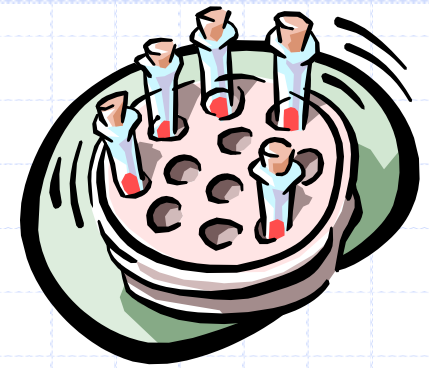

- ◆ Given: a set T of n tasks, each having:
 - A start time, s_i
 - A finish time, f_i (where $s_i < f_i$)
- ◆ Goal: Perform all the tasks using a minimum number of “machines.”

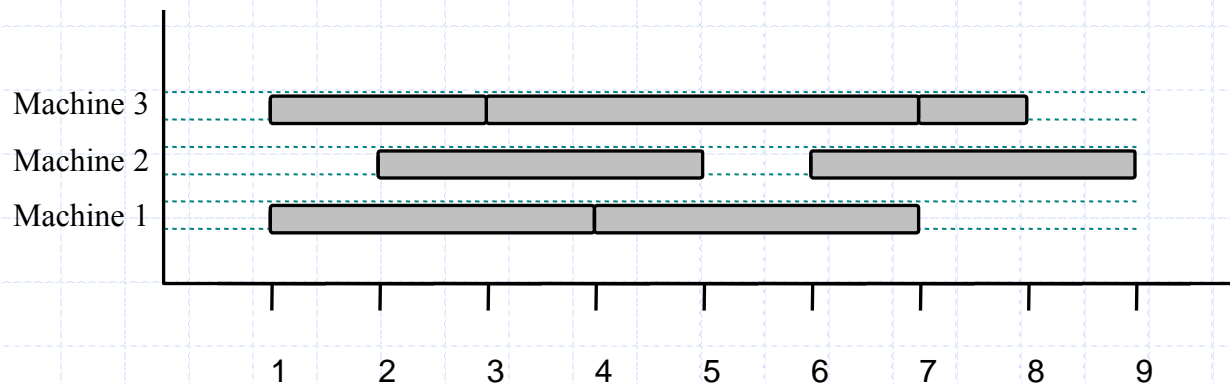

Task Scheduling Algorithm

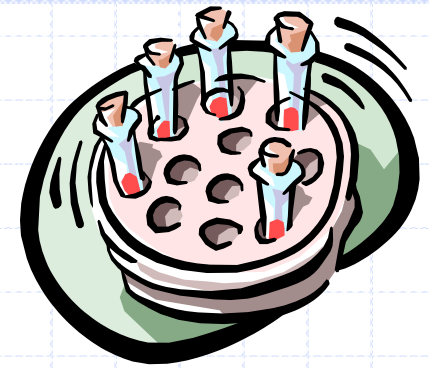

- ◆ **Greedy choice:** consider tasks by their start time and use as few machines as possible with this order.
 - Run time: $O(n \log n)$. Why?
- ◆ **Correctness:** Suppose there is a better schedule.
 - We can use $k-1$ machines
 - The algorithm uses k
 - Let i be first task scheduled on machine k
 - Machine i must conflict with $k-1$ other tasks
 - But that means there is no non-conflicting schedule using $k-1$ machines

Algorithm *taskSchedule*(T)

Input: set T of tasks w/ start time s_i and finish time f_i

Output: non-conflicting schedule with minimum number of machines

$m \leftarrow 0$ {no. of machines}

while T is not empty

remove task i w/ smallest s_i


if *there's a machine j for i* **then**

schedule i on machine j

else

$m \leftarrow m + 1$

schedule i on machine m

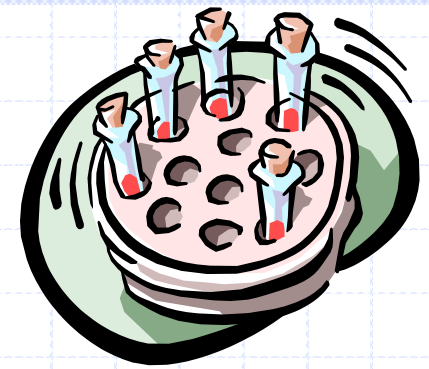

Example

- ◆ Given: a set T of n tasks, each having:
 - A start time, s_i
 - A finish time, f_i (where $s_i < f_i$)
 - $[1,4], [1,3], [2,5], [3,7], [4,7], [6,9], [7,8]$ (ordered by start)
- ◆ Goal: Perform all tasks on min. number of machines

