https://mubx.dev/#about

Performance	Accessibility	Best Practices	SEO
!	97	100	100

Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

▲ 0–49 ■ 50–89 ● 90–100

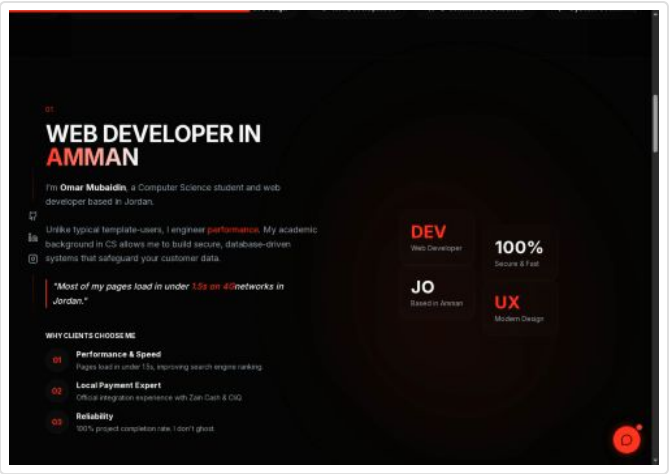

METRICS Collapse view

● First Contentful Paint

0.3 s

First Contentful Paint marks the time at which the first text or image is painted. Learn more about the First Contentful Paint metric.

! Largest Contentful Paint

Error!

NO_LCP

! Total Blocking Time

Error!

● Cumulative Layout Shift

0

NO_LCP

Cumulative Layout Shift measures the movement of visible elements within the viewport. Learn more about the Cumulative Layout Shift metric.

Speed Index

2.0 s

Speed Index shows how quickly the contents of a page are visibly populated. Learn more about the Speed Index metric.

Show audits relevant to: All LCP CLS

INSIGHTS

Forced reflow

A forced reflow occurs when JavaScript queries geometric properties (such as offsetWidth) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations. Unscored

Top function call	Total reflow time
...chunks/4b2c135c89b53e2a.js:2:8059 (mubx.dev)	44 ms

Source	Total reflow time
[unattributed]	161 ms
...chunks/ef5d7324bc7045f0.js:1:19068 (mubx.dev)	44 ms
...chunks/ef5d7324bc7045f0.js:1:32648 (mubx.dev)	2 ms

Legacy JavaScript — Est savings of 14 KiB

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile Baseline features, unless you know you must support older browsers. Learn why most sites can deploy ES6+ code without transpiling. Unscored

URL		Wasted bytes
mubx.dev 1st Party		**13.9 KiB**
...chunks/4b2c135c89b53e2a.js (mubx.dev)		13.9 KiB
...chunks/4b2c135c89b53e2a.js:1:6069 (mubx.dev)	`Array.prototype.at`	
...chunks/4b2c135c89b53e2a.js:1:5457 (mubx.dev)	`Array.prototype.flat`	
...chunks/4b2c135c89b53e2a.js:1:5570 (mubx.dev)	`Array.prototype.flatMap`	
...chunks/4b2c135c89b53e2a.js:1:5946 (mubx.dev)	`Object.fromEntries`	
...chunks/4b2c135c89b53e2a.js:1:6204 (mubx.dev)	`Object.hasOwn`	
...chunks/4b2c135c89b53e2a.js:1:5199 (mubx.dev)	`String.prototype.trimEnd`	
...chunks/4b2c135c89b53e2a.js:1:5114 (mubx.dev)	`String.prototype.trimStart`	

Render blocking requests

Requests are blocking the page's initial render, which may delay LCP. Deferring or inlining can move these network requests out of the critical path. LCP Unscored

URL	Transfer Size	Duration
mubx.dev 1st Party	**16.5 KiB**	**0 ms**
...chunks/c6e0e111f4537bed.css (mubx.dev)	16.5 KiB	

Optimize DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size. Unscored

Statistic	Element	Value
Total elements		994
DOM depth	div.p-6 > div.flex > div.relative > div.w-3 `<div class="w-3 h-3 bg-green-500 rounded-full animate-ping absolute inset-0">`	13
Most children	REACT NEXT.JS TYPESCRIPT NODE.JS POSTGRESQL PRISMA TAILWIND VERCEL FIGMA HTML5 ... `<div class="flex flex-wrap justify-center gap-4 md:gap-8 max-w-6xl mx-auto">`	27

These insights are also available in the Chrome DevTools Performance Panel - record a trace to view more detailed information.

DIAGNOSTICS

! Minify CSS — Error!

Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. Unscored

! Minify JavaScript — Error!

Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. Unscored

! Reduce unused CSS — Error!

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. Learn how to reduce unused CSS. Unscored

! Reduce unused JavaScript — Error!

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. Learn how to reduce unused JavaScript. Unscored

! Avoid long main-thread tasks — Error!

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. Learn how to avoid long main-thread tasks Unscored

○ Avoid non-composited animations — 272 animated elements found

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations CLS Unscored

Element	Name
nav.fixed > div.hidden > a.text-sm > span.absolute `<span class="absolute -bottom-1 left-1/2 -translate-x-1/2 h-0.5 bg-gradient-to-r from-n…">`	
Unsupported CSS Property: color	color
About `<a class="text-sm font-medium transition-colors relative group text-neon font-bold" href="/#about" aria-current="page">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide	

Element	Name
`<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">` Unsupported CSS Property: color	color
div.space-y-6 > div.flex > a.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-arrow-right w-3 h-3 opacity-0 group-hover:opacity-100 transi…" aria-hidden="true">` Unsupported CSS Property: color	
 body.inter_c15e96cb-module__0bjUvq__variable `<body class="inter_c15e96cb-module__0bjUvq__variable space_grotesk_11bf8cd-module__L78y…">` Unsupported CSS Property: background-color	background-color
Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">` Unsupported CSS Property: color	color
Next.js & React Expertise `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">` Unsupported CSS Property: color	color
Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">` Unsupported CSS Property: color	color
TAILWIND `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">` Unsupported CSS Property: color	color
 Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">` Unsupported CSS Property: color	color

Element	Name
Amman Based `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color

Element	Name
Mobile-First Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
NPM `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
JAVA `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Secure Auth Systems `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Secure Auth Systems `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
GIT `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Next.js & React Expertise `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color

Element	Name
Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 High-Performance SEO `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
VERCEL `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
C++ `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
High-Performance SEO `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
High-Performance SEO `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color

Element	Name
High-Performance SEO `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Mobile-First Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Amman Based `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
BASH `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
VS CODE `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
GITHUB `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color

Element	Name
POSTGRESQL `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
 Next.js & React Expertise `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
FIGMA `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Amman Based `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Mobile-First Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
DOCKER `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
HTML5 `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Amman Based `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color

Element	Name
TAILWIND `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
FASTAPI `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
NEXT.JS `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
CSS3 `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
 Amman Based `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Secure Auth Systems	

Element	Name
`<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
GOLAND `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Mobile-First Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 0 % `<span class="text-3xl md:text-4xl font-black text-foreground mb-1 group-hover:text-neon…">`	
Unsupported CSS Property: color	color
Next.js & React Expertise `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
High-Performance SEO	

Element	Name
`<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 Secure Auth Systems `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
SALES BOOST – BLOB POD STORE `<span class="text-xs md:text-sm text-muted font-medium uppercase tracking-widest group-…">`	
Unsupported CSS Property: color	color
UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
+ 0 % `<span class="text-3xl md:text-4xl font-black text-foreground mb-1 group-hover:text-neon…">`	

Element	Name
Unsupported CSS Property: color	color
TYPESCRIPT `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
BOOTSTRAP `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Technical Consulting `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color

Element	Name
POSTMAN `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 Mobile-First Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
NODE.JS `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
 MEMBERS MANAGED – HTU CLUB PORTAL `<span class="text-xs md:text-sm text-muted font-medium uppercase tracking-widest group-…">`	
Unsupported CSS Property: color	color
 0 + `<span class="text-3xl md:text-4xl font-black text-foreground mb-1 group-hover:text-neon…">`	

Element	Name
Unsupported CSS Property: color	color
REACT `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
LARAVEL `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
LEADS – VYNEX MEDIA LANDING PAGE `<span class="text-xs md:text-sm text-muted font-medium uppercase tracking-widest group-…">`	
Unsupported CSS Property: color	color
Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Secure Auth Systems `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 01 WEB DEVELOPER IN AMMAN I'm Omar Mubaidin, a Computer Science student and w… `<section id="about" class="py-24 relative bg-background transition-colors duration-300">`	
Unsupported CSS Property: color	color
SUPABASE `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color

Element	Name
Next.js & React Expertise `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Database Design `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
PYTHON `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
SWIFT `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
Java `<img alt="Java" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/java-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
 FULL STACK DEVELOPER & CS STUDENT BUILDING FAST, SECURE WEB SYSTEMS FOR AMBIT… `<section class="relative min-h-screen flex items-start lg:items-center pt-32 pb-20 overflo…">`	
Unsupported CSS Property: color	color
E-commerce Solutions `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Next.js & React Expertise	

Element	Name
`<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
 System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
API Development `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Full Stack Architecture `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
System Scalability `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
PRISMA `<div class="group p-4 md:p-6 rounded-2xl bg-white/5 border border-white/10 backdrop-bl…" style="opacity:0;transform:translateY(20px)">`	
Unsupported CSS Property: color	color
UI/UX Engineering `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
High-Performance SEO `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	

Element	Name
Unsupported CSS Property: color	color
 Custom Web Apps `<div class="flex items-center gap-3 px-6 py-3 rounded-full bg-card border border-borde…">`	
Unsupported CSS Property: color	color
Bootstrap `<img alt="Bootstrap" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/Bootstrap.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide	

Element	Name
`<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
JAVA `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
FASTAPI `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide	

Element	Name
`<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
GITHUB `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
NPM `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
Supabase `<img alt="Supabase" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/supabase-logo-icon.svg">`	
Unsupported CSS Property: color	color
[redacted] div.flex > div.flex > div.flex > svg.lucide	

Element	Name
 `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Postman `<img alt="Postman" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/postman-icon-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
CSS3 `<img alt="CSS3" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/CSS3.svg">`	
Unsupported CSS Property: color	color
NODE.JS `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	

Element	Name
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Next.js `<img alt="Next.js" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/next-dot-js-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
PRISMA `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
POSTGRESQL	

Element	Name
`<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
Node.js `<img alt="Node.js" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/nodejs-icon-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
TypeScript `<img alt="TypeScript" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/typescript-icon-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
Vercel `<img alt="Vercel" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/vercel-logo-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
Git `<img alt="Git" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/git-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	
Unsupported CSS Property: color	color

Element	Name
Tailwind `<img alt="Tailwind" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/tailwindcss-icon-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
NPM `<img alt="NPM" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/NPM.svg">`	
Unsupported CSS Property: color	color
CSS3 `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"`	

Element	Name
`stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Swift `<img alt="Swift" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/swift-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
Figma `<img alt="Figma" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/figma-icon.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	
Unsupported CSS Property: color	color

Element	Name
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">` Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">` Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">` Unsupported CSS Property: color	color
VERCEL `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">` Unsupported CSS Property: color	color
Prisma `<img alt="Prisma" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/prisma-svgrepo-com.svg">` Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">` Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"`	

Element	Name
`stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">`	
Unsupported CSS Property: color	color
React `<img alt="React" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/react-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Python `<img alt="Python" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/python-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
SUPABASE `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide	

Element	Name
<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">	
Unsupported CSS Property: color	color
GoLand <img alt="GoLand" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/GoLand.svg">	
Unsupported CSS Property: color	color
BASH	

Element	Name
`<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Laravel `<img alt="Laravel" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/laravel-2.svg">`	
Unsupported CSS Property: color	color
Docker `<img alt="Docker" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/docker-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-search w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
FastAPI `<img alt="FastAPI" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300`	

Element	Name
`grayscale group-h…" style="color:transparent" src="/techstackicons/FastAPI.svg">`	
Unsupported CSS Property: color	color
PostgreSQL `<img alt="PostgreSQL" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/postgresql-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">`	
Unsupported CSS Property: color	color
BOOTSTRAP `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
REACT `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
GIT `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
LARAVEL `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color

Element	Name
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	
Unsupported CSS Property: color	color
C++ `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
C++ `<img alt="C++" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/c-1.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
VS CODE `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
VS Code	

Element	Name
<img alt="VS Code" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/Visual Studio Code (VS Code).svg">	
Unsupported CSS Property: color	color
HTML5	
Unsupported CSS Property: color	color
GitHub <img alt="GitHub" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/github-svgrepo-com.svg">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-database w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">	
Unsupported CSS Property: color	color

Element	Name
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
PYTHON `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
SWIFT `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
FIGMA `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-lock w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
TYPESCRIPT	

Element	Name
`<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-shopping-cart w-4 h-4 text-muted group-hover:text-neon trans…" aria-hidden="true">`	
Unsupported CSS Property: color	color
 FULL STACK DEVELOPER & CS STUDENT `<span class="inline-flex items-center px-3 py-1 rounded-full text-xs font-bold tracking…">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-zap w-4 h-4 text-muted group-hover:text-neon transition-colo…" aria-hidden="true">`	
Unsupported CSS Property: color	color

Element	Name
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
NEXT.JS `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-layers w-4 h-4 text-muted group-hover:text-neon transition-c…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-pen-tool w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">`	
Unsupported CSS Property: color	color
GOLAND `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	

Element	Name
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-terminal w-4 h-4 text-muted group-hover:text-neon transition…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-code w-4 h-4 text-muted group-hover:text-neon transition-col…" aria-hidden="true">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-message-circle w-4 h-4 text-muted group-hover:text-neon tran…" aria-hidden="true">`	
Unsupported CSS Property: color	color
DOCKER `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-smartphone w-4 h-4 text-muted group-hover:text-neon transiti…" aria-hidden="true">`	
Unsupported CSS Property: color	color
POSTMAN `<span class="text-[10px] md:text-xs font-bold font-mono text-muted group-hover:text-for…">`	
Unsupported CSS Property: color	color
HTML5 `<img alt="HTML5" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/HTML5.svg">`	
Unsupported CSS Property: color	color

Element	Name
 div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-globe w-4 h-4 text-muted group-hover:text-neon transition-co…" aria-hidden="true">`	
Unsupported CSS Property: color	color
Bash `<img alt="Bash" loading="lazy" width="48" height="48" decoding="async" data-nimg="1" class="w-full h-full object-contain transition-all duration-300 grayscale group-h…" style="color:transparent" src="/techstackicons/bash-icon-svgrepo-com.svg">`	
Unsupported CSS Property: color	color
div.flex > div.flex > div.flex > svg.lucide `<svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-map-pin w-4 h-4 text-muted group-hover:text-neon transition-…" aria-hidden="true">`	
Unsupported CSS Property: color	color
ASAP 1 Month Flexible `<select id="deadline" name="deadline" class="w-full bg-background border border-border rounded-lg px-3 py-2 text-xs tex…">`	
Unsupported CSS Property: color	color
EMAIL mubxdev@proton.me `<div class="flex items-center gap-4 text-muted hover:text-foreground transition-colors">`	
Unsupported CSS Property: color	color
2024 - Present Computer Science Student Al-Hussein Technical University (HTU) … `<div class="bg-card/40 border border-border/50 backdrop-blur-sm p-6 rounded-2xl hover:…">`	
Unsupported CSS Property: color	color
div.bg-card > form.space-y-4 > div > input#email `<input type="email" id="email" required="" class="w-full bg-background border border-border rounded-xl px-5 py-4 text-foregr…" placeholder="name@company.com" name="email">`	
Unsupported CSS Property: color	color
Privacy Policy	

Element	Name
`<a class="text-xs text-muted-foreground hover:text-foreground transition-colors" href="/legal/privacy">`	
Unsupported CSS Property: color	color
LOCATION Amman, Jordan (Remote Available) `<div class="flex items-center gap-4 text-muted hover:text-foreground transition-colors">`	
Unsupported CSS Property: color	color
Services `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/services">`	
Unsupported CSS Property: color	color
My Link Tree `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/links">`	
Unsupported CSS Property: color	color
mubxdev@proton.me `<a href="mailto:mubxdev@proton.me" class="flex items-center gap-2 text-muted-foreground hover:text-neon transition-c…">`	
Unsupported CSS Property: color	color
Contact `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/contact">`	
Unsupported CSS Property: color	color
New Website Redesign E-commerce Custom App `<select id="goal" name="goal" class="w-full bg-background border border-border rounded-lg px-3 py-2 text-xs tex…">`	
Unsupported CSS Property: color	color
Home `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/#about">`	
Unsupported CSS Property: color	color
LinkedIn `<a href="https://www.linkedin.com/in/omarmubaidin" target="_blank" rel="noopener noreferrer" class="p-3 rounded-lg bg-card hover:bg-muted/10 text-muted-foreground hover:text-…" aria-label="LinkedIn">`	
Unsupported CSS Property: color	color

Element	Name
Send Inquiry `<button type="submit" class="w-full py-4 bg-neon text-black font-bold text-lg rounded-xl hover:bg-backg…">`	
Unsupported CSS Property: color	color
200 - 500 JD 500 - 1000 JD 1000 - 2500 JD 2500+ JD `<select id="budget" name="budget" class="w-full bg-background border border-border rounded-lg px-3 py-2 text-xs tex…">`	
Unsupported CSS Property: color	color
Visit GitHub Profile `<a href="https://github.com/Omarmubx7" target="_blank" rel="noopener noreferrer" class="p-3 rounded-lg bg-card hover:bg-muted/10 text-muted-foreground hover:text-…" aria-label="Visit GitHub Profile">`	
Unsupported CSS Property: color	color
2023 Web Development Intern Freelancer Gained hands-on experience in frontend ... `<div class="bg-card/40 border border-border/50 backdrop-blur-sm p-6 rounded-2xl hover:…">`	
Unsupported CSS Property: color	color
2026 - Present Full Stack Developer Freelance Building high-performance web sy... `<div class="bg-card/40 border border-border/50 backdrop-blur-sm p-6 rounded-2xl hover:…">`	
Unsupported CSS Property: color	color
Terms of Service `<a class="text-xs text-muted-foreground hover:text-foreground transition-colors" href="/legal/terms">`	
Unsupported CSS Property: color	color
div.bg-card > form.space-y-4 > div > textarea#message `<textarea name="message" id="message" rows="4" required="" class="w-full bg-background border border-border rounded-xl px-5 py-4 text-foregr…" placeholder="I need a landing page for...">`	
Unsupported CSS Property: color	color
About `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/about">`	
Unsupported CSS Property: color	color
Instagram `<a href="https://www.instagram.com/mubx.dev?igsh=MTg4bDVqMGdwbGdpbQ==" target="_blank" rel="noopener noreferrer" class="p-3 rounded-lg bg-card`	

Element	Name
`hover:bg-muted/10 text-muted-foreground hover:text-…" aria-label="Instagram">`	
Unsupported CSS Property: color	color
Projects `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/projects">`	
Unsupported CSS Property: color	color
Free Tools (Open Source) `<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/tools/neon-gradient-card">`	
Unsupported CSS Property: color	color
عربي / EN `<button class="flex items-center gap-1 font-bold text-sm px-3 py-1.5 rounded-full border …" aria-label="Switch to Arabic">`	
Unsupported CSS Property: color	color

More information about the performance of your application. These numbers don't directly affect the Performance score.

PASSED AUDITS (17)

Hide

Use efficient cache lifetimes

A long cache lifetime can speed up repeat visits to your page. Learn more about caching. Unscored

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts, such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored

Document request latency

Your first network request is the most important. Reduce its latency by avoiding redirects, ensuring a fast server response, and enabling text compression. LCP FCP Unscored

- Applies text compression
- Avoids redirects

Server responds quickly (observed 89 ms)

Duplicated JavaScript

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. LCP Unscored

Font display

Consider setting font-display to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with font metric overrides. Unscored

Improve image delivery

Reducing the download time of images can improve the perceived load time of the page and LCP. Learn more about optimizing image size LCP Unscored

INP breakdown

Start investigating how to improve INP by looking at the longest subpart. Unscored

LCP breakdown

Each subpart has specific improvement strategies. Ideally, most of the LCP time should be spent on loading the resources, not within delays. Unscored

LCP request discovery

Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored

Network dependency tree

Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **0 ms**

Initial Navigation

Preconnected origins

preconnect hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add preconnect hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

3rd parties

3rd party code can significantly impact load performance. Reduce and defer loading of 3rd party code to prioritize your page's content. Unscored

Optimize viewport for mobile

Tap interactions may be delayed by up to 300 ms if the viewport is not optimized for mobile. Unscored

head > meta

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

Avoids enormous network payloads — Total size was 564 KiB

Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. Unscored

URL	Transfer Size
mubx.dev 1st Party	**347.3 KiB**
...chunks/4b2c135c89b53e2a.js (mubx.dev)	71.2 KiB
...media/83afe278b6a6bb3c-s.p.3a6ba036.woff2 (mubx.dev)	48.8 KiB
...chunks/506b0b0b5578a47f.js (mubx.dev)	41.2 KiB
...media/70bc3e132a0a741e-s.p.15008bfb.woff2 (mubx.dev)	41.0 KiB
...chunks/83918d10e01e881d.js (mubx.dev)	32.0 KiB

URL	Transfer Size
...media/9ff27b8a0a8f3dc0-s.p.9cb3a3e2.woff2 (mubx.dev)	31.5 KiB
...chunks/cc96f6b9b0c5e725.js (mubx.dev)	24.9 KiB
...media/0c89a48fa5027cee-s.p.4564287c.woff2 (mubx.dev)	23.3 KiB
https://mubx.dev	16.9 KiB
...chunks/c6e0e111f4537bed.css (mubx.dev)	16.5 KiB

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. Learn more about User Timing marks. Unscored

JavaScript execution time — 0.5 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. TBT Unscored

URL	Total CPU Time	Script Evaluation	Script Parse
mubx.dev 1st Party	**1,461 ms**	**423 ms**	**33 ms**
...chunks/4b2c135c89b53e2a.js (mubx.dev)	707 ms	352 ms	18 ms
https://mubx.dev	553 ms	7 ms	1 ms
...chunks/506b0b0b5578a47f.js (mubx.dev)	147 ms	52 ms	12 ms
...chunks/ef5d7324bc7045f0.js (mubx.dev)	54 ms	12 ms	3 ms
Unattributable	**169 ms**	**7 ms**	**0 ms**
`Unattributable`	169 ms	7 ms	0 ms

Minimizes main-thread work — 1.8 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work TBT Unscored

Category	Time Spent
Style & Layout	537 ms
Script Evaluation	535 ms
Other	532 ms
Rendering	79 ms
Script Parsing & Compilation	68 ms
Garbage Collection	23 ms
Parse HTML & CSS	17 ms

Image elements have explicit `width` and `height`

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions CLS Unscored

97

Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so manual testing is also encouraged.

CONTRAST

Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.

Failing Elements



FULL STACK DEVELOPER & CS STUDENT

```
<span class="inline-flex items-center px-3 py-1 rounded-full text-xs font-bold tracking…">
```

These are opportunities to improve the legibility of your content.

BEST PRACTICES

Identical links have the same purpose.

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. Learn more about identical links. Unscored

Failing Elements

About

```
<a class="text-sm font-medium transition-colors relative group text-neon font-bold" href="/#about" aria-current="page">
```

About

```
<a class="text-muted-foreground hover:text-foreground hover:translate-x-1 transition…" href="/about">
```

These items highlight common accessibility best practices.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable. Unscored

Interactive elements indicate their purpose and state

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints. Unscored

The page has a logical tab order

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering. Unscored

- Visual order on the page follows DOM order

DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering. Unscored

- User focus is not accidentally trapped in a region

A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps. Unscored

- The user's focus is directed to new content added to the page

If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content. Unscored

- HTML5 landmark elements are used to improve navigation

Landmark elements (`<main>`, `<nav>`, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Unscored

- Offscreen content is hidden from assistive technology

Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Unscored

- Custom controls have associated labels

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Unscored

- Custom controls have ARIA roles

Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.

PASSED AUDITS (26) Hide

- [aria-*] attributes match their roles

Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.

- [aria-hidden="true"] is not present on the document <body>

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.

- [role]s have all required [aria-*] attributes

Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.

- [role] values are valid

ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.

- [aria-*] attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.

- [aria-*] attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.

- Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible.

- Image elements have `[alt]` attributes

  Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

- Form elements have associated labels

  Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels.

- `[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.

  Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.

- Select elements have associated label elements.

  Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the `select` element.

- ARIA attributes are used as specified for the element's role

  Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.

- `[aria-hidden="true"]` elements do not contain focusable descendents

  Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how `aria-hidden` affects focusable elements.

- Elements use only permitted ARIA attributes

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.

- Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.

- `<html>` element has a `[lang]` attribute

If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the `lang` attribute.

- `<html>` element has a valid value for its `[lang]` attribute

Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the `lang` attribute.

- Links have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.

- Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.

- List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements

Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. Learn more about proper list structure.

- No element has a `[tabindex]` value greater than 0

  A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the `tabindex` attribute.

- Touch targets have sufficient size and spacing.

  Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.

- Heading elements appear in a sequentially-descending order

  Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.

- Skip links are focusable.

  Including a skip link can help users skip to the main content to save time. Learn more about skip links.

- Document has a main landmark.

  One main landmark helps screen reader users navigate a web page. Learn more about landmarks.

- Deprecated ARIA roles were not used

  Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.

NOT APPLICABLE (32) Hide

- `[accesskey]` values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. Unscored

- `button`, `link`, and `menuitem` elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. Unscored

- Elements with `role="dialog"` or `role="alertdialog"` have accessible names.

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible. Unscored

- ARIA input fields have accessible names

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. Unscored

- ARIA `meter` elements have accessible names

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `meter` elements. Unscored

- ARIA `progressbar` elements have accessible names

When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label `progressbar` elements. Unscored

- Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children.

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. Unscored

- `[role]`s are contained by their required parent element

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. Unscored

- Elements with the `role=text` attribute do not have focusable descendents.

  Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the `role=text` attribute. Unscored

- ARIA toggle fields have accessible names

  When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. Unscored

- ARIA `tooltip` elements have accessible names

  When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `tooltip` elements. Unscored

- ARIA `treeitem` elements have accessible names

  When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling `treeitem` elements. Unscored

- The page contains a heading, skip link, or landmark region

  Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks. Unscored

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements.

  When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly. Unscored

- Definition list items are wrapped in `<dl>` elements

  Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly. Unscored

- ARIA IDs are unique

  The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive

technologies. Learn how to fix duplicate ARIA IDs. Unscored

- No form fields have multiple labels

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels. Unscored

- `<frame>` or `<iframe>` elements have a title

Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles. Unscored

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the `lang` attribute. Unscored

- Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons. Unscored

- `<input type="image">` elements have `[alt]` text

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. Unscored

- Links are distinguishable without relying on color.

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable. Unscored

- The document does not use `<meta http-equiv="refresh">`

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag. Unscored

- `<object>` elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. Learn more about alt text for `object` elements. Unscored

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

  Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the `headers` attribute. Unscored

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

  Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers. Unscored

- `[lang]` attributes have a valid value

  Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the `lang` attribute. Unscored

- `<video>` elements contain a `<track>` element with `[kind="captions"]`

  When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about video captions. Unscored

- Tables have different content in the summary attribute and `<caption>`.

  The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption. Unscored

- All heading elements contain content.

  A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. Learn more about headings. Unscored

- Uses ARIA roles only on compatible elements

  Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles. Unscored

- Image elements do not have `[alt]` attributes that are redundant text.

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the `alt` attribute. Unscored

Best Practices

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. Learn how to use a CSP to prevent XSS Unscored

Description	Directive	Severity
Host allowlists can frequently be bypassed. Consider using CSP nonces or hashes instead, along with `'strict-dynamic'` if necessary.	`script-src`	High
`'unsafe-inline'` allows the execution of unsafe in-page scripts and event handlers. Consider using CSP nonces or hashes to allow scripts individually.	`script-src`	High

Mitigate DOM-based XSS with Trusted Types

The `require-trusted-types-for` directive in the `Content-Security-Policy` (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. Learn more about mitigating DOM-based XSS with Trusted Types. Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High

PASSED AUDITS (13) Hide

- Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS.

- Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs.

- Avoids third-party cookies

Third-party cookies may be blocked in some contexts. Learn more about preparing for third-party cookie restrictions.

- Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers.Learn more about user-friendly input fields.

- Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission.

- Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications.

- Displays images with correct aspect ratio

Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.

- Serves images with appropriate resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images.

- Page has the HTML doctype

Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.

- Properly defines charset

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.

- No browser errors logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit

- No issues in the `Issues` panel in Chrome Devtools

Issues logged to the `Issues` panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

- Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps. Unscored

NOT APPLICABLE (5) Hide

- Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more. Unscored

- Use a strong HSTS policy

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS policy. Unscored

- Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. Learn more about deploying the COOP header. Unscored

- Mitigate clickjacking with XFO or CSP

The `X-Frame-Options` (XFO) header or the `frame-ancestors` directive in the `Content-Security-Policy` (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. Learn more about mitigating clickjacking. Unscored

- Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit. Unscored

100

SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

- Structured data is valid

Run the Structured Data Testing Tool to validate structured data. Learn more about Structured Data.
Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (10)

Hide

- Page isn't blocked from indexing

Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives.

- Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.

- Document has a meta description

Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description.

- Page has successful HTTP status code

Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes.

- Links have descriptive text

Descriptive link text helps search engines understand your content. Learn how to make links more accessible.

- Links are crawlable

Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable

- robots.txt is valid

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.

- Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

- Document has a valid `hreflang`

hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about `hreflang`.

- Document has a valid `rel=canonical`

Canonical links suggest which URL to show in search results. Learn more about canonical links.

Captured at Feb 16, 2026, 11:03 PM GMT+3

Emulated Desktop with Lighthouse 13.0.1

Single page session

Initial page load

Unknown

Using HeadlessChromium 144.0.7559.132 with lr

Generated by **Lighthouse** 13.0.1 | File an issue