Technical pack
Go bag range

··· ▬▬ ···

Five matte black 72-hour emergency bags, sold worldwide: four backpacks and one duffel, sharing one construction, one material set and one branding system. The factory makes the empty bags with their internal pouch sets and labels; contents are packed by us in the UK. The Cub, Scout and Recruit dock onto the front of the adult Operator (Sheet 9).

SHEET	STYLE	OVERALL SIZE, MM	VOLUME	TAG	PARTICULAR FEATURES
1, 2	**Operator** backpack	520 H × 320 W × 220 D	35 L	Blue	Name window by the handle, left bottle pocket, Morse SOS laser-cut slots on the right panel, hip belt, whistle sternum buckle, four hidden female docking buckles on the front, five internal pouches
3	**Recruit** backpack, child 3–12	400 H × 260 W × 150 D	15 L	Red	Child-release sternum buckle with whistle, cinching straps, four docking tabs, same body as the Scout
4	**Cub** backpack, baby 0–3	460 H × 300 W × 180 D	24 L	Yellow	Wipe-clean lining, changing-mat roll straps under the base, pram clips, strap garage, four docking tabs, formula sleeve in the feeding pouch, stage dots on the tag
5	**Unit** duffel, family	660 L × 360 W × 300 H	65 L	Green	Stowable backpack straps, two end bottle pockets, lockable pulls, two packing cubes
8	**Scout** backpack, pet	400 H × 260 W × 150 D	15 L	Orange	Lead D-ring on the strap, dispenser eyelet, four docking tabs; dog and cat kits differ only in contents
6	Branding, hardware and materials: patch 70 × 40 mm, Morse cut table, tag 60 × 15 mm with stage dots, name card 85 × 54 mm, inside label, colours, materials				
7	Bill of materials per bag, construction, QC tests, packing, quote quantities				
9	**New:** docking system drawing, Spec A and Spec B materials, list of changes from Rev A				

What we need from you

1. **First order: 300 pieces in total, 60 of each style** (Operator 60, Recruit 60, Cub 60 as 20 per stage tag, Unit 60, Scout 60 as 30 dog tag and 30 cat tag). Unit price for this order, FOB and DDP London, for **Spec A and Spec B** (Sheet 9). Please confirm you accept 60 per style; if not, tell us your lowest quantity per style. For planning only, also give an indicative price at 300 per style for repeat orders.
2. Sample set: one of each style in the spec you recommend, with sample lead time and cost.
3. Production lead time from approved sample for the 300-piece order.
4. Tooling: laser-cut Morse slots, rubber patch mould, moulded tag.
5. Material test reports for the fabric, coating, zips and buckles you quote, and REACH compliance.

Contact

Omar Rahmat
omar.rahmat@icloud.com
blackoutsos.com

Confidential. Designs, names and marks in this pack belong to Blackout SOS. For quotation and sampling only; not to be reproduced, shared, or used for any other customer.


VISUAL REFERENCE — THE RANGE, LEFT TO RIGHT: RECRUIT, OPERATOR, CUB, UNIT, SCOUT




Concept render for look, finish and proportion only. All dimensions, materials and construction are as drawn on the sheets that follow. Finish: matte black throughout; the only colour on each bag is its tag and the matching side tab. No camouflage, no visible MOLLE, no bright branding.

Sheet 1 — Operator 35 L · exterior views


Scale 0.6 px per mm on screen · all dimensions in mm · colour: black throughout, tag blue

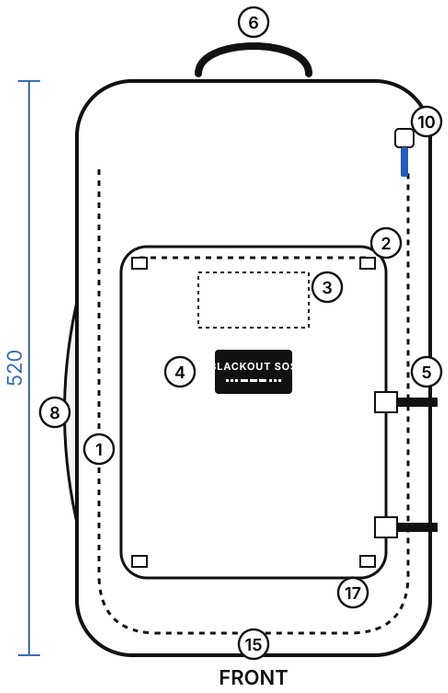


FRONT

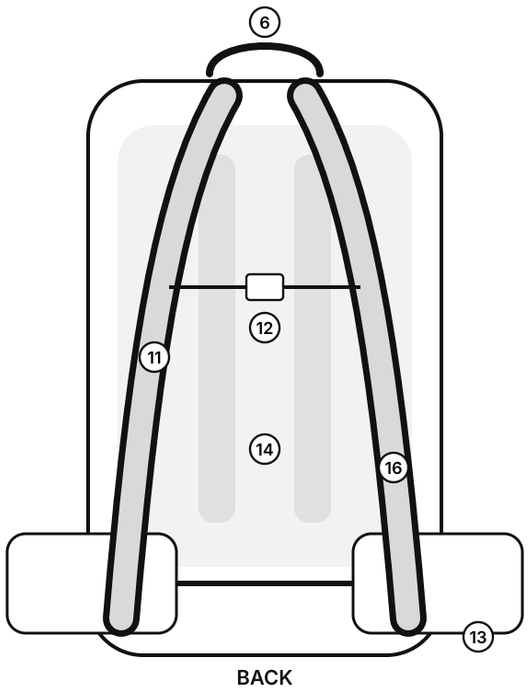


BACK

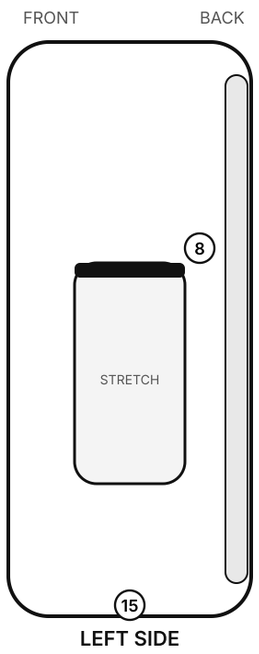

LEFT SIDE

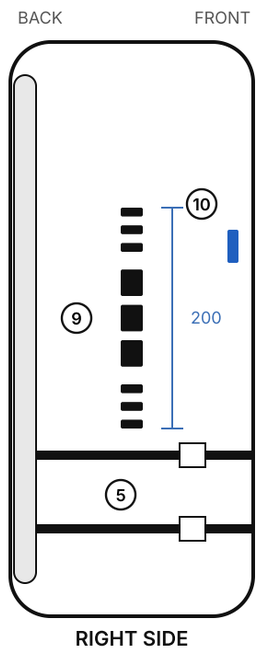

RIGHT SIDE

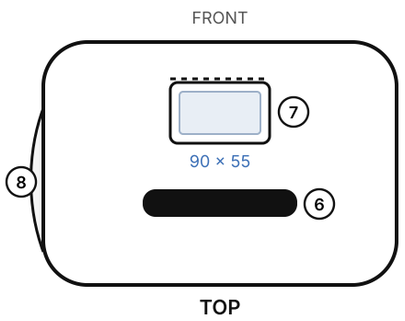

TOP

Overall
H 520 × W 320 × D 220 mm · 35 L nominal, 31 L usable
Empty weight target 1.3 kg · load rating 10 kg
Carry-on size: fits 55 × 40 × 23 cm

Build
Shell 500D Cordura nylon, TPU laminated, matte black
Base 1000D nylon, TPU coated · lining 210D ripstop
Main zip YKK #8 AquaGuard, 2 sliders, storm flap
Pocket zips YKK #5 AquaGuard · Duraflex buckles, black
Seams: taped on main body · bar-tacks at every strap anchor

1 Clamshell main opening, YKK #8 AquaGuard, two sliders, storm flap

2 Front organiser pocket 240 × 300 mm, YKK #5 AquaGuard, mesh inner

3 Loop-Velcro field 100 × 50 mm, black, for the customer's own patch

4 BLACKOUT SOS rubber patch 70 × 40 mm, black-on-black, sewn (Sheet 6)

5 Compression straps, right side only: 20 mm webbing, 20 mm side-release buckles, at 290 and 400 mm from top

6 Grab handle: 25 mm webbing, 140 mm, padded sleeve, bar-tacked both ends

7 Name-tag window 90 × 55 mm on top panel beside the handle: #5 zip, clear TPU window, holds an 85 × 54 mm card

8 Side bottle pocket, left: 100 × 200 mm stretch Cordura, elastic cuff, drain eyelet, fits 750 ml to 1 L

9 Morse SOS laser-cut slots, right side panel, 200 mm tall, black mesh backing (Sheet 6)

10 Colour tag 60 × 15 mm looped on the main zip pull, plus 10 × 30 mm loop on the right side; blue (Sheet 6)

11 Shoulder straps 60 mm, S-curve, 10 mm EVA foam, mesh face, 40 mm ladder-lock adjusters

12 Sternum strap 20 mm on rail, buckle with built-in whistle

13 Hip belt: 40 mm webbing, padded wings 150 × 90 mm, stows behind the back panel

14 Back panel: 10 mm EVA, two airflow channels, mesh face

15 Base panel 1000D nylon, TPU coated, no feet


16 Black reflective piping 3 mm along strap edges and handle

17 Docking points: four 20 mm female side-release buckles on 25 mm webbing tabs at the front-pocket corners, centres 220 mm across and 280 mm down, recessed under the pocket piping so they don't show. Take one Cub, Scout or Recruit at a time, 10 kg max (Sheets 3, 4, 8, 9)


Not shown: hydration port omitted; no external MOLLE; all hardware black; all thread black bonded nylon.

Sheet 2 — Operator interior, packing map and pouch set

Same pouch system on Recruit, Cub and Unit, scaled · lining black 210D ripstop

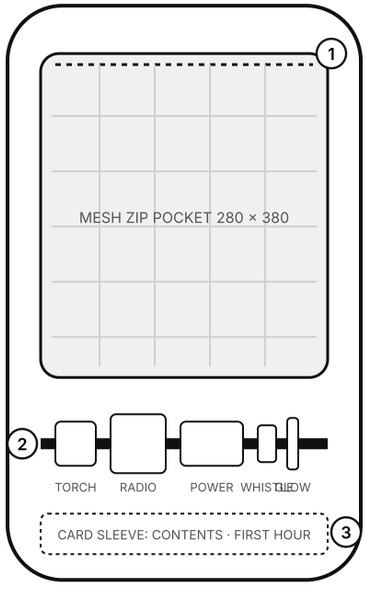

LID (inside of front panel)

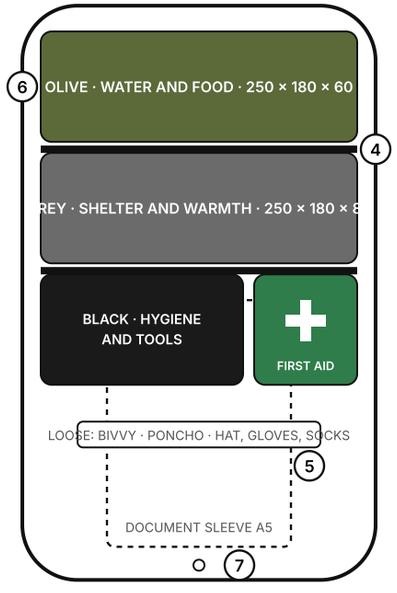

MAIN BODY (back wall)

Interior callouts

1 Lid mesh pocket 280 × 380 mm, black polyester mesh, YKK #5 zip across the top, holds the lid items and the cards

2 Elastic loop row: 25 mm black elastic, five loops sized torch · radio · power bank · whistle · glow sticks, bar-tacked between loops

3 Card sleeve 150 × 60 mm, clear TPU, under the loop row: contents card and first-hour guide

4 Pouch rails: two rows of 25 mm nylon webbing across the back wall, bar-tacked every 50 mm to make loops. Each rail is sewn through the shell back panel with a 40 × 20 mm reinforcing patch behind every bar-tack, and its ends are caught in the side seams; never sewn to the lining alone. Each pouch has two 25 mm webbing straps on its back: the strap threads behind a rail loop and closes on itself with a black metal press stud (15 mm, ring-spring). Pouches lift out in one pull for grab-and-go and go back in seconds. Hook-and-loop (Velcro) is not used for attachment

5 Document sleeve A5 (148 × 210 mm), TPU-lined, Velcro flap, sewn flat to the back wall behind the pouches

6 Pouch packing map, top to bottom: olive, grey, then black beside green. Loose soft items sit on top of the pouches

7 Drain eyelet, 8 mm brass, black, in the base


8 Main compartment lining 210D nylon ripstop, black; lid lining the same with the mesh pocket over it

9 Two 20 mm webbing loops on the back wall at the top for the hydration bladder hook (no port, loops only)


Pouch	Colour	Size mm (W × H × D)	Holds	Construction
Water and food	Olive 210D ripstop	250 × 180 × 60	Water pouches, rations, comfort pack, tablets, spork	Boxed pouch, YKK #5 zip on three sides, 20 mm grab tab, pouch name screen-printed by the factory on the front in white, 8 mm capitals (WATER AND FOOD · SHELTER AND WARMTH · HYGIENE AND TOOLS · FIRST AID), plus a 60 × 20 mm clear label window for our contents card, two 25 mm press-stud straps on the back for the rails (item 4), lining 210D black
Shelter and warmth	Grey 210D ripstop	250 × 180 × 80	Foil blankets, hand warmers; bivvy, poncho, hat, gloves and socks sit loose on top	
Hygiene and tools	Black 210D ripstop	250 × 180 × 60	Wipes, sanitiser, toilet roll, toothbrush, pads, bags, multi-tool, tape, cord, ties, ferro rod, pen	
First aid	Green 210D with white cross	180 × 120 × 60	First aid kit contents, trauma dressing, medication pouch, masks, gloves	
Lid mesh pocket	Black mesh	280 × 380 flat	Head torch, radio, power bank, cable, whistle, glow sticks, batteries	Sewn into the lid lining, YKK #5 zip
Document sleeve	Black TPU-lined	A5, 160 × 220	Document pouch, map, contacts card, cash	Sewn to the back wall, Velcro flap

Sheet 3 — Recruit 15 L · child's bag, ages 3–12


Scale 0.6 px per mm · dimensions in mm · same build as Operator unless noted · tag red

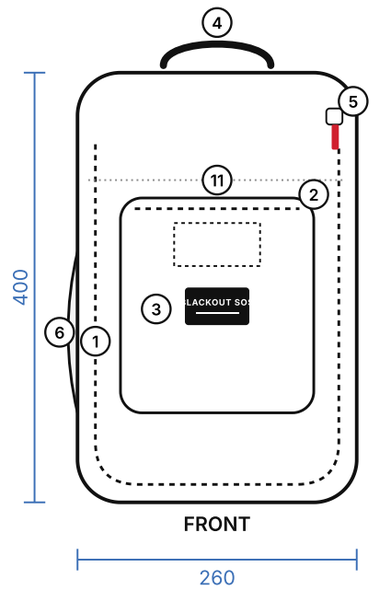


FRONT

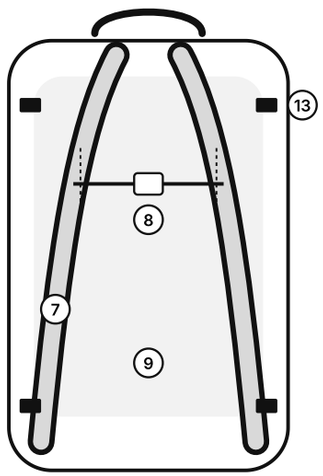


BACK

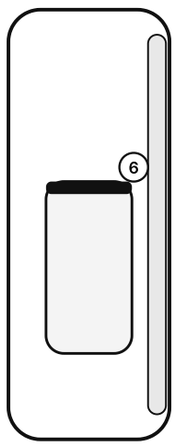

LEFT

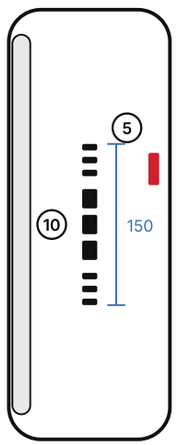

RIGHT

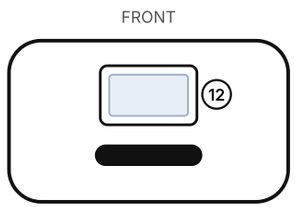

TOP

Overall
H 400 × W 260 × D 150 mm · 15 L nominal, 13 L usable
Empty weight target 0.6 kg · packed 2.9 kg · max load 4 kg

Differences from Operator
No hip belt, no compression straps; four docking tabs (Sheet 9)
Straps 45 mm, sternum strap height-adjustable on a rail
Patch 60 × 35 mm · Morse cut 150 mm tall, slot 14 mm
Whistle lanyard with breakaway clasp · reflective piping all round
Inside label adds: Not a toy · ages 3–12 · small parts · 4 kg max

1 Clamshell main opening, YKK #5 AquaGuard, two sliders with large easy-grip pulls

2 Front pocket 180 × 200 mm, YKK #5 AquaGuard; holds the activity pack

3 BLACKOUT SOS patch 60 × 35 mm with loop field 80 × 40 mm above

4 Grab handle 25 mm webbing, 100 mm, padded

5 Red tag 60 × 15 mm on the main zip pull, 10 × 30 mm loop on the right side

6 Bottle pocket, left: 80 × 160 mm stretch, elastic cuff, fits a 500 ml child's bottle

7 Shoulder straps 45 mm, 8 mm EVA, mesh face, 25 mm ladder locks; strap ends sewn into keepers so nothing dangles

8 Sternum strap 20 mm with whistle buckle, slides on a rail between 50 and 100 mm from the top so it fits ages 3 to 12

9 Back panel 8 mm EVA, mesh face; 3 mm black reflective piping around the back panel and both straps

10 Morse SOS laser-cut, right side, 150 mm tall, 14 mm slots, mesh backed (Sheet 6)

11 Reflective piping line across the front panel at 100 mm from top: a torch beam finds the child from the front too


12 Name-tag window 90 × 55 mm on the top panel; the ID wristband and the family photo card live here

13 Docking (new in Rev B): four docking tabs on the back panel: 25 mm webbing, 40 mm long, bar-tacked, each ending in a 20 mm male side-release buckle, centres 220 mm apart across and 280 mm apart down, centred on the back panel; they mate with the Operator's four female buckles (Sheet 1, item 17, and Sheet 9); tabs fold flat under a 20 mm elastic keeper when not in use. At ages 3 and 4 the Recruit rides on a parent's Operator for long walks

Interior as Sheet 2, scaled: lid mesh pocket 200 × 280, one elastic loop row (torch, whistle, glow sticks), pouch rails with two loops each; pouches olive 200 × 140 × 50, grey 200 × 140 × 60, black 160 × 120 × 50, green 140 × 100 × 50. No blades, no fire, no loose batteries anywhere in the kit.

Sheet 4 — Cub 24 L · baby bag, carried by a parent

Scale 0.6 px per mm · dimensions in mm · one bag, three stage kits (Cub 1, 2, 3) · tag yellow

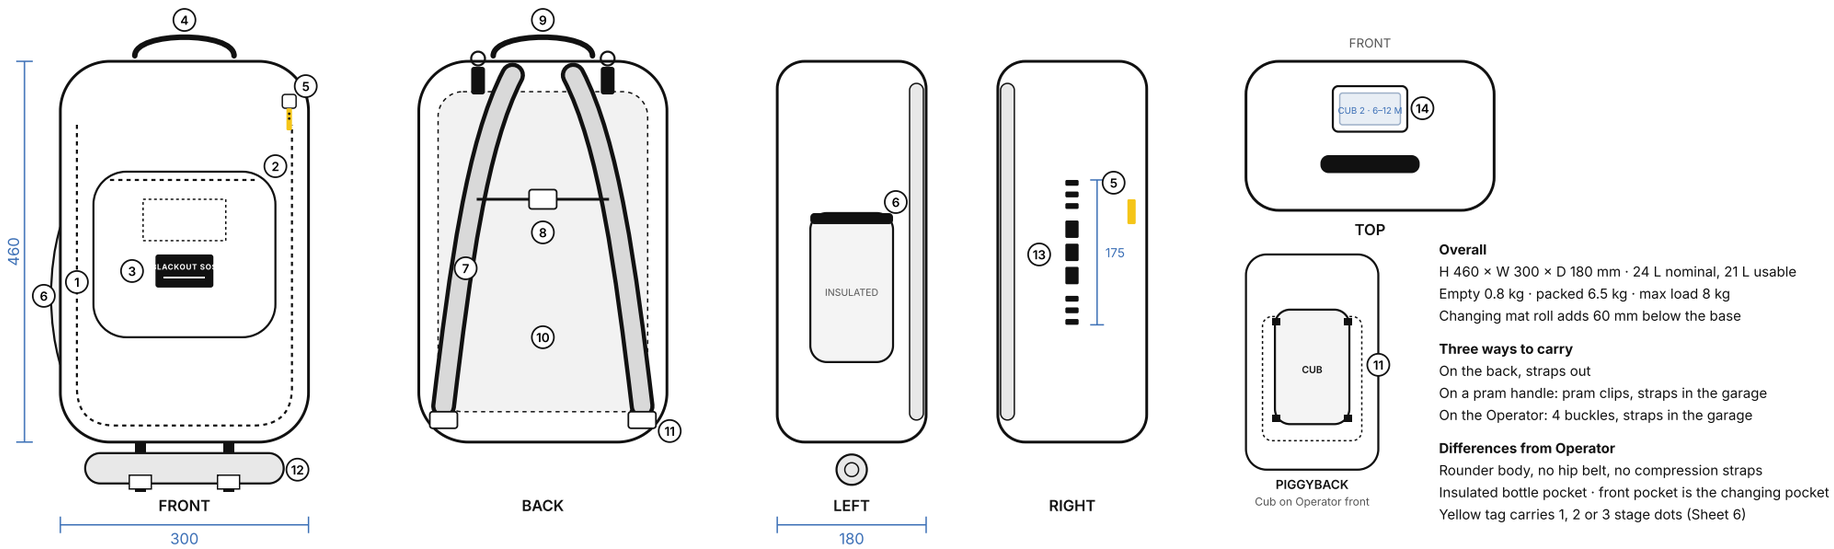

Overall
H 460 × W 300 × D 180 mm · 24 L nominal, 21 L usable
Empty 0.8 kg · packed 6.5 kg · max load 8 kg
Changing mat roll adds 60 mm below the base

Three ways to carry
On the back, straps out
On a pram handle: pram clips, straps in the garage
On the Operator: 4 buckles, straps in the garage

Differences from Operator
Rounder body, no hip belt, no compression straps
Insulated bottle pocket · front pocket is the changing pocket
Yellow tag carries 1, 2 or 3 stage dots (Sheet 6)

1 Clamshell main opening, YKK #8 AquaGuard, two sliders, storm flap

2 Changing pocket 220 × 200 mm on the front: wipes, nappy bags and cream reachable one-handed; YKK #5 AquaGuard

3 BLACKOUT SOS patch 70 × 40 mm with loop field 100 × 50 mm above

4 Grab handle 25 mm webbing, 120 mm, padded

5 Yellow tag 60 × 15 mm on the main zip pull with 1, 2 or 3 black stage dots; 10 × 30 mm yellow loop on the right side

6 Insulated bottle pocket, left: 100 × 180 mm, foil-lined, elastic cuff; fits a 240 ml baby bottle or a 500 ml water pouch

7 Shoulder straps 50 mm, 10 mm EVA, mesh face; sewn and adjusted with 25 mm ladder locks as standard (no buckles at the strap tips)

8 Sternum strap 20 mm on rail, whistle buckle

9 Pram clips: two 25 mm webbing loops, 150 mm, with swivel snap hooks, anchored at the top of the back panel; stow inside the garage

10 Strap garage: the whole back panel is a zipped flap (YKK #5 coil, three sides) that swallows the straps and pram clips so the bag hangs flat

11 Piggyback (changed in Rev B): four docking tabs on the back panel: 25 mm webbing, 40 mm long, bar-tacked, each ending in a 20 mm male side-release buckle, centres 220 mm apart across and 280 mm apart down, centred on the back panel; they mate with the Operator's four female buckles (Sheet 1, item 17, and Sheet 9); tabs fold flat under a 20 mm elastic keeper when not in use. When docked, the shoulder straps and pram clips go in the strap garage

12 Changing mat 500 × 400 mm, wipe-clean, rolled to 60 mm, held under the base by two 20 mm straps with side-release buckles

13 Morse SOS laser-cut, right side, 175 mm tall, 16 mm slots, mesh backed (Sheet 6)


14 Name-tag window 90 × 55 mm; the stage card reads CUB 1 · 0–6 M, CUB 2 · 6–12 M or CUB 3 · 12 M–3 Y; the parent swaps the card when moving up a stage

15 Base 1000D TPU; black reflective piping on straps and handle


Interior as Sheet 2, scaled: lid mesh pocket 240 × 340, one elastic row (torch, glow stick, whistle, thermometer), pouch rails; pouches olive 220 × 160 × 60 (feeding; inside it a formula sleeve: clear TPU front, 8 elastic slots, each holds a 200 ml ready-to-feed carton 45 × 70 × 120 mm, printed YOUR FORMULA · 6 TO 8 CARTONS · CHECK DATES), black 220 × 160 × 80 (nappies), grey 220 × 160 × 60 (warmth), green 140 × 100 × 50 (infant first aid). Clothes bag and wrap carrier sit loose.

Sheet 5 — Unit 65 L · family duffel, converts to backpack


Scale 0.6 px per mm · dimensions in mm · tag green

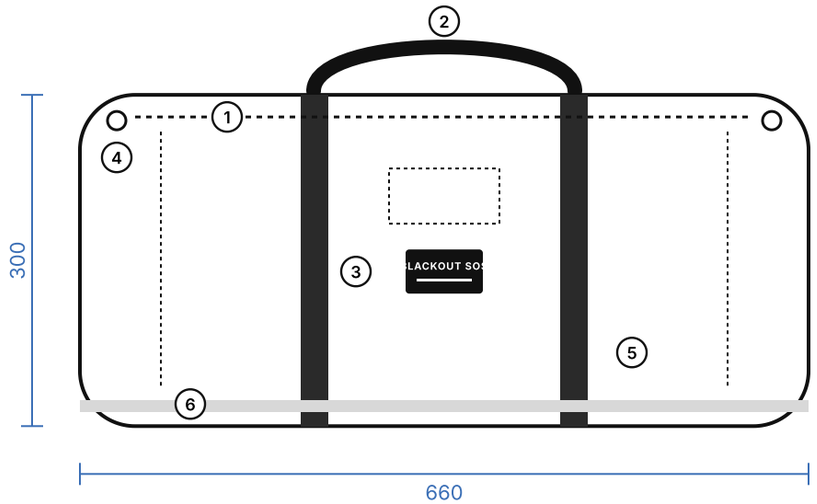

FRONT (long side)

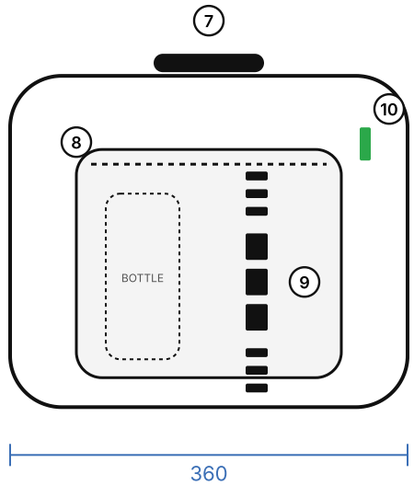

RIGHT END

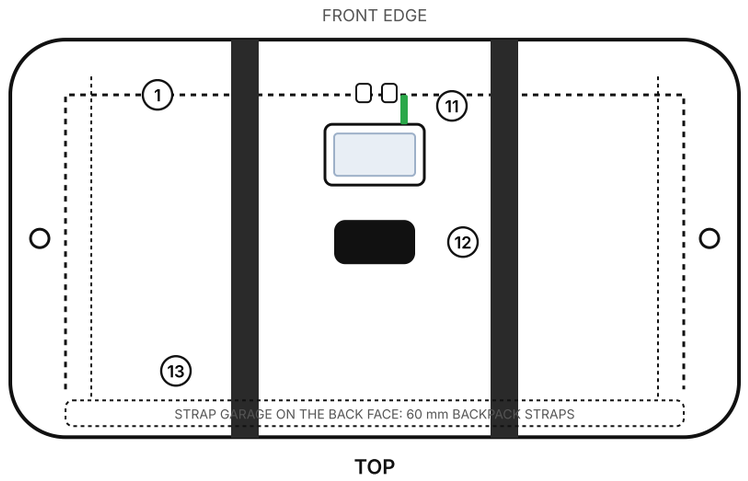

TOP

Overall
L 660 × W 360 × H 300 mm · 65 L nominal, 56 L usable · empty 1.8 kg · packed 15.4 kg · max load 20 kg
Carry: wrap handles with grip · removable padded shoulder strap · stowable backpack straps for short wa

Inside
Two packing cubes, 210D ripstop with mesh lids and grab handles: A 300 × 250 × 200 (water and food, ol
Lid: full-size mesh zip pocket 600 × 280 and a card sleeve · document sleeve A5 on the back wall · drain e

1 U-shaped lid zip, YKK #10 AquaGuard, two sliders, storm flap; opens the whole top like a lid

2 Wrap-around handles: two 25 mm webbing bands run under the base and over the top, joined by a 40 × 120 mm Velcro grip; bar-tacked at every crossing

3 BLACKOUT SOS patch 70 × 40 mm with loop field 100 × 50 mm above, on the front long side

4 Shoulder-strap D-rings, 25 mm, both ends; padded shoulder strap 50 mm × 1.2 m with 200 × 80 mm pad, removable

5 Compression: one 25 mm strap each end over the end pocket, ladder-lock

6 Base 1000D TPU with two 25 mm webbing skid rails along the length

7 End grab handles, 25 mm webbing, 100 mm, both ends

8 End pockets both ends, 240 × 200 mm, YKK #5 AquaGuard, each with an internal bottle sleeve for a 750 ml bottle

9 Morse SOS laser-cut into the right end-pocket face, 200 mm tall, 20 mm slots, mesh backed (Sheet 6)

10 Green tag 60 × 15 mm on the lid-zip slider, 10 × 30 mm green loop at the right end's top corner

11 Name-tag window 90 × 55 mm on the lid, between the handle bands, in front of the grip

12 Grip: the two handles meet in a Velcro-wrapped padded grip so one hand carries 15 kg comfortably

13 Strap garage on the back face: zipped panel hiding two 60 mm padded backpack straps with a 20 mm sternum strap and whistle buckle


14 Black reflective piping along both handle bands and the lid edge

Not shown: hip belt omitted; internal 25 mm rail along the back wall, sewn as Sheet 2 item 4; each cube fastens with two press-stud straps; lid pocket card sleeve as Sheet 2.

Sheet 6 — Branding, hardware and materials


Artwork drawn at 4 px per mm · wordmark font Barlow Condensed Bold, all capitals · factory to supply strike-offs of every item

A · Front patch 70 × 40 mm

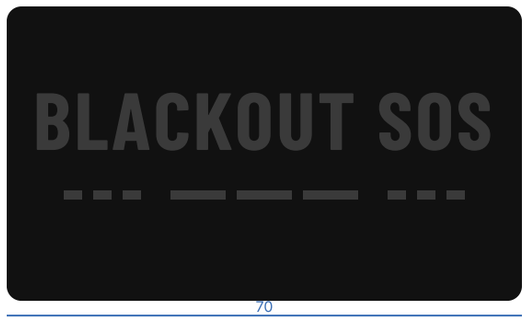

Matte black PVC rubber patch, 2 mm base, letters and Morse raised 1 mm in the same black; the mark reads only by its sheen. Cap height 9 mm. Morse: dots 2.5 × 1.2 mm, dashes 7.5 × 1.2 mm, 1.5 mm between marks, 4 mm between groups, 4 mm below the letters. Corner radius 2 mm. Sewn on with black thread 2 mm from the edge. Recruit uses the same artwork at 60 × 35 mm.


B · Morse SOS laser cut, side panel

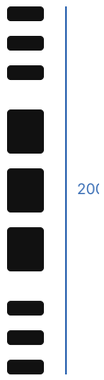

Bag	Slot W	Dot	Dash	Gap / group	Total
Operator	20	8	24	8 / 16	200
Recruit	14	6	18	6 / 12	150
Cub	16	7	21	7 / 14	175
Unit	20	8	24	8 / 16	200


All in mm. Cut through the TPU-laminated shell only, 2 mm corner radius, edges heat-sealed. Backed inside with black polyester mesh bonded 10 mm beyond the pattern on all sides, then the lining. Centred on the panel width; top of pattern 150 mm from the top seam (Recruit 125, Cub 140, Unit: centred on the end-pocket face).

C · Colour tag and zip pull

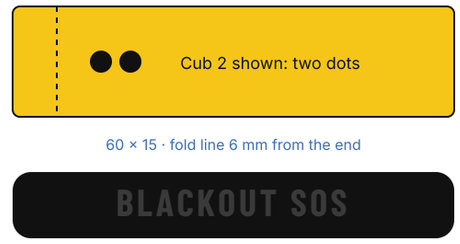

Tag: woven polyester, high density, 60 × 15 mm, colour both faces, folded and lark's-headed through the slider so the customer can swap it. Stage dots on the Cub tag only: 3 mm, 4 mm apart, starting 6 mm from the fold; one, two or three. Side loop: 10 mm webbing in the same colour, 30 mm loop, bar-tacked. Zip pull: black TPR rubber 60 × 12 × 3 mm, wordmark debossed 0.5 mm, 4 mm cap height, on every slider.

D · Name card 85 × 54 mm (printed, supplied by us)

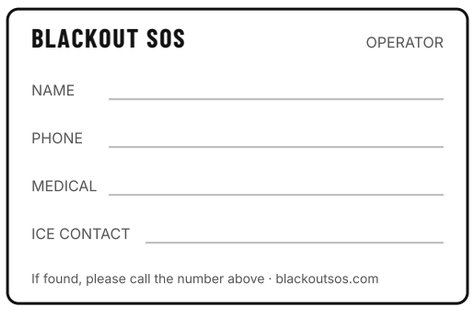

350 gsm card, matt laminated, write-on with a ballpoint. Cub cards carry the stage line (CUB 1 · 0–6 M etc.). Recruit cards add the family photo on the reverse. Ships in the window; two spares in the lid sleeve.

E · Inside label 60 × 40 mm (woven, sewn into the back wall seam)



Black ground, white and grey weave. One label artwork per bag with the model line changed. Recruit label adds: NOT A TOY · AGES 3–12 · SMALL PARTS. Cub label adds: FORMULA NOT INCLUDED · ADD YOUR OWN. No QR code on any label. A separate care and composition label to UK textile rules sits beside it.

F · Colours

- **Shell, webbing, hardware, thread** — black. Match the Cordura swatch we approve; no blue or brown cast.
- **Blue tag, Operator** — #1F5FBF, close to Pantone 2935 C
- **Red tag, Recruit** — #D0202E, close to Pantone 186 C
- **Yellow tag, Cub** — #F5C518, close to Pantone 116 C
- **Green tag, Unit** — #2BA84A, close to Pantone 7482 C
- **Olive pouch** — #5C6A3A · **grey pouch** #6B6B6B · **green first-aid pouch** #2F7D4A with white cross

Pantone references are the nearest match for the factory's lab-dip; we approve on physical swatches, not screen. Tags must pass 20 washes without bleeding onto the black shell.

Material or hardware	Specification	Where	Accepted alternative
Shell fabric	500D Cordura nylon 6,6, TPU film laminated 0.1 mm on the face, matte black, water column 5,000 mm or better	All outer panels	500D high-tenacity nylon with the same TPU lamination, named in the quote as "Cordura-equivalent"
Base fabric	1000D nylon, TPU coated both sides, black	Base panels, Unit skid area	1680D ballistic nylon, TPU coated
Lining	210D nylon ripstop, PU coated, black	All compartments, pouches (dyed olive, grey, green, black)	210D polyester ripstop
Stretch fabric	Stretch Cordura-type nylon/spandex, black	Bottle pockets	Heavy stretch mesh, black
Mesh	Polyester 3D spacer mesh 4 mm (back and straps); flat polyester mesh (pockets, Morse backing), black	Back panel, strap faces, lid pockets	None
Foam	EVA closed-cell, 10 mm back and straps (8 mm Recruit), 5 mm hip belt and grip	Padding	PE foam of the same density
Zips	YKK AquaGuard: #8 main (Operator, Cub), #10 main (Unit), #5 pockets and Recruit main; black tape, black sliders, non-lock	All external zips; #5 coil for strap garages	Spec A: none on external zips, SBS coil inside only. Spec B: see Sheet 9
Buckles and adjusters	Duraflex acetal, black: 20 mm side-release (whistle type on sternum), 25 mm ladder locks, 40 mm hip belt, 25 mm swivel snap hooks (Cub pram clips), 25 mm D-rings (Unit)	As sheets 1–5	ITW Nexus, black
Webbing	Nylon, black: 20 mm (straps, rails), 25 mm (handles, Unit bands), 40 mm (hip belt), 50 mm (Unit shoulder strap); elastic 25 mm black	All	Polypropylene not accepted on load-bearing straps
Reflective	Black reflective piping 3 mm (reads black by day, silver in a beam)	Strap edges, handles, Recruit front line	None
Windows	Clear TPU 0.5 mm, cold-crack resistant to −20 °C	Name window, card sleeves, pouch label windows	Clear PVC 0.5 mm
Thread	Bonded nylon #69 (Tex 70), black, UV stable; #138 on handles and the Unit bands	All	Bonded polyester of the same size
Seam sealing	Hot-air seam tape on all shell-to-shell seams of the main compartment; storm flaps over every external zip	Main body	Welded seams where the factory offers RF welding

Sheet 7 — Bill of materials, construction, QC and packing

Quantities per bag · fabric in m² · webbing in m · factory to confirm consumption from its own patterns

Component	Operator 35 L	Recruit 15 L	Cub 24 L	Unit 65 L
Shell 500D Cordura TPU, black	1.2 m²	0.7 m²	1.0 m²	1.8 m²
Base 1000D TPU	0.1 m²	0.05 m²	0.08 m²	0.3 m²
Lining 210D ripstop, black; plus coloured for pouches	1.4 m² + 0.6 m² pouches	0.8 + 0.4	1.2 + 0.6	2.2 + 1.2 (cubes and pouches)
Stretch fabric, bottle pockets	1 pocket	1	1, foil-lined	2 sleeves inside end pockets
3D spacer mesh (back, straps) and flat mesh (pockets, Morse backing)	0.25 + 0.2 m²	0.15 + 0.12	0.2 + 0.18	0.2 + 0.3
EVA foam 10 mm (8 mm Recruit), 5 mm hip belt and grip	back, 2 straps, hip belt	back, 2 straps	back, 2 straps	2 straps, shoulder pad, grip
Main zip YKK AquaGuard, 2 sliders, storm flap	#8, 1,100 mm	#5, 900 mm	#8, 1,000 mm	#10, 1,500 mm
Pocket zips YKK #5 AquaGuard (front pocket, name window, end pockets)	2	2	2	3
Internal zips #5 coil (lid mesh pocket, strap garage)	1	1	2 (garage 600 mm)	2 (garage 1,400 mm)
Rubber zip pulls, debossed	5	4	6	7
20 mm side-release buckles	2 compression + 4 female piggyback	4 male (docking tabs)	2 mat straps + 4 male (docking tabs)	0
20 mm sternum buckle with whistle	1	1	1	1 (in garage)
25 mm ladder locks · 40 mm hip buckle · 25 mm swivel hooks · 25 mm D-rings	2 · 1 · 0 · 0	2 · 0 · 0 · 0	2 · 0 · 2 · 0	4 · 0 · 2 · 2
Webbing 20 · 25 · 40 · 50 mm, black nylon	1.5 · 0.6 · 1.2 · 0 m	0.8 · 0.4 · 0 · 0	1.6 · 0.8 · 0 · 0	1.2 · 4.5 · 0 · 1.3
Elastic 25 mm · reflective piping 3 mm	0.4 · 2.5 m	0.3 · 2.5	0.4 · 2.2	0.6 · 3.0
Clear TPU: name window 90 × 55, lid card sleeve, pouch label windows	1 + 1 + 4	1 + 1 + 4	1 + 1 + 4	1 + 1 + 6
Rubber patch · loop field · colour tag · side loop	70 × 40 · 100 × 50 · blue · blue	60 × 35 · 80 × 40 · red · red	70 × 40 · 100 × 50 · yellow with dots · yellow	70 × 40 · 100 × 50 · green · green
Labels: inside woven · care and composition · drain eyelet	1 · 1 · 1	1 · 1 · 1	1 · 1 · 1	1 · 1 · 1
Press studs 15 mm, black metal, ring-spring (pouch and cube straps)	8 (4 pouches × 2)	8	8	4 (2 cubes × 2)
Extras	—	—	Changing mat 500 × 400 wipe-clean, 2 straps	2 packing cubes, removable shoulder strap, 2 skid rails

Construction

Lockstitch 8–9 stitches per inch, bonded nylon #69; #138 on handles and the Unit bands. Double-needle on every webbing attachment.

42-stitch bar-tacks at: strap tops and bottoms, handle ends, hip-belt anchors, compression straps, pram clips, mat straps, pouch-rail loops (through the shell with a reinforcing patch), loop-field corners, D-rings, every handle-band crossing on the Unit.

Main-compartment shell seams hot-air taped on the inside before lining; TPU face outward; all internal raw edges bound with 20 mm nylon tape.

Storm flap 20 mm over every external zip; zip garages at slider rest positions; sliders rest at the top centre on clamshells.

Laser cuts made after lamination, edges heat-sealed, mesh bonded behind, then lined. No cut may reach within 15 mm of a seam.

Webbing ends heat-cut and folded under, never exposed. No foam visible anywhere. Patch sewn last, after the panel passes inspection.

Children's bag (Recruit): broken-needle control log, no sharp edges on any hardware, pull-test on every strap anchor.

Quality checkpoints and tests

Dimensions ±5 mm on height, width, depth; weight ±5% of the target on Sheets 1–5.

Water: closed bag under a shower head for 10 minutes; no water inside the main compartment or the name window.

Load: grab handle 30 kg static for 5 minutes (Unit handles and bands 50 kg); each strap anchor 25 kg pull without stitch failure; each pouch strap and rail loop 15 kg static pull for 1 minute, no stitch failure and no stud release; packed bag dropped 5 times from 1 m on each face, every pouch still attached; press studs 1,000 open-close cycles; Cub mat straps 10 kg; docking: Operator with a docked bag loaded to 10 kg, dropped 5 times from 30 cm, no buckle release or tab failure.

Zips: 2,000 open-close cycles on the main zip, slider still smooth; AquaGuard tape unmarked.

Morse cut: pattern dimensions to Sheet 6 ±1 mm, no fraying, mesh fully bonded. Window clarity: card legible through the TPU.

Whistle buckle audible at 100 dB at 1 m. Tags colour-fast after 20 washes. Reflective piping reads in a torch beam at 20 m.

Samples: swatch card and hardware set → pre-production sample per style → one revision → gold-seal sample signed by us and kept by the factory. Pre-shipment inspection by a third party to AQL 2.5 (major) / 4.0 (minor) before the balance payment.

Packing and shipping

Each bag: straps tucked, name card in its window, two spare cards in the lid sleeve, tag on the slider, folded once at the mid seam only, in a recycled LDPE poly bag with a silica-gel sachet. No paper stuffing.

Export cartons, 5-ply, double-wall: Operator 10 per carton · Recruit 20 · Scout 20 · Cub 10 · Unit 6. Carton under 20 kg. Carton label: BLACKOUT SOS, model, tag colour, quantity, carton number of total, gross weight, dimensions, barcode.

Pouches and cubes shipped flat inside their bag, unfilled. Contents are packed by us in the UK.


Terms to quote: FOB Xiamen or Shenzhen; HS 4202.92; lead time from gold-seal approval; payment 30% deposit, 70% after passed inspection.

We supply: this tech pack as PDF, vector artwork (AI and PDF) for the patch, tag, zip pull, labels and name card, and the approved swatch. Artwork files are sent with the order to sample.


First order: 300 pieces, 60 per style (Cub 20 per stage tag, Scout 30 dog and 30 cat tag). Quote at Spec A and Spec B, plus an indicative price at 300 per style for repeat orders.

Sheet 8 — Scout 15 L · pet bag, carried by the owner


Scale 0.6 px per mm · dimensions in mm · same body pattern as the Recruit, adult straps · tag orange

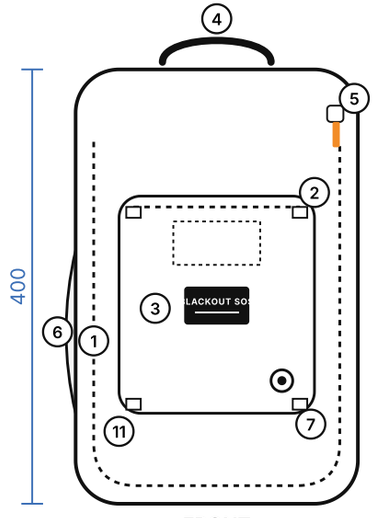


FRONT

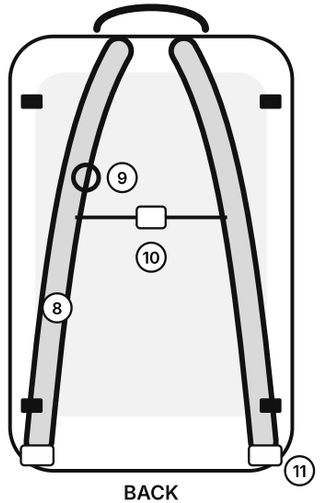

BACK

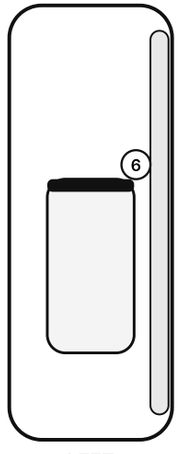


LEFT

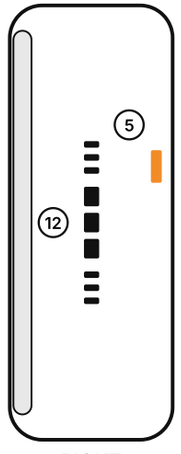

RIGHT

FRONT

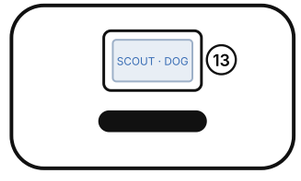

TOP

Overall
H 400 × W 260 × D 150 mm · 15 L nominal, 13 L usable
Empty 0.6 kg · packed 2.7 kg (dog) or 4.4 kg (cat) · max load 6 kg

Shared tooling
Same body, lid and front pocket pattern as the Recruit (Sheet 3)
Changes: adult 50 mm straps, hip-free; lead D-ring; dispenser eyelet; four docking tabs (Sheet 9); orange tag with 1 dot (dog) or 2 dots (cat); pet card in the window

Interior
As Recruit, plus a flat sleeve on the back wall for the cat carrier

1 Clamshell main opening, YKK #5 AquaGuard, two sliders

2 Front pocket 180 × 200 mm: the clean-up pocket; poo bags, pads, wipes

3 BLACKOUT SOS patch 60 × 35 mm with loop field 80 × 40 mm above

4 Grab handle 25 mm webbing, 100 mm, padded

5 Orange tag 60 × 15 mm on the main zip pull with 1 or 2 stage dots; 10 × 30 mm orange loop on the right side

6 Bottle pocket, left: 80 × 160 mm stretch; holds a water pouch or the folded bowls

7 Dispenser eyelet: 12 mm rubber-lined grommet in the front pocket's lower corner, so a roll of poo bags feeds through one at a time

8 Shoulder straps 50 mm adult, 10 mm EVA, mesh face; sewn and adjusted with 25 mm ladder locks as standard

9 Lead-anchor D-ring, 25 mm steel, bar-tacked to the left strap at chest height: clips the lead to you, hands free

10 Sternum strap 20 mm on rail, whistle buckle (recall and signal)

11 Piggyback (changed in Rev B): four docking tabs on the back panel: 25 mm webbing, 40 mm long, bar-tacked, each ending in a 20 mm male side-release buckle, centres 220 mm apart across and 280 mm apart down, centred on the back panel; they mate with the Operator's four female buckles (Sheet 1, item 17, and Sheet 9); tabs fold flat under a 20 mm elastic keeper when not in use. One bag at a time on an Operator

12 Morse SOS laser-cut, right side, 150 mm tall, 14 mm slots, mesh backed (Sheet 6)


13 Name-tag window 90 × 55 mm; pet card with photo, microchip number, vet's number, feeding and medication

Not shown: black reflective piping on straps and handle as the Recruit; base 1000D TPU; inside label adds MAX LOAD 6 kg.


Bill of materials: as Sheet 7 Recruit column, plus 1 × 25 mm steel D-ring, 1 × 12 mm grommet, 4 × docking tabs with 20 mm male side-release buckles, 50 mm straps in place of 45 mm, cat-carrier sleeve 210D 300 × 350 mm.

Sheet 9 — Docking system, Spec A and Spec B, changes from Rev A


Scale 0.6 px per mm · dimensions in mm

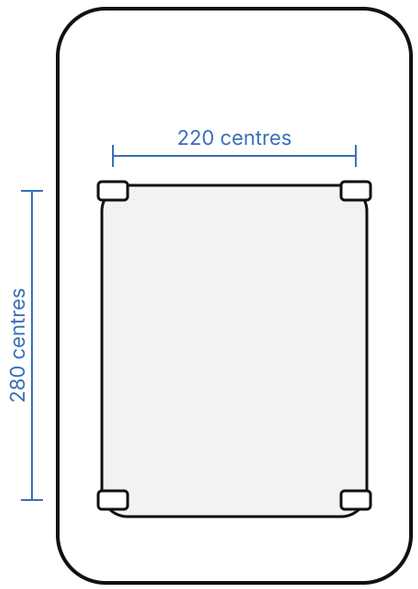

OPERATOR · FRONT
4 × 20 mm FEMALE side-release buckles on 25 mm tabs at the front-pocket corners

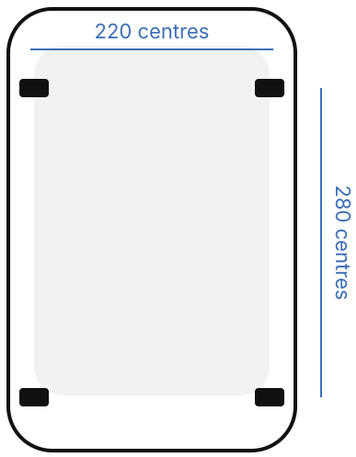

CUB · SCOUT · RECRUIT · BACK
4 docking tabs: 25 mm webbing, 40 mm long, 20 mm MALE buckle, bar-tacked; fold flat under an elastic keeper

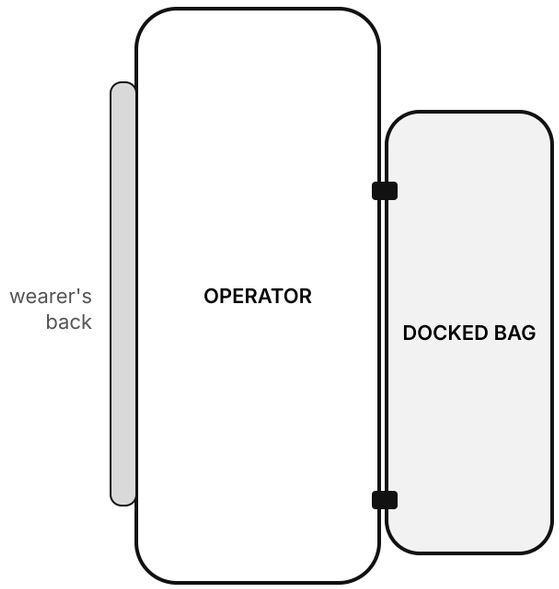

SIDE VIEW, DOCKED
Docked bag sits on the Operator's outer face; wearer's chest stays free for a baby carrier

Rules

One docked bag at a time
Max docked load 10 kg
Cub: straps and pram clips in the garage when docked
Scout, Recruit: straps tucked behind an elastic keeper

Test

Docked bag loaded to 10 kg, Operator dropped 5 × from 30 cm: no release, no tab failure;
each tab 25 kg pull

Spec A and Spec B: quote both

PART	SPEC A (AS SHEETS 1–8)	SPEC B (VALUE OPTION)
Shell	500D Cordura nylon 6,6, TPU laminated, water column 5,000 mm+	600D or 900D polyester, TPU or PU coated, matte black, water column 3,000 mm+
Seams	Taped on main body, bar-tacks at anchors	Same
Main and pocket zips	YKK AquaGuard, storm flaps	Water-resistant coated coil zips (YKK or SBS equivalent), storm flaps kept
Buckles	Duraflex or ITW Nexus acetal, black	Generic acetal, black, passing the same load tests
Webbing	Nylon	Nylon (polypropylene not accepted on load-bearing straps)
Everything else	Same in both: sizes, colours, pouches, labels, patch, Morse cut, docking system, QC tests and packing	

Changes from Rev A

1. Docking system defined (this sheet): dedicated tabs on Cub, Scout and Recruit; no buckles at strap tips.
2. Recruit: ages 3–12, sternum rail 50–100 mm, four docking tabs added (Sheet 3).
3. Cub: formula sleeve with 8 elastic slots added to the feeding pouch; label reads FORMULA NOT INCLUDED · ADD YOUR OWN; stage 3 card reads CUB 3 · 12 M–3 Y (Sheet 4).
4. No QR code on any label; rotation card removed from the card sleeve; label line reads BATCH · PACKED (Sheets 2, 6).
5. Spec B added; first order is 300 pieces, 60 per style; repeat-order price at 300 per style for reference (Sheet 7).
6. Scout carton quantity added: 20 per carton.
7. Every pouch and packing cube now has its name screen-printed by the factory in white (Sheets 2, 5).
8. Pouch attachment defined: 25 mm rails sewn through the shell with reinforcing patches; pouches fasten with two press-stud straps each; no hook-and-loop; pull and drop tests added (Sheets 2, 5, 7).