


Prefill (chunk = 512 tokens, repeated)



prefill → decode boundary: `mx.eval · mx.clear_cache · resolve decode policy`
compressed decode → drop the native prefill cache (footprint = DKV store only)

Decode (per token, per layer)

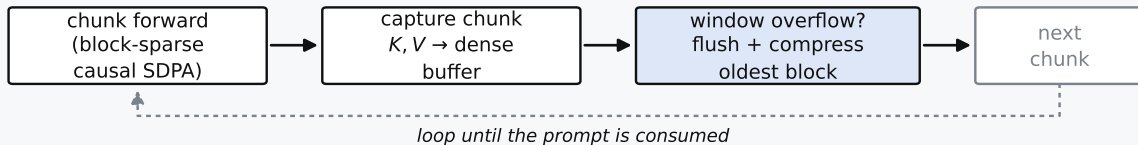