

int num = 10;


num:

int& ref = num;

num:

ref: ↗ Pure Variable Name

With No Storage Attached to it

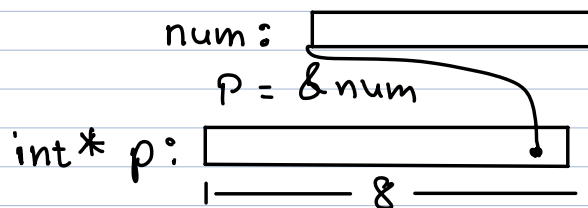

main()
{
 int num = 10; : num
 f(num);
}

void f(int& ref)
{

}

void f(int num)
void f(int* p);

