

```
int max(int n1, int n2)
{
    if (n1 > n2)
        return n1;
    return n2;
}
```

```
float max(float n1, float n2)
{
    if (n1 > n2)
        return n1;
    return n2;
}
```

```
std::string max(std::string n1, std::string n2)
{
    if (n1 > n2)
        return n1;
    return n2;
}
```

```
max(n1, n2)
{
    if (n1 > n2)
        return n1;
    return n2;
}
```

```
def max(n1, n2):
    if n1 > n2:
        return n1
    return n2
```

```
max([], "Hello")
```

```
template <typename T>
function()
{
    // ...
}
```


```
template <typename T>
class
{
    // ...
};
```

```

template <typename T>
T max (T const& n1, T const& n2)
{
    if (n1 > n2)
        return n1;
    return n2;
}

```

function template

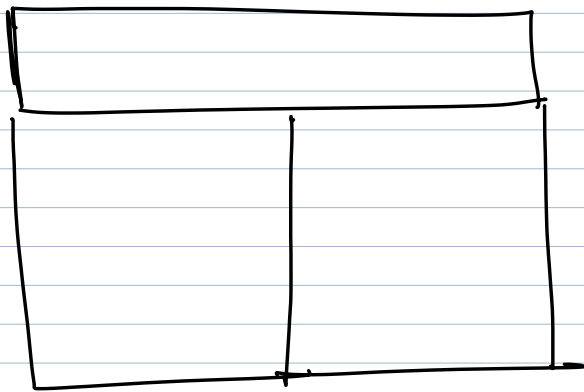

`int (*p)[5];`

`int (*pfn)(int, int);`

```

template <typename T> T max (T const& n1, T const& n2)

```

```

{
    ==
    (

```

```

}

```

max

```
template<typename T> T max(T const& n1, T const& n2)
```

max is a function template having type parameter T

accepting n1 → const ref. to T
 n2 → const ref. to T
returning T