Name: Esha Satish Salunkhe Roll No.: 431

INDEX

Page No:

Assignment No 1

Que 1) Design the following static web pages required for an online book store web site.
1) **HOME PAGE:** The static home page must contain three **frames**.
2) **LOGIN PAGE**
3) **CATOLOGUE PAGE:** The catalogue page should contain the details of all the books available in the web site in a table.
4) **REGISTRATION PAGE**

Aim: Design the following static web pages required for online book store.
1. **Home page:-** the static home page must contains three pages
2. **Top frame:-** logo and college name and links to homepage, login page, registration page and catalogue page
3. **Left frame:-** at least four links for navigation which will display the catalogue of Respective links
4. **Right frame:-** the pages to links in the left frame must be loaded here initially it Contains the description of the website.

DESCRIPTION: In this program the entire web paged are created by using basic HTML tags. Home page is divided into 3 frames by using <frameset> and <frame> tags. A frame is used to display a web page within a web page.

<frameset>:
- The <frameset> tag defines a frameset.
- The <frameset> element holds one or more <frame> elements.
- Each <frame> element can hold a separate document.
- The <frameset> element specifies HOW MANY columns or rows there will be in the frameset, and HOW MUCH percentage/pixels of space will occupy each of them.

<frame>:
- The <frame> tag defines one particular window (frame) within a <frameset>.
- Each <frame> in a <frameset> can have different attributes, such as border, scrolling, the ability to resize, etc.

PROGRAM:

home.html:

```
<frameset rows="40%,*">
        <frame src="top.html" noresize scrolling="NO" name="topframe">
<frameset cols="15%,*">
        <frame src="left.html" noresize scrolling="NO" name="leftframe">
        <frame src="right.html" noresize name="rightframe" scrolling="auto">
</frameset>
</frameset>
```

top.html:

```
<html>
  <head>
     <title>Top Frame</title>
  </head>
 <body bgcolor="YellowGreen ">
     <img src="images/logo1.png" width="125" height="115" align="left">
```

```
    <img src="images/cse.png" width="125" height="115" align="right">
  <center>
    <marquee bgcolor="yellow" width="650" behavior="alternate">
   <font face="Brush Script MT" size="8" color="green"><b><i>Online Book Store</i></b>
       </font>
    </marquee> <br>
<font face="Brush Script" size="6" color="white"><b>Created & Maintained By
MRCET</b></font>
  </center>
<br>
<table width="100%" height="50%" cellspacing=10>
<tr align="center">
          <td>    <a href="Home.html" target="_parent"><font face="Brush Script" size="6"
color="navy">HOME </a> </td>
          <td> <a href="login.html" target="rightframe"><font face="Brush Script" size="6"
color="navy">LOGIN</a> </td>
          <td> <a href="registration.html" target="rightframe"> <font face="Brush Script"
size="6" color="navy">REGISTER </a> </td>
          <td> <a href="catalogue.html" target="rightframe"> <font face="Brush Script"
size="6" color="navy">CATALOGUE</a> </td>
   </tr>
  </table>
 </body>
</html>
```

left.html:

```
<html>
  <body align="center" bgcolor="bisque"> <br>
    <a href="cse.html" target="rightframe"><font size="6">CSE</font></a><br><br>
    <a href="ece.html" target="rightframe"><fontsize="6">ECE</font></a><br><br>
    <a href="eee.html" target="rightframe"><fontsize="6">EEE</font></a><br><br>
    <a href="mech.html" target="rightframe"><fontsize="6">MECH</font></a><br>
  </body>
</html>
```

right.html:

```
<html>
  <body bgcolor="orange">
    <center>
      <img src="images/Books.jpg" height="170"><br>
       <font face="Brush Script MT" size="5" color="blue">
         <h1><b>Welcome to the Online Book Store!!!</b></font><br />
       <font face="Brush Script MT" size="5" color="red">
         <h2><b> "A Huge Collection Of Engineering E-Books"</b></h2></font>
    </center>
  </body>
</html>
```

cse.html:

```
<html>
    <head><title>CSE</title></head>
 <body bgcolor="cyan">
 <center><font color="blue"><h1>Computer Science and Engineering</h1></font></center>
<br>
   <table align="center">
    <tr>
        <td>Text Books</td>
        <td>
        <select >
            <option value="select the book" selected>Select the book
            <option value="C&Ds">C&Ds
            <option value="Ads">Ads
            <option value="Java">Java
            <option value="Oracle">Oracle
            <option value="Ms SQL Server">Ms SQL Server
            <option value="MySql">MySql
        </select>
         </td></tr>
    <tr>
        <td>Quantity</td>
        <td><input type="text" id="q"></td>
    </tr>
    <tr>
        <td></td>
        <td>
            <form method=post action="order.html">
                <input type="submit" value=ok />
            </form>
        </td>
     </tr>
   </table>
   <center>
     <pre> Cost of one book is"500" + shipping "100" </pre>
   </center>
  </body>
</html>
```

ece.html:

```
<html>
    <body bgcolor="Plum">
        <h1><font color="blue">Electronics and Communication Engineering</font></h1>
        <h2>
        <ul>
    <li>Digital Circuits</li> <li>Signals and Systems</li> <li>Digital Communication</li>
        </ul>
        </h2>
    </body>
</html>
```

eee.html:

```
<html>
   <body bgcolor="Plum">
       <h1><font color="blue">Electrical and Electronics Engineering</font></h1>
       <h2>
           <ul type="square">
               <li>Concepts in Electric Circuits</li>
               <li>Introduction to Electronic Engineering</li>
               <li>Electrical Power</li>
           </ul>
       </h2>
   </body>
</html>
```

mech.html:

```
<html>
   <body bgcolor="Plum">
      <h1><font color="blue">Electronics and Communication Engineering</font></h1>
      <h2>
        <ol type="I">
               <li>Theory of Machines</li>
               <li>Automation and Robotics</li>
               <li>Engineering Fluid Mechanics</li>
        </ol>
      </h2>
    </body>
</html>
```

catalogue.html:

```
<html>
  <head>
     <title> Catalogue </title>
   </head>
<body bgcolor="pink">
  <form action="order.html">
    <table border="1" width="100%">
      <tr>
        <td>
          <img src="images/wt.jpg" width=100 height=100/>
        </td>
        <td> Book: Web Technologies <br> Author: Uttam K. Roy <br> Publication:Oxford
              University Press</td> <td>531     </td>
        <td> <input type="submit" value="Add to cart"/></td> </tr>
      <tr>
        <td> <img src="images/php.jpg" width=100 height=100/></td>
        <td> Book: PHP & MySQL Web Development <br> Author:Luke Welling & Laura
            Thompson <br> Publication:PEARSON</td> <td> 898     </td>
        <td> <input type="submit" value="Add to cart"/></td> </tr>
</table> </form>
</body> </html>
```

login.html:

```
<html>
  <body bg color="pink">
    <basefont face="Cambria" size="4"> <br>
    <center>
     <img src="images/login.jpg" width="385" height="135" /><br />
      <font face="Brush Script MT" size="7" color="purple">
        <b>Enter Login Details:</b>
      </font>
    </center>
   <form name="f1" method="post" action="right.html">
    <table align="center" width="100" height="150" cellspacing=”15”>
      <tr><td><b>Login ID:</b></td>
          <td><input type="text" name="t1"></td>
      </tr>
      <tr>
          <td><b>Password:</b></td>
          <td><input type="password" name="t2"></td>
      </tr>
      <tr align="center">
          <td><input type="submit" name="b1" value="Submit"></td>
          <td><input type="reset" name="b2" value="Reset"></td>
      </tr>
    </table>    </form>    </basefont>   </body>    </html>
```


registration.html:


```
<html>
<head><title>Registration Form</title></head>
<body bgcolor="#E4F0F8">
<center><font color="blue" size="6" face="arial">Registration Form</font></center><br />
<form action="right.html">
    First Name(Minimum 6 characters)<font color="red">* </font>
      <input type='text' id='firstname' /><br /><br />
    Last Name<font color="red"><font color="red">* </font> </font>    
      <input type='text' id='lastname' /><br /><br />
    EmailAddress<font color="red">* </font>    
      <input type='text' id='email' /><br />
  <font color="red">(one e-mail id only):</font>    
  <font color="redblue">e.g. smith@hotmail.com</font><br /><br/>
    Password(minimum 6 characters)<font color="red">* </font>    
      <input type='password' id='pass'><br /><br/>
    Address<font color="red">* </font>    
      <textarea rows="2" cols="20" id='addr' /></textarea> <br /> <br/>
    Mobile No<font color="red">* </font>    
      <input type='text' id='mobileno' /><br />
    Gender: <input type='radio' name="gender">male
              <input type='radio' name="gender">female<br/><br />
      <input type='Submit' value='submit' />
      <input type='Reset' value='reset' />
</form>      </body>          </html>
```


order.html:


```
<html>
  <head><title>order conformation</title></head>
    <body bgcolor="cyan">
      <center>
        <pre><strong>
        <b>Your order Is Conformed
        </strong></pre>
        <h2><b>THANK YOU...Visit Again</h2>
      </center>
    </body>
</html>
```


OUTPUT:

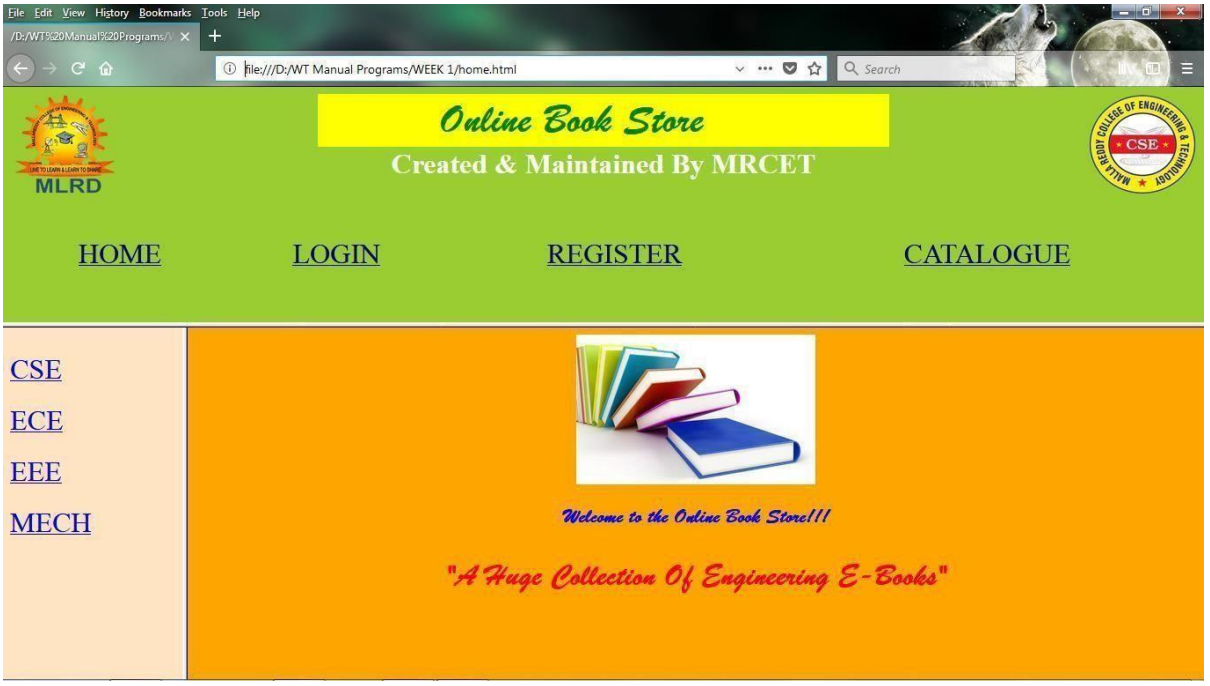

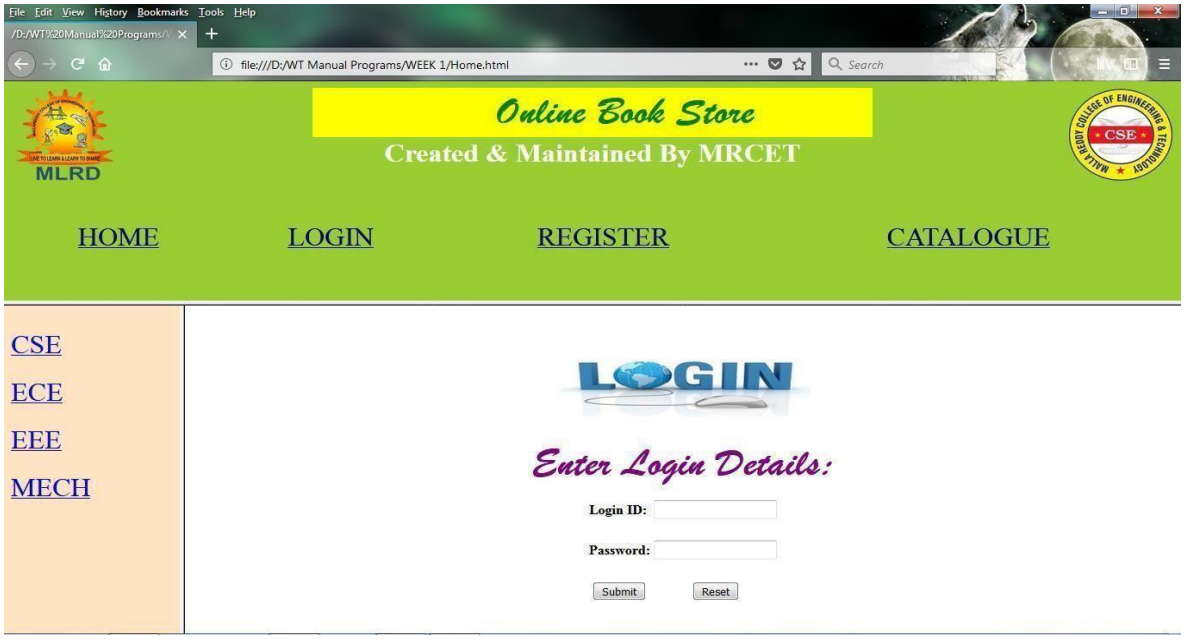


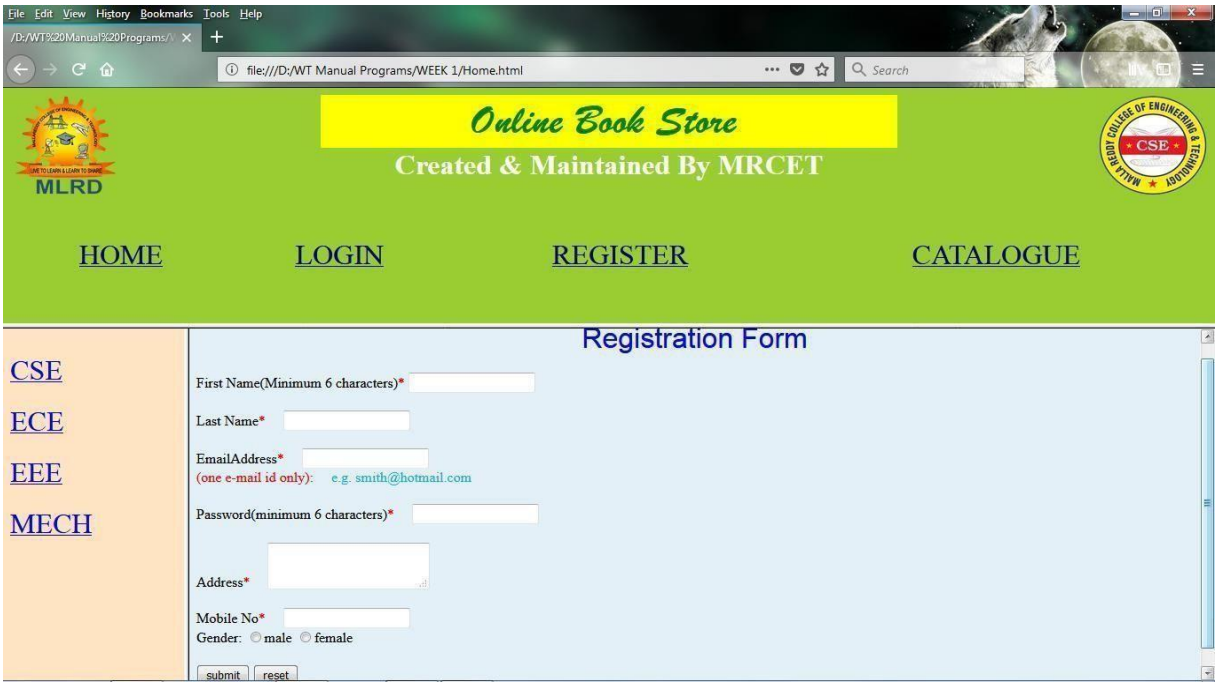

Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Registration Form
First Name(Minimum 6 characters)*
Last Name*
EmailAddress*
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)*
Address*
Mobile No*
Gender: male female
submit
reset

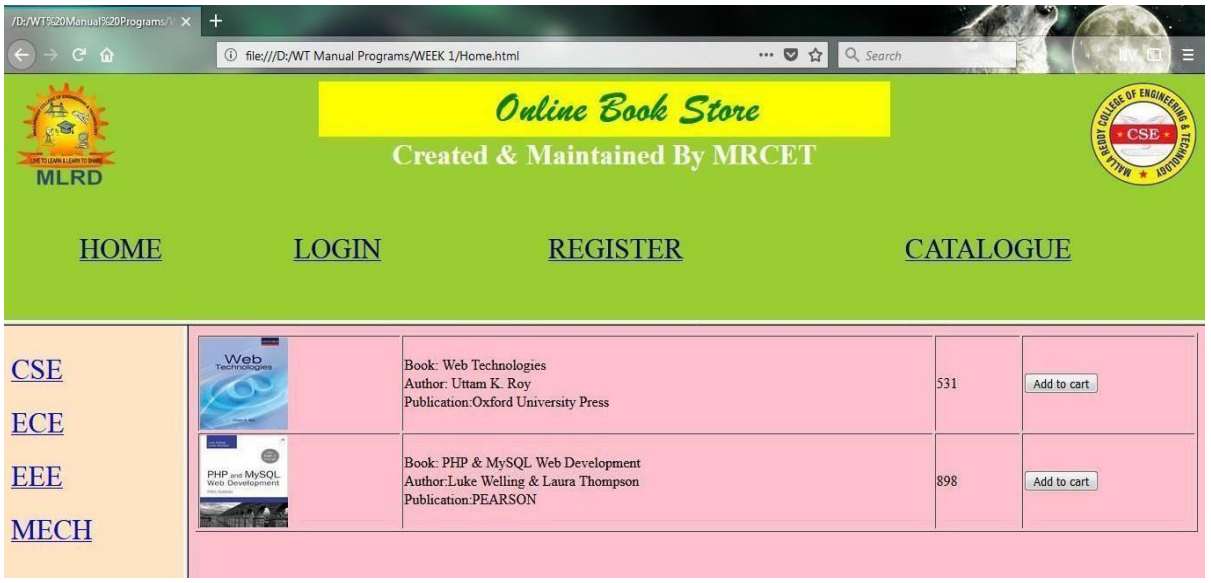

Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Book: Web Technologies
Author: Uttam K. Roy
Publication:Oxford University Press
531
Add to cart
Book: PHP & MySQL Web Development
Author:Luke Welling & Laura Thompson
Publication:PEARSON
898
Add to cart

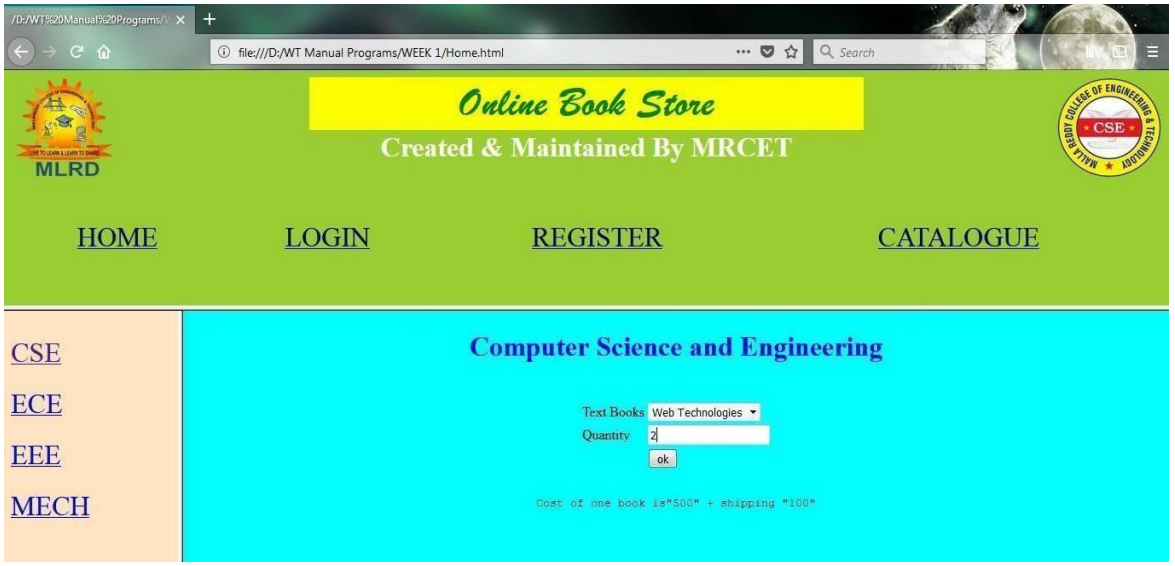
Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Computer Science and Engineering
Text Books Web Technologies
Quantity 2
ok
Cost of one book is"500" + shipping "100"


file:///D:/WT Manual Programs/WEEK 1/Home.html
Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Your order Is Conformed
THANK YOU...Visit Again

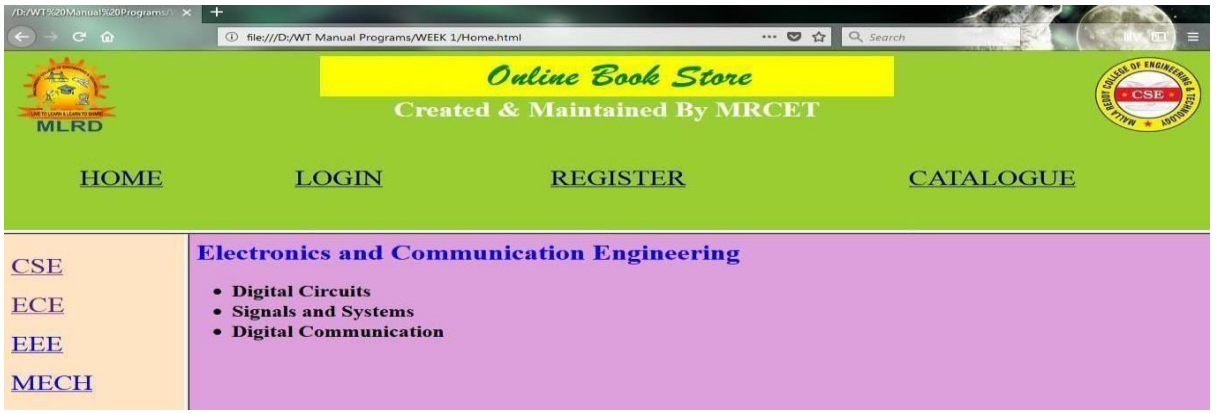
file:///D:/WT Manual Programs/WEEK 1/Home.html
Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Electronics and Communication Engineering
Digital Circuits
Signals and Systems
Digital Communication

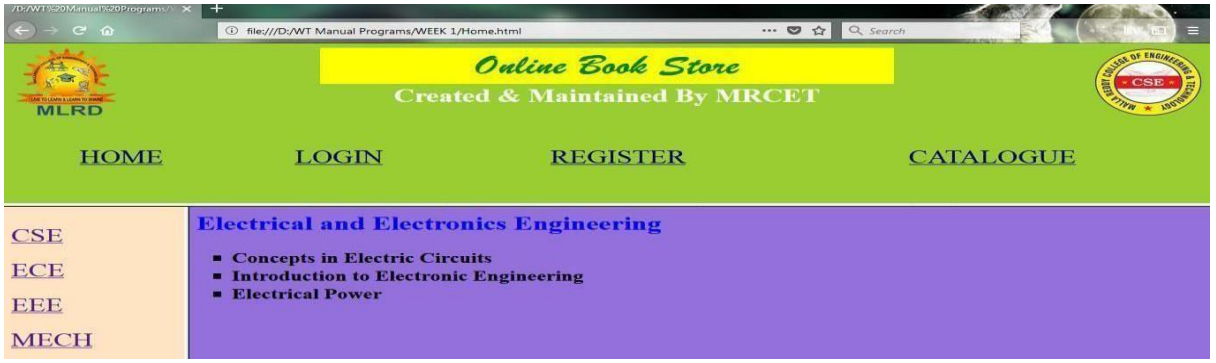
file:///D:/WT Manual Programs/WEEK 1/Home.html
Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Electrical and Electronics Engineering
Concepts in Electric Circuits
Introduction to Electronic Engineering
Electrical Power

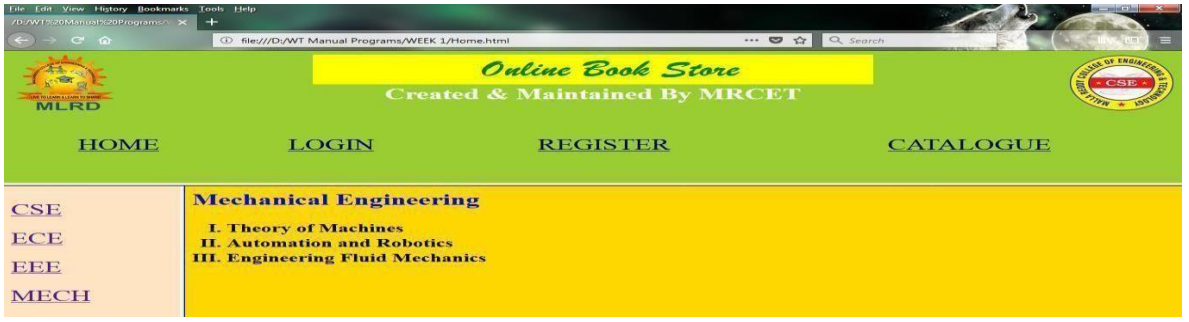
file:///D:/WT Manual Programs/WEEK 1/Home.html
Online Book Store
Created & Maintained By MRCET
MLRD
HOME
LOGIN
REGISTER
CATALOGUE
CSE
ECE
EEE
MECH
Mechanical Engineering
I. Theory of Machines
II. Automation and Robotics
III. Engineering Fluid Mechanics

Assignment No. 2

Que.2) Write *JavaScript* to validate the following fields of the Registration page.

1. **First Name** (Name should contains alphabets and the length should not be less than 6 characters).
2. **Password** (Password should not be less than 6 characters length).
3. **E-mail id** (should not contain any invalid and must follow the standard pattern name@domain.com)
4. **Mobile Number** (Phone number should contain 10 digits only).
5. **Last Name and Address** (should not be Empty).

AIM: To validate the fields of registration page using JavaScript

DESCRIPTION: In order to validate the fields of login and registration pages JavaScript is used. JavaScript is programming code that can be inserted into HTML pages. JavaScript inserted into HTML pages, can be executed by all modern web browsers. JavaScript is mainly used for validating the elements in a form submitted by the user. This JavaScript code can react to user events.

PROGRAM: After clicking OK button the page is redirected to success.html

```
<html>
  <head><title>Registration Form Validation</title></head>
    <body bgcolor="#E4F0F8">
      <script type='text/javascript'>
        function formValidator()
         {
        // Make quick references to our fields
        var firstname = document.getElementById('firstname');
        var lastname = document.getElementById('lastname');
        var email = document.getElementById('email');
        var pass = document.getElementById('pass');
        var addr = document.getElementById('addr');
        var mobileno = document.getElementById('mobileno');

        // Check each input in the order that it appears in the form!
 if(notEmpty(firstname, "can not be null")){
   if(isAlphabet(firstname, "Please enter only letters for your Firstname")){
     if(lengthRestriction(firstname, 6)){
       if(isAlphabet(lastname, "Please enter only letters for your Lastname")){
        if(emailValidator(email, "Please enter a valid email address")){
          if(lengthRestriction(pass, 6)){
            if(isAlphanumeric(pass, "please enter Numbers and Letters Only for password")){
              if(notEmpty(addr, "please enter the address")){
                if(isNumeric(mobileno, "Please enter a valid mobileno")){
                  if(lengthRestriction1(mobileno, 10 , 10)){
                        return true;
                                } } } }
                        }
                      }
                    }
                  } } }
        return false;
   }
function notEmpty(elem, helperMsg){
```

```
        if(elem.value.length == 0){
                alert(helperMsg);
                elem.focus(); // set the focus to this input
                return false;
            }
        return true;
    }
function isNumeric(elem, helperMsg){
        var numericExpression = /^[0-9]+$/;
        if(elem.value.match(numericExpression)){
        return true;
        }else{
                alert(helperMsg);
                elem.focus();
                return false;
        }
    }
function isAlphabet(elem, helperMsg){
        var alphaExp = /^[a-zA-Z]+$/;
        if(elem.value.match(alphaExp)){
                return true;
        }else{
                alert(helperMsg);
                elem.focus();
                return false;
        }
    }


function isAlphanumeric(elem, helperMsg){
        var alphaExp = /^[0-9a-zA-Z]+$/;
        if(elem.value.match(alphaExp)){
                return true;
        }else{
                alert(helperMsg);
                elem.focus();
                return false;
        }
     }


function lengthRestriction(elem, min){
        var uInput = elem.value;
        if(uInput.length >= min){
                return true;
        }else{
                alert("Please enter minimum " +min+ " characters");
                elem.focus();
                return false;
        }
    }
```


```
function emailValidator(elem, helperMsg)


{
        var emailExp = /^[\w\-\.\+]+\@[a-zA-Z0-9\.\-]+\.[a-zA-z0-9]{2,4}$/;
        if(elem.value.match(emailExp))
        {
                return true;
        }
        else{
                alert(helperMsg);
                elem.focus();
                return false;
            }
    }


     function lengthRestriction1(elem, min, max)
    {
        var uInput = elem.value;
        if(uInput.length >= min && uInput.length <= max)
        {
                return true;
        }
         else {
                alert("Please enter 10 numbers only");
                elem.focus();
                return false;
            }
    }
```


```
</script>
<center><font color="blue" size="6" face="arial">Registration Form</font></center><br />
<form onsubmit='return formValidator()' action="right.html">
   First Name(Minimum 6 characters)<font color="red">* </font>
         <input type='text' id='firstname' /><br /><br />
   Last Name<font color="red"><font color="red">* </font> </font>    
        <input type='text' id='lastname' /><br /><br />
   Email Address<font color="red">* </font>    
        <input type='text' id='email' /><br />
        <font color="red">(one e-mail id only):</font>    
        <font color="redblue">e.g. smith@hotmail.com</font><br /><br/>
   Password(minimum 6 characters)<font color="red">* </font>    
        <input type='password' id='pass'><br /><br/>
   Address<font color="red">* </font>    
        <textarea rows="2" cols="20" id='addr' /></textarea> <br /> <br/>
   Mobile No<font color="red">* </font>    
        <input type='text' id='mobileno' /><br />
   Gender: <input type='radio' name="gender">male
            <input type='radio' name="gender">female<br/><br />
        <input type='Submit' value='submit' />
        <input type='Reset' value='reset' />
     </form>
   </body>
</html>
```


OUTPUT:

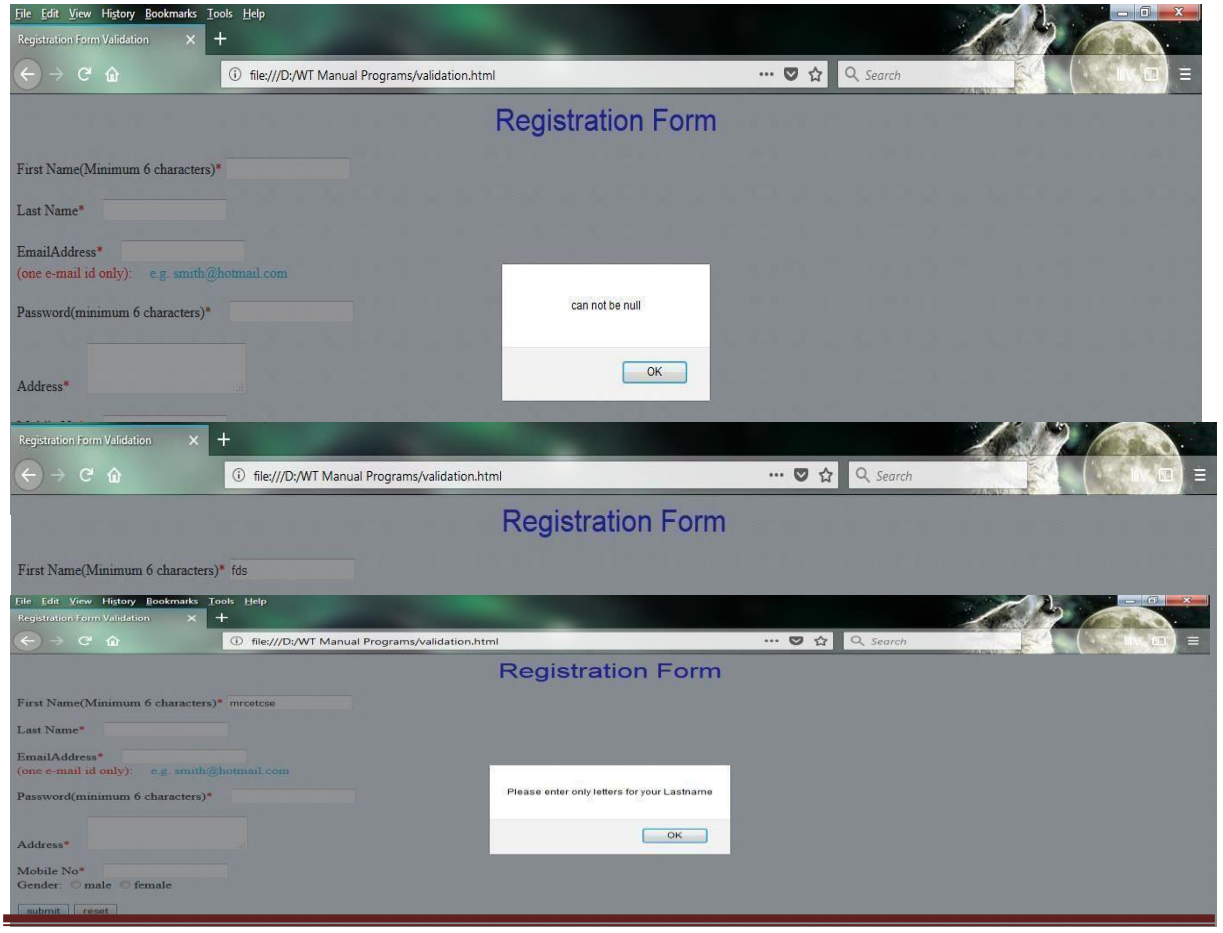


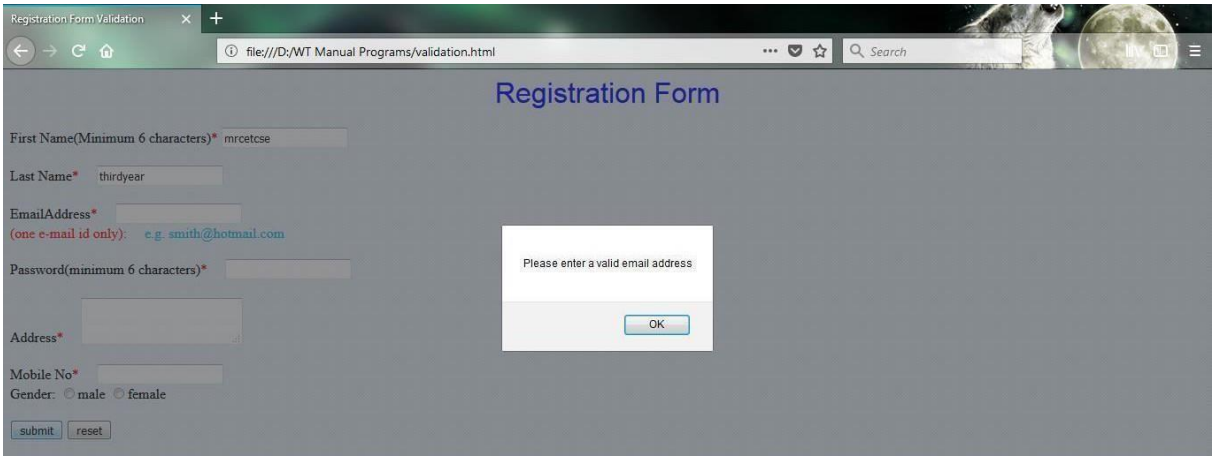

Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress*
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)*
Address*
Mobile No*
Gender: male female
submit reset
Please enter a valid email address
OK

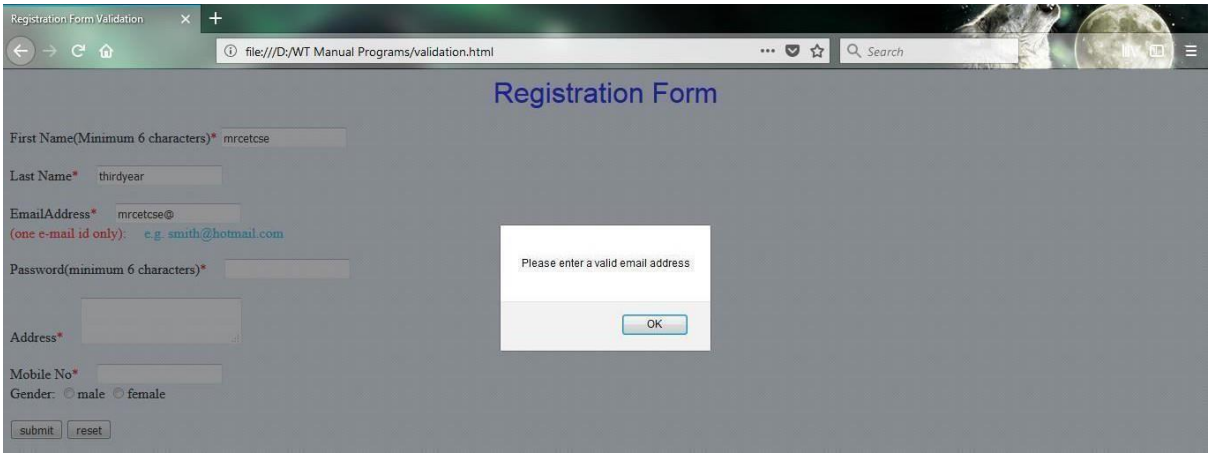

Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)*
Address*
Mobile No*
Gender: male female
submit reset
Please enter a valid email address
OK

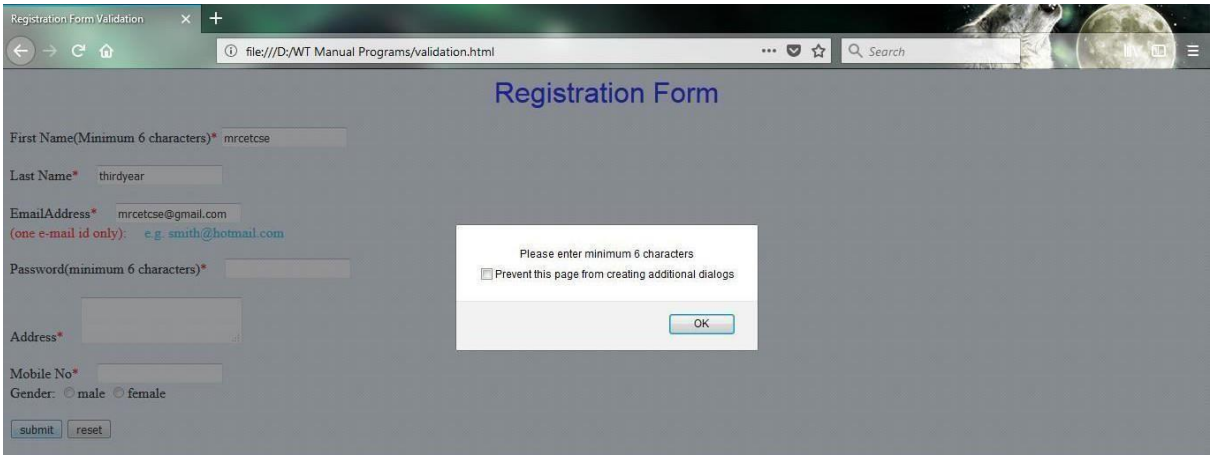
Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@gmail.com
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)*
Address*
Mobile No*
Gender: male female
submit reset
Please enter minimum 6 characters
Prevent this page from creating additional dialogs
OK

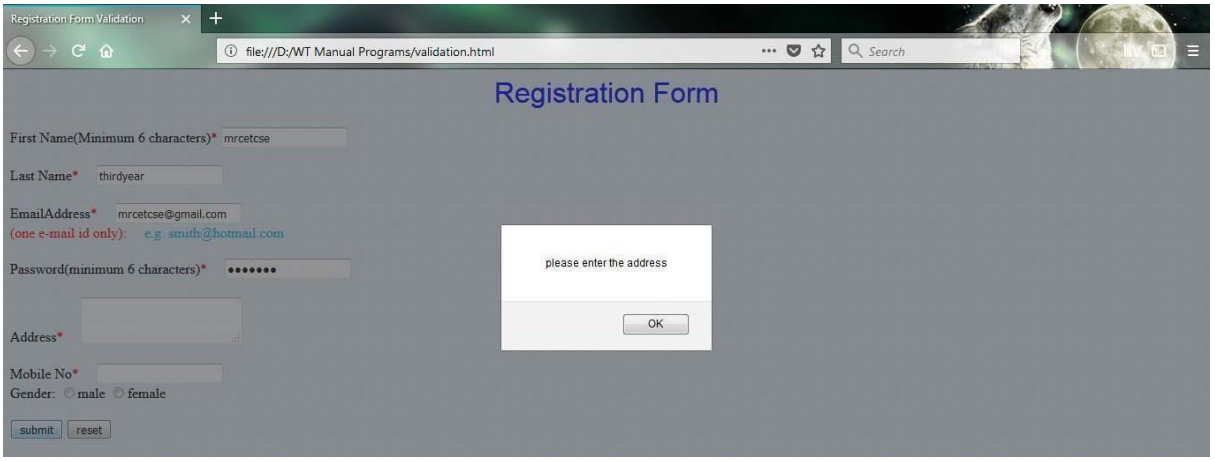
Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@gmail.com
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)*
Address*
Mobile No*
Gender: male female
submit reset
please enter the address
OK

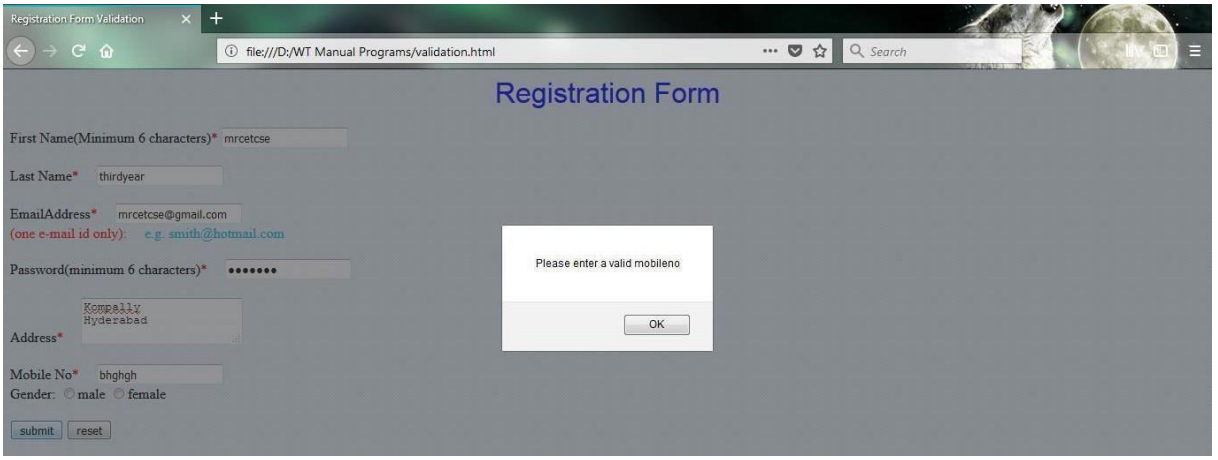
Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@gmail.com
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)* •••••••
Kompally
Hyderabad
Address*
Mobile No* bhghgh
Gender: male female
submit reset
Please enter a valid mobileno
OK

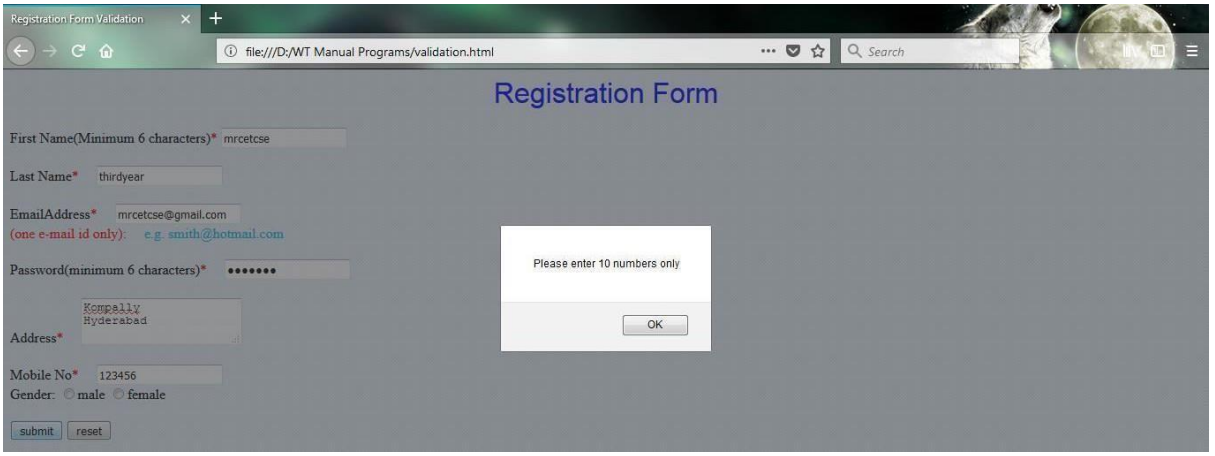
Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@gmail.com
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)* •••••••
Kompally
Hyderabad
Address*
Mobile No* 123456
Gender: male female
submit reset
Please enter 10 numbers only
OK

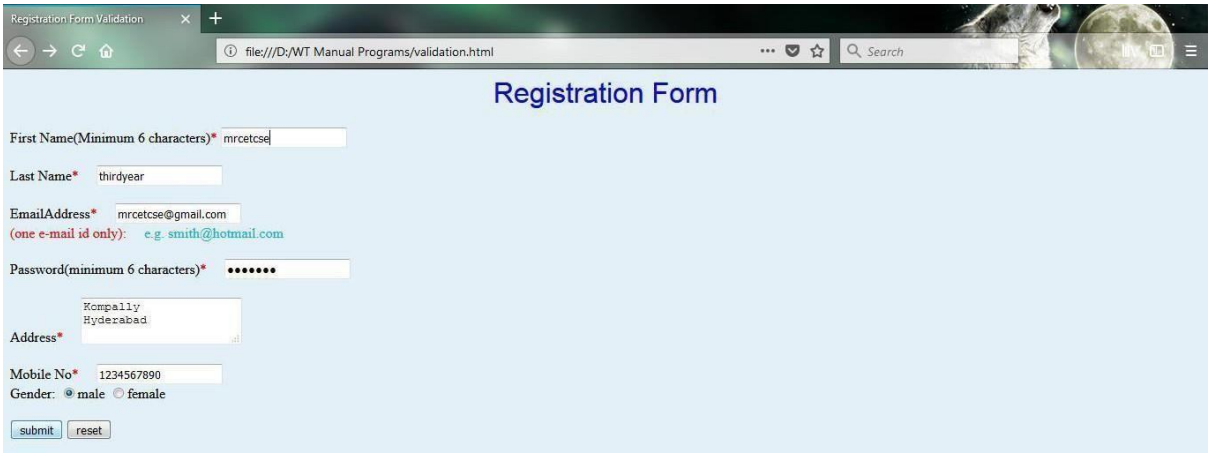
Registration Form Validation
file:///D:/WT Manual Programs/validation.html
Search
Registration Form
First Name(Minimum 6 characters)* mrcetcse
Last Name* thirdyear
EmailAddress* mrcetcse@gmail.com
(one e-mail id only): e.g. smith@hotmail.com
Password(minimum 6 characters)* •••••••
Kompally
Hyderabad
Address*
Mobile No* 1234567890
Gender: male female
submit reset


HTML Color Names
order conformation
file:///D:/WT%20Manual%20Programs/success.html?gender=on
Successfully Registered....

Assignment No – 3

Que. 3)Develop and demonstrate the usage of inline, internal and external style sheet using CSS.

Aim: Design a web page using CSS which includes the following:

1) Use different font styles
2) Control the repetition of image with background-repeat and no-repeat property
3) Define style for links as a: link, a: active, a: hover, a: visited
4) Add customized cursors for links.

PROGRAM:

style.css

```
p.left
{
text-align:left;
color:blue;
font-family:Cambria;
font-size:large;
text-indent:20px;
}
p.center
{
 text-align:center;
 text-decoration:underline;
 text-transform:uppercase;
 letter-spacing:-3px;
 word-spacing:20px;
 font-size:larger;
}
p.right
{
 text-align:right;
 color:red;
 font-family:Tahoma;
 font-size:15pt;
 text-decoration:overline;
 font-style:italic;
}
b#headline
{
 color:orange;
 font-size:22px;
 font-family:arial;
 text-decoration:underline;
}
```

sample.html

```
<html>
  <head>
   <style type="text/css">
    body
        {
        background-image:url('images/cse.png');
        background-repeat:no-repeat;
        background-position:center center;
        background-attachment:fixed;
        background-color:pink;
        }
        a:link { text-decoration:none;color:orange; }
        a:visited { text-decoration:none;color:red; }
        a:hover { text-decoration:underline;color:blue; }
        a:active { text-decoration:underline;color:purple; }
        h3 { color:green; }
        .c1{cursor:crosshair}
        .c2{cursor:pointer}
        .c3{cursor:move}
        .c4{cursor:text}
        .c5{cursor:wait}
        .c6{cursor:help}
    </style>
  <link rel="stylesheet" type="text/css" href="style.css">
 </head>
<body bgcolor="cyan">

  <h1 style="color:blue;text-align:center;"> CSS (Inline, Internal and External) </h1>


  <p>This Paragraph is a Not Styled</p>
  <p class="left">This Paragraph is Styled by class "Left"</p>
  <p class="center">This Paragraph is Styled by class "Center"</p>
  <p class="right">This Paragraph is Styled by class "Right"</p>
    <b>This is normal Bold</b> <br>
    <b id="headline">This Bold Text is Styled </b>

  <h2><b><a href=" ">This is a link</a></b></h2>

  <h3 class="c1">The cursor over this element is plus sign</h3>
  <h3 class="c2">The cursor over this element is a pointing hand</h3>
  <h3 class="c3">The cursor over this element is a grasping hand</h3>
  <h3 class="c4">The cursor over this element is a I bar</h3>
  <h3 class="c5">The cursor over this element is a wait</h3>
  <h3 class="c6">The cursor over this element is a question mark</h3>
</html>
```

RECORD NOTES

OUTPUT 1:

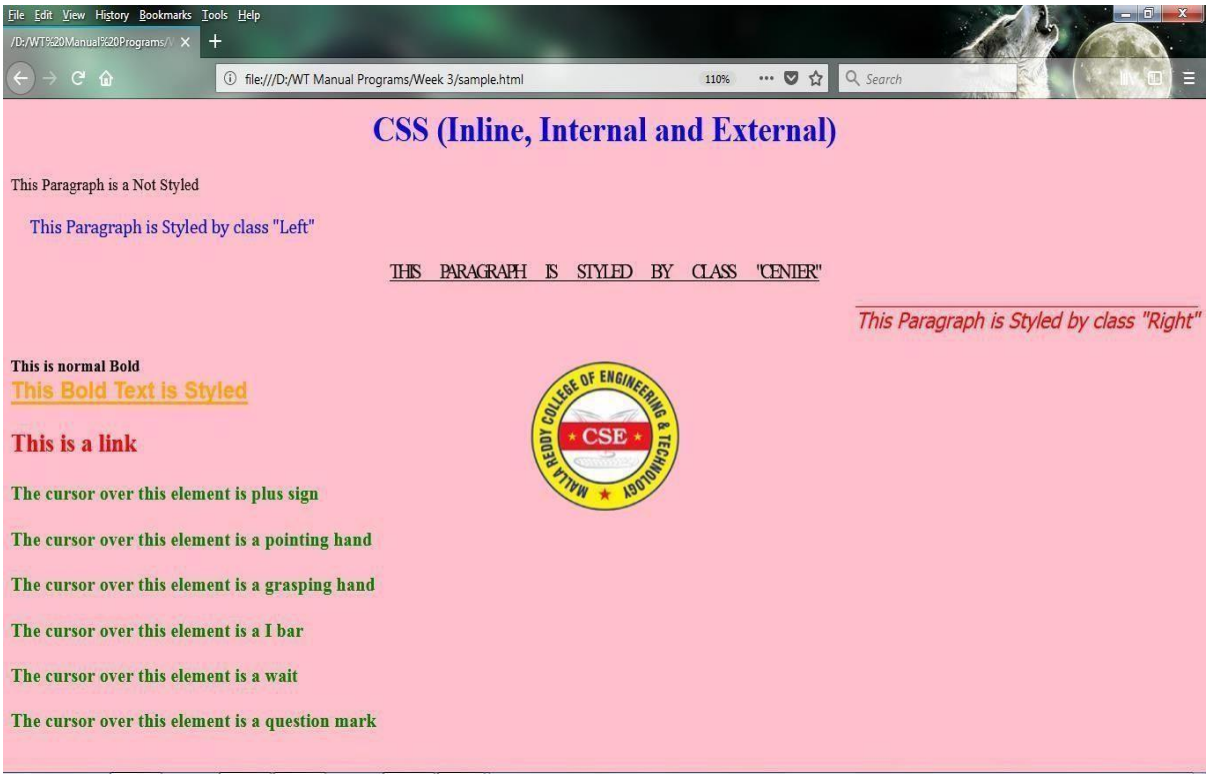

OUTPUT 2: background-repeat : repeat;



Assignment No. 4

Que.4 Develop and demonstrate JavaScript with POP-UP boxes and functions for the following problems:


a) Input: Click on Display Date button using onclick( ) function
Output: Display **date** in the textbox
b) Input: A number n obtained using **prompt**
Output: **Factorial** of n number using **alert**
c) Input: A number n obtained using **prompt**
Output: A **multiplication table** of numbers from 1 to 10 of n using **alert**
d) Input: A number n obtained using **prompt** and add another number using **confirm**
Output: **Sum** of the entire n numbers using **alert**

PROGRAM:

a) date.html

```
<html>
<body>
    <script>
    function display(){
    var x="You have clicked";
    var d=new Date();
    var date=d.getDate();
    var month=d.getMonth();
    month++;
    var year=d.getFullYear();
    document.getElementById("dis").value=date+"/"+month+"/"+year;
    }
    </script>
<form>
<input type="text" id="dis" /><br />
<input type="button" value="Display Date" onclick="display()" />
</form>
<body>
</html>
```

OUTPUT:

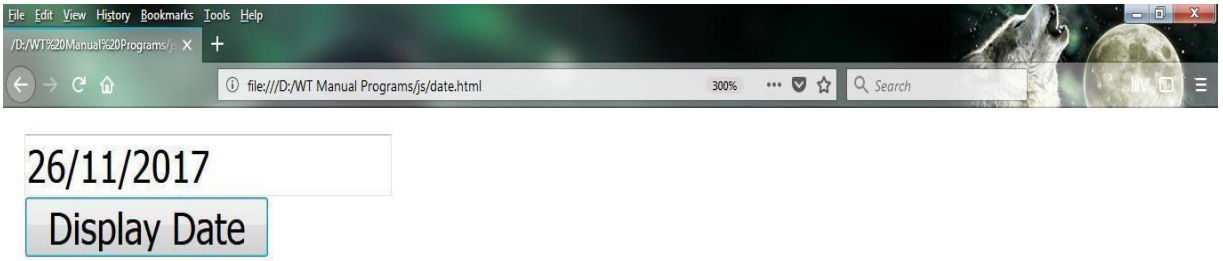



b) factorial.html


```
<html>
<head>
   <title>factorial</title>
  <script language='javascript'>
```

```
    function factorialcalc()
     {
         number = parseint(prompt("enter a number, i'll calculate its factorial", "whole
                  numbers bigger than zero, please"))
         factorial = 1
         for (i=1; i <= number; i++)
         {
                  factorial = factorial * i
         }
         alert("the factorial of " + number + " is " + factorial)
     }
   </script>
  </head>
<body><form name=frm>
<input type=button value='factorial' onclick="factorialcalc();">
</form>
</body>
</html>
```

OUTPUT:

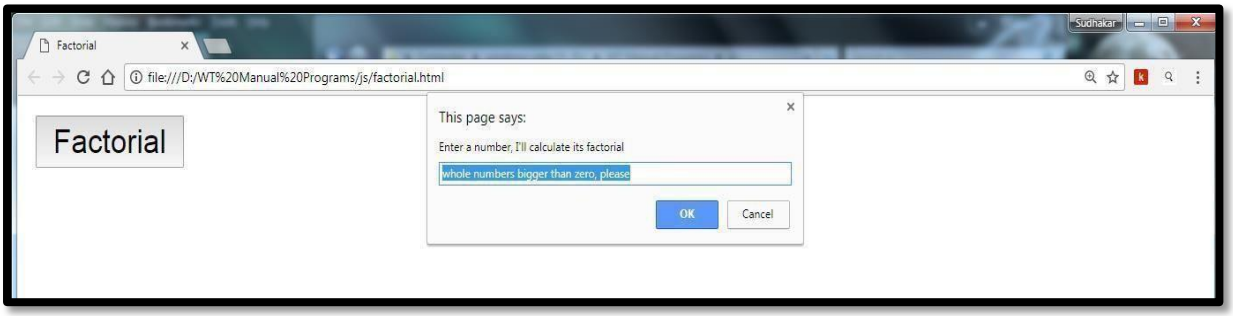

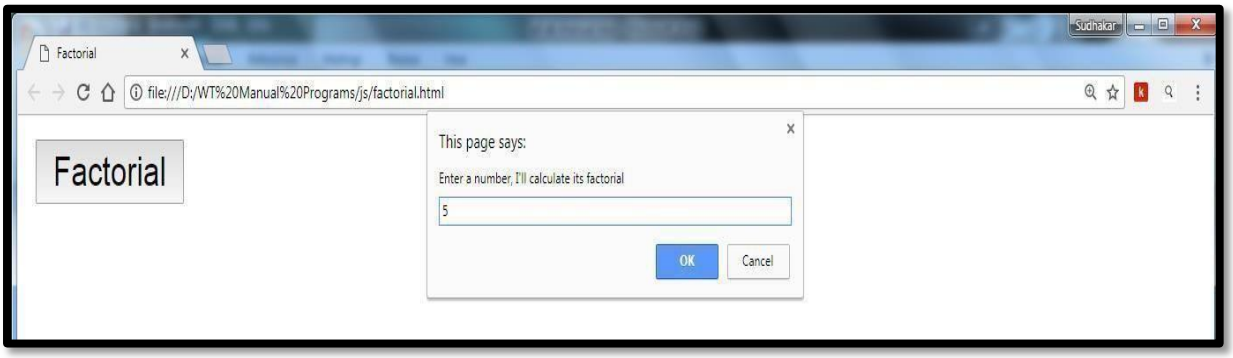

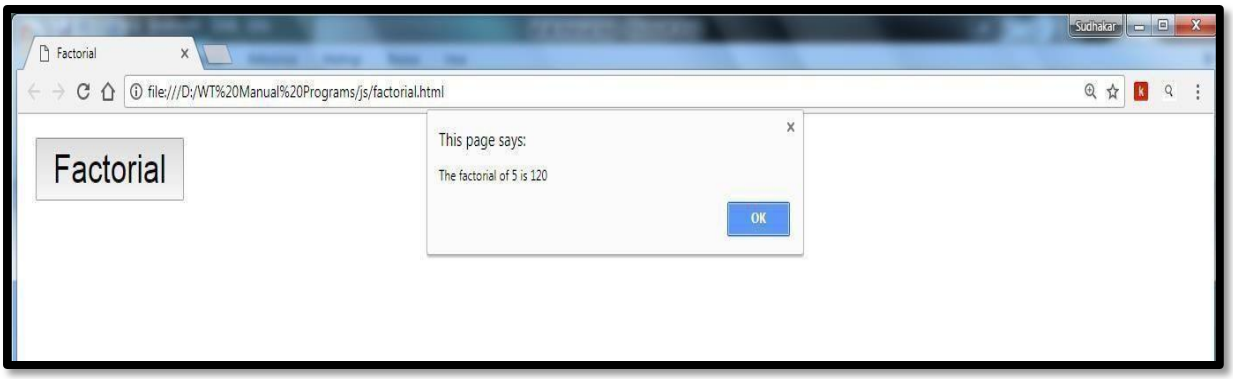



c) multable.html

```
<html>
  <head><title> Multiplication Table </title></head>
 <body>
  <script type="text/javascript">
   <!--
      var n=prompt("Enter positive value for n: "," ");
      if(!isNaN(n)) {
                var table="";
                var number="";
                for(i=1;i<=10;i++) {
                        number = n * i;
                        table += n + " * " + i + " = " + number + "\n";
                }
                alert(table);
                }
          else {
                alert("Enter positive value");
                 n=prompt("Enter positive value for n: "," ");
      }


      document.write(n+" table values displayed using alert ..<br />");
    // -->
</script>
</body>
</html>
```

OUTPUT:

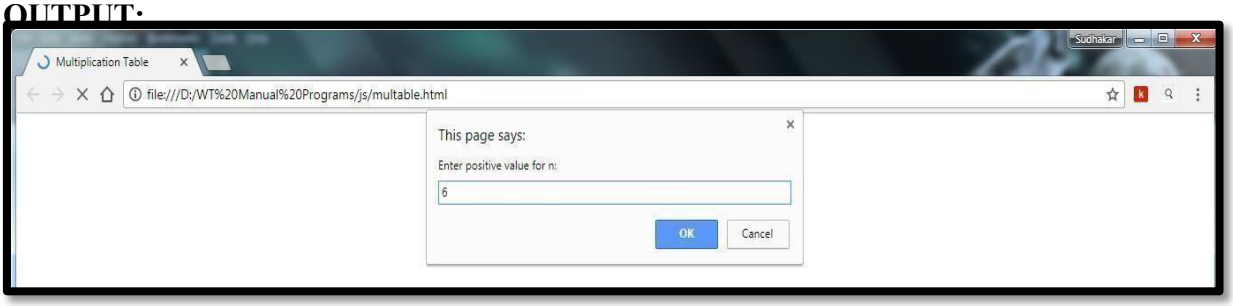

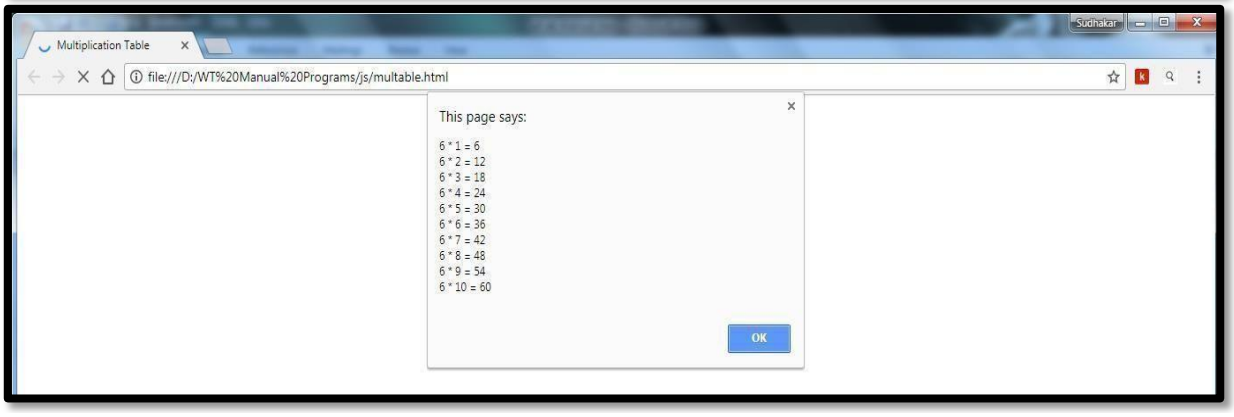





d) sum of n numbers.html

```
<html>
  <head><title>sum of n numbers using popup boxes</title>
 <script language='javascript'>
  function addsum()
    {
    alert("you're going to give me a list of numbers. i'm going to add them together for you");
          var keepgoing = true
          var sumofnums = 0
          while (keepgoing) {
          sumofnums = sumofnums + parseint(prompt("what's the next number to add?",""))
          keepgoing = confirm("add another number?")
          }
  alert("the sum of all your numbers is " + sumofnums)
    }
</script>
</head>
<body>
 <form name=frm>
   <input type=button value='sum of n numbers' onclick="addsum();">
 </form>
</body>
</html>
```

OUTPUT:

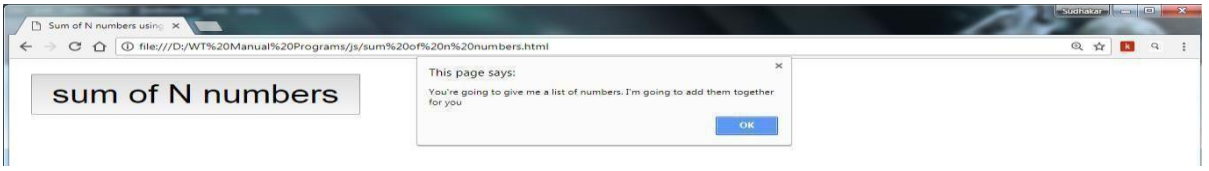

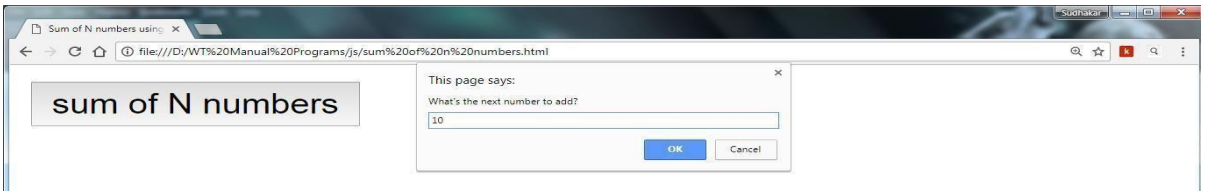









Assignment No. 5

Que.5 Write an HTML page that contains a selection box with a list of 5 countries. When the user selects a country, its capital should be printed next in the list. Add CSS to customize the properties of the font of the capital (color,bold and font size).

```
<html>
 <head>
    <title>WT Lab manual program no. 3</title>
 </head>
<style>
    h1
    {
    color: red;
    text-align: center;
    }
    .textbox1
    {
    color: blue;
    font-size: 30px;
    font-weight: bold;
    }
 </style>
<body>
 <center>
   <h1> Select the country name to find its capital</h1>
    <form name="myform">
      Select Country <select name="country" id="sbox1" onClick="myFunction()" required>
       <option value=""></option>
       <option value="NEW DELHI">INDIA</option>
       <option value="CANBERRA">AUSTRALIA</option>
       <option value="WASHINGTON D.C">AMERICA</option>
       <option value="LONDON">UNITEDKINGDOM</option>
       <option value="BERLIN">GERMANY</option>
      </select><br><br>
   Capital <input type="text" class="textbox1" id="sbox2">
  </form>
 </center>
<script>
function myFunction()
{     var a=document.getElementById("sbox1").value;
      document.getElementById("sbox2").value=a;          }
</script>      </body>         </html>
```

OUTPUT:



Select the country name to find its capital

Select Country INDIA

Capital **NEW DELHI**

Assignment No. 6

Que.6 Write an HTML page including any required JavaScript that takes a number from text field in the range of 0 to 999 and shows it in words. It should not accept four and above digits, alphabets and special characters.

AIM: To convert number to words using JavaScript

PROGRAM:

0-999.html

```
<html>
<head>
   <title>HTML - Convert numbers to words using JavaScript</title>
     <SCRIPT language=Javascript>
      <!--
      function isNumberKey(evt)
      {
         var charCode = (evt.which) ? evt.which : evt.keyCode;
         if (charCode != 46 && charCode > 31
           && (charCode < 48 || charCode > 57))
            return false;
         return true;
      }
      //-->
   </SCRIPT>
  <script>
   function NumToWord(inputNumber, outputControl)
   {
     var str = new String(inputNumber)
     var splt = str.split("");
     var rev = splt.reverse();
     var once = ['Zero', ' One', ' Two', ' Three', ' Four', ' Five', ' Six', ' Seven', ' Eight', ' Nine'];
     var twos = ['Ten', ' Eleven', ' Twelve', ' Thirteen', ' Fourteen', ' Fifteen', ' Sixteen', '
Seventeen', ' Eighteen', ' Nineteen'];
     var tens = ['', 'Ten', ' Twenty', ' Thirty', ' Forty', ' Fifty', ' Sixty', ' Seventy', ' Eighty', '
Ninety'];
   numLength = rev.length;
   var word = new Array();
   var j = 0;
   for (i = 0; i < numLength; i++) {
      switch (i) {
         case 0:
            if ((rev[i] == 0) || (rev[i + 1] == 1)) {
               word[j] = '';
            }
            else {
               word[j] = once[rev[i]];
            }
            word[j] = word[j];
            break;
         case 1:
            aboveTens();
```

```
            break;
        case 2:
            if (rev[i] == 0) {
                word[j] = '';
            }
            else if ((rev[i - 1] == 0) || (rev[i - 2] == 0)) {
                word[j] = once[rev[i]] + " Hundred ";
            }
            else {
                word[j] = once[rev[i]] + " Hundred and";
            }
            break;
        default: break;
      }
      j++;
  }
  function aboveTens() {
      if (rev[i] == 0) { word[j] = ''; }
      else if (rev[i] == 1) { word[j] = twos[rev[i - 1]]; }
      else { word[j] = tens[rev[i]]; }
  }
  word.reverse();
  var finalOutput = '';
  for (i = 0; i < numLength; i++) {
      finalOutput = finalOutput + word[i];
  }
  document.getElementById(outputControl).innerHTML = finalOutput;
}
</script>
</head>
<body>
  <h1>HTML - Convert numbers to words using JavaScript</h1>
  <input id="Text1" type="text" onkeypress="return isNumberKey(event)"
onkeyup="NumToWord(this.value,'divDisplayWords');" maxlength="3" style="background-
color: #efefef; border: 2px solid #CCCCC; font-size: large" />
  <br />  <br />
  <div id="divDisplayWords" style="font-size: 30; color: Teal; font-family: Arial;">
  </div>
</body>
</html>
```

OUTPUT:



Assignment No . 7


Que - 7: Develop and demonstrate PHP Script for the following problems:

a) Write a PHP Script to find out the Sum of the Individual Digits.
b) Write a PHP Script to check whether the given number is Palindrome or not

a) Find out Sum of the individual Digits

```
<?php
$n=323;
$sum=0;
while($n>0)
{
$r=$n%10;
$sum+=$r;
$n=$n/10;
}
echo "sum of individual digits are: $sum";
?>
```

Output:

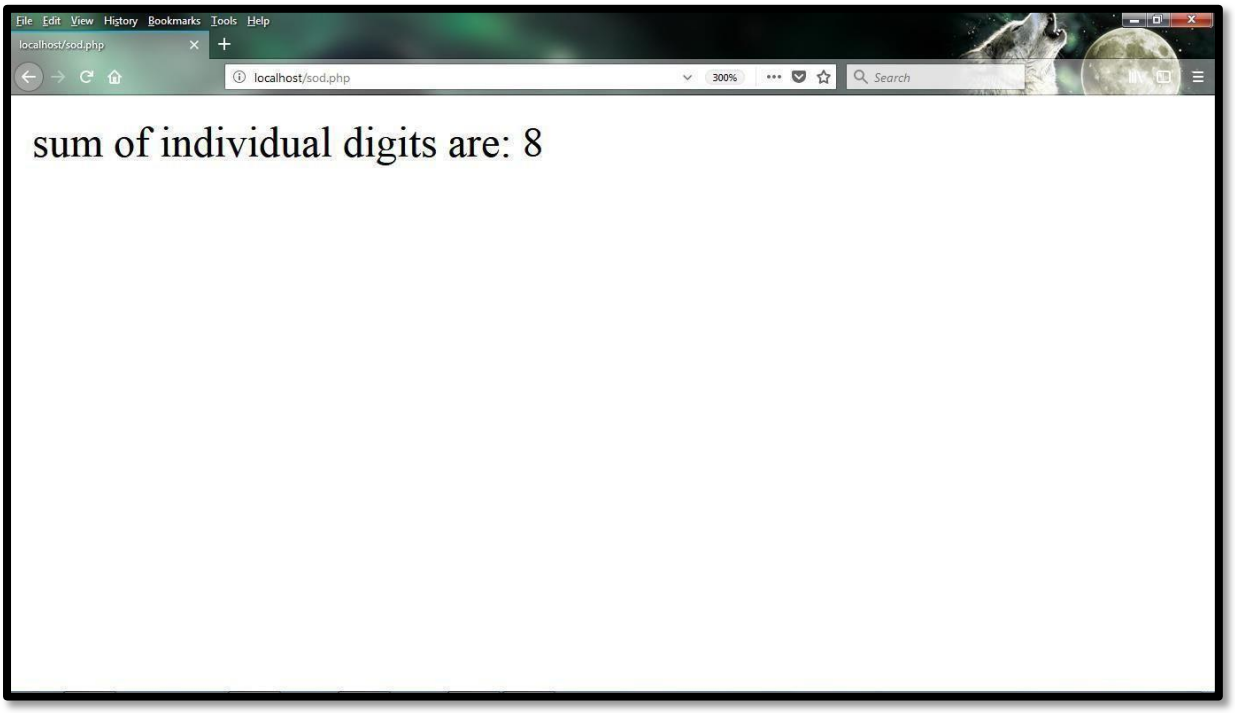


b) Check whether the given number is Palindrome or not

```
<?php
$n=323;
$t=$n;
$rev=0;
while($n>0)
{
$r=$n%10;
$rev=$rev*10+$r;
$n=(int)($n/10);
}
echo "Reverse digits are: $rev <br>";

if($t==$rev)
echo "$rev is a Palindrome";
else
echo "$rev is not a Palindrome";
?>
```

Output:

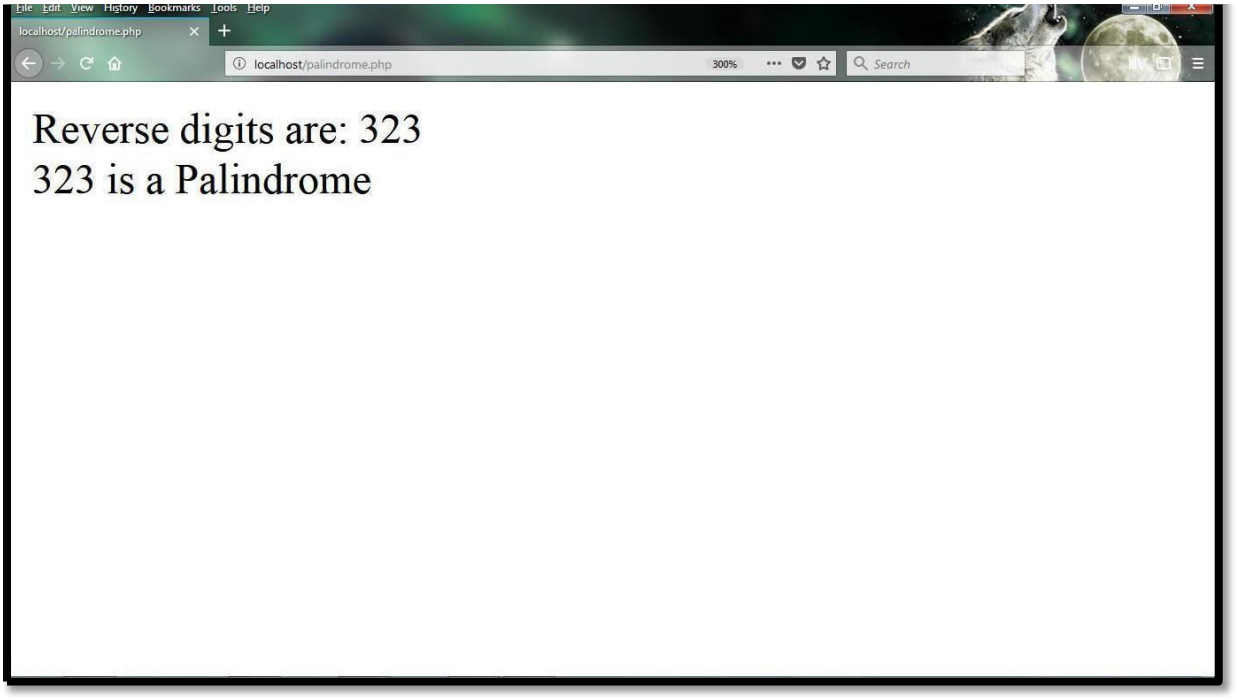

Assignment No - 8:

Create an XML document that contains 10 users information. Write a Java Program, which takes User Id as input and returns the user details by taking the user information from XML document using DOM parser or SAX parser.

AIM: Takes User Id as input and returns the user details using XML with DOM

PROGRAM:

users.xml

```
<usersinformation>
  <user>
      <rollno>501</rollno>
      <name>aaa</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>502</rollno>
      <name>bbb</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>503</rollno>
      <name>ccc</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>504</rollno>
      <name>ddd</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>505</rollno>
      <name>eee</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>506</rollno>
      <name>fff</name>
      <branch>cse</branch>
      <college>mrcet</college>
  </user>
  <user>
      <rollno>507</rollno>
      <name>ggg</name>
      <branch>cse</branch>
```


```
        <college>mrcet</college>
    </user>
    <user>
        <rollno>508</rollno>
        <name>hhh</name>
        <branch>cse</branch>
        <college>mrcet</college>
    </user>
    <user>
        <rollno>509</rollno>
        <name>iii</name>
        <branch>cse</branch>
        <college>mrcet</college>
    </user>
    <user>
        <rollno>510</rollno>
        <name>jjj</name>
        <branch>cse</branch>
        <college>mrcet</college>
    </user>
</usersinformation>
```

UserDom.java

```
import java.io.File;
import javax.xml.parsers.*;
import org.w3c.dom.*;
import java.util.Scanner;
public class UserDom
{
public static void main(String args[]) throws Exception
{
DocumentBuilderFactory fac=DocumentBuilderFactory.newInstance();
DocumentBuilder b=fac.newDocumentBuilder();
Document doc=b.parse(new File("users.xml"));
doc.getDocumentElement().normalize();
Element root=doc.getDocumentElement();
Scanner in=new Scanner(System.in);
System.out.println("Enter User ID:");
int n=in.nextInt();
int flag=0;
NodeList nl=doc.getElementsByTagName("user");
for(int i=0;i<nl.getLength();i++)
{
Node node=nl.item(i);
if(node.getNodeType()==Node.ELEMENT_NODE)
{
Element e=(Element)node;
int
x=Integer.parseInt(e.getElementsByTagName("rollno").item(0).getTextContent());
if(x==n)
{
```

```
System.out.println(root.getNodeName());
System.out.println("-----------------------------------------");
  System.out.println("rollno:\t"+e.getElementsByTagName("rollno").item(0).getTextContent());
   System.out.println("name:\t"+e.getElementsByTagName("name").item(0).getTextContent());
  System.out.println("branch:\t"+e.getElementsByTagName("branch").item(0).getTextContent());
System.out.println("college:"+e.getElementsByTagName("college").item(0).getTextContent());
flag=1;
break;
}
else
{
flag=0;
}
}
}
if(flag==0)
System.out.println("User not available");
}
}
```

OUTPUT:

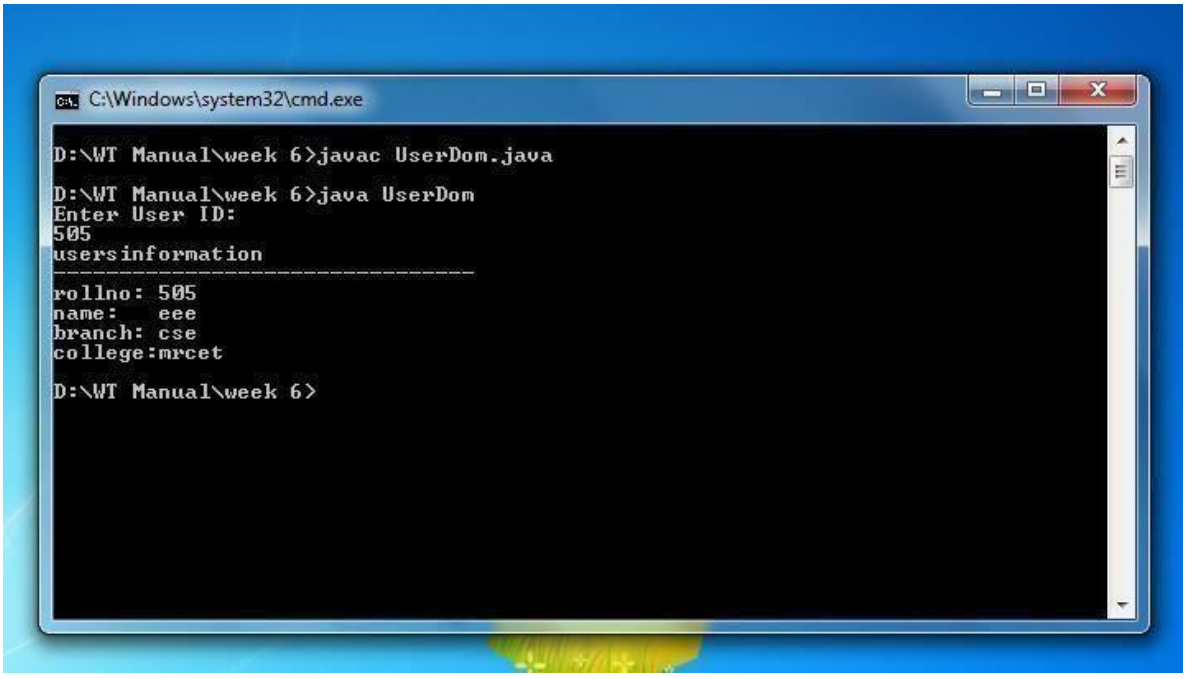

Assignment No – 9

Que. 9 Implement the following web applications using (a) PHP, (b) Servlets and (c) JSP.

9 (i) (a). A web application that takes a name as input and on submit it shows a hello <name> page where name is taken from the request. It shows the start time at the right top corner of the page and provides a logout button. On clicking this button, it should show a logout page with Thank You <name > message with the duration of usage (hint: Use session to store name and time).


AIM: To design an application that use session to store data.

PROGRAM:

login.html

```
<html>
 <form action="home.php" method="post">
Username<input type="text" name="text1"><br>
<input type="submit" value="SignIn" name="submit">
</form>
</html>
```


Output of login.html:

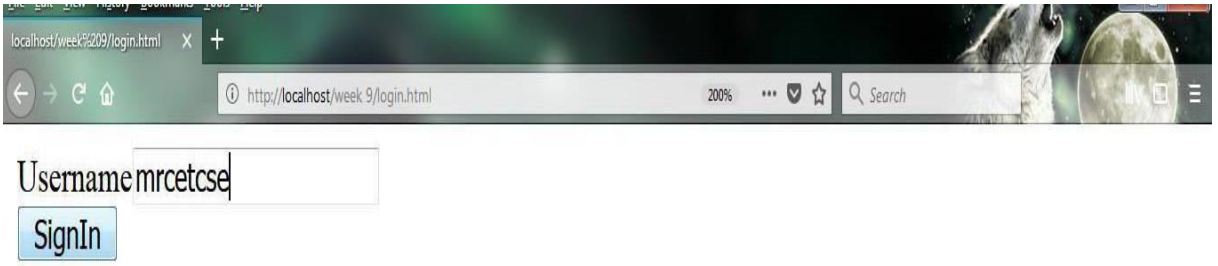

Home.php:

```
<?php
    session_start();
    date_default_timezone_set("Asia/Calcutta");
    $_SESSION['luser'] = $_POST['text1'];
    $_SESSION['start'] = time();
    $tm=$_SESSION['start'];
    print "<p align='right'>Session started at " . date("h:i:sa",$tm) . "<br>";
    print "<form action='logoutpage.php' method='post'>";
    print "<input type='submit' value='Logout'></p>";
    print "</form>";
    print "Hello " . $_SESSION['luser'];
?>
```


Output of home.php:

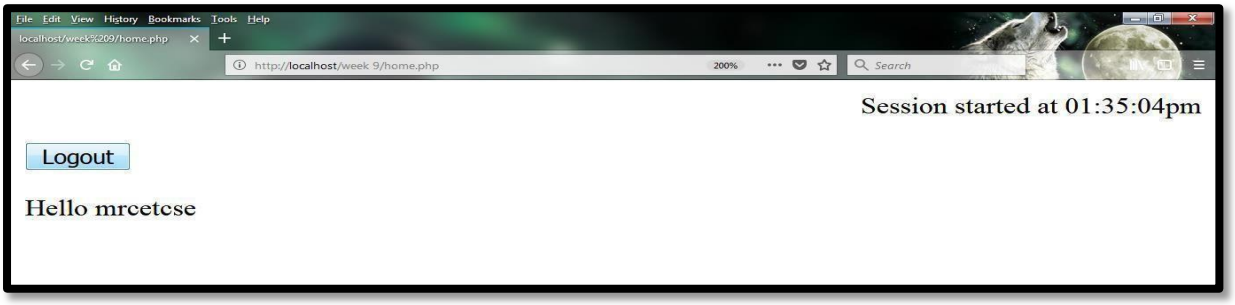

Logoutpage.php:

```
<?php
    session_start();
    date_default_timezone_set("Asia/Calcutta");
    print "<p align='right'>Session started at " . date("h:i:sa",time()) . "</p><br>";
    print "Thank you " . $_SESSION['luser'];
    $sessiontime = time() - $_SESSION['start'];
    print "<br> Your session duration: " . $sessiontime . " seconds";
    session_destroy();
?>
```

Output of Logoutpage.php:

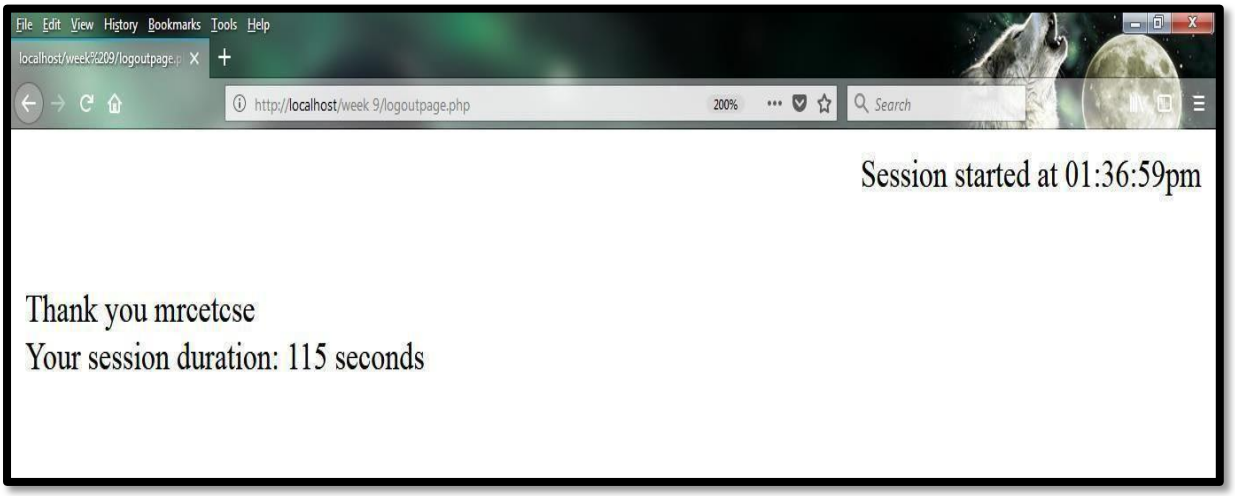

9 (ii) (a). Write a PHP Program to display current Date, Time and Day using PHP Script.


AIM: To display current date , Time and Day using PHP.

PROGRAM:

date.php

```
<?php
   date_default_timezone_set ("Asia/Calcutta");
   echo "Date: ";
   echo date("d/m/y");
   echo "<br> Time: ";
   echo date(" H:i:s A", time());
   echo "<br> Day: ";
   $day=date("l");
   echo $day;
?>
```

Output:

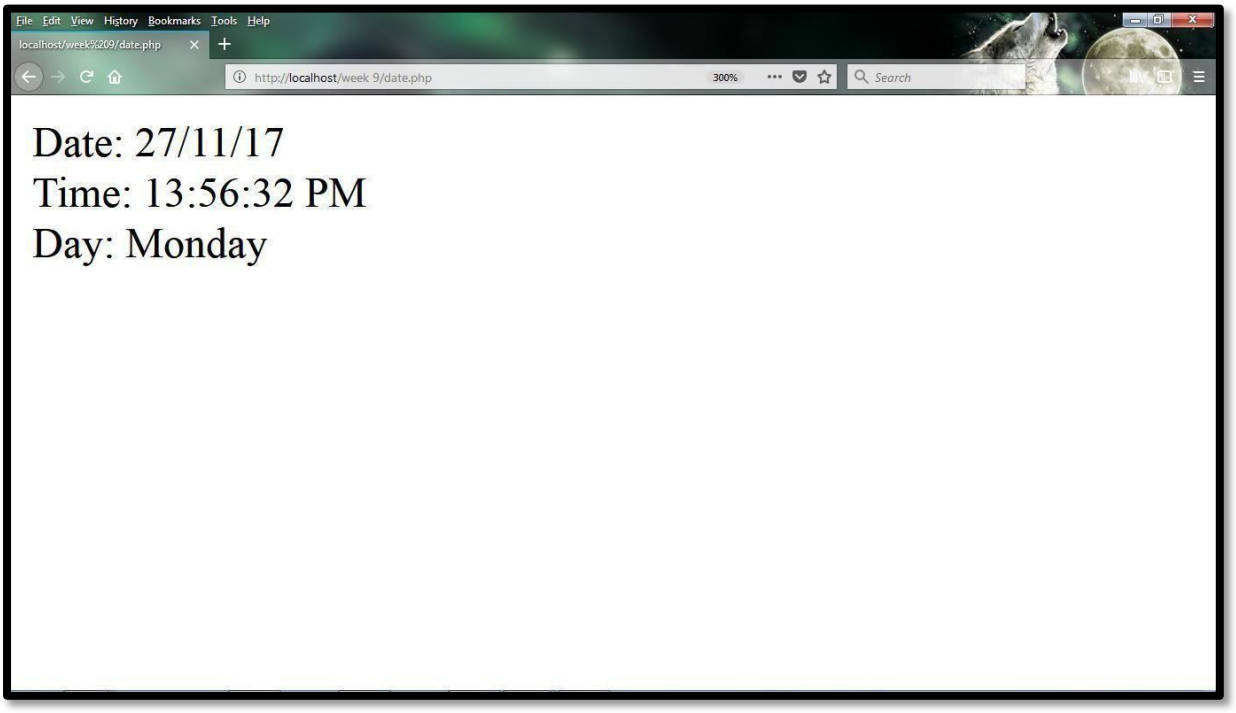

9 (iii) (a). A web application that takes name and age from an HTML page. If the age is less than 18, it should send a page with "Hello <name>, you are not authorized to visit the site" message, where <name> should be replaced with the entered name. Otherwise it should send "Welcome <name> to this site" message.

AIM: To design an application to validate age are less than 18 or more than 18 using PHP.

PROGRAM:


checkage.html

```
<html>
 <body bgcolor="bisque">
  <form action='home.php' method='post'>
     <center><b><font color="blue" size="10">Login</font></b></center><br><br>
    User name: <input type='text' name='name'><br>
    age: <input type='text' name='age'><br>
    <input type='submit'value='Login'>
  </form>
 </body>
</html>
```

home.php

```
<?php
  $name = $_POST['name'];
  $age = $_POST['age'];
  if ($age < 18)
   print "Hello " . $name . " you are not authorized to visit this site.";
  else
   print "Welcome " . $name . " to this site."
?>
```

Output:

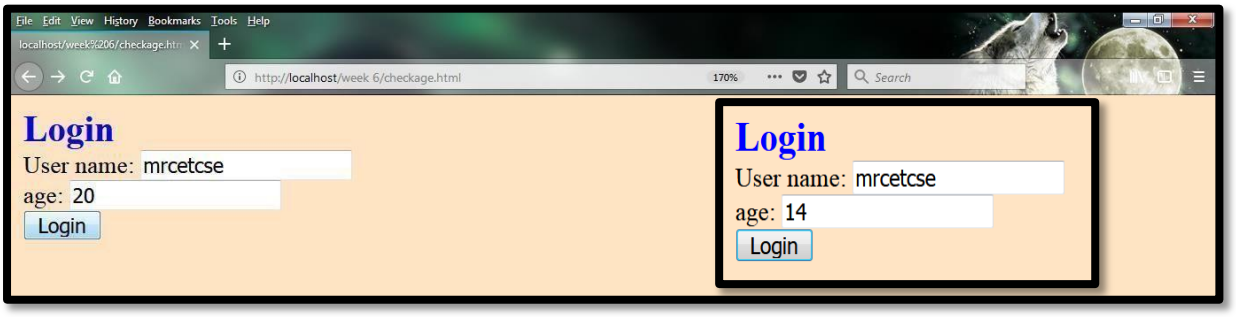





9 (iv) (a). A web application that lists all cookies stored in the browser on clicking "List Cookies" button. Add cookies if necessary.


AIM: To design an application to develop cookies using PHP.

PROGRAM:

cookieset.php

```
<html>
<head> <title> User Acess </title> </head>
<body bgcolor="bisque"> <br>
<center>
    <?php
        $firstname = 'aaa';
        $middlename = 'bbb';
        $lastname = 'ccc';
        setcookie('first_name',$firstname,time() + 86400);
        setcookie('middle_name',$middlename,time() + 86400);
        setcookie('last_name',$lastname,time() + 86400);
        print "cookies set";
    ?>
</center>
</body>
</html>
```


Output:

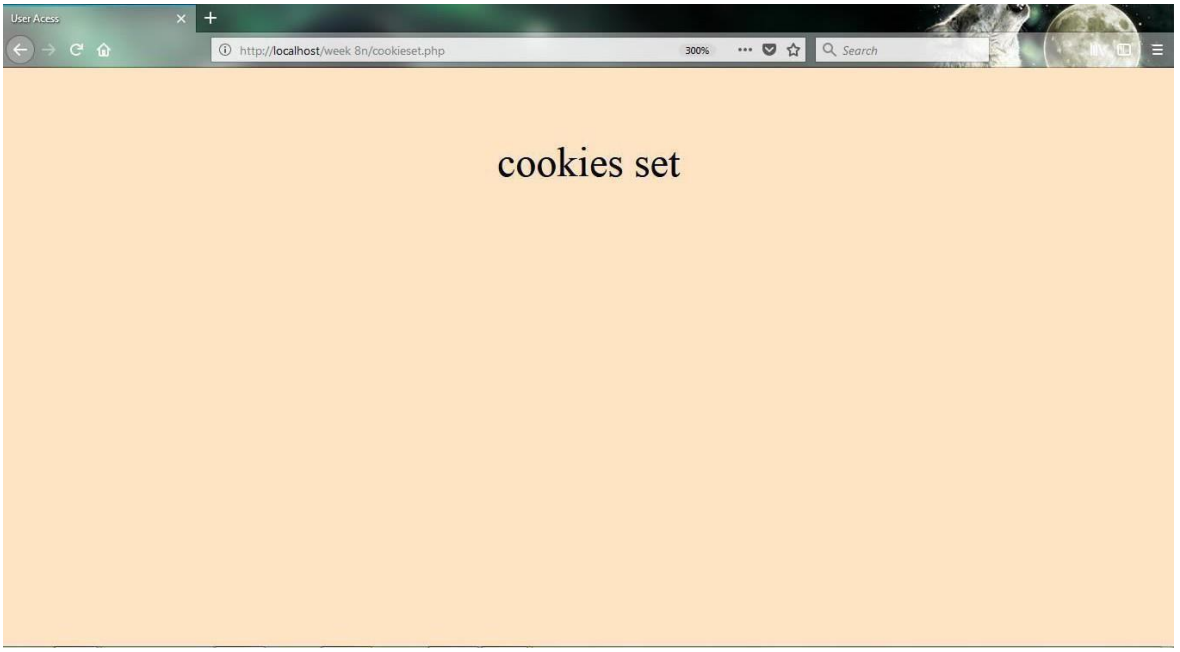

Listcookie.php

```
<html>
<head> <title> Cookie </title> </head>
<body bgcolor="GreenYellow">
<center>
<form action="" method="post">
    <input type="submit" value="LIST COOKIES" name="list">
</form>
</center>
     <?php
         error_reporting(0);
         if($_POST['list'])
         {
         foreach($_COOKIE as $key=>$val)
         {
         echo "<center>".$key." is ".$val."<br>
         </center>";
         }
         }
     ?>
</body>
</html>
```

Output:

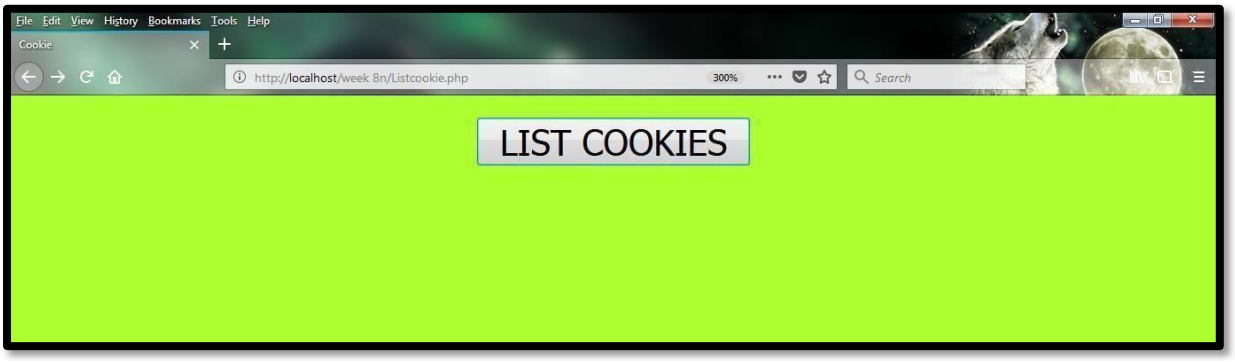



9 (i) (b). A web application that takes a name as input and on submit it shows a hello <name> page where name is taken from the request. It shows the start time at the right top corner of the page and provides a logout button. On clicking this button, it should show a logout page with Thank You <name > message with the duration of usage (hint: Use session to store name and time).

USING SERVLET

Session1.html

```
<html>
<head> <title> SESSION LOGIN </title> </head>
<body>
<center>
<form action="http://localhost:8080/Session1/session6vib" method="get">
Enter Name: <input type="text" name="uname"> <br>
<input type="submit" value="LOGIN" name="register">
</form>
</center>
</body>
</html>
```

Session1.java

```
import javax.servlet.*;
import javax.servlet.http.*;
import java.io.*;
import java.util.*;
public class Session1 extends HttpServlet
{
public void doGet(HttpServletRequest req, HttpServletResponse res) throws IOException,
ServletException
{
try
{
res.setContentType("text/html");
PrintWriter out=res.getWriter();
out.println("<form method=get action=session26vib>");
Date d=new Date();
out.println("<p align=right> Time:"+d.getTime()+"</p>");
String un=req.getParameter("uname");
HttpSession session=req.getSession();
session.setAttribute("user",un);
session.setAttribute("time",d.getTime());
out.println("Hello\t"+un);
out.println("<br><br> <input type=submit value=logout>");
out.println("</form");
}
catch(Exception e)
{
e.printStackTrace();
}
} }
```


Session2.java


```
import javax.servlet.*;
import javax.servlet.http.*;
import java.io.*;
import java.util.*;
public class Session2 extends HttpServlet
{
public void doGet(HttpServletRequest req, HttpServletResponse res) throws IOException,
ServletException
{
try
{
res.setContentType("text/html");
PrintWriter out=res.getWriter();
HttpSession session=req.getSession();
Date d2=new Date();
String un=(String)session.getAttribute("user");
Long t1=(Long)session.getAttribute("time");
Long t2=d2.getTime();
session.invalidate();
out.println("Thank you\t"+un);
out.println("<br><br> Session duration: '"+(t2-t1)/(60*60)+"'seconds");
}
catch(Exception e)
{
e.printStackTrace();
}
}
}
```


web.xml

```
<?xml version="1.0"?>
<web-app>
<servlet>
<servlet-name>session1</servlet-name>
<servlet-class>Session1</servlet-class>
</servlet>
<servlet-mapping>
<servlet-name>session1</servlet-name>
<url-pattern>/session6vib</url-pattern>
</servlet-mapping>
<servlet>
<servlet-name>session2</servlet-name>
<servlet-class>Session2</servlet-class>
</servlet>
<servlet-mapping>
<servlet-name>session2</servlet-name>
<url-pattern>/session26vib</url-pattern>
</servlet-mapping>
</web-app>
```

Output:

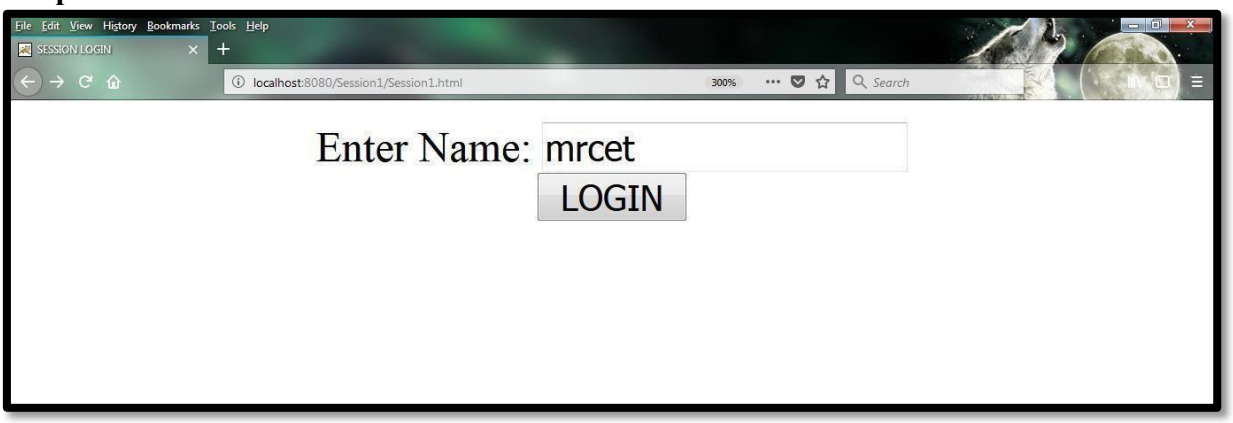
File Edit View History Bookmarks Tools Help
SESSION LOGIN
localhost:8080/Session1/Session1.html
300%
Search
Enter Name: mrcet
LOGIN

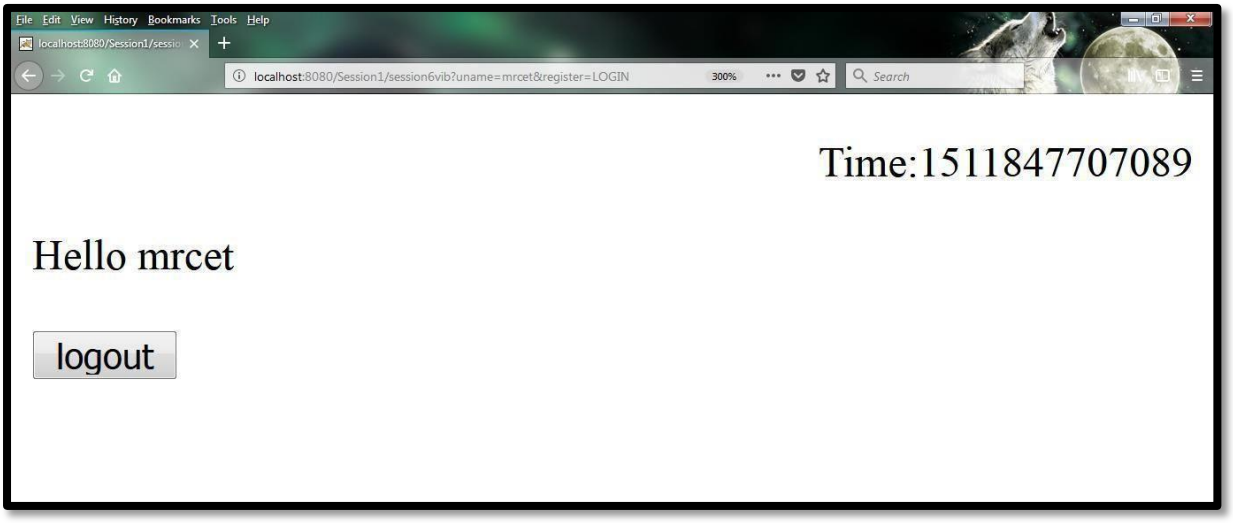
File Edit View History Bookmarks Tools Help
localhost:8080/Session1/session6vib?uname=mrcet&register=LOGIN
300%
Search
Time:1511847707089
Hello mrcet
logout

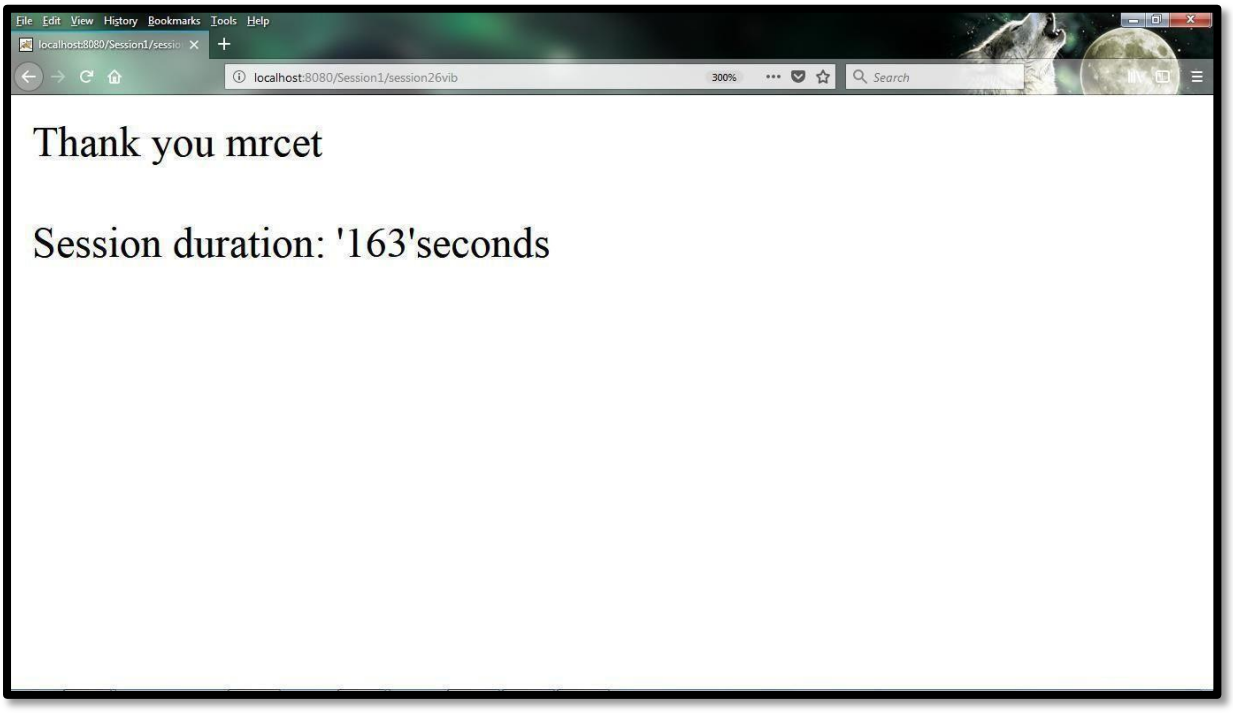
File Edit View History Bookmarks Tools Help
localhost:8080/Session1/session26vib
300%
Search
Thank you mrcet
Session duration: '163'seconds

9 (ii) (b). Write a Servlet application to print the current date and time.

Aim: To print Current date and time using Servlet.

USING SERVLET


DateSrv.java

```
import java.io.*;
import javax.servlet.*;
public class DateSrv extends GenericServlet
{
    //implement service()
    public void service(ServletRequest req, ServletResponse res) throws IOException,
ServletException
    {
        //set response content type
        res.setContentType("text/html");
        //get stream obj
        PrintWriter pw = res.getWriter();
        //write req processing logic
        java.util.Date date = new java.util.Date();
        pw.println("<h2>"+"Current Date & Time: " +date.toString()+"</h2>");
        //close stream object
        pw.close();
    }
}
```

web.xml

```
<?xml version="1.0"?>
<web-app>
<servlet>
<servlet-name>Date</servlet-name>
<servlet-class>DateSrv</servlet-class>
</servlet>
<servlet-mapping>
<servlet-name>Date</servlet-name>
<url-pattern>/date</url-pattern>
</servlet-mapping>
</web-app>
```

Output:

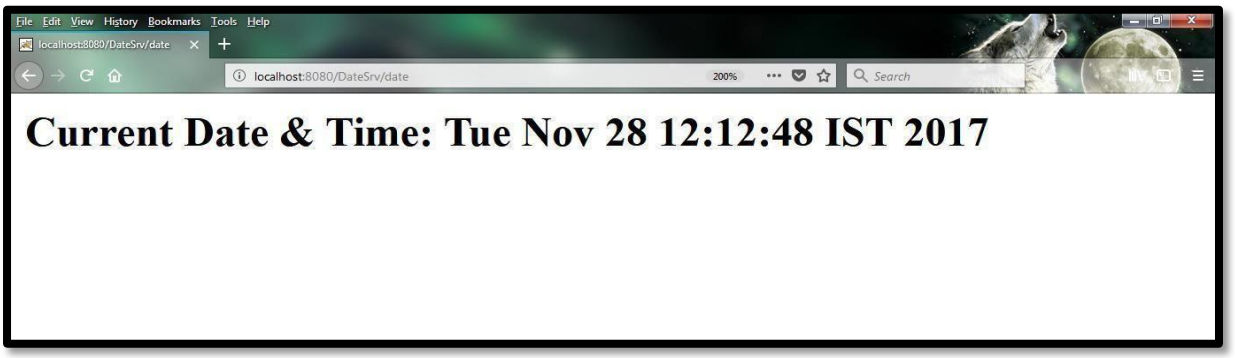

9 (iii) (b). A web application that takes name and age from an HTML page. If the age is less than 18, it should send a page with "Hello <name>, you are not authorized to visit the site" message, where <name> should be replaced with the entered name. Otherwise it should send "Welcome <name> to this site" message.

AIM: To design an application to validate age are less than 18 or more than 18 using SERVLET.

USING SERVLET

index.html:

```
<html
<head>
        <title>VoterApp</title>
    </head>
    <body>
         <form action= "http://localhost:8080/CheckAge/check" method="get">
             <fieldset style="width:20%; background-color:#80ffcc">
                 <table>
                     <tr><td>Name</td><td><input type="text" name="name"></td></tr>
                     <tr><td>Age</td><td><input type="text" name="age"></td></tr>
                     <tr><td></td>
                     <td><input type = "submit" value="Check Eligibility"></td></tr>
                 </table>
             </fieldset>
         </form>
    </body>
</html>
```

VoterSrv.java:


```
import java.io.*;
import java.util.*;
import javax.servlet.*;
import javax.servlet.http.*;
public class VoterSrv extends HttpServlet
{
    public void service(HttpServletRequest req, HttpServletResponse res) throws
IOException,ServletException
    {
        //set response content type
         res.setContentType("text/html");
         //get printWrite obj
         PrintWriter pw = res.getWriter();
         //read form data from page as request parameter
         String name = req.getParameter("name");
         int age = Integer.parseInt(req.getParameter("age"));
         if (age>=18)
         {
             pw.println("<font color='green' size='4'>Welcome "+name+" to this site</font>");
         }
         else
             pw.println("<font color='red' size='4'>Hello "+name+", you are not authorized to
visit the site</font>");
```

```
        //add hyperlink to dynamic page
        pw.println("<br><br><a href='index.html'>back</a>");
        //close the stream
        pw.close();
    }
}
```


web.xml:

```
<web-app>
    <servlet>
        <servlet-name>abc</servlet-name>
        <servlet-class>VoterSrv</servlet-class>
    </servlet>
    <servlet-mapping>
        <servlet-name>abc</servlet-name>
        <url-pattern>/check</url-pattern>
    </servlet-mapping>
</web-app>
```

Output:

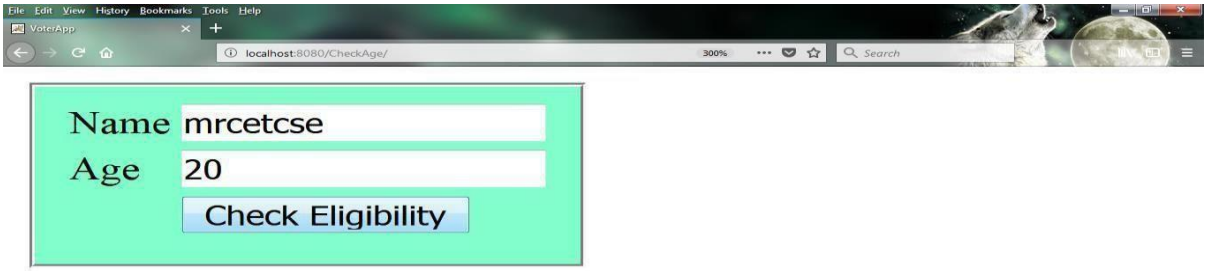



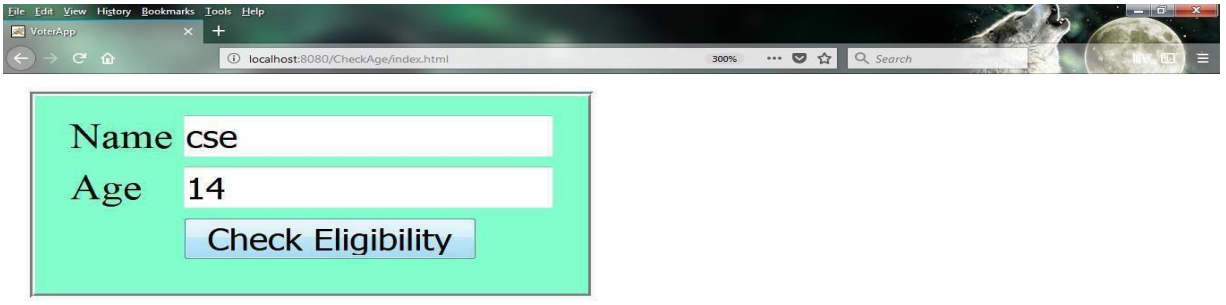



9 (iv) (b). A web application that lists all cookies stored in the browser on clicking "List Cookies" button. Add cookies if necessary.

AIM: To design an application to develop cookies using Servlet.

USING SERVLET

index.html

```
<html>
    <head>
        <title>CookiesExample</title>
    </head>
    <body>
        <form method='get' action='http://localhost:8080/MyServlet1/login'>
            <fieldset style="width:14%; background-color:#ccffcc">
                User Name:<input type="text" name="Name"/><br/>
                Password:<input type="password" name="Password"/><br/>
                 <input type="submit" value="submit"/>
        </form>
            </fieldset>
        </form>
    </body>
</html>
```

MyServlet1.java

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
public class MyServlet1 extends HttpServlet
{
  public void doGet(HttpServletRequest request, HttpServletResponse response) {
    try{
        response.setContentType("text/html");
        PrintWriter pwriter = response.getWriter();

        String uname = request.getParameter("Name");
        String upassword = request.getParameter("Password");
        pwriter.print("Cookies Set:<br>Hello "+uname);
        pwriter.print("<br>Your Password is: "+upassword);

        //Creating two cookies
        Cookie c1=new Cookie("Name",uname);
        Cookie c2=new Cookie("Password",upassword);
        //Adding the cookies to response header
        response.addCookie(c1);
        response.addCookie(c2);
      pwriter.print("<br><a href='welcome'>LIST COOKIES</a>");
        pwriter.close();
  }catch(Exception exp){
     System.out.println(exp);
   }
  }
}
```

MyServlet2.java

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
public class MyServlet2 extends HttpServlet {
 public void doGet(HttpServletRequest request,
   HttpServletResponse response){
   try{
     response.setContentType("text/html");
     PrintWriter pwriter = response.getWriter();


     //Reading cookies
     Cookie c[]=request.getCookies();
     //Displaying User name and User Password value from cookie


for(int i=0;i<c.length;i++){
pwriter.print("<br>"+c[i].getName()+": "+c[i].getValue());//printing name and value of
cookie
}
     pwriter.close();
   }catch(Exception exp){
     System.out.println(exp);
    }
  }
}
```


web.xml

```
<web-app>
<display-name>Cookies  Example</display-name>
 <welcome-file-list>
 <welcome-file>index.html</welcome-file>
 </welcome-file-list>
<servlet>
 <servlet-name>Servlet1</servlet-name>
 <servlet-class>MyServlet1</servlet-class>
</servlet>
<servlet-mapping>
 <servlet-name>Servlet1</servlet-name>
 <url-pattern>/login</url-pattern>
</servlet-mapping>
<servlet>
 <servlet-name>Servlet2</servlet-name>
 <servlet-class>MyServlet2</servlet-class>
</servlet>
<servlet-mapping>
 <servlet-name>Servlet2</servlet-name>
 <url-pattern>/welcome</url-pattern>
</servlet-mapping>
</web-app>
```

Output:

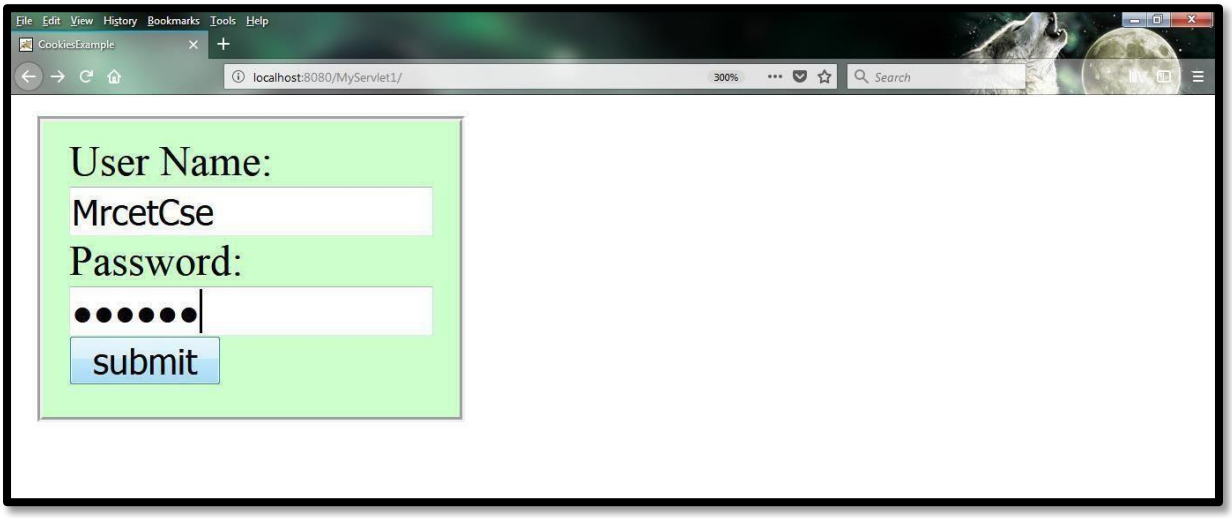
File Edit View History Bookmarks Tools Help
CookiesExample
localhost:8080/MyServlet1/
300%
Search
User Name:
MrcetCse
Password:
submit

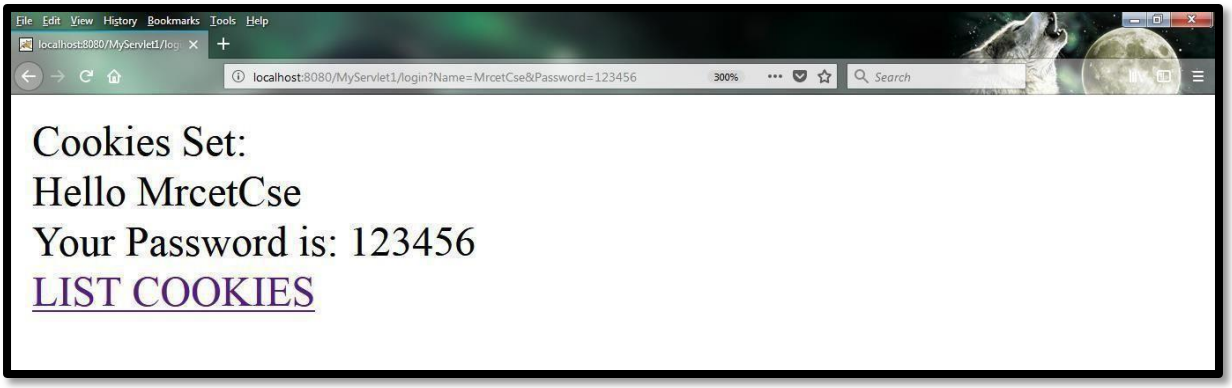
File Edit View History Bookmarks Tools Help
localhost:8080/MyServlet1/login?Name=MrcetCse&Password=123456
300%
Search
Cookies Set:
Hello MrcetCse
Your Password is: 123456
LIST COOKIES

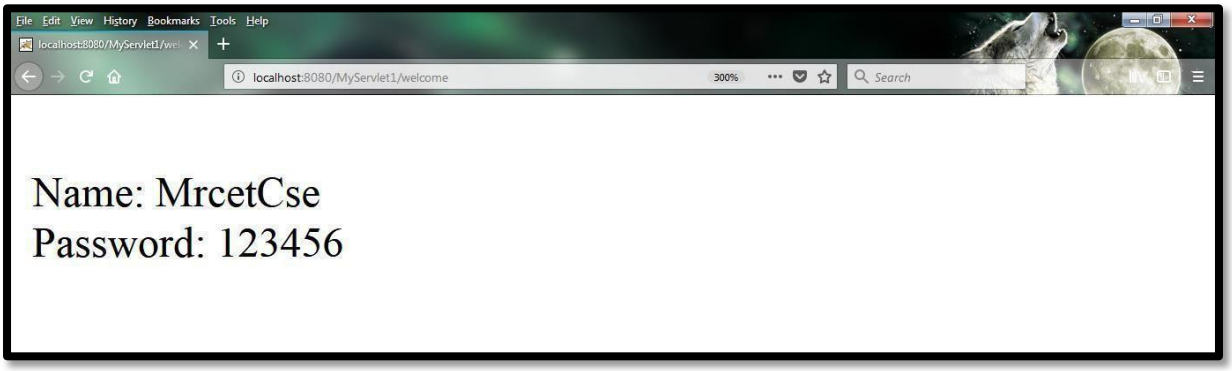
File Edit View History Bookmarks Tools Help
localhost:8080/MyServlet1/welcome
300%
Search
Name: MrcetCse
Password: 123456

9 (i) (c). A web application that takes a name as input and on submit it shows a hello <name> page where name is taken from the request. It shows the start time at the right top corner of the page and provides a logout button. On clicking this button, it should show a logout page with Thank You <name > message with the duration of usage (hint: Use session to store name and time).

USING JSP

Sessionjsp.html

```
<html>
<head> <title> SESSION LOGIN </title> </head>
<body>
<center>
<form action="http://localhost:8080/jsp/Session1.jsp" method="get">
Enter Name: <input type="text" name="uname"> <br>
<input type="submit" value="LOGIN" name="register">
</form>
</center>
</body>
</html>
```


Session1.jsp


```
<%@page language="java" import="java.util.*" errorPage=""%>
<form method="get" action="http://localhost:8080/jsp/Session2.jsp">
<%
Date d=new Date();
%>
<p align="right"> Time;<%=d.getTime()%></p>
<%
String un=request.getParameter("uname");
session.setAttribute("user",un);
session.setAttribute("time",d.getTime());
%>
Hello <%=un%>
<br><br>
<input type="submit" value="logout">
</form>
```


Session2.jsp

```
<%@page language="java" import="java.util.*" errorPage=""%>
<%
Date d2=new Date();
String un=(String)session.getAttribute("user");
Long t1=(Long)session.getAttribute("time");
Long t2=d2.getTime();
%>
Thank you <%=un%>
<br><br>
Session duration: <%=(t2-t1)/(60*60)%> seconds
<% session.invalidate();%>
```

Output:

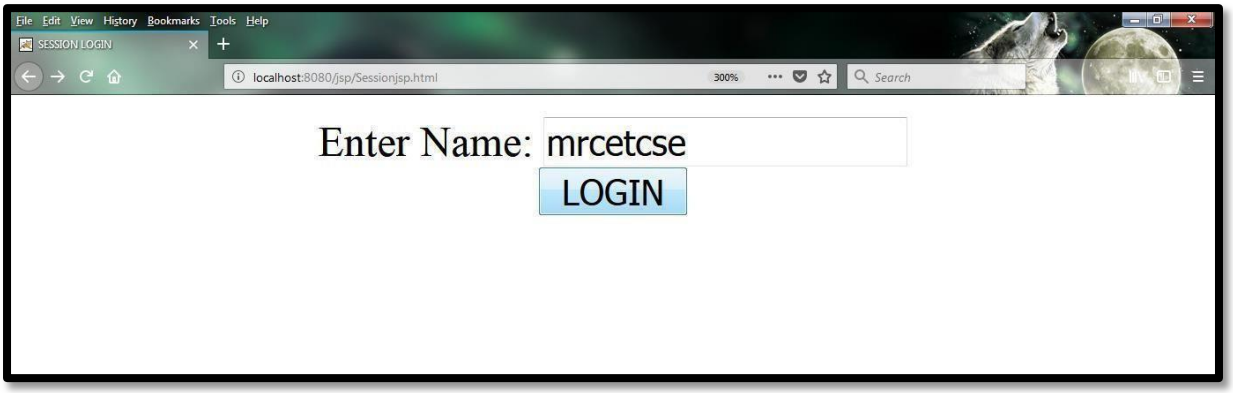
File Edit View History Bookmarks Tools Help
SESSION LOGIN
localhost:8080/jsp/Sessionjsp.html
300%
Search
Enter Name: mrcetcse
LOGIN

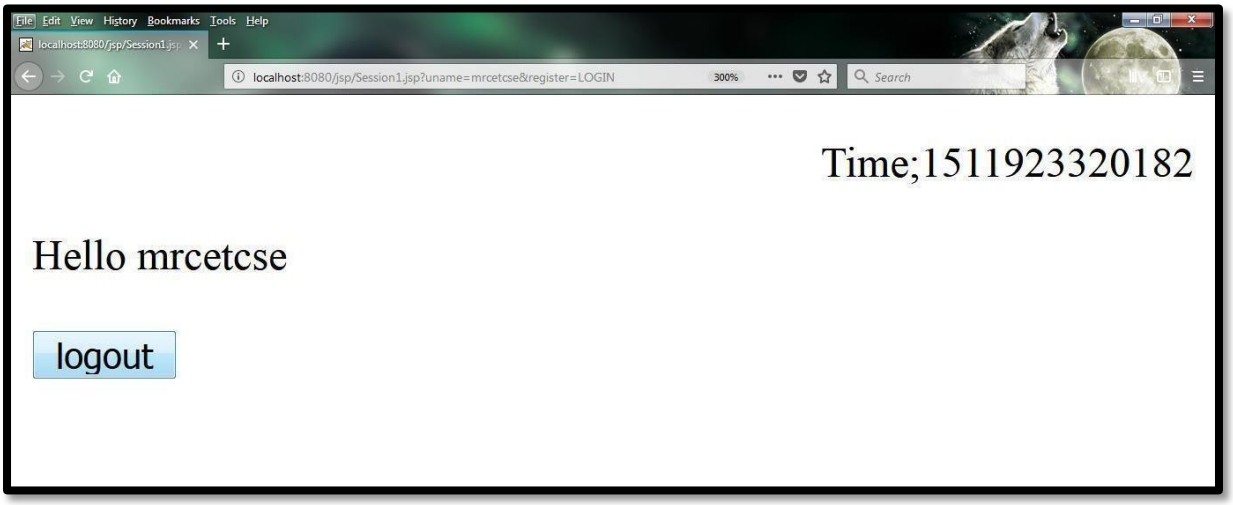
File Edit View History Bookmarks Tools Help
localhost:8080/jsp/Session1.jsp
localhost:8080/jsp/Session1.jsp?uname=mrcetcse&register=LOGIN
300%
Search
Time;1511923320182
Hello mrcetcse
logout

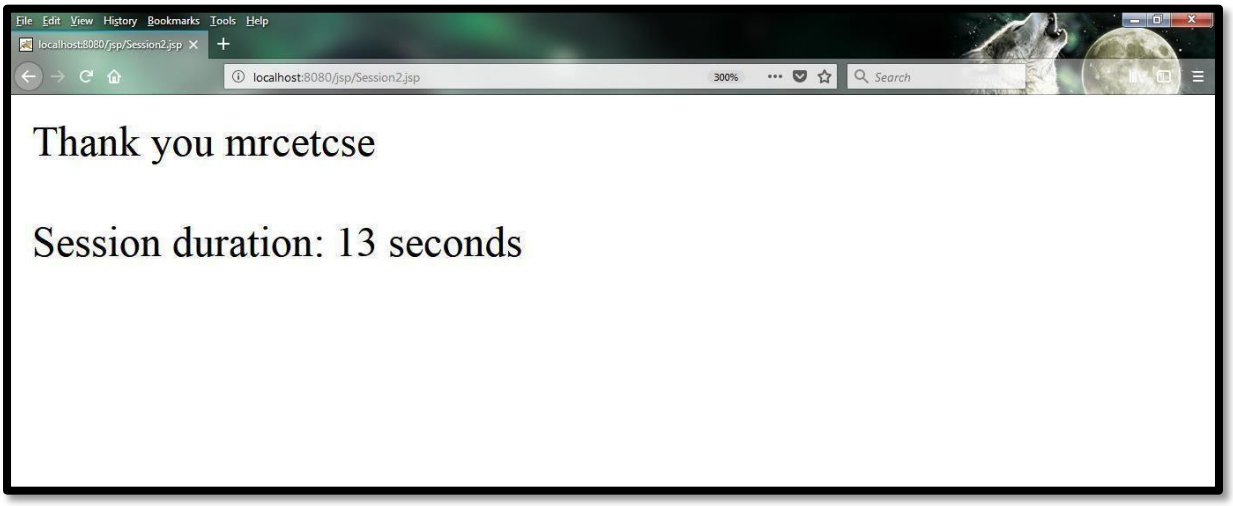
File Edit View History Bookmarks Tools Help
localhost:8080/jsp/Session2.jsp
localhost:8080/jsp/Session2.jsp
300%
Search
Thank you mrcetcse
Session duration: 13 seconds

9 (ii) (b). Write a JSP application to print the current date and time.


Aim: To print Current date and time using JSP.

USING JSP

test.jsp

```
<html>
   <head><title>JSPApp</title></head>
   <body>
      <form>
         <fieldset style="width:50%; background-color: #ccffeb;">
            <legend><b><i>JSP Application<i><b></legend>
            <h3>Current Date and Time is :</h3>
            <% java.util.Date d = new java.util.Date();
            out.println(d.toString()); %>
         </fieldset>
      </form>
   </body>
</html>
```

Output:

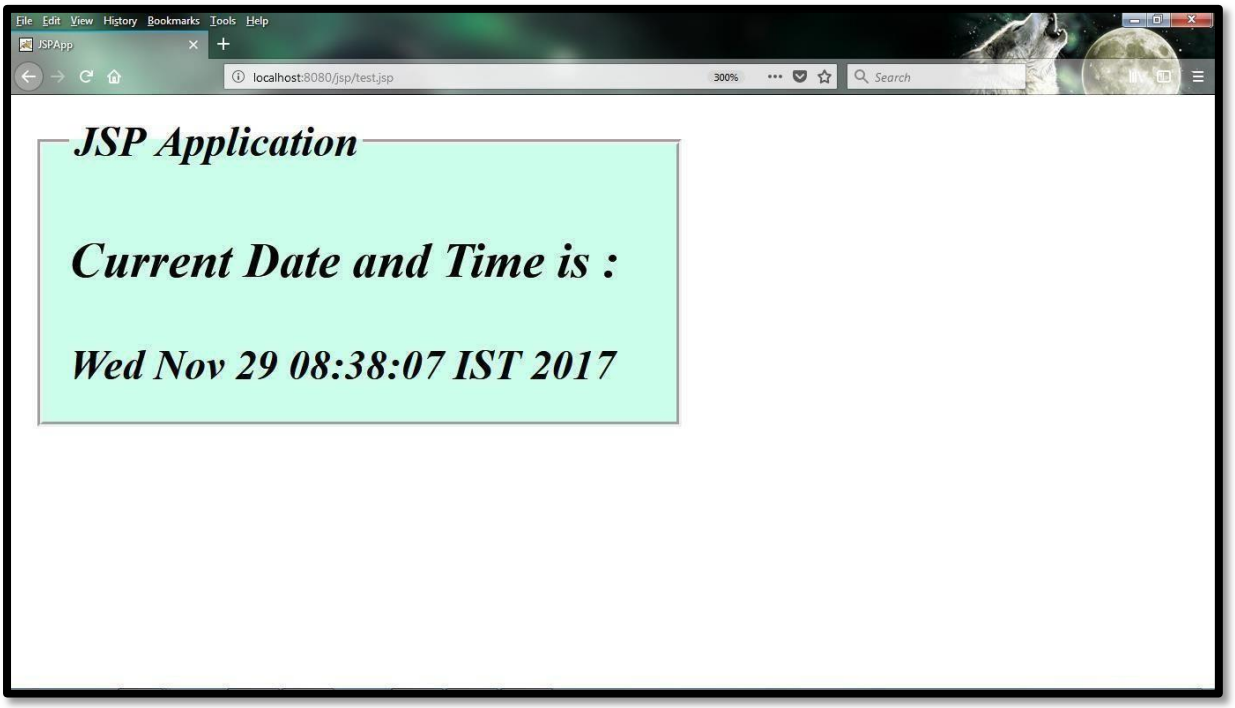

9 (iii) (c). A web application that takes name and age from an HTML page. If the age is less than 18, it should send a page with "Hello <name>, you are not authorized to visit the site" message, where <name> should be replaced with the entered name. Otherwise it should send "Welcome <name> to this site" message.

AIM: To design an application to validate age are less than 18 or more than 18 using JSP.

USING JSP


UserEligibility.html:

```
<html>
<head> <title> User Acess </title> </head>
<body> <br>
<center>
<h1> USER ELIGIBILITY </h1>
<form action="http://localhost:8080/jsp/checkage.jsp" method="get">
<input type="text" name="uname" placeholder="Enter your name"> <br>
<input type="text" name="uage" placeholder="Enter your age"> <br>
<input type="submit" value="submit" name="sub"<>
</form>
</center>
</body>
</html>
```

checkage.jsp:

```
<%@page language="java" import="java.sql.*" errorPage=""%>
<%
String name;
int age;
name=request.getParameter("uname");
age=Integer.parseInt(request.getParameter("uage"));
if(age<=18)
{
out.println("<h1> Hello\t " +name+"\t you are not eligible </h1>");
}
else
{
out.println("<h1> Welcome " +name+" to this site </h1>");
}
%>
```


Output:

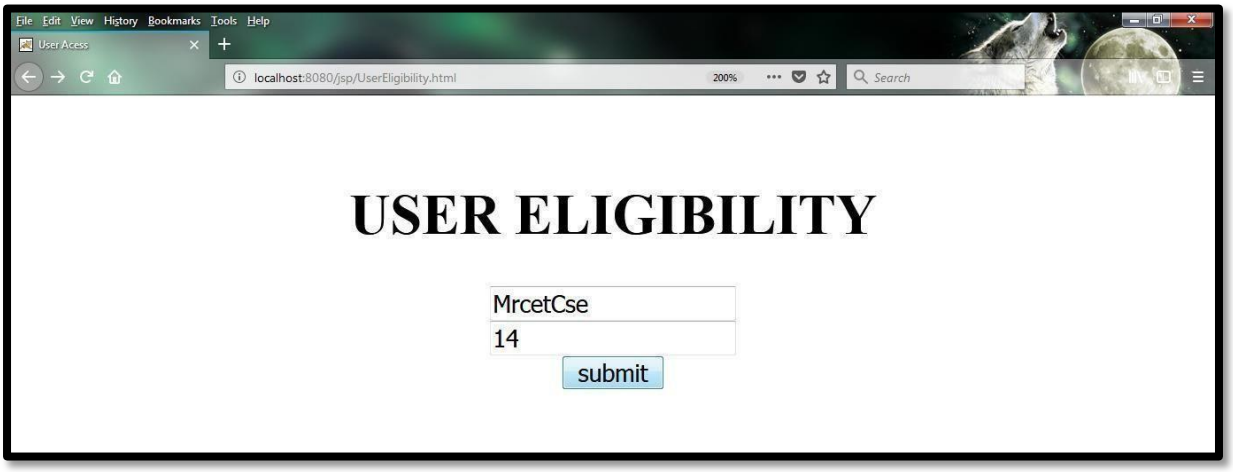

File Edit View History Bookmarks Tools Help
User Acess
localhost:8080/jsp/UserEligibility.html
200%
Search
USER ELIGIBILITY
MrcetCse
14
submit


File Edit View History Bookmarks Tools Help
localhost:8080/jsp/checkage.js
localhost:8080/jsp/checkage.jsp?uname=MrcetCse&uage=14&sub=submit
200%
Search
Hello MrcetCse you are not eligible


File Edit View History Bookmarks Tools Help
User Acess
localhost:8080/jsp/UserEligibility.html
200%
Search
USER ELIGIBILITY
MrcetCse
34
submit


File Edit View History Bookmarks Tools Help
localhost:8080/jsp/checkage.js
localhost:8080/jsp/checkage.jsp?uname=MrcetCse&uage=34&sub=submit
200%
Search
Welcome MrcetCse to this site

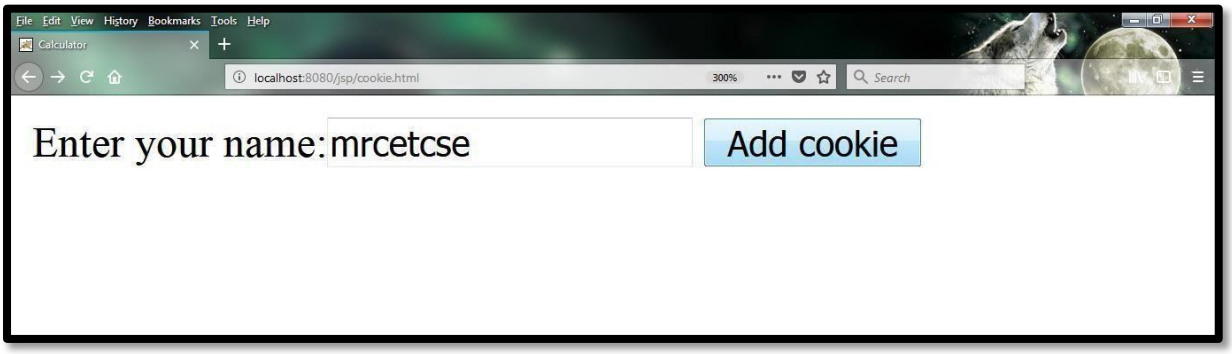
File Edit View History Bookmarks Tools Help
Calculator
localhost:8080/jsp/cookie.html
300%
Search
Enter your name:mrcetcse
Add cookie

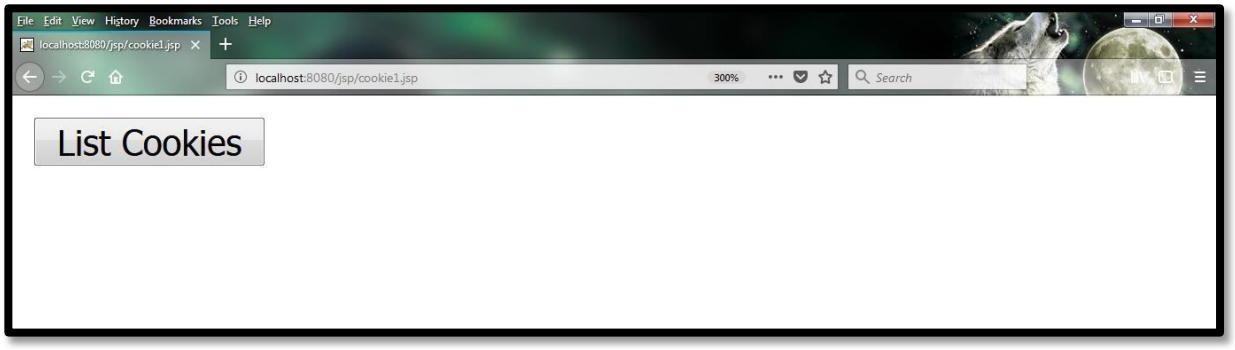
File Edit View History Bookmarks Tools Help
localhost:8080/jsp/cookie1.jsp
localhost:8080/jsp/cookie1.jsp
300%
Search
List Cookies


File Edit View History Bookmarks Tools Help
List of Cookies
localhost:8080/jsp/cookie2.jsp
300%
Search
List of Cookies
Cookie Name
Cookie value
firstname
mrcetcse
JSESSIONID
9AA6DDB601FCBACBE8AE79EAEEC1A8AD

Assignment No. 10

Que. 10 Implement the web applications with Database using
(a) PHP, (b) Servlets and (c) JSP.

a) A user validation web application, where the user submits the login name & password to the server. The name and password are checked against the data already available in Database and if the data matches, a successful login page is returned. Otherwise failure message is shown to the user.

AIM: To design an application that verifies user details from database using PHP.

PROGRAM:

db.php

```
<html>
<body>
<?php
$severname="localhost";
$username="root";
$password="TIGER";
$conn=new mysqli($severname,$username,$password);
if($conn->connect_error)
{
die("connection failed".$conn->connect_error);
}
echo "Connected successfully <br>";
//Create database
$sql = "CREATE DATABASE reg";
if(mysqli_query($conn,$sql))
echo "Database created successfully<br>";
else
echo "error";
$servername="localhost";
$dbname="reg";
$conn = mysqli_connect($servername, $username, $password, $dbname);
// Check connection
if (!$conn)
{
die("Connection failed: " . mysqli_connect_error());
}
echo "Connected successfully <br>";
// sql to create table
$sql = "CREATE TABLE Guests (
name VARCHAR(30) NOT NULL,
pwd VARCHAR(30) NOT NULL)";
if (mysqli_query($conn, $sql))
{
echo "Table MyGuests created successfully<br>";
}
 else {
echo "Error creating table: " . mysqli_error($conn);
}
$sql = "INSERT INTO Guests (name, pwd) VALUES ('cse', '5')";
```

```
if (mysqli_query($conn, $sql)) {
echo "New record created successfully";
}
else
{
echo "Error: " . $sql . "<br>" . mysqli_error($conn);
}
mysqli_close($conn);
?>
</body>
</html>
```

Output of db.php:




Login.html


```
<html>
<head> <title> Login Page </title> </head>
<body>
<center> <h1> Login Page </h1>
<form action="loginform.php" method="post">
<table>
<tr> <td> <label> Name: </label> </td>
<td> <input type="text" name="uname" /> </td>
</tr>
<tr> <td> <label> Password: </label> </td>
<td> <input type="password" name="upwd" /> </td>
</tr>
<tr> <td> <input type="submit" value="submit" /> </td>
<td> <input type="reset" value="reset" /> </td>
</tr>
    </table>
  </form>
 </center>
</body>
</html>
```

loginform.php

```
<html>
<head> <title> Registration page </title> </head>
<body>
   <?php
      $name=$_POST["uname"];
      $pwd=$_POST["upwd"];
      $conn=mysql_connect("localhost","root","TIGER") or die("mysql_error()");
      mysql_select_db("reg") or die("mysql_error()");
      $query=mysql_query("SELECT * from guests where name='$name'");
      while($row=mysql_fetch_array($query))
      {
      $duser=$row['name'];
      $dpwd=$row['pwd'];
      }
      if($pwd==$dpwd && $name==$duser)
      echo "welcome $name branch";
      else
      echo "invalid user";
   ?>
 </body>
</html>
```

OUTPUT:

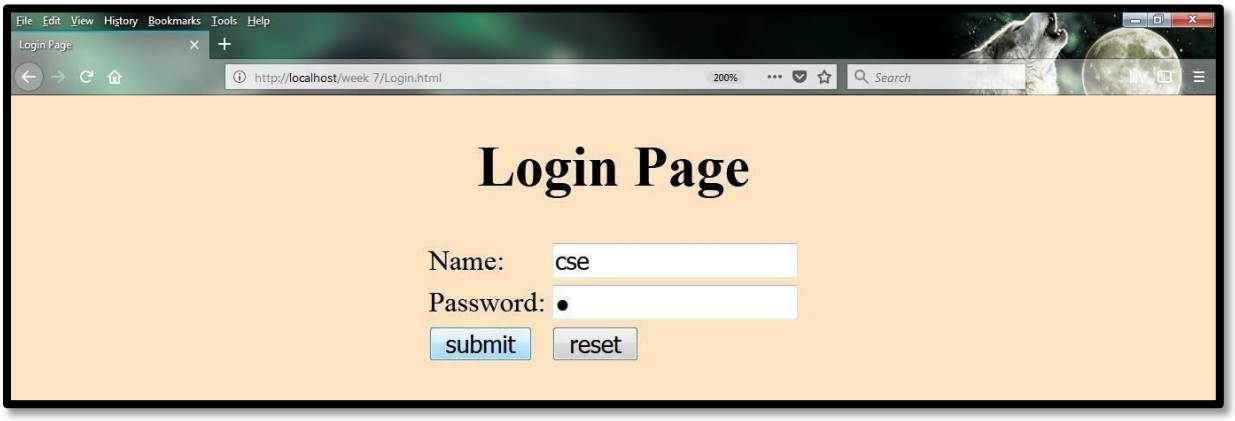

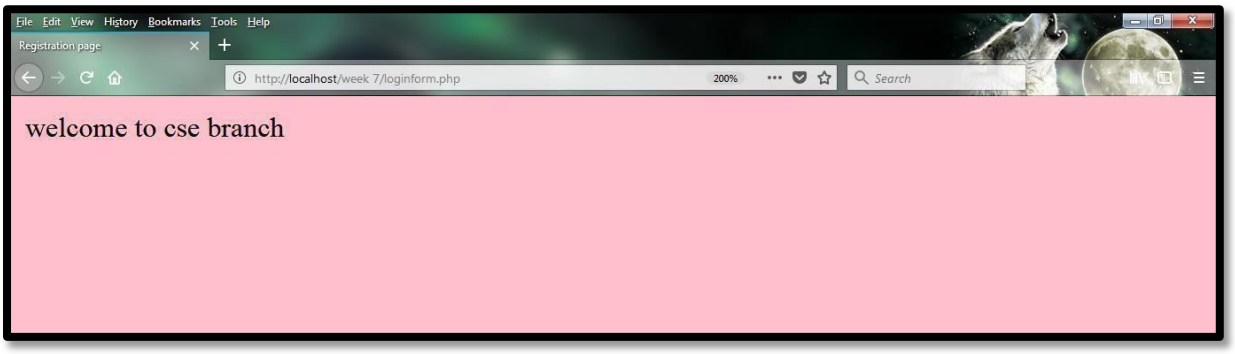

(b) **USING SERVLET**

DBExample.java

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
import java.util.*;
import java.sql.*;

public class DBExample extends HttpServlet{


    public void doGet(HttpServletRequest request,
                HttpServletResponse response)
          throws ServletException, IOException
  {
    String JDBC_DRIVER="com.mysql.jdbc.Driver";
    String DB_URL="jdbc:mysql://localhost/csec";
    String USER = "root";
    String PASS = "TIGER";
    response.setContentType("text/html");
    PrintWriter out = response.getWriter();
    out.println("<html><body><h1>Welcome to MRCET</h1>\n") ;
    try{
      Class.forName("com.mysql.jdbc.Driver");
Connection conn = DriverManager.getConnection(DB_URL,
USER, PASS);
        Statement stmt = conn.createStatement();
      String sql;
      sql = "SELECT * FROM Emp";
      ResultSet rs = stmt.executeQuery(sql);
      while(rs.next()){
        out.println("ID: " + rs.getString(1));
        out.println("Age: " + rs.getString(2));
        out.println("First Name: " + rs.getString(3)+"<br>");
       }
      rs.close();
      stmt.close();
      conn.close();
    }catch(SQLException se){
      out.println(se.getMessage());
    }catch(Exception e){
      out.println(e.getMessage());
    }
    out.println("</body></html>");
  }
}
```

web.xml:

```
<?xml version="1.0" encoding="UTF-8"?>

<web-app>
<servlet>
<servlet-name>DBExample</servlet-name>
<servlet-class>DBExample</servlet-class>
</servlet>
<servlet-mapping>
<servlet-name>DBExample</servlet-name>
<url-pattern>/db</url-pattern>
</servlet-mapping>
</web-app>
```

OUTPUT:

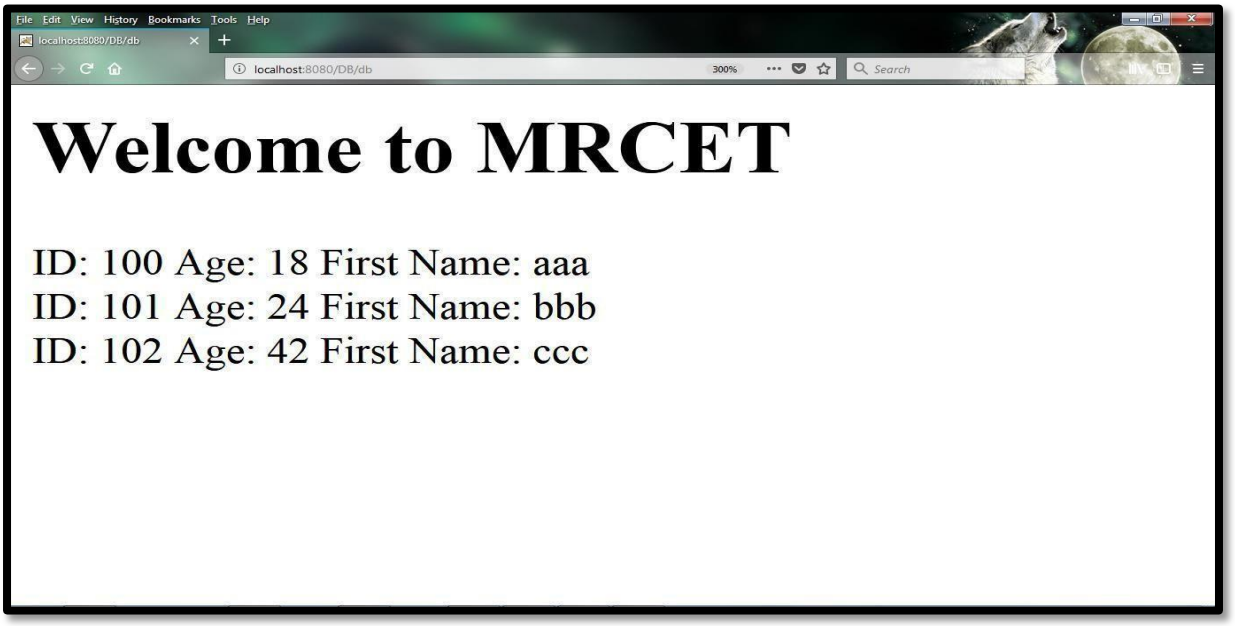

(c) **USING JSP**

```
import java.sql.*;
class MysqlCon{
public static void main(String args[]){
try{
Class.forName("com.mysql.jdbc.Driver");
Connection con=DriverManager.getConnection(
"jdbc:mysql://localhost:3306/sonoo","root","root");
//here sonoo is database name, root is username and password
Statement stmt=con.createStatement();
ResultSet rs=stmt.executeQuery("select * from emp");
while(rs.next())
System.out.println(rs.getInt(1)+" "+rs.getString(2)+" "+rs.getString(3));
con.close();
}catch(Exception e){ System.out.println(e);}
}
}
```

OUTPUT:



Assignment No. 11

Que. 11) Modify the above PHP program to use an xml instead of

database AIM: To design an application that verifies user details from an xml

using PHP. **PROGRAM:**

db.php

Userlogin.xml:

```
<Authentication>
  <user>
        <username>cse</username>
        <password>5</password>
  </user>
  <user>
        <username>mrcet</username>
        <password>mlrd</password>
  </user>
</Authentication>
```

Loginform.php:

```
<html>
 <head>
  <title> Registration page </title>
 </head>
<body bgcolor="pink">

<?php
    $myxml=simplexml_load_file("Userlogin.xml");
    $username=$_POST['uname'];
    $password=$_POST['upwd'];
    $xmlusername="";
    $xmlpassword="";

    for($i=0;$i<count($myxml);$i++)
    {
    $xmlusername=$myxml->user[$i]->username;
    $xmlpassword=$myxml->user[$i]->password;

    if($xmlusername==$username && $xmlpassword==$password)
    {
    echo "welcome $username";
    die();
    }


    }
    echo "Invalid username or password";
?>

</body>
</html>
```

Loginform.php:


```
<html>
  <head> <title> Login Page </title> </head>
<body bgcolor="bisque">
<center>
<h1> Login Page </h1>
<form action="Loginform.php" method="post">
<table>
<tr> <td> <label> Name: </label> </td>
<td> <input type="text" name="uname" /> </td>
</tr>
<tr> <td> <label> Password: </label> </td>
<td> <input type="password" name="upwd" /> </td>
</tr>
<tr> <td> <input type="submit" value="submit" />
</td>
<td> <input type="reset" value="reset" /> </td>
</tr>
</table>  </form>  </center>  </body>  </html>
```

OUTPUT:

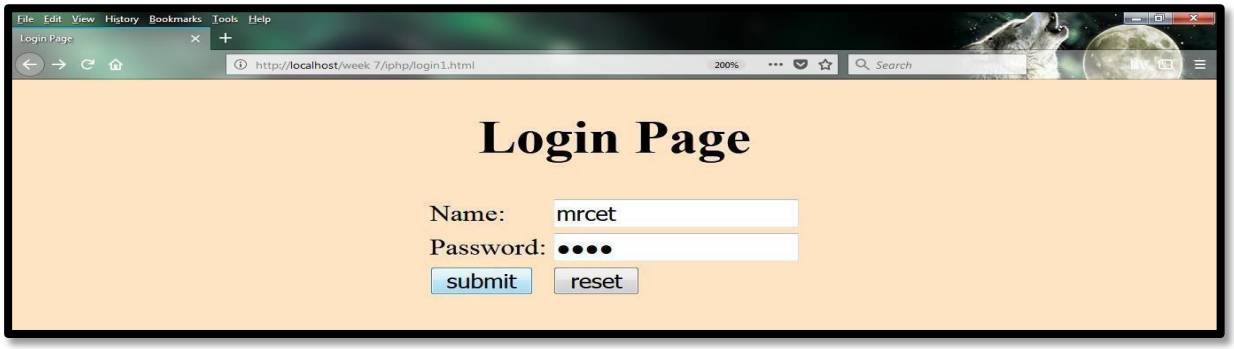





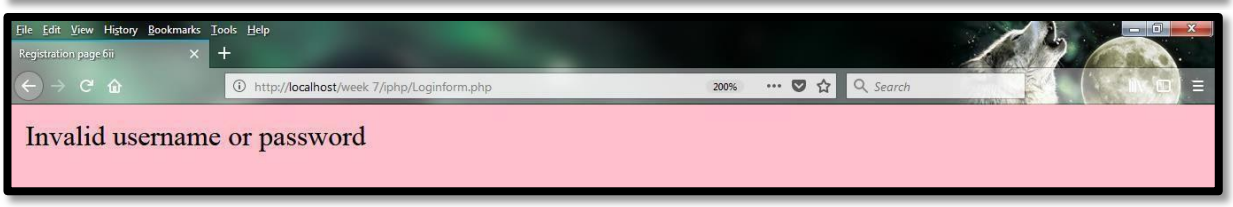

Assignment No . 12

Write a program to design a simple calculator using (a) JavaScript (b) PHP (c) Servlet and (d) JSP.

(a) USING JavaScript


AIM: To design a simple calculator using JAVASCRIPT.


PROGRAM:

cal.html

```
<html>
<head>
 <title>Calculator</title>
<script language="javascript">
var inputstring="";
function updatestring(value)
{
inputstring=inputstring+value;
document.calculator.input.value=inputstring;
}
</script>
</head>
 <body>
<form name="calculator">
<table border="4" align="center" bgcolor="pink" bordercolor="black">
<tr>
 <td colspan="4"><input type="text" name="input" maxlength="15" size="27"></td> </tr>
<tr> <td><input type="button" value="clear" onclick="input.value=' ';inputstring=' ' "></td>
<td><input type="button" value="mod" onclick="updatestring('%')"></td>
<td><input type="button" value="*" onclick="updatestring('*')"> </td>     </tr>
<tr>
<td><input type="button" value="7" onclick="updatestring('7')"> </td>
<td><input type="button" value="8" onclick="updatestring('8')"> </td>
 <td><input type="button" value="9" onclick="updatestring('9')"> </td>
 <td><input type="button" value="/" onclick="updatestring('/')"> </td>       </tr>
<tr>
<td><input type="button" value="4" onclick="updatestring('4')"> </td>
<td><input type="button" value="5" onclick="updatestring('5')"> </td>
 <td><input type="button" value="6" onclick="updatestring('6')"> </td>
 <td><input type="button" value="-" onclick="updatestring('-')"> </td>     </tr>
<tr>
<td><input type="button" value="1" onclick="updatestring('1')"> </td>
 <td><input type="button" value="2" onclick="updatestring('2')"> </td>
<td><input type="button" value="3" onclick="updatestring('3')"> </td>
 <td><input type="button" value="+" onclick="updatestring('+')"> </td>     </tr>
<tr>
<td><input type="button" value="0" onclick="updatestring('0')"> </td>
<td><input type="button" value="00" onclick="updatestring('00')"> </td>
 <td><input type="button" value="." onclick="updatestring('.')"> </td>
<td><input type="button" value="=" onclick="input.value=eval(inputstring);"> </td> </tr>
</table>          </form>          </body>          </html>
```

OUTPUT:

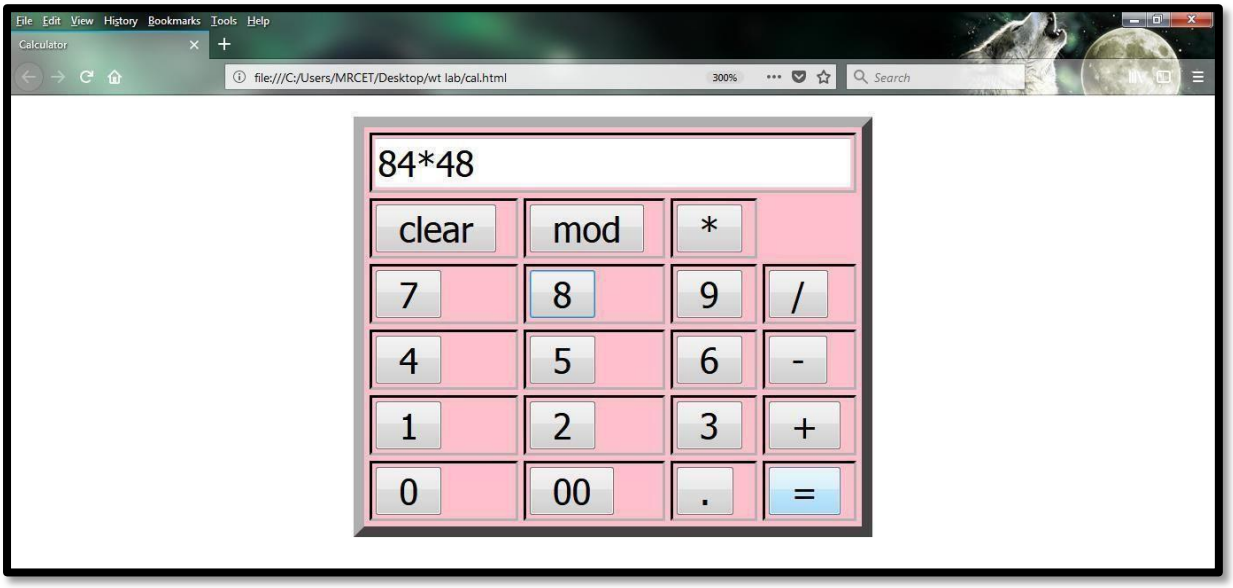
File Edit View History Bookmarks Tools Help
Calculator
file:///C:/Users/MRCET/Desktop/wt lab/cal.html
300%
Search
84*48
clear
mod
*
7
8
9
/
4
5
6
-
1
2
3
+
0
00
.
=

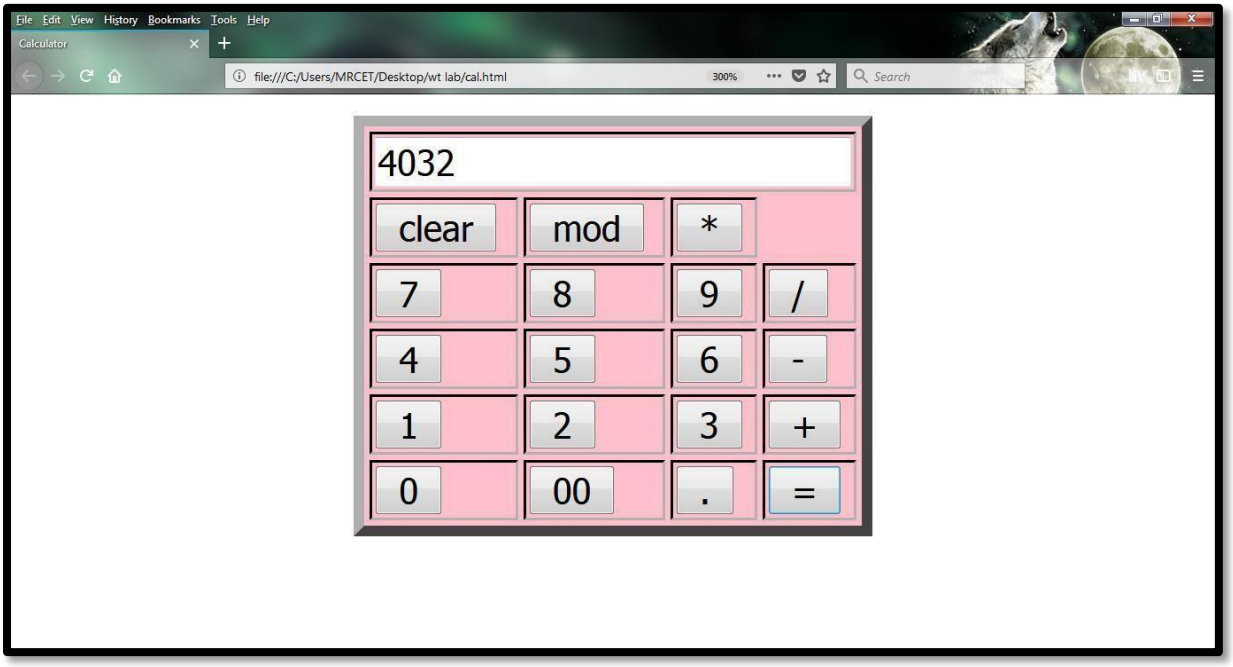
File Edit View History Bookmarks Tools Help
Calculator
file:///C:/Users/MRCET/Desktop/wt lab/cal.html
300%
Search
4032
clear
mod
*
7
8
9
/
4
5
6
-
1
2
3
+
0
00
.
=

(b) **USING PHP**

AIM: To design an application that works as a simple calculator using PHP.

PROGRAM:

form.html


```
<html>
<head> <title> scientific calculator </title> </head>
<body bgcolor="bisque"> <br>
<form name='f1' action='add.php' method='post'>
1st Number<input type='text' name='t1'><br>
2nd Number<input type='text' name='t2'><br>
<input type='submit' name='add' value='add'>
<input type='submit' name='sub' value='sub'>
<input type='submit' name='mul' value='mul'>
<input type='submit' name='div' value='div'>
</form>
</body>
</html>
```

add.php

```
<?php
$a = $_POST['t1'];
$b = $_POST['t2'];
if (isset($_POST['add']))
{
$c = $a + $b;
print $a . "+" . $b . "=" . $c;
}
if (isset($_POST['sub']))
{
$c = $a - $b;
print $a . "-" . $b . "=" . $c;
}
if (isset($_POST['mul']))
{
$c = $a * $b;
print $a . "*" . $b . "=" . $c;
}
if (isset($_POST['div']))
{
$c = $a / $b;
print $a . "/" . $b . "=" . $c;
}
?>
```

Output:


File Edit View History Bookmarks Tools Help
scientific calculator
http://localhost/week 7/calculator/cal from db/form1.html
300%
Search
1st Number 20
2nd Number 22
add
sub
mul
div

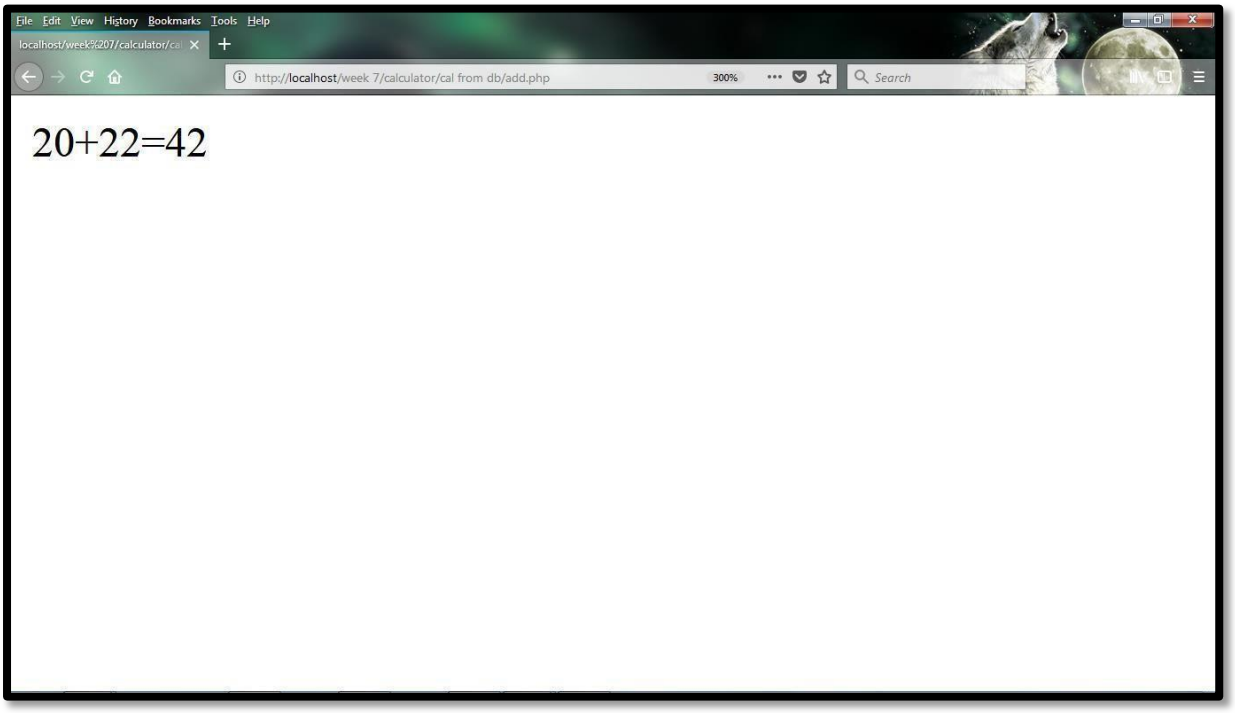
File Edit View History Bookmarks Tools Help
http://localhost/week 7/calculator/cal from db/add.php
300%
Search
20+22=42

(c) **USING SERVLETS**

AIM: Develop Servlet Application of Basic Calculator(+,-,*,/,%) using ServletInputStream and ServletOutputStream.

DESCRIPTION:

In java with using 2 operant's and 1 operator we can calculate the basic mathematically operation such as addition, subtraction, multiplication, division Servlet is a Java class which extends the capabilities of server that provides the application accessed by means of request response model. It uses two interfaces i.e. HTTPRequest & HTTPResponse

HTTPRequest: This is an interface which provides methods for extracting HTTP parameters from the query or request body depending on the type of request i.e. get or post

HTTPResponse: This interface provides an OutputStream for retrieving information such as images or PrintWriter for retrieving text output.

PROGRAM:

index.html

```
<html>
 <head>
  <title>Simple Calculator</title>
 </head>
 <body>
 <h3>Please Enter Two Numbers :::</h3>
 <form method="GET" action="http://localhost:8080/Cal/calc">
 Number:<input type="text" id="t1" name="t1"/><br/>
 <select name="op">
 <option value="+">+</option>
 <option value="-">-</option>
 <option value="*">*</option>
 <option value="/">/</option>
 <option value="%">%</option>
 </select></br>
 Number:<input type="text" id="t2" name="t2">
 <input type="submit" value="calculate"/></br>
 </form>
 </body>
</html>
```

Cal.java


```
import java.io.IOException;
import java.io.PrintWriter;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
public class Cal extends HttpServlet
 {
public void doGet(HttpServletRequest request, HttpServletResponse response)
```


```
 throws ServletException, IOException {
 response.setContentType("text/html;charset=UTF-8");
 PrintWriter pw= response.getWriter();
 int n1 = Integer.parseInt(request.getParameter("t1"));
int n2 = Integer.parseInt(request.getParameter("t2"));
String op=request.getParameter("op");
if(op.equals("+")){pw.println("Addition :::"+(n1+n2));}
else if(op.equals("-")){pw.println("Subtraction :::"+(n1-n2));}
else if(op.equals("*")){pw.println("Multiplication :::"+(n1*n2));}
else if(op.equals("/")){pw.println("Division :::"+(n1/n2));}
else{pw.println("Remainder :::"+(n1%n2));}
pw.close();
}
}
```

web.xml

```
<web-app>
<servlet>
 <servlet-name>Calculator</servlet-name>
 <servlet-class>Cal</servlet-class>
</servlet>
<servlet-mapping>
 <servlet-name>Calculator</servlet-name>
 <url-pattern>/calc</url-pattern>
</servlet-mapping>
</web-app>
```

Output:

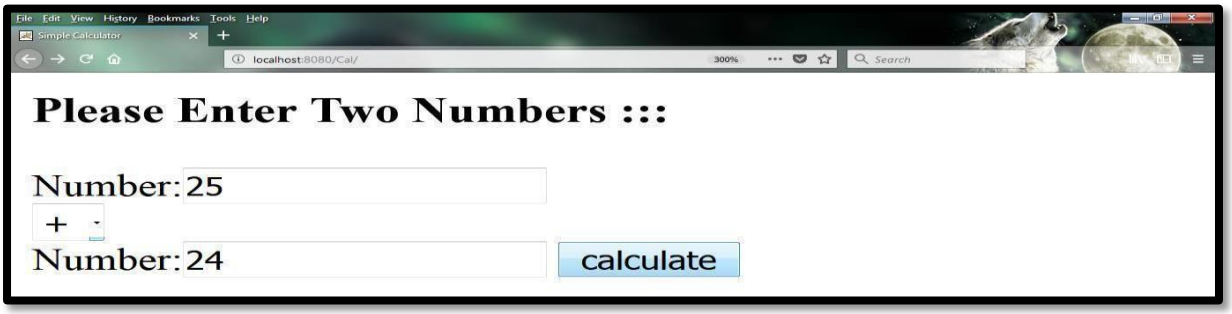

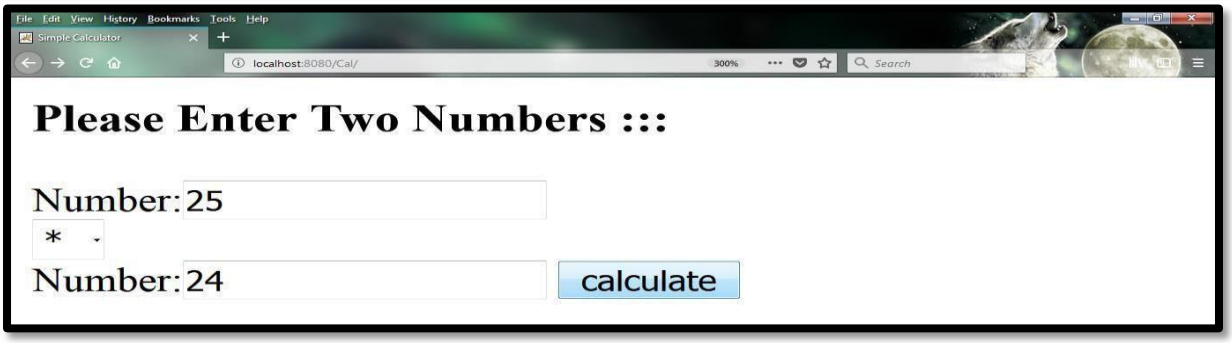



(d) **USING JSP**

Aim: To design a calculator using JSP.

calculator.html

```
<html>
<title>calculator</title>
<head><h1><center>Basic Calculator</center></h1></head>
<body>
<center>
<form action="http://localhost:8080/jsp/calculator.jsp" method="get">

<label for="num1"><b>Number 1</b></label>
<input type="text" name ="num1"><br><br>
<label for = "num2"><b>Number 2</b></label>
<input type="text" name="num2"><br><br>

<input type ="radio" name = "r1" value="Add">+
<input type = "radio" name = "r1" value="Sub">-<br>
<input type="radio" name="r1" value ="mul">*
<input type = "radio" name="r1" value="div">/<br><br>

<input type="submit" value="submit">
</center>
</body>
</html>
```

calculator.jsp

```
<html>
<title>calculator</title>
<head></head>
<body>
<%@page language="java"%>
<%
 int num1 = Integer.parseInt(request.getParameter("num1"));
 int num2 = Integer.parseInt(request.getParameter("num2"));
 String operation = request.getParameter("r1");
 if(operation.equals("Add")){
 int add=num1+num2;
 out.println("Addition is: "+add);
 }
 else if(operation.equals("Sub")){
 int sub=num1-num2;
 out.println("Substraction is: "+sub);
 }
 else if(operation.equals("mul")){
 int mul=num1*num2;
 out.println("multiplication is: "+mul);
 }
 else if(operation.equals("div"))
 {
 int div = num1/num2;
```

```
 if(num1>=num2)
 out.println("division is: "+div);
 else
 out.println("The division cannot be performed");
 }
%>
</body>
</html>
```

OUTPUT:

