

my-app.c

```
struct T1  
{  
    ≡  
};
```

```
struct T1* get_T1_instance(-,-,-);
```

```
// 1 or more functions that use instance of T1
```

```
release_T1_instance(struct T1* pT1);
```

```
struct T2  
{  
    ≡  
};
```

```
struct T2* get_T2_instance(-,-,-);
```

```
// 1 or more functions that use instance of T2
```

```
release_T2_instance(struct T2* pT2);
```

•

•

•

•

•

```
struct Tn  
{  
    ≡  
};
```

```
struct Tn* get_Tn_instance(-,-,-);
```

```
// 1 or more functions that use instance of Tn
```

```
release_Tn_instance(struct Tn* pTn);
```

my_app.c

// Header file

#include <file1.h>

:

#include <file2.h>

// structures

struct T1

{
 ==
 ==
};

struct T2

{
 ==
 ==
};

.

|

|

struct Tn

{
 ==
};

// decl of functions

get_T1_instance();

==

release_T1 - - - - -


↘

// some other funcs

```
int main(void)
{
    Total combo.
}
```

// Def. of functions

Modular Programming

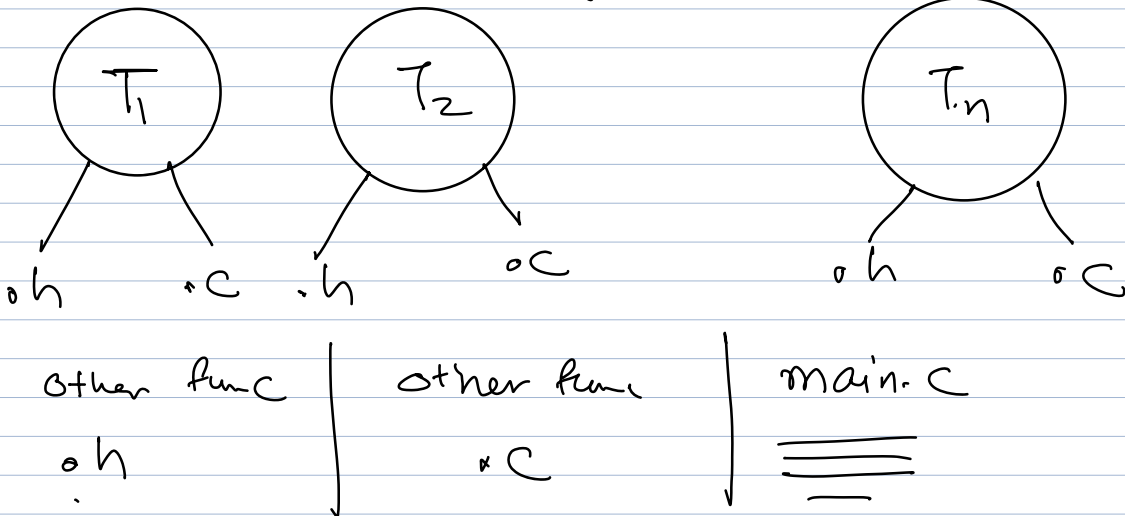

Pro's

Con's.

