

① hello.c $\xrightarrow{\text{preprocess}}$ hello.i $\xrightarrow{\text{compile}}$ hello.s $\xrightarrow{\text{Assemble}}$
hello.o $\xrightarrow{\text{link}}$ hello.exe main()

function | Data Type.

implement $\longrightarrow$ library.

C / C++ : Source code : library.

library = Data Constants + Functions + Type

Struct Management
 functions,
 → Allocation
 - Release
 - Use.

Function : Define करता आगत.

Type : Define करता आगत.

SERVER.

Define करता function call करत.


Define केलेल्या type चे instance तयार करत, आणि ते वापरत.

Useful functionality तयार करता येते.

CLIENT

Date.c

util2.c

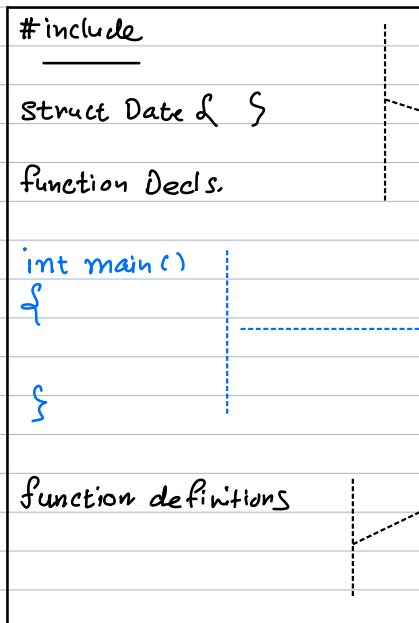

SERVER.

CLIENT

Date.exe [Machine's]

EU-1

EU-100

2×100

SERVER
810E
CODE
ISOLATE

Binary
file

CLIENT
Level
Programmer
000

Client
level
company
000

000

000

00

Date.h

#include

struct Date {

Function Decls.

Date.c

#include "Date.h"

function Definitions.

Library Type
not Binary Files

Static
Library

libDate.a

Date.lib

Dynamic Link
Library

libDate.so

Date.dll

Date.h + Date.dll

include
Path

library
path

Bundle = MODULE

MODULE = Independent

$\frac{\text{Date.h} + \text{Date.c}}{\text{utility.l.c}} = \text{Source code level module}$

