

int num = 10;


num:

int& ref = num;

num:

ref: ↗ Pure Variable Name

With No Storage Attached to it

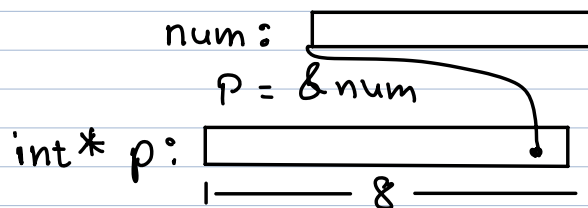

main()  
{  
  int num = 10;  : num  
  f(num);  
}

void f(int& ref)  
{  
    
}

void f(int num)  
void f(int\* p);

