




Process = Address Space + kernel D.S.

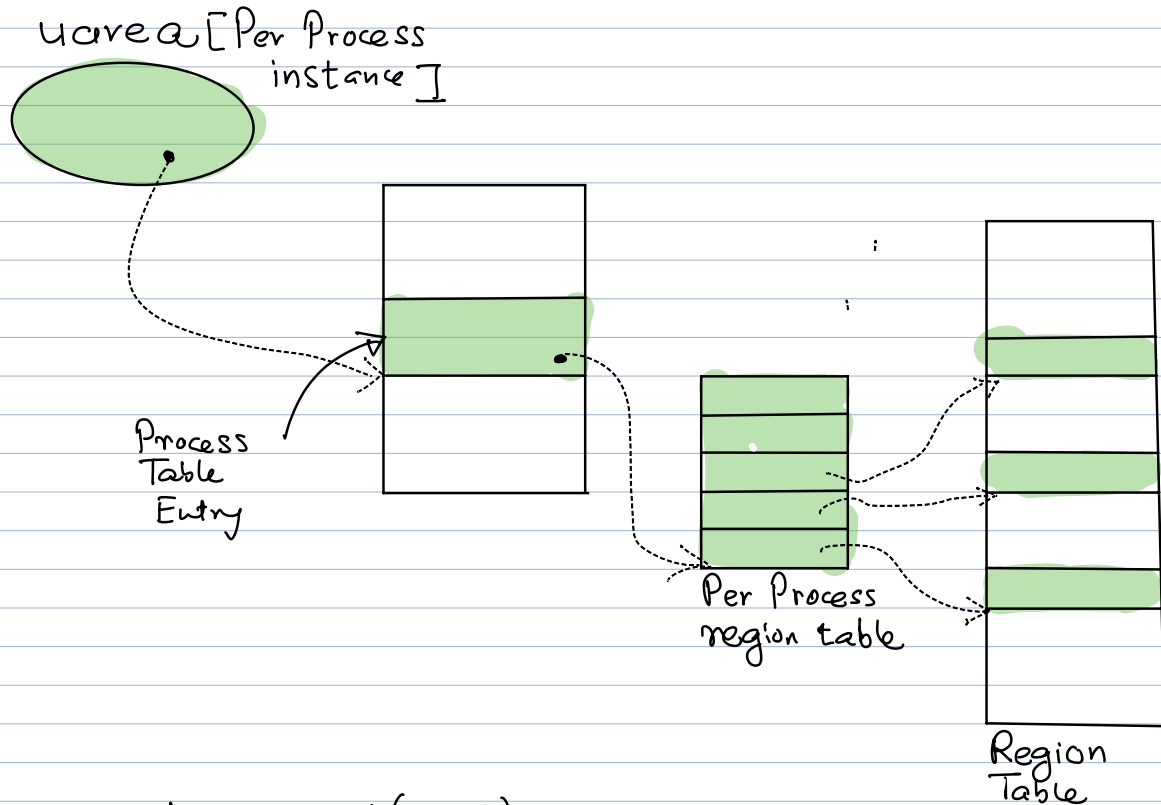

```
pid_t getpid(void)
{
    return w->proc->pid;
}
```

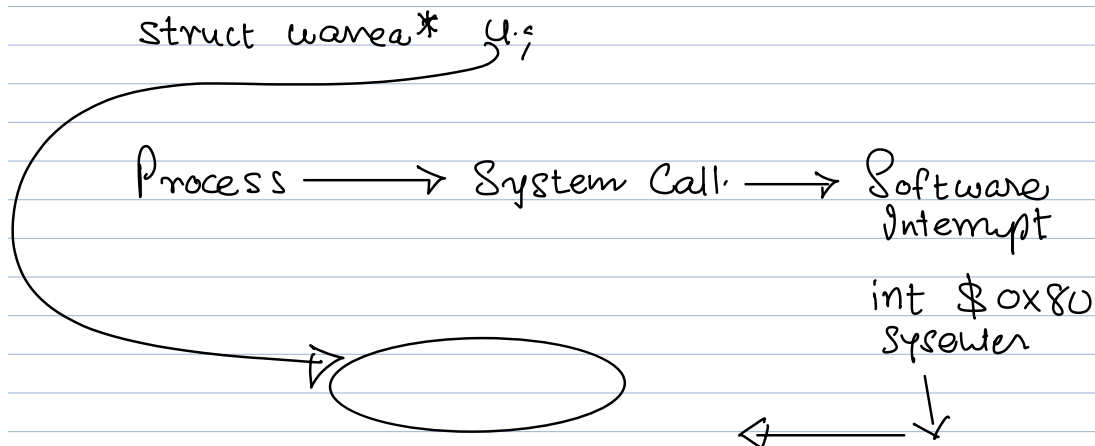

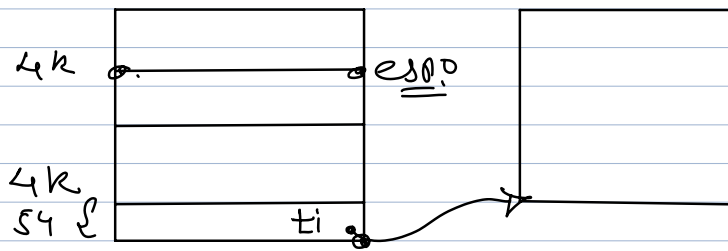

```

movl %esp, %eax
movl $0xffffe000, %ecx
andl %ecx, %eax
movl (%eax), %eax

```

```


union {
    unsigned long stack[2048];
    struct thread_info ti; // 54 byte.
}

```

```

struct thread_info {
    struct task_struct * task;
}

```

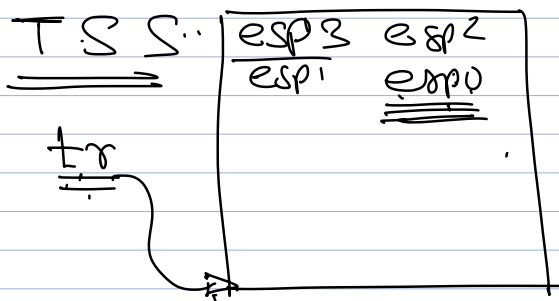

esp

int \$0x80

cpu 3-10

\$0x80

7DTR

7D.


[Addr]

3-10

CS: eip4

sys\_call table [eax] CS: eip

Stage-I:  $n:1$  | Kernel level: 1 execution context  
 User level:  $n$ -sequences of execution thread.

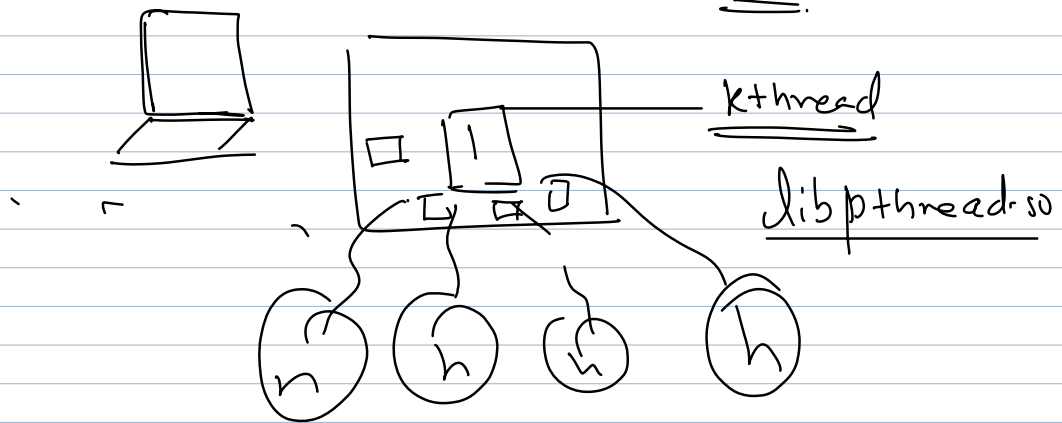

Stage-II:  $m:n$  where  $n$  = number of kthreads  
 $m$  = number of uthreads.  
 $m \gg n$ .

