

— README

1. APIs Used & Rationale

- **Primary API** (<https://jsonplaceholder.typicode.com/posts>): Used as a reliable, mock data source to fetch a standard list of records/posts for automated processing.
- **Enrichment API** (<https://jsonplaceholder.typicode.com/users>): Used to fetch corresponding user metadata (such as name and email address) for each item, simulating real-world data enrichment pipelines.
- **Gmail API (via n8n integration)**: Used to securely authenticate and send out formatted email digests to the user.


2. Data Transformation

- **Code Node (Slicing)**: Positioned between the two HTTP requests, this node takes the raw array of incoming posts and slices to ensure only relevant records move down the pipeline.
- **IF Node (Condition Filtering)**: Evaluates specific attributes (such as record IDs) to split the stream. Matching records are routed to the True branch, while non-matching records are filtered out.
- **Dynamic Expression Mapping**: The final email node leverages n8n expressions (`{{ $json.name }}`, `{{ $json.email }}`, `{{ $json.id }}`) to extract and embed live data into a clean text template.

3. Error Path Behavior

- To fulfill reliability requirements and prevent silent failures if an external API drops or times out:
 - **"Continue Workflow"** has been explicitly enabled under the *On Error* settings for both HTTP Request nodes.
 - If a network interruption occurs, the workflow catches the exception gracefully rather than crashing abruptly, allowing continuous execution or clean logging.

Workflow :

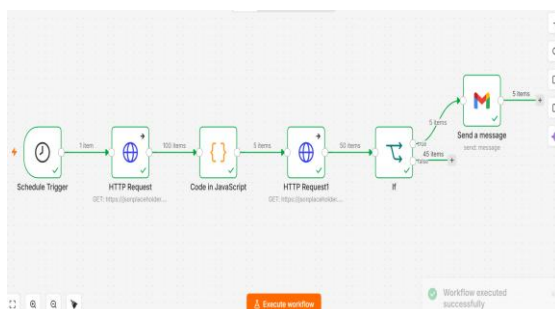

Output:

