



Default type in conc program parameter :

Default type of parameter determines what type of default value they can accept in our declared parameter.


Default type :

1. Constant :

In this default value can be set as character to show it in the parameter.

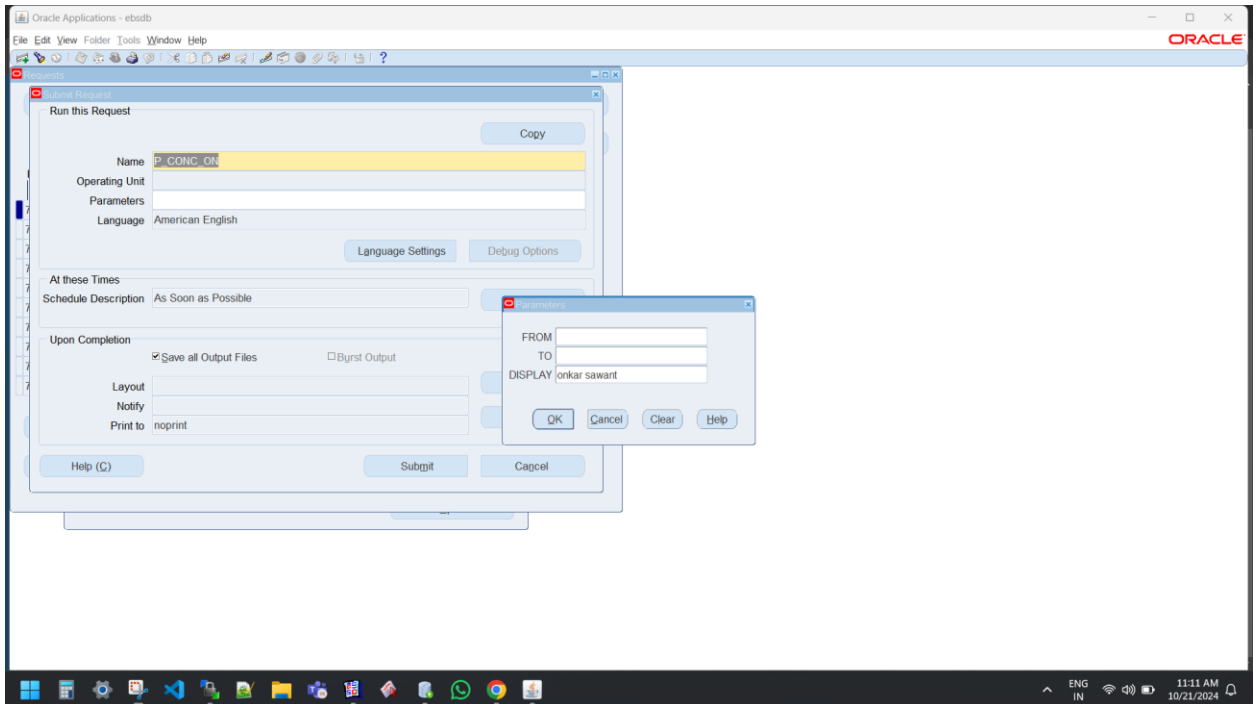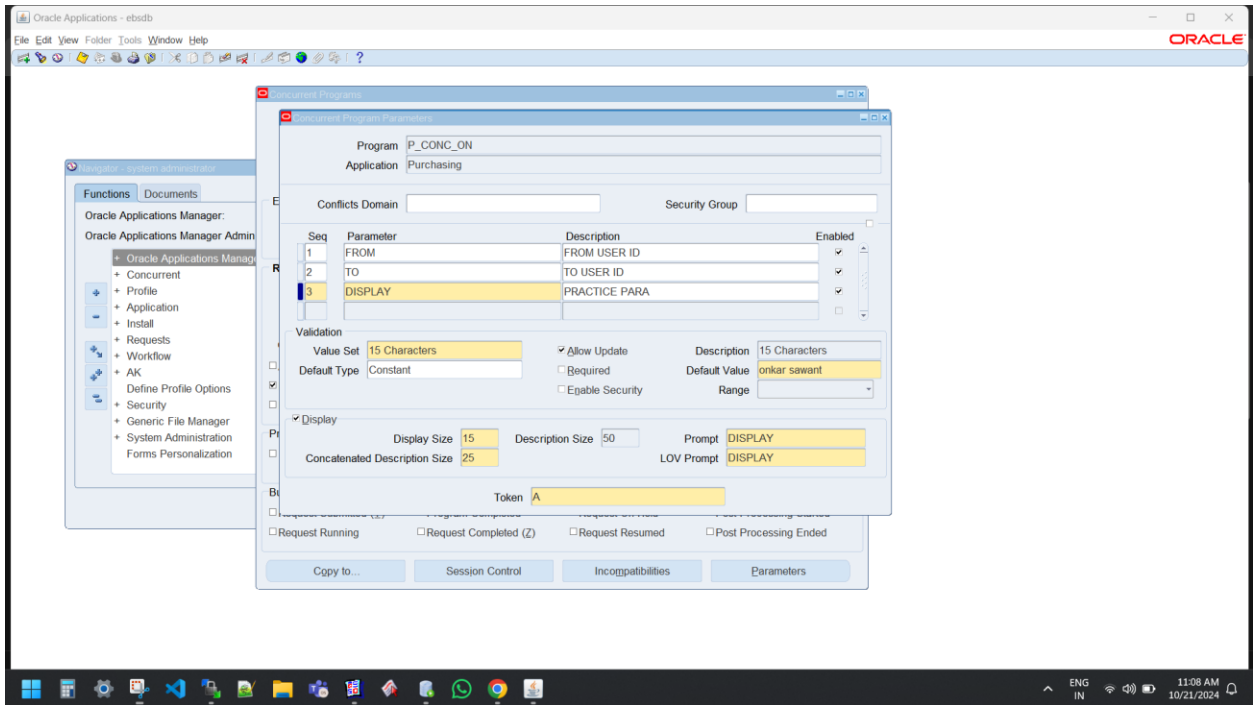


2. Current date/TIME
Shows curr date/TIME val in parameter.

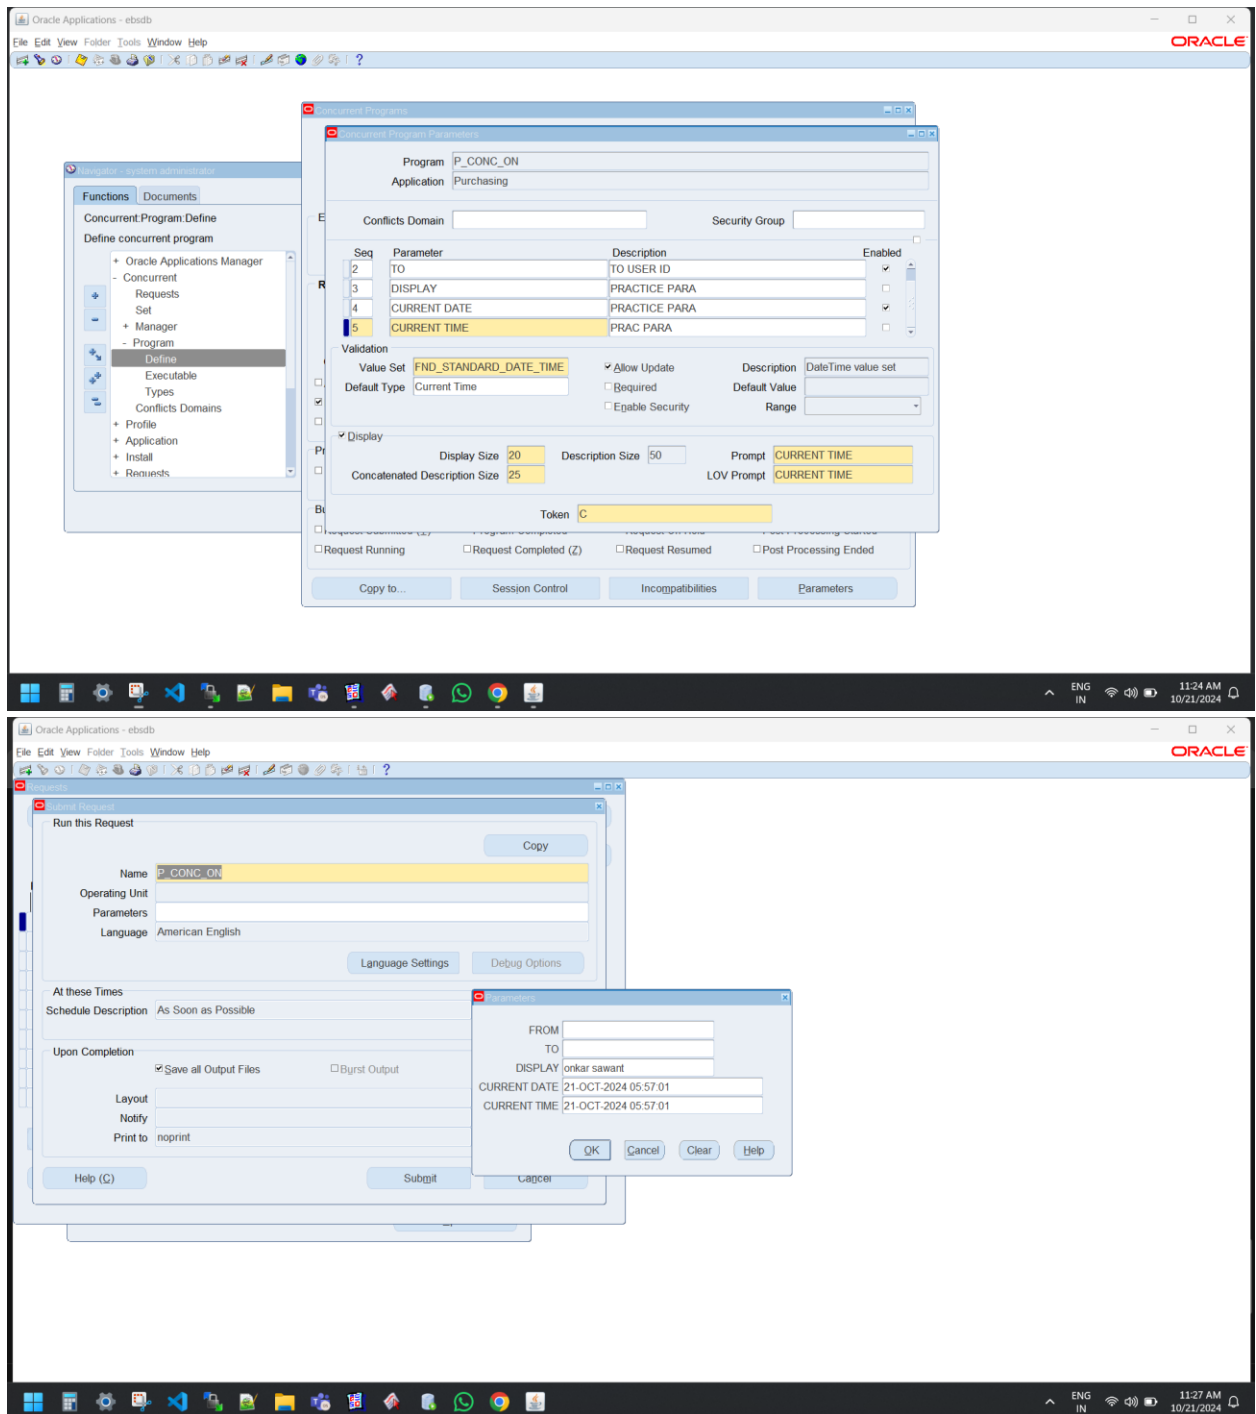

3. Sql statement

We can write sql statement in default value box which gives us output and shows this o/p in para value.

Q) CLIENT WANTS MIN(USER_ID) AND MAX(USER_ID) FROM FND_USER THEN WE CAN USE THIS IN PARA VALUE:

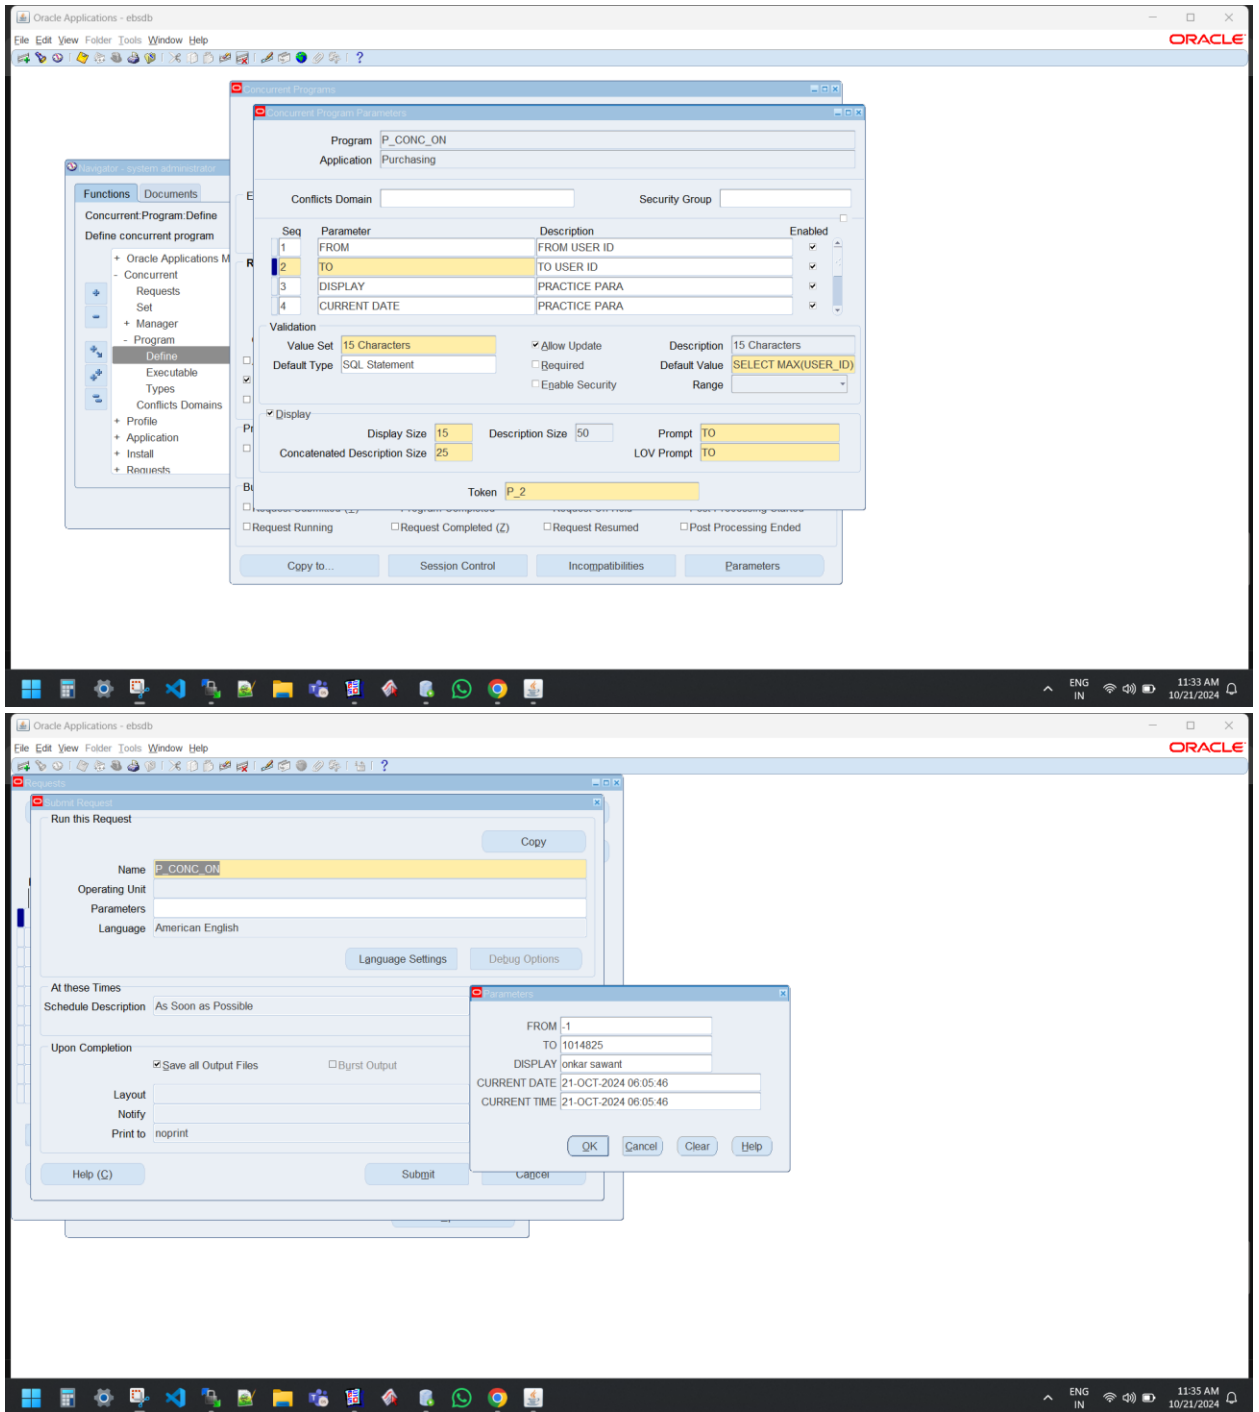

4. Segment

It saves the another parameter value in our targetted para.

