

PyOD: A Python Toolbox for Scalable Outlier Detection

Yue Zhao

YUEZHAO@CS.TORONTO.EDU

Zain Nasrullah

ZNASRULLAH@CS.TORONTO.EDU

*Department of Computer Science, University of Toronto,
Toronto, ON M5S 2E4, Canada*

Zheng Li

JK_ZHENGLI@HOTMAIL.COM

Northeastern University Toronto, Toronto, ON M5X 1E2, Canada

Editor:

Abstract

PyOD is an open-source Python toolbox for performing scalable outlier detection on multi-variate data. Uniquely, it provides access to a wide range of outlier detection algorithms, including established outlier ensembles and more recent neural network-based approaches, under a single, well-documented API designed for use by both practitioners and researchers. With robustness and scalability in mind, best practices such as unit testing, continuous integration, code coverage, maintainability checks, interactive examples and parallelization are emphasized as core components in the toolbox’s development. PyOD is compatible with both Python 2 and 3 and can be installed through Python Package Index (PyPI) or <https://github.com/yzhao062/pyod>.

Keywords: Outlier Detection, Anomaly Detection, Outlier Ensembles, Unsupervised Learning, Neural Networks, Python

1. Introduction

Outlier detection, also known as anomaly detection, refers to the identification of rare items, events or observations which differ from the general distribution of a population. Since the ground truth is often absent in such tasks, dedicated outlier detection algorithms are extremely valuable in fields which process large amounts of unlabelled data and require a means to reliably perform pattern recognition. Industry applications include fraud detection in finance (Ahmed et al., 2016), fault diagnosis in mechanics (Shin et al., 2005), intrusion detection in network security (Garcia-Teodoro et al., 2009) and pathology detection in medical imaging (Baur et al., 2018).

To help approach these problems, established outlier detection packages exist in various programming languages such as **ELKI Data Mining** (Achtert et al., 2010) and **RapidMiner** (Hofmann and Klinkenberg, 2013) in Java and **outliers** package (Komsta and Komsta, 2011) in R. However, Python, one of the most important languages in machine learning, still lacks a dedicated toolkit for outlier detection. Existing implementations either stand as single algorithm tools like **PyNomaly** (Constantinou, 2018) or exist as part of a general-purpose framework like **scikit-learn** (Pedregosa et al., 2011) which does not cater specifically to anomaly detection. To fill this gap, we propose and implement **PyOD**—a comprehensive Python toolbox for scalable outlier detection.

Table 1: Select Outlier Detection Models in PyOD

Method	Category	JIT Enabled	Multi-core
LOF (Breunig et al., 2000)	Proximity	No	Yes
kNN (Ramaswamy et al., 2000)	Proximity	No	Yes
AvgkNN (Angiulli and Pizzuti, 2002)	Proximity	No	Yes
CBLOF (He et al., 2003)	Proximity	Yes	No
OCSVM (Ma and Perkins, 2003)	Linear Model	No	No
LOCI (Papadimitriou et al., 2003)	Proximity	Yes	No
PCA (Shyu et al., 2003)	Linear Model	No	No
MCD (Hardin and Rocke, 2004)	Linear Model	No	No
Feature Bagging (Lazarevic and Kumar, 2005)	Ensembling	No	Yes
ABOD (Kriegel et al., 2008)	Proximity	Yes	No
Isolation Forest (Liu et al., 2008)	Ensembling	No	Yes
HBOS (Goldstein and Dengel, 2012)	Proximity	Yes	No
SOS (Janssens et al., 2012)	Proximity	Yes	No
AutoEncoder (Sakurada and Yairi, 2014)	Neural Net	Yes	No
AOM (Aggarwal and Sathe, 2015)	Ensembling	No	No
MOA (Aggarwal and Sathe, 2015)	Ensembling	No	No
SO-GAAL (Liu et al., 2018)	Neural Net	No	No
MO-GAAL (Liu et al., 2018)	Neural Net	No	No
XGBOD (Zhao and Hryniewicki, 2018b)	Ensembling	No	Yes
LSCP (Zhao et al., 2019)	Ensembling	No	No

Compared to existing libraries, PyOD has six distinct advantages. Firstly, it contains more than 20 algorithms which cover both classical techniques such as local outlier factor and recent neural network architectures such as autoencoders or adversarial models. Secondly, PyOD implements combination methods for merging the results of multiple detectors and outlier ensembles which are an emerging set of models. Thirdly, PyOD includes a unified API, detailed documentation and interactive examples across all algorithms for clarity and ease of use. Fourthly, all models are covered by unit testing with cross platform continuous integration, code coverage and code maintainability checks. Fifthly, optimization instruments are employed when possible: just-in-time (JIT) compilation and parallelization are enabled in select models for scalable outlier detection. Lastly, PyOD is compatible with both Python 2 and 3 across major operating systems (Windows, Linux and MacOS). Popular detection algorithms implemented in PyOD (version 0.6.7) are summarized in Table 1.

2. Project Focus

Build robustness. Continuous integration tools (*Travis CI*, *AppVeyor* and *CircleCI*) are leveraged to conduct automated testing under various versions of Python and operating systems. Tests are executed daily, when commits are made to the development and master branches, or when a pull requested is opened.

Quality assurance. The project follows the PEP8 standard; maintainability is ensured by *CodeClimate*, an automated code review and quality assurance tool. Additionally, code blocks with high cognitive complexity are actively refactored and a standard set of unit tests exist to ensure 95% overall code coverage. These design choices enhance collaboration and this standard is enforced on all pull requests for consistency.

Community-based development. PyOD’s code repository is hosted on GitHub¹ to facilitate collaboration. At the time of this writing, 6 contributors have helped developed the code base and others have contributed in the form of bug reports and feature requests.

Documentation and examples. Comprehensive documentation is developed using *sphinx* and *numpydoc* and rendered using *Read the Docs*². It includes detailed API references, an installation guide, code examples and algorithm benchmarks. An interactive Jupyter notebook is also hosted on *Binder* allowing others to experiment prior to installation.

Project relevance. PyOD has been used in various academic and commercial projects (Zhao and Hryniewicki, 2018a,b; Zhao et al., 2019). The GitHub repository receives more than 10,000 monthly views and its PyPI downloads exceed 6,000 per month.

3. Library Design and Implementation

PyOD is compatible with both Python 2 and 3 using *six*; it relies on *numpy*, *scipy* and *scikit-learn* as well. Neural networks such as autoencoders and SO_GAAL additionally require *Keras*. To enhance model scalability, select algorithms (Table 1) are optimized with JIT using *numba*. Parallelization for multi-core execution is also available for a set of algorithms using *joblib*. Inspired by *scikit-learn*’s API design, all implemented outlier detection algorithms inherit from a base class with the same interface: (i) *fit* processes the train data and computes the necessary statistics; (ii) *decision_function* generates raw outlier scores for unseen data after the model is fitted; (iii) *predict* returns a binary class label corresponding to each input sample instead of the raw outlier score; (iv) *predict_proba* offers the result as a probability using either normalization or Unification Kriegel et al., 2011 and (v) *fit_predict* is equivalent to calling *predict* after *fit*. Within this framework, new models are easy to implement by taking advantage of inheritance and polymorphism; base methods can then be overridden as necessary.

Once a detector has been fit on a training set, the corresponding train outlier scores and binary labels are accessible using its *decision_scores_* and *labels_* attributes. Once fitted, the model’s *predict*, *decision_function* and *predict_proba* methods may be called for use on new data. An example showcasing the ease of use of this API is shown in Code Snippet. 1 with an angle-based outlier detector (ABOD).

In addition to the outlier detection algorithms, a set of helper and utility functions (*generate_data*, *evaluate_print* and *visualize*) are included in the library for quick model exploration and evaluation. The two-dimensional artificial data used in the example is created by *generate_data* which generates inliers from a Gaussian distribution and outliers from a uniform distribution. An example of using *visualize* is shown in Fig. 1. Other notable utility functions include: precision at rank n and score order inversion.

1. <https://github.com/yzhao062/pyod>

2. <https://pyod.readthedocs.io>

Code Snippet 1. Demo of PyOD API with the ABOD detector

```

>>> from pyod.models.abod import ABOD
>>> from pyod.utils.data import generate_data
>>> from pyod.utils.data import evaluate_print
>>>
>>> X_train, y_train, X_test, y_test = generate_data(\
...     n_train=200, n_test=100, n_features=2)
>>>
>>> clf = ABOD(method='fast') # initialize detector
>>> clf.fit(X_train)
>>>
>>> y_test_pred = clf.predict(X_test) # binary labels
>>> y_test_scores = clf.decision_function(X_test) # raw outlier scores
>>> y_test_proba = clf.predict_proba(X_test) # outlier probability
>>>
>>> evaluate_print('ABOD', y_test, y_test_scores) # performance evaluation
ABOD Performance; ROC: 0.934; Precision@n: 0.902
>>>
>>> visualize(y_test, y_test_scores) # prediction visualization

```

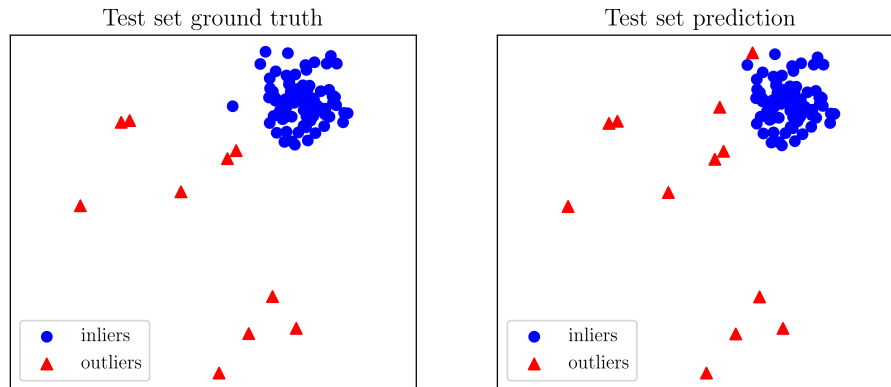


Figure 1: Demonstration of using PyOD in visualizing prediction result

4. Conclusion and Future Plans

This paper presents PyOD, a comprehensive toolbox built in Python for scalable outlier detection. It includes more than 20 classical and emerging detection algorithms and is being used in both academic and commercial projects. As avenues for future work, we plan to enhance the toolbox by implementing models that work well with time series and geospatial data, improving computational efficiency through distributed computing and addressing engineering challenges such as handling sparse matrices or memory limitations.

References

- Elke Achtert, Hans-Peter Kriegel, Lisa Reichert, Erich Schubert, Remigius Wojdanowski, and Arthur Zimek. Visual evaluation of outlier detection models. In *International Conference on Database Systems for Advanced Applications*, pages 396–399. Springer, 2010.
- Charu C Aggarwal and Saket Sathe. Theoretical foundations and algorithms for outlier ensembles. *ACM SIGKDD Explorations Newsletter*, 17(1):24–47, 2015.
- Mohiuddin Ahmed, Abdun Naser Mahmood, and Md Rafiqul Islam. A survey of anomaly detection techniques in financial domain. *Future Gener. Comput. Syst.*, 55:278–288, 2016.
- Fabrizio Angiulli and Clara Pizzuti. Fast outlier detection in high dimensional spaces. In *PKDD*, pages 15–27. Springer, 2002.
- Christoph Baur, Benedikt Wiestler, Shadi Albarqouni, and Nassir Navab. Deep autoencoding models for unsupervised anomaly segmentation in brain mr images. *arXiv preprint arXiv:1804.04488*, 2018.
- Markus M Breunig, Hans-Peter Kriegel, Raymond T Ng, and Jörg Sander. Lof: identifying density-based local outliers. In *ACM SIGMOD Record*, volume 29, pages 93–104, 2000.
- Valentino Constantinou. Pynomaly: Anomaly detection using local outlier probabilities (loop). *The Journal of Open Source Software*, 3:845, 2018.
- Pedro Garcia-Teodoro, Jesus Diaz-Verdejo, Gabriel Maciá-Fernández, and Enrique Vázquez. Anomaly-based network intrusion detection: Techniques, systems and challenges. *computers & security*, 28(1-2):18–28, 2009.
- Markus Goldstein and Andreas Dengel. Histogram-based outlier score (hbos): A fast unsupervised anomaly detection algorithm. *KI-2012*, pages 59–63, 2012.
- Johanna Hardin and David M Rocke. Outlier detection in the multiple cluster setting using the minimum covariance determinant estimator. *Computational Statistics & Data Analysis*, 44(4):625–638, 2004.
- Zengyou He, Xiaofei Xu, and Shengchun Deng. Discovering cluster-based local outliers. *Pattern Recognition Letters*, 24(9-10):1641–1650, 2003.
- Markus Hofmann and Ralf Klinkenberg. *RapidMiner: Data mining use cases and business analytics applications*. CRC Press, 2013.
- JHM Janssens, Ferenc Huszár, EO Postma, and HJ van den Herik. Stochastic outlier selection. Technical report, Technical report TiCC TR 2012-001, Tilburg University, Tilburg Center for Cognition and Communication, Tilburg, The Netherlands, 2012.
- Lukasz Komsta and Maintainer Lukasz Komsta. *Package outliers*, 2011. URL <https://cran.r-project.org/web/packages/outliers/outliers.pdf>. R package version 0.14.
- Hans-Peter Kriegel, Arthur Zimek, et al. Angle-based outlier detection in high-dimensional data. In *SIGKDD*, pages 444–452. ACM, 2008.

- Hans-Peter Kriegel, Peer Kroger, Erich Schubert, and Arthur Zimek. Interpreting and unifying outlier scores. In *SDM*, pages 13–24. SIAM, 2011.
- Aleksandar Lazarevic and Vipin Kumar. Feature bagging for outlier detection. In *SIGKDD*, pages 157–166. ACM, 2005.
- Fei Tony Liu, Kai Ming Ting, and Zhi-Hua Zhou. Isolation forest. In *2008 Eighth IEEE International Conference on Data Mining*, pages 413–422. IEEE, 2008.
- Yezheng Liu, Zhe Li, Chong Zhou, Yuanchun Jiang, Jianshan Sun, Meng Wang, and Xiangnan He. Generative adversarial active learning for unsupervised outlier detection. *arXiv preprint arXiv:1809.10816*, 2018.
- Junshui Ma and Simon Perkins. Time-series novelty detection using one-class support vector machines. In *IJCNN*, volume 3, pages 1741–1745. IEEE, 2003.
- Spiros Papadimitriou, Hiroyuki Kitagawa, Phillip B Gibbons, and Christos Faloutsos. Loci: Fast outlier detection using the local correlation integral. In *Data Engineering, 2003. Proceedings. 19th International Conference on*, pages 315–326. IEEE, 2003.
- Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al. Scikit-learn: Machine learning in python. *Journal of machine learning research*, 12(Oct):2825–2830, 2011.
- Sridhar Ramaswamy, Rajeev Rastogi, and Kyuseok Shim. Efficient algorithms for mining outliers from large data sets. In *ACM Sigmod Record*, volume 29, pages 427–438, 2000.
- Mayu Sakurada and Takehisa Yairi. Anomaly detection using autoencoders with nonlinear dimensionality reduction. In *MLSDA Workshop*, 2014.
- Hyun Joon Shin, Dong-Hwan Eom, and Sung-Shick Kim. One-class support vector machines application in machine fault detection and classification. *Computers & Industrial Engineering*, 48(2):395–408, 2005.
- Mei-Ling Shyu, Shu-Ching Chen, Kanoksri Sarinnapakorn, and LiWu Chang. A novel anomaly detection scheme based on principal component classifier. Technical report, Department of Electrical and Computer Engineering, University of Miami, 2003.
- Yue Zhao and Maciej K Hryniewicki. DCSO: dynamic combination of detector scores for outlier ensembles. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD), Outlier Detection De-constructed Workshop*, London, UK, August 2018a.
- Yue Zhao and Maciej K Hryniewicki. XGBOD: improving supervised outlier detection with unsupervised representation learning. In *IJCNN*, Rio de Janeiro, Brazil, July 2018b.
- Yue Zhao, Maciej K Hryniewicki, Zain Nasrullah, and Zheng Li. LSCP: Locally selective combination in parallel outlier ensembles. In *SDM*, Calgary, Canada, May 2019. SIAM.