



**Vidyavardhini's College of Engineering and Technology**

**Department of Artificial Intelligence & Data Science**

---

Experiment No.6
Implement adversarial search using mini-max
Date of Performance:
Date of Submission:





# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

**Aim:** Implementation of Adversarial Search using mini-max algorithm.

**Objective:** To study the mini-max algorithm and its implementation for problem solving.

### Theory:

#### Adversarial Search

Adversarial search is a search, where we examine the problem which arises when we try to plan ahead of the world and other agents are planning against us.

There might be some situations where more than one agent is searching for the solution in the same search space, and this situation usually occurs in game playing.

The environment with more than one agent is termed as multi-agent environment, in which each agent is an opponent of other agent and playing against each other. Each agent needs to consider the action of other agent and effect of that action on their performance.

So, Searches in which two or more players with conflicting goals are trying to explore the same search space for the solution, are called adversarial searches, often known as Games.

#### Mini-Max Algorithm in Artificial Intelligence

- o Mini-max algorithm is a recursive or backtracking algorithm which is used in decision-making and game theory. It provides an optimal move for the player assuming that opponent is also playing optimally.
- o Mini-Max algorithm uses recursion to search through the game-tree.
- o Min-Max algorithm is mostly used for game playing in AI. Such as Chess, Checkers, tic-tac-toe, go, and various tow-players game. This Algorithm computes the minimax decision for the current state.
- o In this algorithm two players play the game, one is called MAX and other is called MIN.
- o Both the players fight it as the opponent player gets the minimum benefit while they get the maximum benefit.
- o Both Players of the game are opponent of each other, where MAX will select the maximized value and MIN will select the minimized value.
- o The minimax algorithm performs a depth-first search algorithm for the exploration of the complete game tree.
- o The minimax algorithm proceeds all the way down to the terminal node of the tree, then backtrack the tree as the recursion.

Pseudo-code for MinMax Algorithm:

```
if  
    return static
```

CSL502: Artificial Intelligence  
Lab



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

if

7. for do false

return

else

14. for do true

return

Initial call:


Minimax(node, 3, true)

*Working of Min-Max Algorithm:*

- o The working of the minimax algorithm can be easily described using an example. Below we have taken an example of game-tree which is representing the two-player game.
- o In this example, there are two players one is called Maximizer and other is called Minimizer.
- o Maximizer will try to get the Maximum possible score, and Minimizer will try to get the minimum possible score.
- o This algorithm applies DFS, so in this game-tree, we have to go all the way through the leaves to reach the terminal nodes.
- o At the terminal node, the terminal values are given so we will compare those value and backtrack the tree until the initial state occurs. Following are the main steps involved in solving the two- player game tree:

### Step-1:

function to get the utility values for the terminal states. In the below tree diagram, let's take A is the initial state of the tree. Suppose maximizer takes first turn which has worst-case initial value =  $-\infty$ , and minimizer will take next turn which has worst-case initial value =  $+\infty$ .

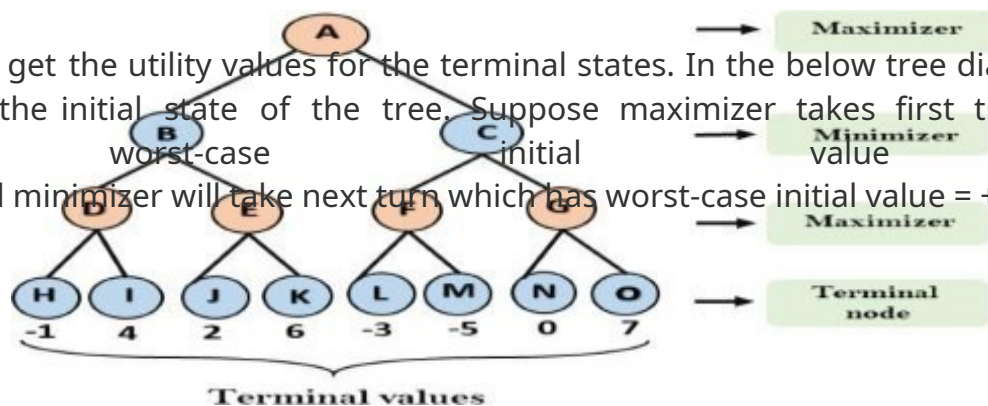

**Step 2:** Now, first we find the utilities value for the Maximizer, its initial value is  $-\infty$ ,

so we will compare each value in terminal state with initial

CSL502: Artificial Intelligence  
Lab




# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

value of Maximizer and determines the higher nodes values. It will find the maximum among the all.

- o For node D  $\max(-1, -\infty) \Rightarrow \max(-1, 4) = 4$
- o For Node E  $\max(2, -\infty) \Rightarrow \max(2, 6) = 6$
- For Node F  $\max(-3, -\infty) \Rightarrow \max(-3, -5) = -3$
- For node G  $\max(0, -\infty) = \max(0, 7) = 7$

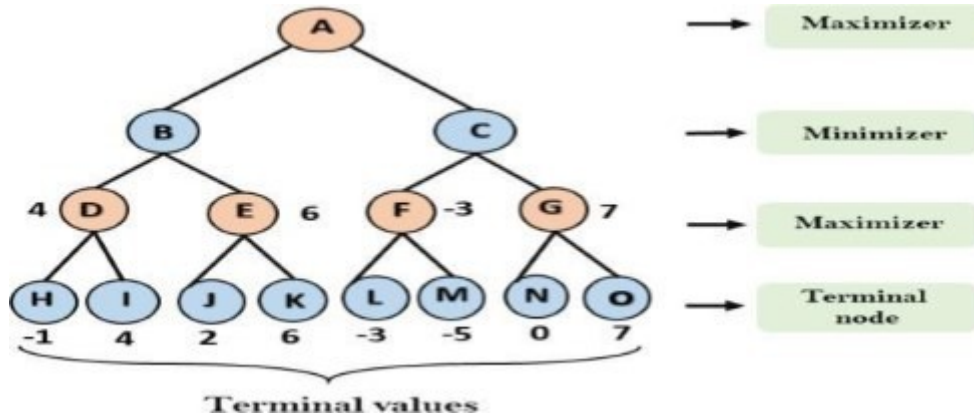


**Step 3:** In the next step, it's a turn for minimizer, so it will compare all nodes value with  $+\infty$ , and will find the 3<sup>rd</sup>

- layer node values. o For node B=  
 $\min(4, 6) = 4$
- o For node C=  $\min(-3, 7) = -3$


CSL502: Artificial Intelligence  
Lab



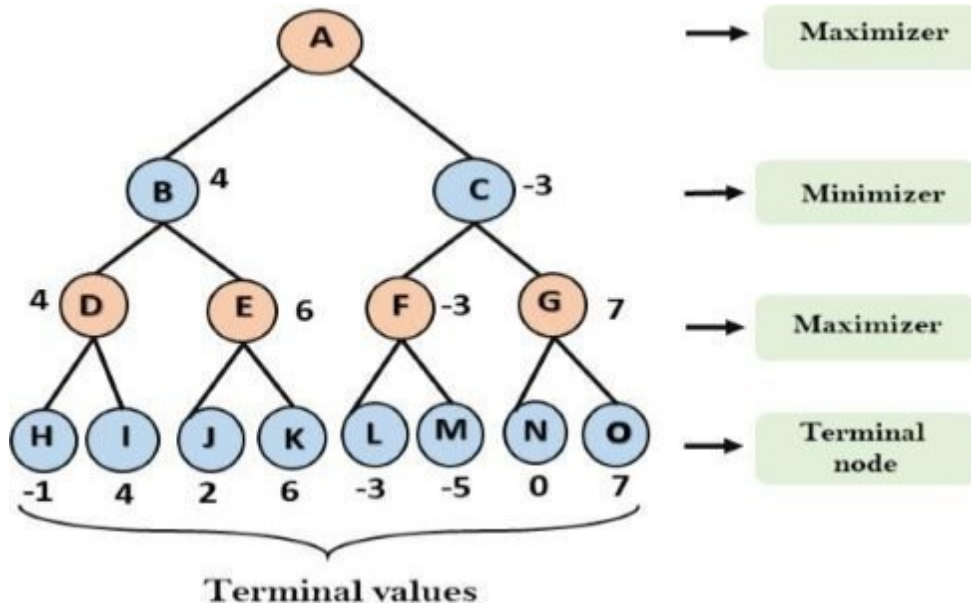

**Step 4:** Now it's a turn for Maximizer, and it will again choose the maximum of all nodes value and find the maximum value for the root node. In this game tree, there are only 4 layers, hence we reach immediately to the root node, but in real games, there will be more than 4 layers.

- o For node A  $\max(4, -3) = 4$

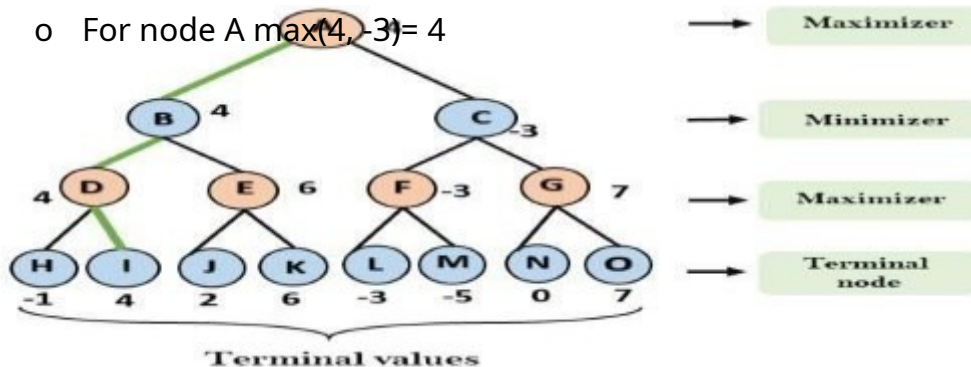

That was the complete workflow of the minimax two player game. **Properties of Mini-Max algorithm:**

- o **Complete-** Min-Max algorithm is Complete. It will definitely find a solution (if exist), in the finite search tree.
- o **Optimal-** Min-Max algorithm is optimal if both opponents are playing optimally.
- o **Time complexity-** As it performs DFS for the game-tree, so the time complexity of Min-Max algorithm is  $O(b^m)$ , where  $b$  is branching factor of the game-tree, and  $m$  is the maximum depth of the tree.

CSL502: Artificial Intelligence  
Lab



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

- o **Space Complexity-** Space complexity of Mini-max algorithm is also similar to DFS which is  **$O(bm)$** .

### Conclusion:

Comment on your implemented Program and result you got.



