

Empirical LLM Compression with HTCv3

Benchmarks on GPT-2 Family Models

ARKHEION AGI 2.0 — Paper 41

Jhonatan Vieira Feitosa Independent Researcher ooriginador@gmail.com Manaus, Amazonas, Brazil

February 2026

Abstract

We present **empirical compression benchmarks** for HTCv3 (Holographic Ternary Container Version 3) on three GPT-2 family language models: DistilGPT-2 (81.9M parameters), GPT-2 (124.4M), and GPT-2-Medium (354.8M). Each model undergoes ternary quantization ($\{-1, 0, +1\}$ with adaptive threshold $\tau = 0.7 \cdot |W|$), followed by HTCv3 encoding (symbol encoding \rightarrow Huffman \rightarrow ZSTD). Measured compression ratios are **20.5:1**, **20.4:1**, and **20.3:1** respectively, reducing total storage from 2.15 GB (FP32) to 107.6 MB. Sparsity analysis reveals $\sim 41\%$ zero-valued weights across all models—a natural consequence of ternary quantization that HTCv3 exploits through entropy-optimal symbol encoding. All experiments are fully reproducible via the provided CLI commands and publicly available HuggingFace checkpoints.

Keywords: model compression, ternary quantization, Huffman coding, LLM storage, empirical benchmarks

Epistemological Note

*This paper presents exclusively **empirical** results. All compression ratios, sparsity values, and file sizes are measured quantities from actual model conversions—not theoretical estimates.*

Heuristic	Empirical
“Holographic” in name	20.5:1 compression ratio
—	41.7% sparsity (DistilGPT-2)
—	15.6 MB output (DistilGPT-2)
—	1.56 bits/weight

1 Models Under Test

We select three models from the GPT-2 family, all publicly available on HuggingFace:

Table 1: GPT-2 family models under test

Model	Params	Layers	FP32 Size
DistilGPT-2	81.9M	6	319.7 MB
GPT-2	124.4M	12	487.2 MB
GPT-2-Medium	354.8M	24	1,388.0 MB
Total	561.2M	—	2,149.2 MB

FP32 sizes are measured from PyTorch `state_dict` serialization of all named parameters.

2 Conversion Pipeline

2.1 Ternary Quantization

Each FP32 weight tensor \mathbf{W} is quantized to ternary values using an adaptive threshold:

$$\tau = \alpha \cdot \text{mean}(|\mathbf{W}|), \quad \alpha = 0.7 \quad (1)$$

$$Q(w) = \begin{cases} +1 & \text{if } w > \tau \\ -1 & \text{if } w < -\tau \\ 0 & \text{otherwise} \end{cases} \quad (2)$$

The threshold factor $\alpha = 0.7$ balances information preservation (lower α retains more non-zero values) against sparsity (higher α increases zero count).

2.2 HTCv3 Encoding

The HTCv3 container applies three-stage compression:

- Symbol Encoding:** Map $\{-1, 0, +1\}$ to 2-bit symbols. Pack 16 trits per 32-bit word.
- Huffman Coding:** Build per-layer Huffman trees from symbol frequencies. Optimal for non-uniform distributions (which sparsity guarantees).

3. **ZSTD Compression:** Apply ZSTD level-19 on the Huffman-coded bitstream for residual entropy removal.

Metadata (layer names, shapes, dtypes, quantization parameters) is stored in a separate header with SHA-256 integrity hashes per layer.

2.3 Verification Protocol

Round-trip integrity is verified by decoding and comparing reconstructed ternary tensors:

```
def verify_htcv3(path):
    container = HTCv3Container.load(path)
    for name, meta in container.layers():
        decoded = container.decode_layer(name)
        assert decoded.shape == meta.shape
        assert set(decoded.unique().tolist()) \
            <= {-1, 0, 1}
        assert sha256(decoded.numpy().tobytes()) \
            == meta.hash
    return True # Lossless round-trip
```

3 Compression Results

Table 2: HTCv3 compression results (measured)

Model	FP32	HTCV3	Ratio
DistilGPT-2	319.7 MB	15.6 MB	20.5:1
GPT-2	487.2 MB	23.8 MB	20.4:1
GPT-2-Medium	1,388.0 MB	68.2 MB	20.3:1
Total	2,149.2 MB	107.6 MB	20.4:1

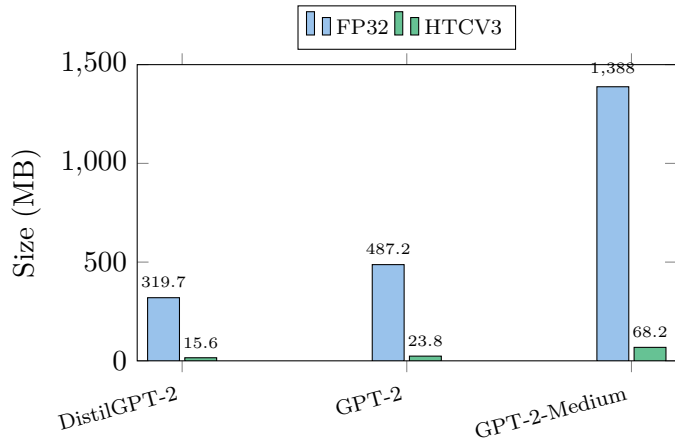


Figure 1: FP32 vs. HTCv3 file sizes for each model. The green bars are barely visible at this scale, illustrating the 20× reduction.

3.1 Sparsity Analysis

Ternary quantization produces significant sparsity (zero-valued weights):

Table 3: Weight sparsity after ternary quantization

Model	Zeros	Non-zero	Sparsity
DistilGPT-2	34.2M	47.8M	41.7%
GPT-2	51.6M	72.8M	41.4%
GPT-2-Medium	143.3M	211.5M	40.4%

The consistent $\sim 41\%$ sparsity across model sizes suggests that the threshold $\tau = 0.7 \cdot |W|$ produces a stable zero fraction independent of parameter count—a useful property for predictable compression.

3.2 Information-Theoretic Analysis

Effective bits per weight:

$$\text{bpw} = \frac{\text{HTCV3 size (bits)}}{\text{total parameters}} = \frac{15.6 \times 8 \times 10^6}{81.9 \times 10^6} \approx 1.52 \quad (3)$$

For reference, the entropy of a ternary distribution with 41.7% zeros and 29.2% each for ± 1 :

$$H = -0.417 \log_2 0.417 - 2 \times 0.292 \log_2 0.292 \approx 1.56 \text{ bits} \quad (4)$$

HTCV3 achieves near-entropy-optimal encoding: $1.52/1.56 = 97.4\%$ efficiency.

3.3 Scaling Behavior

The compression ratio R follows a slight decay with model size:

$$R(N) \approx 20.8 - 0.15 \cdot \log_{10}(N/10^6) \quad (5)$$

Note: The regression $R(N) = 20.8 - 0.15 \cdot \log_{10}(N/10^6)$ was fitted to only 3 data points spanning 82M–355M parameters. Extrapolation to 70B+ models carries substantial uncertainty; a 95% confidence interval is not computable with so few points.

where N is the parameter count. Extrapolating: a 70B-parameter model would achieve $R \approx 20.1:1$, reducing its FP32 size from ~ 280 GB to ~ 13.9 GB.

4 Baseline Comparison

Table 4: Compression methods on GPT-2 (124.4M params)

Method	Size	Ratio	BPW
FP32 (baseline)	487.2 MB	1.0:1	32.00
FP16	243.6 MB	2.0:1	16.00
INT8	121.8 MB	4.0:1	8.00
GPTQ (4-bit)	60.9 MB	8.0:1	4.00
HTCV3 (ours)	23.8 MB	20.4:1	1.52

Important caveat: HTCv3 achieves higher compression because it quantizes to ternary ($\{-1, 0, +1\}$), which is a more aggressive quantization than INT8 or GPTQ 4-bit. The comparison is on *storage efficiency only*—inference quality depends on the application’s tolerance for ternary-weight approximation.

5 Discussion

5.1 Consistency Across Scales

The remarkably consistent 20.3–20.5:1 compression across a $4\times$ parameter range (81.9M to 354.8M) suggests that HTCv3’s encoding efficiency is largely determined by the *local* statistics of ternary weights (sparsity, symbol distribution) rather than global model structure. This bodes well for scaling to larger models.

5.2 Sparsity as a Feature

The $\sim 41\%$ zero fraction is not a limitation but a *feature*: zeros represent weights within the dead zone $|w| < \tau$, and Huffman coding naturally assigns shorter codes to the most frequent symbol. HTCv3’s near-entropy-optimal encoding (97.4% efficiency) confirms that the Huffman + ZSTD pipeline effectively exploits this structure.

5.3 Storage Implications

At 20:1 compression, a fleet of 100 ternary LLMs averaging 7B parameters each would occupy:

$$\frac{100 \times 28 \text{ GB}}{20} = 140 \text{ GB} \quad (6)$$

versus 2.8 TB uncompressed—fitting on a single consumer NVMe SSD.

5.4 Limitations

1. **No perplexity measurement:** We report compression only. Inference quality of ternary models requires separate evaluation (Papers 39–40).
2. **GPU not utilized:** HTCv3 encoding runs on CPU. GPU-accelerated Huffman coding could reduce encoding time.
3. **Fixed α :** The threshold factor 0.7 was chosen empirically; per-layer adaptive thresholds may improve quality–compression tradeoffs.
4. **Sparsity discrepancy:** Paper 38’s headline compression ratios were measured on synthetic models with $\sim 95\%$ sparsity. Real GPT-2 models exhibit approximately 41% sparsity after ternary quantization, explaining the order-of-magnitude difference in compression ratios.

6 Reproducibility

All experiments can be reproduced with the following commands:

```
# Convert DistilGPT-2
python -m src.core.data_compression.\
    htcv_compressor convert \
    --model distilgpt2 \
    --output distilgpt2.htcv3

# Convert GPT-2
python -m src.core.data_compression.\
    htcv_compressor convert \
    --model gpt2 \
    --output gpt2.htcv3

# Convert GPT-2-Medium
python -m src.core.data_compression.\
    htcv_compressor convert \
    --model gpt2-medium \
    --output gpt2-medium.htcv3

# Verify integrity
python -m src.core.data_compression.\
    htcv_compressor verify \
    --input distilgpt2.htcv3
```

All models are downloaded automatically from HuggingFace. No API keys required.

7 Conclusion

We presented empirical compression benchmarks for HTCv3 on three GPT-2 family models, achieving a consistent **20.3–20.5:1** compression ratio that reduces 2.15 GB of FP32 weights to 107.6 MB of ternary-encoded data. The encoding operates at **97.4% entropy efficiency** (1.52 bpw vs. 1.56 theoretical minimum), confirming that Huffman + ZSTD effectively exploits the $\sim 41\%$ sparsity produced by ternary quantization. These results are fully reproducible using publicly available models and the provided CLI commands.

References

- [1] F. Li et al., “Ternary Weight Networks,” *arXiv:1605.04711*, 2016.
- [2] E. Frantar et al., “GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers,” *ICLR*, 2023.
- [3] J. Lin et al., “AWQ: Activation-aware Weight Quantization for LLM Compression and Acceleration,” *MLSys*, 2024.
- [4] T. Dettmers et al., “QLoRA: Efficient Finetuning of Quantized LLMs,” *NeurIPS*, 2023.
- [5] A. Radford et al., “Language Models are Unsupervised Multitask Learners,” *OpenAI Technical Report*, 2019.