


Multi-contact conditioning: accuracy and response

97 eval-val proteins · 2 replicates averaged per protein · paired protein-bootstrap 95% intervals

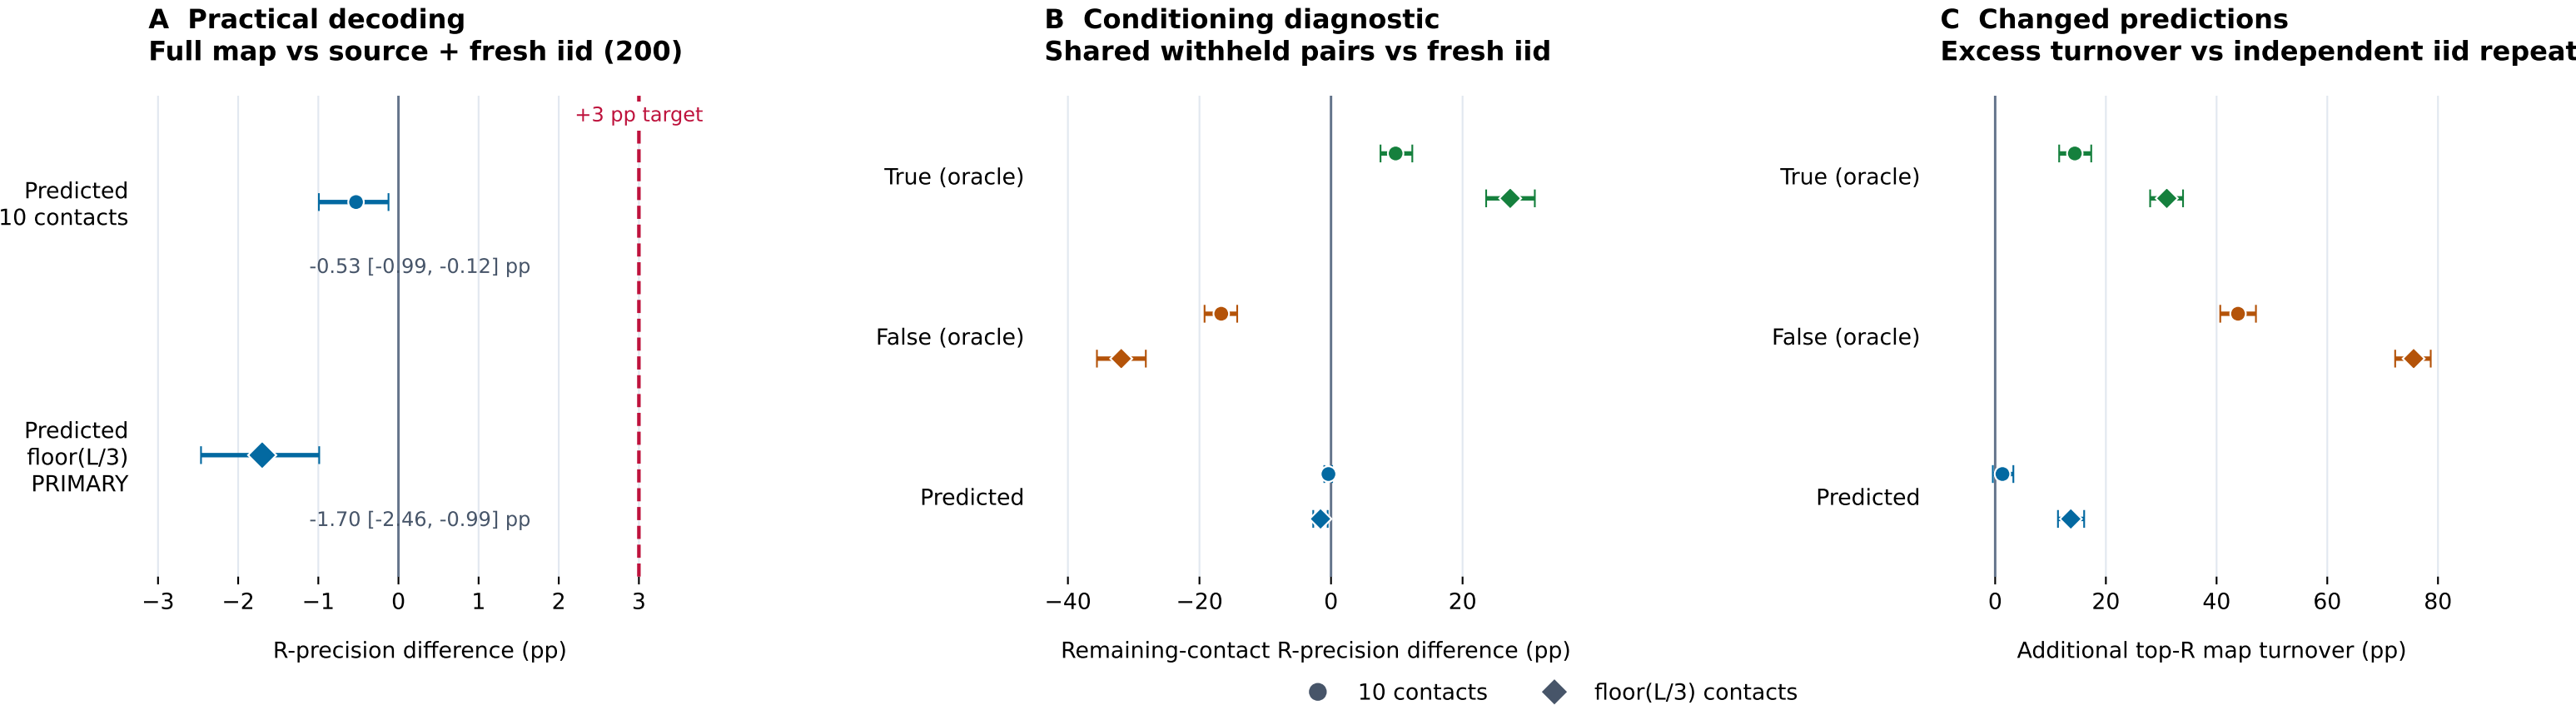

A is the practical test. B uses a common context-excluded universe; true/false contexts use ground truth. C measures response, not accuracy; zero is iid-repeat turnover.

Intervals condition on the saved first pass and inference draws; exploratory comparisons are unadjusted. Panel scales differ. Equal rollout counts do not imply equal compute.