

Deutsche Börse Group's T7

Enhanced Order Drop Copy Interface

Derivatives Message Reference

Release 15.0

EDCI Version	15.0
EDCI Subversion	D0002
Build Version	150.540.5.ga-150005040-17
Date	20 August 2026

Disclaimer

© Deutsche Börse Group 2026

This content is for informational purposes only. None of the information constitutes investment advice or an offer to sell or the solicitation of an offer to buy any contract, share or other financial instrument. This content is only for use as general information and all descriptions, examples and calculations contained are for illustrative purposes only.

Deutsche Börse AG, Frankfurter Wertpapierbörse (FWB®, the Frankfurt Stock Exchange), Eurex Frankfurt AG, Eurex Deutschland and Eurex Clearing AG do not represent that the information in this publication is comprehensive, complete or accurate and exclude liability for any consequence resulting from acting upon the contents of this or another publication, in so far as no willful violation of obligations took place or, as the case may be, no injury to life, health or body arises or claims resulting from the Product Liability Act are affected.

Securities traded on the Frankfurt Stock Exchange and Eurex derivatives (other than EURO STOXX 50® Index Futures contracts, EURO STOXX® Select Dividend 30 Index Futures contracts, STOXX® Europe 50 Index Futures contracts, STOXX® Europe 600 Index Futures contracts, STOXX® Europe Large/Mid/Small 200 Index Futures contracts, EURO STOXX® Banks Sector Futures contracts, STOXX® Europe 600 Banks/Industrial Goods & Services/Insurance/Media/Personal & Household Goods/Travel & Leisure/Utilities Futures contracts, DAX® Futures contracts, MDAX® Futures contracts, TecDAX® Futures contracts, SMIM® Futures contracts, SLI Swiss Leader Index® Futures contracts, Eurex inflation/commodity/weather/property and interest rate derivatives) are currently not available for offer, sale or trading in the United States nor may they be offered, sold or traded by persons to whom US tax laws apply.

The fund shares listed in XTF Exchange Traded Funds® are admitted for trading on the Frankfurt Stock Exchange. Users of this information service who legally reside outside Germany are herewith advised that sale of the fund shares listed in XTF Exchange Traded Funds may not be permitted in their country of residence. The user makes use of the information at their own risk.

Legal validity of this disclaimer

In the event that individual parts of or formulations contained in this text are not, or are no longer, legally valid (either in whole or in part), the content and validity of the remaining parts of the document are not affected.

Trademarks

The names and designations listed under www.deutsche-boerse.com/disclaimer are registered trademarks of Deutsche Börse AG or an affiliate of Deutsche Börse Group.

The names and trademarks listed there do not represent a complete list and, as well as all other trademarks and protected rights mentioned in this publication, are subject unreservedly to the applicable trademark law in each case and are not permitted to be used without the express permission of the registered owner. The simple fact that this publication mentions them does not imply that trademarks are not protected by the rights of third parties.

Information on trademarks of Stoxx Ltd. and ISS STOXX Index GmbH are available under www.stoxx.com/trademarks.

EEX® is a registered trademark of European Energy Exchange AG.

TRADEGATE® is a registered trademark of Tradegate AG Wertpapierhandelsbank.

Flexible is better.® is a registered trademark of Axioma, Inc.

Contents

1	List of Abbreviations	4
2	Introduction	5
3	Message Formats	6
3.1	Message Fragmentation	6
3.2	Data Types	7
4	Overview of Supported Message Types	9
4.1	Session Layer	9
4.2	Order Handling	9
4.3	Risk Handling	9
5	Session Layer	11
5.1	Session Logon	11
5.2	Session Logon Response	13
5.3	Heartbeat	15
5.4	Heartbeat Notification	16
5.5	Session Logout	17
5.6	Session Logout Response	18
5.7	User Logon	19
5.8	User Logon Response	20
5.9	User Logout	21
5.10	User Logout Response	22
5.11	Reject	23
5.12	Session Logout Notification	25
5.13	Session List Notification	26
5.14	Partition List Notification	27
5.15	Service Availability Market	28
5.16	Retransmit	29
5.17	Retransmit Response	31
6	Order Handling	33
6.1	Trading Session Event	33
6.2	Extended Order Information	35
6.3	Order (Mass) Cancellation Notification	44
6.4	Cross Request Notification	46
6.5	Quote Request Notification	48
6.6	Enter CLIP Notification	50
6.7	Order Reject Notification	56
7	Risk Handling	58
7.1	Trading Action Request	58
7.2	Trading Action Response	60
7.3	Risk Notification	61
7.4	Entitlement Notification	63
7.5	Legal Notification	65
7.6	Party Action Report	67
7.7	Status Broadcast	69
A	Appendix	70
A.1	XML Interface Description	70
B	Change Log	70
B.1	T7 Release 15.0 – Version 2 (EDCI 15.0-D0002)	70

B.2 T7 Release 15.0 – Version 1 (EDCI 15.0-D0001)	71
---	----

Contents

1 List of Abbreviations

Please find a list of all the abbreviations used in the document. The first time an abbreviation is introduced in the document it is written in brackets after the phrase.

EDCI	Enhanced Drop Copy Interface
OCO	One Cancels the Other (order)
SMP	Self Match Prevention
XML	eXtensible Markup Language
XSD	XML Schema Definition

2 Introduction

The T7 Enhanced Drop Copy Interface (EDCI) is a service for both Trading participants and Clearing members providing order information.

Clearing members will be able to monitor the order book activity of their Non-clearing members (NCMs) in real time, allowing them to react pro-actively before risk positions accumulate. This offering complements the existing Trade Drop Copy service offered to the clearing members.

Trading participants will have access to a comprehensive overview of all order activities impacting the order book, including the lean orders.

The purpose of this document is to provide all message formats for the derivatives market part of EDCI.

The chapter [Message Formats](#) provides the detailed message formats and fields. An introduction to the [XML Interface Description](#) and important message flows are provided in the appendix.

In addition to this document a corresponding XML representation and the schema files are published.

3 Message Formats

The following chapters provide details on the administrative and application messages used by EDCI. Additionally, information on data types is provided.

The Interface version used by the participant needs to be provided during [Logon](#) in *DefaultCstmApp/VerID (1408)*; the corresponding response message will return the Interface Version, which the EDC Gateway currently uses, in the same field.

The Interface Version will allow the participant to recognize that EDCI has changed. The Build Number shows to which EDCI XML file, EDCI XSD file, exchange software the EDCI message reference belongs to.

3.1 Message Fragmentation

In case the complete data of a transaction does not fit into a single message, EDCI automatically sends a sequence of messages to the participant.

The field *LastFragment (893)* in the corresponding header structure indicates whether the current message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction or if the application should wait for further messages in order to retrieve the full data set.

3.2 Data Types

EDCI supports the following data types:

EDCI Data Type	Description	No Value
signed int	Little endian byte order. Supported are 1, 2, 4 and 8-byte, signed integers two's complement representation.	1 byte signed int: 0x80 2 byte signed int: 0x8000 4 byte signed int: 0x80000000 8 byte signed int: 0x8000000000000000
unsigned int	Little endian byte order. Supported are 1, 2, 4 and 8-byte, unsigned integers.	1 byte unsigned int: 0xFF 2 byte unsigned int: 0xFFFF 4 byte unsigned int: 0xFFFFFFFF 8 byte unsigned int: 0xFFFFFFFFFFFFFFFF
Fixed String	Length information specifies the fixed size. Encoded as character array. Completely filled with valid characters (space padding if required).	0x00 at the first position
Fixed String (0- terminable)	Length information specifies the fixed size. Encoded as character array optionally 0-terminable (minimum string size of 1). XML file: attribute "isTerminable" is set to true. Padding after 0-terminator required up to fixed size.	0x00 at the first position
Variable String	Length information specifies the maximum possible size. Separate counter field specifies the transmitted string size. XML file: attribute "variableSize" set to true. The message is filled up to a multiple of 8 bytes and truncated.	0x00 at the first position (if the field is not the last one of a certain message) OR the related counter field specifying the transmitted string size is set to 0.

EDCI Data Type	Description	No Value
Counter	This data type represents an unsigned integer as a counter for arrays of variable size.	see 1 byte unsigned int and 2 byte unsigned int respectively
LocalMktDate	Date of Local Market (as opposed to UTC) in YYYYMMDD 4 byte unsigned binary format. Example: date 10.09.2014 is represented by a 4 byte unsigned integer number 20140910.	see 4 byte unsigned int
PriceType	Price in integer format including 8 decimals. For certain asset classes, prices may have negative values.	see 8 byte signed int
Qty	Quantity in integer format including 4 decimals.	see 8 byte signed int
UTCTimestamp	Date and time, in UTC, represented as nanoseconds past the UNIX epoch (00:00:00 UTC on 1 January 1970).	see 8 byte unsigned int
char	String of length 1.	0x00

4 Overview of Supported Message Types

The following message formats are based on:

- Interface Version: 15.0
- Build Number: 150.540.5.ga-150005040-17

4.1 Session Layer

EDCI Message	Sender	FIX Message	MsgType (35)
Session Logon	Participant	Logon	A
Session Logon Response	EDC Gateway	Logon	A
Heartbeat	Participant	Heartbeat	0
Heartbeat Notification	EDC Gateway	Heartbeat	0
Session Logout	Participant	Logout	5
Session Logout Response	EDC Gateway	Logout	5
User Logon	Participant	UserRequest	BE
User Logon Response	EDC Gateway	UserResponse	BF
User Logout	Participant	UserRequest	BE
User Logout Response	EDC Gateway	UserResponse	BF
Reject	EDC Gateway	Reject	3
Session Logout Notification	EDC Gateway	Logout	5
Session List Notification	EDC Gateway	SessionDetailsListResponse	U6
Partition List Notification	EDC Gateway	PartitionListReport	U10
Service Availability Market	EDC Gateway	UserNotification	CB
Retransmit	Participant	ApplicationMessageRequest	BW
Retransmit Response	EDC Gateway	ApplicationMessageRequestAck	BX

4.2 Order Handling

EDCI Message	Sender	FIX Message	MsgType (35)
Trading Session Event	EDC Gateway	TradingSessionStatus	h
Extended Order Information	EDC Gateway	ExecutionReport	8
Order (Mass) Cancellation Notification	EDC Gateway	OrderMassActionReport	BZ
Cross Request Notification	EDC Gateway	CrossRequest	DS
Quote Request Notification	EDC Gateway	QuoteRequest	R
Enter CLIP Notification	EDC Gateway	ExecutionReport	8
Order Reject Notification	EDC Gateway	Reject	3


4.3 Risk Handling

EDCI Message	Sender	FIX Message	MsgType (35)
Trading Action Request	Participant	TradingActionRequest	U34
Trading Action Response	EDC Gateway	TradingActionReport	U35
Risk Notification	EDC Gateway	PartyRiskLimitsUpdateReport	CR
Entitlement Notification	EDC Gateway	PartyEntitlementsUpdateReport	CZ
Legal Notification	EDC Gateway	UserNotification	CB
Party Action Report	EDC Gateway	PartyActionReport	DI
Status Broadcast	EDC Gateway	TradingSessionStatus	h

5 Session Layer

5.1 Session Logon

This message must be the first message sent by the participant to the assigned gateway authenticating the T7 EDC session. Password change is not supported.

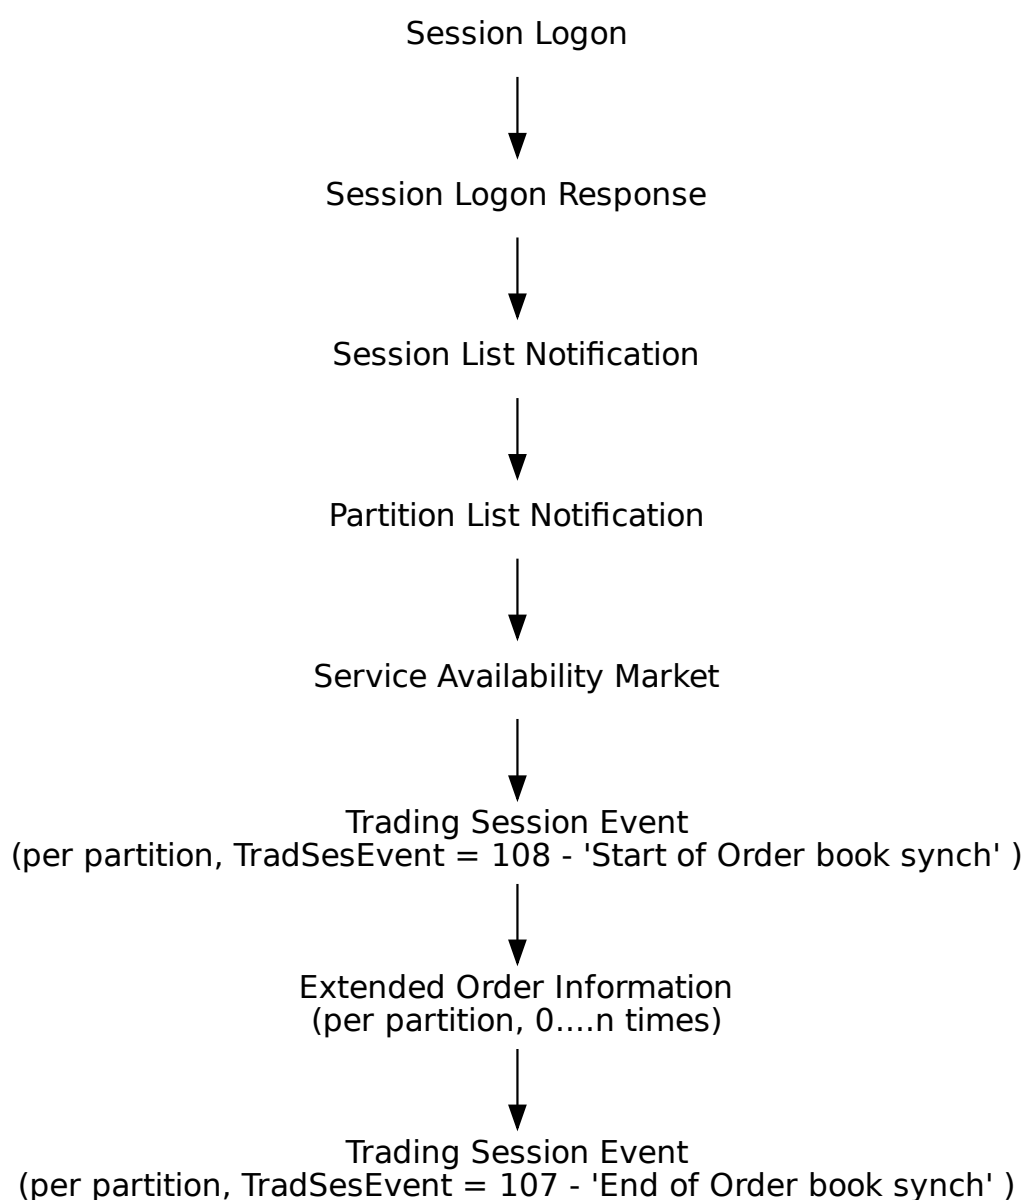

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10000 (Logon, MsgType = A)
39020	Pad2	U	2	6	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway. Must be set to 1.
50	SenderSubID	U	4	12	unsigned int	not used
<MessageBody>						
108	HeartBtInt	N	4	16	unsigned int	Heartbeat interval (milliseconds). If heartbeat Interval equal 0, gateway will not take any action for skipped heartbeats (only allowed for non-production environments) not set: gateway will define interval.
20055	PartyIDSessionID	Y	4	20	unsigned int	Session ID.
1408	DefaultCstmApplVer-ID	Y	30	24	Fixed String (0-terminable)	Indicates the EDC interface version the participant application uses (see front page). Valid characters: \x20, \x22-\x7B, \x7D, \x7E
554	Password	Y	32	54	Fixed String (0-terminable)	Password. Valid characters: 0-9, A-Z, a-z, \x21, \x23, \x24, \x25, \x26, \x2A, \x2B, \x2D, \x2F, \x3D, \x40, \x5F
39020	Pad2	U	2	86	Fixed String	not used

5.2 Session Logon Response

This message confirms the Session Logon request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
<MessageHeaderOut>														
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.								
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10001 (Logon, MsgType = A)								
39020	Pad2	U	2	6	Fixed String	not used								
<ResponseHeader>														
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.								
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.								
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.								
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message		
Value	Description													
0	Not Last Message													
1	Last Message													
39030	Pad3	U	3	29	Fixed String	not used								
<MessageBody>														
108	HeartBtInt	Y	4	32	unsigned int	Actual heartbeat interval (in milliseconds), gateway overrides out of range value or sets to default if logon omits the field.								
25004	SessionInstanceID	Y	4	36	unsigned int	Session ID.								
1301	MarketID	Y	2	40	unsigned int	Market ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>XEUR</td></tr><tr><td>2</td><td>XEEE</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	1	XEUR	2	XEEE	*	More values
Value	Description													
1	XEUR													
2	XEEE													
*	More values													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
339	TradSesMode	Y	1	42	unsigned int	Trading Session Mode <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Development</td></tr><tr><td>2</td><td>Simulation</td></tr><tr><td>3</td><td>Production</td></tr><tr><td>4</td><td>Acceptance</td></tr><tr><td>5</td><td>Disaster Recovery</td></tr></table>	Value	Description	1	Development	2	Simulation	3	Production	4	Acceptance	5	Disaster Recovery
Value	Description																	
1	Development																	
2	Simulation																	
3	Production																	
4	Acceptance																	
5	Disaster Recovery																	
1408	DefaultCstmApplVer-ID	Y	30	43	Fixed String (0-terminable)	The default custom application version ID that is the default for a session. Valid characters: \x20, \x22-\x7B, \x7D, \x7E												
28763	DefaultCstmApplVer-SubID	Y	5	73	Fixed String	EDCI subversion. Identifies EDCI changes within one EDCI version. <table><tr><td>Value</td><td>Description</td></tr><tr><td>D0002</td><td>Derivatives subversion</td></tr></table>	Value	Description	D0002	Derivatives subversion								
Value	Description																	
D0002	Derivatives subversion																	
39020	Pad2	U	2	78	Fixed String	not used												

5.3 Heartbeat

The Heartbeat message is used by the T7 EDC gateway to monitor the status of the communication link to the EDC client during periods of inactivity.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10011 (Heartbeat, MsgType = 0)
39020	Pad2	U	2	6	Fixed String	not used


5.4 Heartbeat Notification

The Heartbeat notification may be used by the EDC client to monitor the status of the communication link to the T7 EDC gateway during periods of inactivity.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10023 (Heartbeat, MsgType = 0)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.

5.5 Session Logout

Session Logout request.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10002 (Logout, MsgType = 5)
39020	Pad2	U	2	6	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	12	unsigned int	not used


5.6 Session Logout Response

This message confirms the Session Logout request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10003 (Logout, MsgType = 5)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						

5.7 User Logon

Each user needs to logon to T7 via the User Logon message.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10018 (User-Request, MsgType = BE)
39020	Pad2	U	2	6	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	12	unsigned int	not used
<MessageBody>						
553	Username	Y	4	16	unsigned int	The trader ID
554	Password	Y	32	20	Fixed String (0-terminable)	not encrypted Valid characters: 0-9, A-Z, a-z, \x21, \x23, \x24, \x25, \x26, \x2A, \x2B, \x2D, \x2F, \x3D, \x40, \x5F
39040	Pad4	U	4	52	Fixed String	not used


5.8 User Logon Response

The User Logon Response message is used to confirm a user logon.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10019 (User-Response, MsgType = BF)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						

5.9 User Logout

Each user may logout from T7 via the User Logout message.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10029 (User-Request, MsgType = BE)
39020	Pad2	U	2	6	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	12	unsigned int	not used
<MessageBody>						
553	Username	Y	4	16	unsigned int	The trader ID
39040	Pad4	U	4	20	Fixed String	not used

5.10 User Logout Response

The User Logout Response message is used to confirm a user logout.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10024 (User-Response, MsgType = BF)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						

5.11 Reject

All rejections and errors on an application and session level are communicated via the FIX standard Reject (3) message.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10010 (Reject, MsgType = 3)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
373	SessionRejectReason	Y	4	32	unsigned int	Code to identify reason for a session-level Reject message.	
						Value	Description
						1	Required Tag Missing
						5	Value is incorrect (out of range) for this tag
						7	Decoding problem
						11	Invalid TemplateID
						16	Incorrect NumInGroup count for repeating group
						99	Other
						101	Stale request was not forwarded to T7
						103	Service not available
						105	Error converting response or broadcast
						152	Heartbeat violation error
						200	Internal technical error
						210	Validation Error
						217	Session login limit (per time interval) reached
						226	Limit of outstanding session/user logins reached (per Business Unit)
						227	Limit of outstanding session/user logins reached (per Session)
228	Password timestamp not in grace period						
30354	VarTextLen	Y	2	36	Counter	Number of used bytes for field VarText (30355).	
1409	SessionStatus	Y	1	38	unsigned int	Session status.	
						Value	Description
						0	Session active
						4	Session logout complete
30355	VarText	Y	2000	39	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E	

5.12 Session Logout Notification

The Session Logout Notification message is used to inform about an unsolicited session logout triggered by the operator of the T7 system or by the T7 system itself.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10012 (Logout, MsgType = 5)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.
<MessageBody>						
30354	VarTextLen	Y	2	16	Counter	Number of used bytes for field VarText (30355).
30355	VarText	Y	2000	18	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E

5.13 Session List Notification

Returns a list of trading sessions the EDCI session can receive data from.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
<MessageHeaderOut>																
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.										
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10036 (SessionDetailsListResponse, MsgType = U6)										
39020	Pad2	U	2	6	Fixed String	not used										
<NotifHeader>																
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.										
<MessageBody>																
28734	NoSessions	Y	2	16	Counter											
39060	Pad6	U	6	18	Fixed String	not used										
<SessionsGrp> Cardinality: 1 - 1000, Record counter: NoSessions																
20055	>PartyIDSessionID	Y	4	24	unsigned int	Session ID.										
20059	>PartyIDExecuting-Unit	Y	4	28	unsigned int	Business Unit ID.										
20359	>PartyIDSponsored-AccessUnit	N	4	32	unsigned int	Sponsored Access Unit ID.										
28730	>SessionMode	Y	1	36	unsigned int	<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>ETI HF</td></tr><tr><td>2</td><td>ETI LF</td></tr><tr><td>3</td><td>GUI</td></tr><tr><td>4</td><td>FIX LF</td></tr></table>	Value	Description	1	ETI HF	2	ETI LF	3	GUI	4	FIX LF
Value	Description															
1	ETI HF															
2	ETI LF															
3	GUI															
4	FIX LF															
22001	>PartyExecutingFirm	Y	5	37	Fixed String	The executing/owning business unit Valid characters: A-Z, 0-9, \x20										
22359	>PartySponsored-AccessUnit	N	30	42	Fixed String	Sponsored Access Unit name. Valid characters: \x01-\x7E										

5.14 Partition List Notification

Returns a list of trading partitions the EDCI session can receive data from.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10037 (PartitionListReport, MsgType = U10)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.
<MessageBody>						
28735	NoPartitions	Y	1	16	Counter	Specifies the number of partitions in a Partition List Notification.
39070	Pad7	U	7	17	Fixed String	not used
<PartitionGrp> Cardinality: 0-100, Record counter: NoPartitions						
5948	>PartitionID	Y	2	24	unsigned int	Grouping of T7 products.
39060	>Pad6	U	6	26	Fixed String	not used


5.15 Service Availability Market

The Service Availability Market message provides information on the availability of a market.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderOut>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10044 (User-Notification, MsgType = CB)	
39020	Pad2	U	2	6	Fixed String	not used	
<NotifHeader>							
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.	
<MessageBody>							
25238	RiskControlRtm-ServiceStatus	Y	1	16	unsigned int	State of the Risk Control Retransmission Service.	
						Value	Description
						0	Unavailable
						1	Available
25268	MarketwideAnalytics-AndRiskServiceStatus	Y	1	17	unsigned int	State of the Marketwide Analytics and Risk Service.	
						Value	Description
						0	Unavailable
						1	Available
39060	Pad6	U	6	18	Fixed String	not used	

5.16 Retransmit

This message is used for re-transmission of risk control and order drop copy data for recovery purposes. The specified application sequence number range will lead to the retransmission of data whose application sequence number is $\geq$ ApplBegSeqNum (1182) and $\leq$ ApplEndSeqNum (1183).

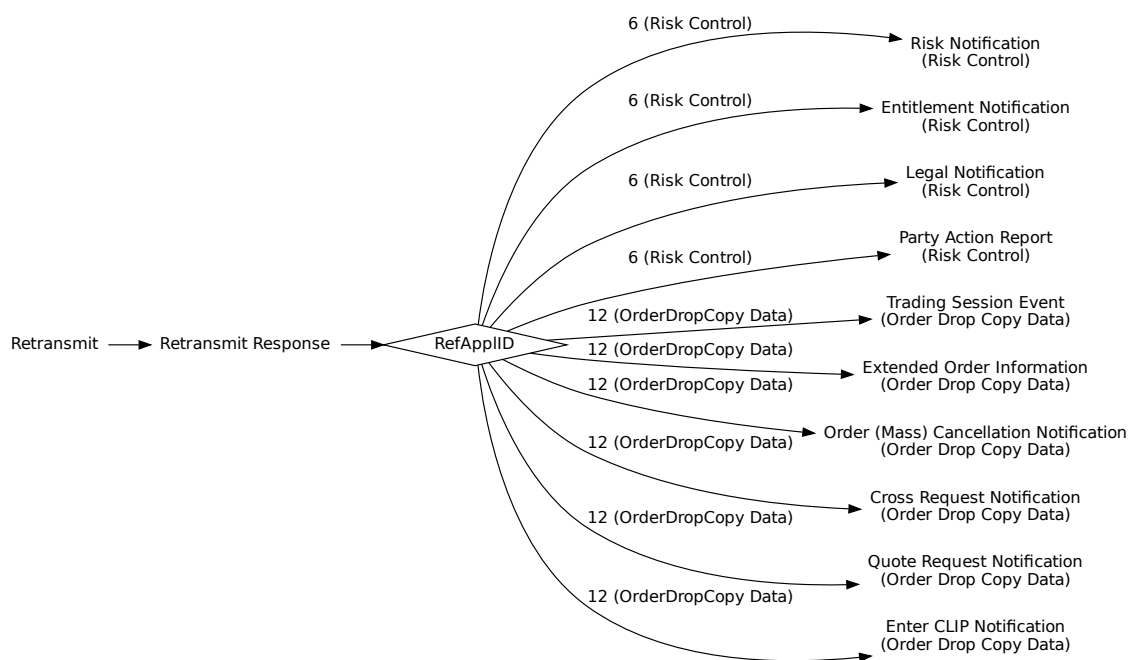

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10008 (ApplicationMessageRequest, Msg-Type = BW)
39020	Pad2	U	2	6	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	12	unsigned int	not used
<MessageBody>						
1182	ApplBegSeqNum	N	8	16	unsigned int	Beginning range of application sequence numbers. 'no value' means first known sequence number: 1

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1183	ApplEndSeqNum	N	8	24	unsigned int	Ending range of application sequence numbers.						
23004	PartyIDGroup	N	4	32	unsigned int	ID of the business unit or sponsored access unit. Required for OrderDrop-Copy only.						
5948	PartitionID	N	2	36	unsigned int	The application sequence numbers are only unique per RefApplID, SubscriptionScope and PartitionID. Therefore, the PartitionID is required to define the scope of a Retransmission Request. Not to be set for Risk Control.						
1355	RefApplID	Y	1	38	unsigned int	Application identifier for a retransmission data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	6	Risk Control	12	OrderDropCopy Data
Value	Description											
6	Risk Control											
12	OrderDropCopy Data											
39000	Pad1	U	1	39	Fixed String	not used						

5.17 Retransmit Response

The Retransmission Response message confirms the Retransmit request and delivers only a fixed number of the requested data packages. So the requesting client would have to send a new retransmission request (with updated sequence numbers) if the captured response does not contain all requested data. (See below: ApplEndSeqNum (1183)). The field ApplTotalMessageCount (1349) indicates how many retransmitted broadcast messages will follow. For fragmented messages, each fragment counts as one message. They will not be interrupted by other messages.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10009 (ApplicationMessageRequestAck, MsgType = BX)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						
<MessageBody>												
1183	ApplEndSeqNum	N	8	32	unsigned int	Ending range of application sequence numbers. If it is not set to the related request's ApplEndSeqNum, the client will have to send another retransmission request (with an updated Appl-BegSeqNum). 'no value' means the requested data is not available.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
1357	RefApplLastSeqNum	N	8	40	unsigned int	Last application sequence number known by the T7 system for a certain scope of RefApplID, Subscription-Scope and PartitionID. 'no value' means that there is no data persisted yet for the requested stream subscription scope.
1349	ApplTotalMessage-Count	Y	2	48	unsigned int	Total number of messages (fragments) included in transmission.
39060	Pad6	U	6	50	Fixed String	not used

6 Order Handling

6.1 Trading Session Event

This message indicates an order book invalidation. This message is followed by a replay of the recent order book data.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10903 (TradingSessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
1357	RefApplLastSeqNum	N	8	40	unsigned int	Last application sequence number assigned to an EDCI data stream before order book synchronization. Only set if TradSesEvent = 108(Start of Order book synchronization) or 107(End of Order book synchronization).														
75	TradeDate	N	4	48	LocalMktDate	Business date. Set if there is a defined business day for the partition, i.e. the first product assigned to the partition has been set to state 'Start-Of-Day'.														
1300	MarketSegmentID	N	4	52	signed int	Product identifier. Only set if TradSesEvent = 103(End of Restatement)														
1368	TradSesEvent	Y	1	56	unsigned int	Trading session event type <table><tr><th>Value</th><th>Description</th></tr><tr><td>101</td><td>Start of Service</td></tr><tr><td>103</td><td>End of Restatement</td></tr><tr><td>104</td><td>End of Service</td></tr><tr><td>107</td><td>End of Order book synchronization</td></tr><tr><td>108</td><td>Start of Order book synchronization</td></tr><tr><td>109</td><td>Order book reset</td></tr></table>	Value	Description	101	Start of Service	103	End of Restatement	104	End of Service	107	End of Order book synchronization	108	Start of Order book synchronization	109	Order book reset
Value	Description																			
101	Start of Service																			
103	End of Restatement																			
104	End of Service																			
107	End of Order book synchronization																			
108	Start of Order book synchronization																			
109	Order book reset																			
39070	Pad7	U	7	57	Fixed String	not used														

6.2 Extended Order Information

This message format is used to send order book data as snapshot or update message.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10901 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
37	OrderID	Y	8	40	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
11	ClOrdID	N	8	48	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
41	OrigClOrdID	N	8	56	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.
48	SecurityID	Y	8	64	signed int	Instrument identifier.
17	ExecID	Y	8	72	UTCTimestamp	Transaction timestamp.
44	Price	N	8	80	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).
99	StopPx	N	8	88	PriceType	Stop price. Required if OrdType (40) is Stop (3) or used as the trigger price for an One-cancels-the-other order.
151	LeavesQty	Y	8	96	Qty	Remaining quantity of an order.
14	CumQty	Y	8	104	Qty	Cumulated executed quantity of an order.
84	CxlQty	Y	8	112	Qty	Total quantity canceled for this order.
38	OrderQty	Y	8	120	Qty	Total Order Quantity.
20003	PartyIDClientID	N	8	128	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A)) used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.
20122	PartyIDInvestment-DecisionMaker	N	8	136	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.
25123	ExecutingTrader	N	8	144	unsigned int	MiFID field: Executing Trader data Field (ESMA Field 5 (Section A)) used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																								
1300	MarketSegmentID	Y	4	152	signed int	Product identifier.																								
28744	MatchInstCrossID	N	4	156	unsigned int	Self Match Prevention ID.																								
432	ExpireDate	N	4	160	LocalMktDate	Date of order expiry. Required if TimeInForce (59) = 6.																								
20055	PartyIDSessionID	N	4	164	unsigned int	Owning Session ID																								
20012	PartyIDExecuting-Trader	N	4	168	unsigned int	Owning User ID.																								
1227	ProductComplex	Y	1	172	unsigned int	This field qualifies an instrument type on T7.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																													
1	Simple instrument																													
2	Standard Option Strategy																													
3	Non-Standard Option Strategy																													
4	Volatility Strategy																													
5	Futures Spread																													
6	Inter-Product Spread																													
7	Standard Future Strategy																													
8	Pack and Bundle																													
9	Strip																													
13	Non-Standard Volatility Strategy																													
14	Total Return Future Strategy																													
39	OrdStatus	Y	1	173	char	Conveys the current status of an order.<table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>New</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (i.e. result of Order Cancel Request)</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	1	Partially filled	2	Filled	4	Cancelled	6	Pending Cancel (i.e. result of Order Cancel Request)	9	Suspended										
Value	Description																													
0	New																													
1	Partially filled																													
2	Filled																													
4	Cancelled																													
6	Pending Cancel (i.e. result of Order Cancel Request)																													
9	Suspended																													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
150	ExecType	Y	1	174	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>5</td><td>Replaced</td></tr><tr><td>6</td><td>Pending Cancel (e.g. result of Order Cancel Request)</td></tr><tr><td>9</td><td>Suspended</td></tr><tr><td>D</td><td>Restated</td></tr><tr><td>L</td><td>Triggered</td></tr><tr><td>F</td><td>Trade</td></tr></table>	Value	Description	0	New	4	Cancelled	5	Replaced	6	Pending Cancel (e.g. result of Order Cancel Request)	9	Suspended	D	Restated	L	Triggered	F	Trade
Value	Description																							
0	New																							
4	Cancelled																							
5	Replaced																							
6	Pending Cancel (e.g. result of Order Cancel Request)																							
9	Suspended																							
D	Restated																							
L	Triggered																							
F	Trade																							
54	Side	Y	1	175	unsigned int	Side of order <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell												
Value	Description																							
1	Buy																							
2	Sell																							
40	OrdType	Y	1	176	unsigned int	Order type. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Market</td></tr><tr><td>2</td><td>Limit</td></tr><tr><td>3</td><td>Stop</td></tr><tr><td>4</td><td>Stop Limit</td></tr></table>	Value	Description	1	Market	2	Limit	3	Stop	4	Stop Limit								
Value	Description																							
1	Market																							
2	Limit																							
3	Stop																							
4	Stop Limit																							
574	MatchType	N	1	177	unsigned int	The point in the matching process at which this trade was matched. The value 3 (reporting from recognized markets) represents trades entered by Market Supervision <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Auto-match incoming order</td></tr><tr><td>5</td><td>Cross Auction</td></tr><tr><td>7</td><td>Call Auction</td></tr><tr><td>11</td><td>Auto match resting order</td></tr><tr><td>13</td><td>Liquidity Improvement Cross</td></tr></table>	Value	Description	4	Auto-match incoming order	5	Cross Auction	7	Call Auction	11	Auto match resting order	13	Liquidity Improvement Cross						
Value	Description																							
4	Auto-match incoming order																							
5	Cross Auction																							
7	Call Auction																							
11	Auto match resting order																							
13	Liquidity Improvement Cross																							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
1815	TradingCapacity	Y	1	178	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker				
Value	Description																	
1	Customer (Agency)																	
5	Principal (Proprietary)																	
6	Market Maker																	
59	TimeInForce	N	1	179	unsigned int	Execution and trading restriction parameters supported by T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Day (GFD)</td></tr><tr><td>1</td><td>Good Till Cancelled (GTC) - Standard Orders only</td></tr><tr><td>3</td><td>Immediate or Cancel (IOC)</td></tr><tr><td>4</td><td>Fill Or Kill (FOK)</td></tr><tr><td>6</td><td>Good Till Date (GTD) - Standard Orders only</td></tr></table>	Value	Description	0	Day (GFD)	1	Good Till Cancelled (GTC) - Standard Orders only	3	Immediate or Cancel (IOC)	4	Fill Or Kill (FOK)	6	Good Till Date (GTD) - Standard Orders only
Value	Description																	
0	Day (GFD)																	
1	Good Till Cancelled (GTC) - Standard Orders only																	
3	Immediate or Cancel (IOC)																	
4	Fill Or Kill (FOK)																	
6	Good Till Date (GTD) - Standard Orders only																	
18	ExecInst	N	1	180	unsigned int	Instructions for order handling. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Persistent Order (FIX value 'H')</td></tr><tr><td>2</td><td>Non-persistent Order (FIX value 'Q')</td></tr><tr><td>5</td><td>Persistent and Book or Cancel order (FIX value 'H 6')</td></tr><tr><td>6</td><td>Non-persistent and Book or Cancel order (FIX value 'Q 6')</td></tr></table>	Value	Description	1	Persistent Order (FIX value 'H')	2	Non-persistent Order (FIX value 'Q')	5	Persistent and Book or Cancel order (FIX value 'H 6')	6	Non-persistent and Book or Cancel order (FIX value 'Q 6')		
Value	Description																	
1	Persistent Order (FIX value 'H')																	
2	Non-persistent Order (FIX value 'Q')																	
5	Persistent and Book or Cancel order (FIX value 'H 6')																	
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')																	
1823	Triggered	N	1	181	unsigned int	<table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Triggered</td></tr><tr><td>1</td><td>Triggered Stop</td></tr><tr><td>2</td><td>Triggered OCO</td></tr></table>	Value	Description	0	Not Triggered	1	Triggered Stop	2	Triggered OCO				
Value	Description																	
0	Not Triggered																	
1	Triggered Stop																	
2	Triggered OCO																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
625	TradingSessionSubID	N	1	182	unsigned int	Marks a certain order to be included in a defined auction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Opening or opening auction</td></tr><tr><td>4</td><td>Closing or closing auction</td></tr><tr><td>8</td><td>Any auction</td></tr></table>	Value	Description	2	Opening or opening auction	4	Closing or closing auction	8	Any auction
Value	Description													
2	Opening or opening auction													
4	Closing or closing auction													
8	Any auction													
28703	ApplSeqIndicator	N	1	183	unsigned int	Indicates if the order is a Lean Order or a Standard Order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No Recovery Required</td></tr><tr><td>1</td><td>Recovery Required</td></tr></table>	Value	Description	0	No Recovery Required	1	Recovery Required		
Value	Description													
0	No Recovery Required													
1	Recovery Required													
2964	SelfMatchPrevention-Instruction	N	1	184	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	CrossMatchInstruction	N	1	185	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	186	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
25124	ExecutingTrader-Qualifier	N	1	187	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
1362	NoFills	Y	1	188	Counter	Specifies the number of partial fills included in this Execution Report.						
2523	CrossedIndicator	Y	1	189	unsigned int	Indicates SMP involvement. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No crossing (Order not subject to crossing)</td></tr><tr><td>1</td><td>Cross rejected (Order subject to crossing and match prevented)</td></tr></table>	Value	Description	0	No crossing (Order not subject to crossing)	1	Cross rejected (Order subject to crossing and match prevented)
Value	Description											
0	No crossing (Order not subject to crossing)											
1	Cross rejected (Order subject to crossing and match prevented)											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1031	CustOrderHandling-Inst	N	1	190	Fixed String	Customer Order Handling Instruction	
						Value	Description
						W	Desk
						Y	Electronic
						C	Vendor-provided Platform billed by Executing Broker
						G	Sponsored Access via Exchange API or FIX provided by Executing Broker
						H	Premium Algorithmic Trading Provider billed by Executing Broker
						D	Other, including Other-provided Screen
*	More values						
1724	OrderOrigination	N	1	191	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer	
						Value	Description
						5	Order received from a direct access customer
						105	Order received from a sponsored access customer
25007	FreeText1	N	12	192	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
25008	FreeText2	N	12	204	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25009	FreeText3	N	12	216	Fixed String	Third free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
30011	FIXCICordID	N	20	228	Fixed String	User defined client order ID for orders entered by the T7 FIX interface Valid characters: \x20-\x7E
30041	FIXOrigCICordID	N	20	248	Fixed String	FIXCICordID (30011) of the last successfully processed task (request) referring to the specific order. Valid characters: \x20-\x7E
25241	PartyEndClient-Identification	N	20	268	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F
<FillsGrp> Cardinality: 0 - 100, Record counter: NoFills						
1364	>FillPx	Y	8	288	PriceType	Price of Fill
1365	>FillQty	Y	8	296	Qty	Quantity of Fill.
28708	>FillMatchID	Y	4	304	unsigned int	Identifier assigned to a trade by a matching system.
1363	>FillExecID	Y	4	308	signed int	Private identifier of an order match step event, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.

6.3 Order (Mass) Cancellation Notification

This message informs about order cancellation (single ore multiple).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10902 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
17	ExecID	Y	8	40	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						
1370	NoAffectedOrders	Y	2	52	Counter	Number of AffectedOrders repeating group instances.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
39020	Pad2	U	2	54	Fixed String	not used								
<AffectedOrdGrp> Cardinality: 0-500, Record counter: NoAffectedOrders														
535	>AffectedOrderID	Y	8	56	unsigned int	Exchange Order ID of an order affected by a (mass) cancel request.								
30535	>AffectedCICordID	N	8	64	unsigned int	Client Order ID of an order affected by a single or mass cancel request.								
1824	>AffectedOrigCICordID	N	8	72	unsigned int	Original Client Order ID of an order affected by a single or mass cancel request.								
48	>SecurityID	Y	8	80	signed int	Instrument identifier.								
20055	>PartyIDSessionID	Y	4	88	unsigned int	Owning Session ID								
20012	>PartyIDExecuting- Trader	Y	4	92	unsigned int	Owning User ID.								
39	>OrdStatus	Y	1	96	char	Conveys the current status of an order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (i.e. result of Order Cancel Request)</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (i.e. result of Order Cancel Request)	9	Suspended
Value	Description													
4	Cancelled													
6	Pending Cancel (i.e. result of Order Cancel Request)													
9	Suspended													
150	>ExecType	Y	1	97	char	The reason why this message was generated. <table><tr><th>Value</th><th>Description</th></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (e.g. result of Order Cancel Request)</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (e.g. result of Order Cancel Request)		
Value	Description													
4	Cancelled													
6	Pending Cancel (e.g. result of Order Cancel Request)													
30536	>AffectedFIXCICordID	N	20	98	Fixed String	FIX Client Order ID of an order affected by a single or mass cancel request. Valid characters: \x20-\x7E								
31824	>AffectedFIXOrigCICordID	N	20	118	Fixed String	Original FIX Client Order ID of an order affected by a single or mass cancel request. Valid characters: \x20-\x7E								
39060	>Pad6	U	6	138	Fixed String	not used								

6.4 Cross Request Notification

This message informs about a cross request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10907 (Cross-Request, MsgType = DS)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
38	OrderQty	Y	8	48	Qty	Total Order Quantity.						
17	ExecID	Y	8	56	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
20055	PartyIDSessionID	Y	4	68	unsigned int	Owning Session ID
20012	PartyIDExecuting- Trader	Y	4	72	unsigned int	Owning User ID.
39040	Pad4	U	4	76	Fixed String	not used

6.5 Quote Request Notification

This message informs about the entry of a request for Quote event.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10905 (Quote-Request, MsgType = R)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
38	OrderQty	Y	8	48	Qty	Total Order Quantity.						
17	ExecID	Y	8	56	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20055	PartyIDSessionID	Y	4	68	unsigned int	Owning Session ID						
20012	PartyIDExecuting-Trader	Y	4	72	unsigned int	Owning User ID.						
54	Side	N	1	76	unsigned int	Side of order <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39030	Pad3	U	3	77	Fixed String	not used						

6.6 Enter CLIP Notification

This message informs about an enter CLIP request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10906 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
44	Price	Y	8	48	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).						
38	OrderQty	Y	8	56	Qty	Total Order Quantity.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																								
17	ExecID	Y	8	64	UTCTimestamp	Transaction timestamp.																								
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.																								
548	CrossID	N	4	76	signed int	User defined CLIP arrangement ID.																								
20055	PartyIDSessionID	Y	4	80	unsigned int	Owning Session ID																								
20012	PartyIDExecuting-Trader	Y	4	84	unsigned int	Owning User ID.																								
1227	ProductComplex	Y	1	88	unsigned int	This field qualifies an instrument type on T7.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																													
1	Simple instrument																													
2	Standard Option Strategy																													
3	Non-Standard Option Strategy																													
4	Volatility Strategy																													
5	Futures Spread																													
6	Inter-Product Spread																													
7	Standard Future Strategy																													
8	Pack and Bundle																													
9	Strip																													
13	Non-Standard Volatility Strategy																													
14	Total Return Future Strategy																													
552	NoSides	Y	1	89	Counter																									
28771	CrossRequestType	Y	1	90	unsigned int	Type of the Cross Request.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Cross Announcement</td></tr><tr><td>2</td><td>Liquidity Improvement Cross</td></tr></table>	Value	Description	1	Cross Announcement	2	Liquidity Improvement Cross																		
Value	Description																													
1	Cross Announcement																													
2	Liquidity Improvement Cross																													
22417	RootPartyContraFirm	N	5	91	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20																								
22437	RootPartyContra-Trader	N	6	96	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20																								
39020	Pad2	U	2	102	Fixed String	not used																								
<CrossRequestSideGrp> Cardinality: 1-2, Record counter: NoSides																														
11	>ClOrdID	N	8	104	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.																								
37	>OrderID	Y	8	112	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.																								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	>PartyIDClientID	N	8	120	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	>PartyIdInvestment-DecisionMaker	N	8	128	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	>ExecutingTrader	N	8	136	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
28773	>MaximumPrice	N	8	144	PriceType	Maximum Price. Only applicable for CrossRequestType(28771) = 2(Liquidity Improvement Cross)						
28744	>MatchInstCrossID	N	4	152	unsigned int	Self Match Prevention ID. Only applicable for CrossRequestType(28771) = 1(Cross Announcement)						
979	>InputSource	N	1	156	unsigned int	Role on/for a message Only applicable for CrossRequestType(28771) = 2(Liquidity Improvement Cross) <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Client Broker</td></tr><tr><td>2</td><td>Proprietary Broker</td></tr></table>	Value	Description	1	Client Broker	2	Proprietary Broker
Value	Description											
1	Client Broker											
2	Proprietary Broker											
54	>Side	Y	1	157	unsigned int	Side of order <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2964	>SelfMatch-PreventionInstruction	N	1	158	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatch-PreventionInstruction is 100(Reject cross on business unit level) Only applicable for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	>CrossMatch-Instruction	N	1	159	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatch-Instruction is not set the default value is defined by the exchange Only applicable for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													
1815	>TradingCapacity	Y	1	160	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
21222	>PartyIdInvestment-DecisionMaker-Qualifier	N	1	161	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person										
Value	Description																					
22	Algo																					
24	Human/Natural person																					
25124	>ExecutingTrader-Qualifier	Y	1	162	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person										
Value	Description																					
22	Algo																					
24	Human/Natural person																					
1031	>CustOrderHandling-Inst	N	1	163	Fixed String	Customer Order Handling Instruction <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
25241	>PartyEndClient-Identification	N	20	164	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1724	>OrderOrigination	N	1	184	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer						
						<table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
39070	>Pad7	U	7	185	Fixed String	not used						

6.7 Order Reject Notification

Order rejections with certain SessionRejectReasons are communicated via the OrderRejectNotification message.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10014 (Reject, MsgType = 3)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>12</td><td>OrderDropCopy Data</td></tr></table>	Value	Description	12	OrderDropCopy Data		
Value	Description											
12	OrderDropCopy Data											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						
20036	PartyIDEntering- Trader	Y	4	52	unsigned int	Entering User ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
20058	PartyIDEnteringUnit	Y	4	56	unsigned int	Entering Business Unit ID.																
373	SessionRejectReason	Y	4	60	unsigned int	Code to identify reason for a session-level Reject message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>10001</td><td>Price not reasonable</td></tr><tr><td>10006</td><td>Stop buy price not reasonable</td></tr><tr><td>10007</td><td>Stop sell price not reasonable</td></tr><tr><td>10016</td><td>Pretrade Risk Limit exceeded</td></tr><tr><td>10021</td><td>Max order quantity exceeded</td></tr><tr><td>10022</td><td>Max order value exceeded</td></tr><tr><td>10023</td><td>Price exceeds extended price reasonability</td></tr></table>	Value	Description	10001	Price not reasonable	10006	Stop buy price not reasonable	10007	Stop sell price not reasonable	10016	Pretrade Risk Limit exceeded	10021	Max order quantity exceeded	10022	Max order value exceeded	10023	Price exceeds extended price reasonability
Value	Description																					
10001	Price not reasonable																					
10006	Stop buy price not reasonable																					
10007	Stop sell price not reasonable																					
10016	Pretrade Risk Limit exceeded																					
10021	Max order quantity exceeded																					
10022	Max order value exceeded																					
10023	Price exceeds extended price reasonability																					

7 Risk Handling

7.1 Trading Action Request

This request is used by a Sponsored Access Provider to stop or release its dedicated Sponsored Access Unit. This message is sent to the service "Marketwide Analytics And Risk Service".



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10908 (Trading-ActionRequest, MsgType = U34)						
39020	Pad2	U	2	6	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	8	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	12	unsigned int	User ID.						
<MessageBody>												
1533	RiskLimitPlatform	Y	1	16	unsigned int	Specifies whether the risk limit applies to on-book or off-book trading. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>On Book</td></tr></table>	Value	Description	0	On Book		
Value	Description											
0	On Book											
25272	OrderDeletion-Instruction	N	1	17	unsigned int	Instructs whether open orders should be deleted. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
2329	PartyActionType	Y	1	18	unsigned int	Type of action to perform on the party. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Halt Trading</td></tr><tr><td>2</td><td>Reinstate</td></tr></table>	Value	Description	1	Halt Trading	2	Reinstate
Value	Description											
1	Halt Trading											
2	Reinstate											
39000	Pad1	U	1	19	Fixed String	not used						
20059	PartyIDExecutingUnit	Y	4	20	unsigned int	Business Unit ID.						
20659	TargetParty-IDExecutingUnit	Y	4	24	unsigned int	Target Business Unit ID (e.g. Sponsored Access Unit).						
39040	Pad4	U	4	28	Fixed String	not used						

7.2 Trading Action Response

This message is the response to the Trading Action Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10909 (TradingActionReport, MsgType = U35)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	28	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	29	Fixed String	not used						
<MessageBody>												
25273	NoPartitionIDs	Y	1	32	Counter	Number of partition entries.						
39070	Pad7	U	7	33	Fixed String	not used						
<MatchingEngineStatusGrp> Cardinality: 0 - 12, Record counter: NoPartitionIDs												
5948	>PartitionID	Y	2	40	unsigned int	Grouping of T7 products.						
25005	>MatchingEngine-Status	Y	1	42	unsigned int	Status of the matching engine partition. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
39050	>Pad5	U	5	43	Fixed String	not used						

7.3 Risk Notification

This message informs about risk events for the business unit.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10033 (PartyRiskLimitsUpdateReport, MsgType = CR)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	Y	4	48	LocalMktDate	Business date.						
20259	PartyDetail-IDExecutingUnit	Y	4	52	unsigned int	Business Unit ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20659	TargetParty- IDExecutingUnit	N	4	56	unsigned int	Target Business Unit ID (e.g. Sponsored Access Unit).								
20816	RequestingParty- IDExecutingSystem	Y	4	60	unsigned int	System ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Eurex Clearing</td></tr><tr><td>2</td><td>T7 trading system</td></tr></table>	Value	Description	1	Eurex Clearing	2	T7 trading system		
Value	Description													
1	Eurex Clearing													
2	T7 trading system													
1301	MarketID	N	2	64	unsigned int	Market ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>XEUR</td></tr><tr><td>2</td><td>XEEE</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	1	XEUR	2	XEEE	*	More values
Value	Description													
1	XEUR													
2	XEEE													
*	More values													
25240	InventoryCheckType	N	1	66	unsigned int	Indicator for checking open orders and quotes. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													
1324	ListUpdateAction	Y	1	67	char	Invocation (A = Add) or release (D = Delete) of a risk limitation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Add (Invocation)</td></tr><tr><td>D</td><td>Delete (Release)</td></tr></table>	Value	Description	A	Add (Invocation)	D	Delete (Release)		
Value	Description													
A	Add (Invocation)													
D	Delete (Release)													
1767	RiskLimitAction	N	1	68	unsigned int	Risk protection action. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Queue Inbound</td></tr><tr><td>2</td><td>Reject</td></tr><tr><td>4</td><td>Warning</td></tr></table>	Value	Description	0	Queue Inbound	2	Reject	4	Warning
Value	Description													
0	Queue Inbound													
2	Reject													
4	Warning													
22807	RequestingParty- EnteringFirm	N	9	69	Fixed String	Entering Entity Short Name. Valid characters: A-Z, 0-9, \x20								
22804	RequestingParty- ClearingFirm	N	9	78	Fixed String	Clearing Member Short Name. Valid characters: A-Z, 0-9, \x20								
39000	Pad1	U	1	87	Fixed String	not used								

7.4 Entitlement Notification

This message informs about entitlement updates of the business unit.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10034 (Party-EntitlementsUpdateReport, MsgType = CZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	Y	4	48	LocalMktDate	Business date.						
20259	PartyDetail-IDExecutingUnit	Y	4	52	unsigned int	Business Unit ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
20816	RequestingParty- IDExecutingSystem	Y	4	56	unsigned int	System ID.	
						Value	Description
						1	Eurex Clearing
						2	T7 trading system
1301	MarketID	N	2	60	unsigned int	Market ID.	
						Value	Description
						1	XEUR
						2	XEEE
						*	More values
1324	ListUpdateAction	Y	1	62	char	Invocation (A = Add) or release (D = Delete) of a risk limitation.	
						Value	Description
						A	Add (Invocation)
						D	Delete (Release)
22807	RequestingParty- EnteringFirm	Y	9	63	Fixed String	Entering Entity Short Name. Valid characters: A-Z, 0-9, \x20	
22804	RequestingParty- ClearingFirm	N	9	72	Fixed String	Clearing Member Short Name. Valid characters: A-Z, 0-9, \x20	
1672	PartyDetailStatus	Y	1	81	unsigned int	Member status.	
						Value	Description
						0	Active
						1	Suspend
39060	Pad6	U	6	82	Fixed String	not used	

7.5 Legal Notification

This message informs about suspension and release from trading.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10035 (User-Notification, MsgType = CB)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
30354	VarTextLen	Y	2	48	Counter	Number of used bytes for field Var-Text (30355).						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
926	UserStatus	Y	1	50	unsigned int	The status of the User	
						Value	Description
						10	Admission to trading suspended
						11	Suspension revoked
30355	VarText	Y	2000	51	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E	

7.6 Party Action Report

A Member supervisor or T7 market supervision has stopped or released a trader or a business unit for one or all markets.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10038 (Party-ActionReport, MsgType = DI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	N	4	48	LocalMktDate	Business date.						
20812	RequestingParty-IDExecutingTrader	N	4	52	unsigned int	Owning User ID.						
20059	PartyIDExecutingUnit	Y	4	56	unsigned int	Business Unit ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
20659	TargetParty- IDExecutingUnit	N	4	60	unsigned int	Target Business Unit ID (e.g. Sponsored Access Unit).	
20012	PartyIDExecuting- Trader	N	4	64	unsigned int	Owning User ID.	
20816	RequestingParty- IDExecutingSystem	Y	4	68	unsigned int	System ID.	
						Value	Description
						2	T7 trading system
1301	MarketID	N	2	72	unsigned int	Market ID.	
						Value	Description
						1	XEUR
						2	XEEE
	*	More values					
25272	OrderDeletion- Instruction	N	1	74	unsigned int	Instructs whether open orders should be deleted.	
						Value	Description
						0	No
	1	Yes					
2329	PartyActionType	Y	1	75	unsigned int	Type of action to perform on the party.	
						Value	Description
						1	Halt Trading
	2	Reinstate					
20807	RequestingParty- IDEnteringFirm	N	1	76	unsigned int	ID of the entering firm.	
						Value	Description
						1	Participant
	2	Market Supervision					
39030	Pad3	U	3	77	Fixed String	not used	

7.7 Status Broadcast

Status Broadcast for Start-of-Day and End-of-Day

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 EDCI message layout. Value: 10045 (TradingSessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway.						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to an EDCI data stream.						
20059	PartyIDExecutingUnit	N	4	24	unsigned int	Business Unit ID.						
23004	PartyIDGroup	N	4	28	unsigned int	ID of the business unit or sponsored access unit.						
5948	PartitionID	Y	2	32	unsigned int	Grouping of T7 products.						
1352	ApplResendFlag	Y	1	34	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	35	unsigned int	Identifier for an EDCI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	36	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	37	Fixed String	not used						
<MessageBody>												
75	TradeDate	N	4	40	LocalMktDate	Business date.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1368	TradSesEvent	Y	1	44	unsigned int	Trading session event type	
						Value	Description
						101	Start of Service
						104	End of Service
39030	Pad3	U	3	45	Fixed String	not used	

A Appendix

A.1 XML Interface Description

The EDCI interface description is also available as a machine readable XML file. The structure of the XML is described by an XML schema file.

The XML file consists of the following parts and definitions:

Definitions	Description
MessageFlow	A "MessageFlow" is a flow diagram describing the system behavior from the user's point of view. The MessageFlow is represented as a tree of nodes.
ApplicationMessage	An "ApplicationMessage" represents a top-level structure which describes a message transmitted between the participant and user and the exchange. In contrast to the "Structure" definition, all components and repeating groups are uncollapsed. Valid values and description of fields are provided in the application scope.
Structure	A "Structure" is either the definition of a top-level-structure ("Message") or of a (repeated) sub-structure. Components and repeating groups are provided in a collapsed representation. All fields show the complete list of valid values.
DataType	A "DataType" is the technical and functional description of a data field. Each "DataType" is part of a (multi-level) inheritance tree based on the following "rootTypes": String , float , and int .

For a detailed description of all available XML elements and attributes please refer to the XML schema file.

B Change Log

B.1 T7 Release 15.0 – Version 2 (EDCI 15.0-D0002)

Changes to the T7 Release 15.0 – Version 1:

- changed valid value *Derivatives* to *D0002* of field *DefaultCstmApp/VerSubID* in message [Session Logon Response](#) (10001)

- added fields *PartyIDGroup*, *ApplResendFlag* in messages [Cross Request Notification](#) (10907), [Order \(Mass\) Cancellation Notification](#) (10902), [Enter CLIP Notification](#) (10906), [Legal Notification](#) (10035), [Extended Order Information](#) (10901), [Order Reject Notification](#) (10014), [Party Action Report](#) (10038), [Entitlement Notification](#) (10034), [Quote Request Notification](#) (10905), [Risk Notification](#) (10033), [Trading Session Event](#) (10903), [Status Broadcast](#) (10045)
- added field *PartyIDGroup* in message [Retransmit](#) (10008)
- added valid value *OrderDropCopy(12)* to field *RefApplID* in message [Retransmit](#) (10008)
- added field *RefApplLastSeqNum* in message [Trading Session Event](#) (10903)

B.2 T7 Release 15.0 – Version 1 (EDCI 15.0-D0001)

Changes to the T7 Release 14.1 – Version 1:

- added messages [Cross Request Notification](#) (10907), [Enter CLIP Notification](#) (10906), [Legal Notification](#) (10035), [Order Reject Notification](#) (10014), [Party Action Report](#) (10038), [Entitlement Notification](#) (10034), [Retransmit](#) (10008), [Retransmit Response](#) (10009), [Quote Request Notification](#) (10905), [Risk Notification](#) (10033), [Service Availability Market](#) (10044), [Status Broadcast](#) (10045), [Trading Action Request](#) (10908), [Trading Action Response](#) (10909), [User Logon](#) (10018), [User Logon Response](#) (10019), [User Logout](#) (10029), [User Logout Response](#) (10024)
- added field *ApplSeqNum* in messages [Order \(Mass\) Cancellation Notification](#) (10902), [Extended Order Information](#) (10901), [Trading Session Event](#) (10903)
- added valid value *RiskControl(6)* to field *ApplID* in messages [Order \(Mass\) Cancellation Notification](#) (10902), [Extended Order Information](#) (10901), [Trading Session Event](#) (10903)
- added valid value *Start_of_Service(101)* to field *TradSesEvent* in message [Trading Session Event](#) (10903)