

Deutsche Börse Group's T7

Enhanced Trading Interface

Derivatives Message Reference

Release 15.0

ETI Version	15.0
ETI Subversion	D0002
Build Version	150.536.0.ga-150006001-56
Date	19 August 2026

Disclaimer

© Deutsche Börse Group 2026

This content is for informational purposes only. None of the information constitutes investment advice or an offer to sell or the solicitation of an offer to buy any contract, share or other financial instrument. This content is only for use as general information and all descriptions, examples and calculations contained are for illustrative purposes only.

Deutsche Börse AG, Frankfurter Wertpapierbörse (FWB®, the Frankfurt Stock Exchange), Eurex Frankfurt AG, Eurex Deutschland and Eurex Clearing AG do not represent that the information in this publication is comprehensive, complete or accurate and exclude liability for any consequence resulting from acting upon the contents of this or another publication, in so far as no willful violation of obligations took place or, as the case may be, no injury to life, health or body arises or claims resulting from the Product Liability Act are affected.

Securities traded on the Frankfurt Stock Exchange and Eurex derivatives (other than EURO STOXX 50® Index Futures contracts, EURO STOXX® Select Dividend 30 Index Futures contracts, STOXX® Europe 50 Index Futures contracts, STOXX® Europe 600 Index Futures contracts, STOXX® Europe Large/Mid/Small 200 Index Futures contracts, EURO STOXX® Banks Sector Futures contracts, STOXX® Europe 600 Banks/Industrial Goods & Services/Insurance/Media/Personal & Household Goods/Travel & Leisure/Utilities Futures contracts, DAX® Futures contracts, MDAX® Futures contracts, TecDAX® Futures contracts, SMIM® Futures contracts, SLI Swiss Leader Index® Futures contracts, Eurex inflation/commodity/weather/property and interest rate derivatives) are currently not available for offer, sale or trading in the United States nor may they be offered, sold or traded by persons to whom US tax laws apply.

The fund shares listed in XTF Exchange Traded Funds® are admitted for trading on the Frankfurt Stock Exchange. Users of this information service who legally reside outside Germany are herewith advised that sale of the fund shares listed in XTF Exchange Traded Funds may not be permitted in their country of residence. The user makes use of the information at their own risk.

Legal validity of this disclaimer

In the event that individual parts of or formulations contained in this text are not, or are no longer, legally valid (either in whole or in part), the content and validity of the remaining parts of the document are not affected.

Trademarks

The names and designations listed under www.deutsche-boerse.com/disclaimer are registered trademarks of Deutsche Börse AG or an affiliate of Deutsche Börse Group.

The names and trademarks listed there do not represent a complete list and, as well as all other trademarks and protected rights mentioned in this publication, are subject unreservedly to the applicable trademark law in each case and are not permitted to be used without the express permission of the registered owner. The simple fact that this publication mentions them does not imply that trademarks are not protected by the rights of third parties.

Information on trademarks of Stoxx Ltd. and ISS STOXX Index GmbH are available under www.stoxx.com/trademarks.

EEX® is a registered trademark of European Energy Exchange AG.

TRADEGATE® is a registered trademark of Tradegate AG Wertpapierhandelsbank.

Flexible is better.® is a registered trademark of Axioma, Inc.

Contents

1	List of Abbreviations	6
2	Introduction	7
3	Message Formats	8
3.1	Message Fragmentation	8
3.2	Data Types	9
3.3	Error Codes	11
4	Overview of Supported Message Types	13
4.1	Session Layer	13
4.2	Order Handling	14
4.3	Quote Handling	14
4.4	Strategy Creation	15
4.5	Flexible Instrument Creation	15
4.6	Scaled Simple Instrument Creation	15
4.7	Quote and Cross Request	15
4.8	CLIP Trading	15
4.9	Selective Request for Quote Service	16
4.10	TES Trading	16
4.11	Basket Trading	17
4.12	Other	17
5	Session Layer	19
5.1	Session Logon	19
5.2	Session Logon (Password encrypted)	21
5.3	Session Logon Response	22
5.4	Session Logout	24
5.5	Session Logout Response	25
5.6	Session Logout Notification	26
5.7	Heartbeat	27
5.8	Heartbeat Notification	28
5.9	Legal Notification	29
5.10	User Logon	31
5.11	User Logon (Password encrypted)	32
5.12	User Logon Response	33
5.13	User Logout	34
5.14	User Logout Response	35
5.15	User Logout Notification	36
5.16	Throttle Update Notification	37
5.17	Subscribe	38
5.18	Subscribe Response	41
5.19	Unsubscribe	42
5.20	Unsubscribe Response	43
5.21	Retransmit	44
5.22	Retransmit Response	46
5.23	Retransmit (Order/Quote Event)	48
5.24	Retransmit Response (Order/Quote Event)	50
5.25	Reject	52
5.26	Session List Inquire	55
5.27	Session List Inquire Response	56
5.28	Trade Enrichment List Inquire	58
5.29	Trade Enrichment List Inquire Response	59
5.30	User List Inquire	61

5.31 User List Inquire Response	62
6 Order Handling	64
6.1 New Order Single or Multi Leg	64
6.2 New Order Single or Multi Leg (short layout)	73
6.3 New Order Response (Standard Order)	79
6.4 New Order Response (Lean Order)	83
6.5 Immediate Execution Response	87
6.6 Book Order Execution	92
6.7 Replace Order Single or Multi Leg	97
6.8 Replace Order Single or Multi Leg (short layout)	107
6.9 Replace Order Response (Lean Order)	113
6.10 Replace Order Response (Standard Order)	117
6.11 Cancel Order Single or Multi Leg	121
6.12 Cancel Order Response (Standard Order)	124
6.13 Cancel Order Response (Lean Order)	127
6.14 Cancel Order Notification	130
6.15 Order Mass Cancellation Request	134
6.16 Order Mass Cancellation Response	137
6.17 Order Mass Cancellation Response No Hits	139
6.18 Order Mass Cancellation Notification	140
6.19 Extended Order Information	143
6.20 Mass Order	153
6.21 Mass Order Ack	159
7 Quote Handling	160
7.1 Mass Quote	160
7.2 Mass Quote Response	164
7.3 Quote Execution Notification	167
7.4 Quote Mass Cancellation Request	170
7.5 Quote Mass Cancellation Response	172
7.6 Quote Mass Cancellation Notification	173
7.7 Quote Activation Request	175
7.8 Quote Activation Response	178
7.9 Quote Activation Notification	179
7.10 Inquire Market Maker Parameters	181
7.11 Inquire Market Maker Parameters Response	182
7.12 Market Maker Parameter Definition	184
7.13 Market Maker Parameter Definition Response	186
8 Strategy Creation	187
8.1 Create Strategy	187
8.2 Create Strategy Response	190
9 Flexible Instrument Creation	194
9.1 Create Flexible Instrument Request	194
9.2 Create Flexible Instrument Response	196
10 Scaled Simple Instrument Creation	198
10.1 Create Scaled Simple Instrument Request	198
10.2 Create Scaled Simple Instrument Response	200
11 Quote and Cross Request	202
11.1 Quote Request	202
11.2 Quote Request Response	204
11.3 Cross Request	205

11.4 Cross Request Response	206
12 CLIP Trading	207
12.1 CLIP Enter Request	207
12.2 Response to a CLIP Request	216
12.3 CLIP Execution Notification	218
12.4 CLIP Delete Request	222
12.5 CLIP Deletion Notification	224
13 Selective Request for Quote Service	227
13.1 SRQS Open Negotiation Request	227
13.2 SRQS Inquire Smart Respondent Request	233
13.3 SRQS Inquire Smart Respondent Response	235
13.4 SRQS Quote Response	236
13.5 SRQS Quote Snapshot Notification	237
13.6 SRQS Quote Snapshot Request	239
13.7 SRQS Response	240
13.8 SRQS Open Negotiation Notification for Requester	241
13.9 SRQS Open Negotiation Notification for Respondent	248
13.10SRQS Update Negotiation Request	253
13.11SRQS Negotiation Notification for Requester	258
13.12SRQS Enter Quote Request	264
13.13SRQS Quote Notification for Responder	269
13.14SRQS Enter Quoting Status Request	273
13.15SRQS Hit Quote Request	274
13.16SRQS Deal Response	280
13.17SRQS Create Deal Notification	281
13.18SRQS Update Deal Request	287
13.19SRQS Deal Notification	289
13.20SRQS Negotiation Status Notification	294
13.21SRQS Negotiation Notification for Respondent	296
13.22SRQS Status Notification	300
14 TES Trading	302
14.1 Enter TES Trade Request	302
14.2 TES Response	309
14.3 TES Broadcast	310
14.4 Modify TES Trade Request	319
14.5 Delete TES Trade Request	322
14.6 Delete TES Trade Broadcast	324
14.7 Approve TES Trade Request	327
14.8 Approve TES Trade Broadcast	333
14.9 TES Status Broadcast	344
14.10TES Execution Broadcast	346
14.11TES Trade Broadcast	348
14.12Reverse TES Trade Request	357
14.13Approve Reverse TES Trade Request	359
14.14TES Reversal Broadcast	361
14.15Upload TES Trade Request	364
14.16TES Trade Upload Broadcast	375
15 Basket Trading	387
15.1 Enter Basket Trade Request	387
15.2 Basket Trading Response	391
15.3 Basket Trading Broadcast	392

15.4 Approve Basket Broadcast	397
15.5 Approve Basket Trade Request	403
15.6 Basket Execution Broadcast	410
15.7 Modify Basket Trade Request	413
15.8 Delete Basket Trade Request	417
15.9 Delete Basket Broadcast	419
15.10 Amend Basket Trade Request	421
15.11 Basket Roll Request	425
15.12 Basket Roll Broadcast	432
16 Other	440
16.1 Trade Notification	440
16.2 Inquire Margin Based Risk Limit Request	450
16.3 Inquire Margin Based Risk Limit Response	451
16.4 Status Broadcast	452
16.5 Trade Notification Status	454
16.6 Update Remaining Risk Allowance Base Request	456
16.7 Update Remaining Risk Allowance Base Response	458
16.8 Trading Session Event	460
16.9 Mass Cancellation Event	462
16.10 Pre-Trade Risk Limits Definition Request	464
16.11 Pre-Trade Risk Limit Response	466
16.12 Inquire Pre-Trade Risk Limits Request	469
16.13 Service Availability	470
16.14 Service Availability Market	473
16.15 News	475
16.16 Entitlement Notification	477
16.17 Party Action Report	479
16.18 Risk Notification	481
16.19 Ping Request	483
16.20 Ping Response	484
16.21 Gap Fill	485
16.22 TES Inquire Boundary Prices Request	487
16.23 TES Inquire Boundary Prices Response	489
16.24 Trading Action Request	490
16.25 Trading Action Response	492
16.26 Update Reference Price Request	493
16.27 Update Reference Price Response	494
A Appendix	495
A.1 T7 Entry Service Message Flow	495
A.2 SRQS Message Flows	500
A.3 Variable Arrays	510
A.4 XML Interface Description	510
B Change Log	511
B.1 T7 Release 15.0 – Version 2 (ETI 15.0-D0002)	511
B.2 T7 Release 15.0 – Version 1 (ETI 15.0-D0001)	511

Contents

1 List of Abbreviations

Please find a list of all the abbreviations used in the document. The first time an abbreviation is introduced in the document it is written in brackets after the phrase.

BOC	Book or Cancel Order
CAO	Closing Auction Only Order
CLIP – Eurex Improve	Client Liquidity Improvement Process
ETI	Enhanced Trading Interface
HF	High-frequency (session)
IOC	Immediate or Cancel Order
LF	Low-frequency (session)
OCO	One Cancels the Other Order
PS (GW)	Partition specific (gateway)
SRQS – Eurex EnLight	Selective Request for Quote Service
TES	T7 Entry Service
UDF	User-defined field that is not part of the official FIX Specification

2 Introduction

The Deutsche Börse Group's T7 is the industry-leading, multi-asset trading platform of the Deutsche Börse Group, its affiliates and partners.

The system has best-in-class performance and is scalable to support markets of any size. It can be customized to support different types of markets.

The Enhanced Trading Interface (ETI) is the high performance interface designed for participants who require the highest throughput and the lowest latency for their transactions. It supports both, cash and derivatives markets.

The ETI Manual provides the description of the main concepts for all supported market types (cash and derivatives).

The purpose of this document is to provide all message formats for the derivative market part of ETI.

The chapter 3 [Message Formats](#) provides the detailed message formats and fields. An introduction to the [XML Interface Description](#) and important message flows are provided in the appendix.

In addition to this document a corresponding XML representation and the schema files as well as C-Header files are published.

3 Message Formats

This chapter provides details on the administrative and application messages used by ETI. Information on data types and the most important error codes are provided. Messages sent by participants not listed in this section are rejected by the server via a Reject (3) message.

Each ETI message format has a unique binary message type identifier (*TemplateID (28500)*) and is based on a standard FIX message.

The Interface version used by the participant needs to be provided during [Session Logon](#) in *DefaultCstmAppVerID (1408)*; the [Session Logon Response](#) will return the Interface Version, which the ETI Gateway currently uses, in the same field.

The Interface Version will allow the participant to recognize that ETI has changed. The Build Number shows to which ETI XML file, ETI XSD file, canned data, exchange software the ETI Manual belongs to.

3.1 Message Fragmentation

In case the complete data of a transaction does not fit into a single message, ETI automatically sends a sequence of messages to the participant.

The field *LastFragment (893)* in the corresponding header structure indicates whether the current message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction or if the application should wait for further messages in order to retrieve the full data set.

Another mechanism for message fragmentation that is used for inquiring reference data (session, user, enrichment rules) bases on the *LastEntityProcess (25035)* field that is part of the requests and the responses.

In the first inquiry (request) *LastEntityProcess (25035)* must not be set. The application should continue sending the inquiries using the *LastEntityProcess (25035)* from the recent response. A response with *LastEntityProcess (25035)* not set indicates that no more data is available.

3.2 Data Types

ETI supports the following data types:

ETI Data Type	Description	No Value
signed int	Little endian byte order. Supported are 1, 2, 4 and 8-byte, signed integers two's complement representation.	1 byte signed int: 0x80 2 byte signed int: 0x8000 4 byte signed int: 0x80000000 8 byte signed int: 0x8000000000000000
unsigned int	Little endian byte order. Supported are 1, 2, 4 and 8-byte, unsigned integers.	1 byte unsigned int: 0xFF 2 byte unsigned int: 0xFFFF 4 byte unsigned int: 0xFFFFFFFF 8 byte unsigned int: 0xFFFFFFFFFFFFFFFF
Float	Encoded as 8-byte signed integer (8 implicit decimals).	0x8000000000000000
FloatDecimal4	Encoded as 8-byte signed integer (4 implicit decimals).	0x8000000000000000
FloatDecimal6	Encoded as 8-byte signed integer (6 implicit decimals).	0x8000000000000000
FloatDecimal7	Encoded as 8-byte signed integer (7 implicit decimals).	0x8000000000000000
Fixed String	Length information specifies the fixed size. Encoded as character array. Completely filled with valid characters (space padding if required).	0x00 at the first position
Fixed String (0- terminable)	Length information specifies the fixed size. Encoded as character array optionally 0-terminable (minimum string size of 1). XML file: attribute "isTerminable" is set to true. Padding after 0-terminator required up to fixed size.	0x00 at the first position

ETI Data Type	Description	No Value
Variable String	Length information specifies the maximum possible size. Separate counter field specifies the transmitted string size. XML file: attribute "variableSize" set to true. The message is filled up to a multiple of 8 bytes and truncated.	0x00 at the first position (if the field is not the last one of a certain message) OR the related counter field specifying the transmitted string size is set to 0.
Counter	This data type represents an unsigned integer as a counter for arrays of variable size.	see 1 byte unsigned int and 2 byte unsigned int respectively
LocalMktDate	Date of Local Market (as opposed to UTC) in YYYYMMDD 4 byte unsigned binary format. Example: date 10.09.2014 is represented by a 4 byte unsigned integer number 20140910.	see 4 byte unsigned int
LocalMonthYearCod	Month of the Local Market in YYYYMM 4 byte unsigned binary format.	See 4 byte unsigned int
PriceType	Price in integer format including 8 decimals. For certain asset classes, prices may have negative values.	see 8 byte signed int
Qty	Quantity in integer format including 4 decimals.	see 8 byte signed int
SeqNum	Message sequence number in 8 byte unsigned binary format.	see 8 byte unsigned int
UTCTimestamp	Date and time, in UTC, represented as nanoseconds past the UNIX epoch (00:00:00 UTC on 1 January 1970).	see 8 byte unsigned int
char	String of length 1.	0x00
Data	Byte array where each byte has a value from 0 to 255. The length information specifies the fixed size. Encoded as byte array. Byte array is always filled completely.	Each byte filled with 0x00.

ETI Data Type	Description	No Value
---------------	-------------	----------

3.3 Error Codes

All rejections and errors on an application and session level are communicated via the FIX standard *Reject (3)* message; except for [Mass Quote Response](#).

The error code will be provided in field *SessionRejectReason (373)*, the error text in field *VarText (30355)*.

ETI offers detailed error description in the error text, only for selected errors unique error codes are available.

ETI will provide the following dedicated error codes, which the participant application may interpret for automated processing:

SessionRejectReason (373)	Description
100	Reject due to exceeded throttle limit.
101	Stale request was not forwarded to T7.
102	Service temporarily not available.
103	Service not available.
211	User already logged in.
216	Gateway is standby.
217	Session login limit reached.
223	User entitlement data timeout.
224	Session limit reached (per PS Gateway and Business Unit).
225	User login tries (per time interval) reached.
226	Limit of outstanding session/user logins reached (per Business Unit).
227	Limit of outstanding session/user logins reached (per session).
228	Password timestamp not in grace period.
10000	Order not found.
10001	Price reasonability check failed.
10002	Client order ID not unique.
10003	Quote activation in progress.
10006	Stop buy price not reasonable.
10007	Stop sell price not reasonable.
10008	GFD order is not executable on current business day.

SessionRejectReason (373)	Description
10009	Execution restriction and instrument state mismatch.
10010	Throttle limit for creation of complex instrument exceeded.
10011	Order maintenance not allowed in current state.
10013	Required min lot size not reached.

4 Overview of Supported Message Types

The following message formats are based on:

- Interface Version: 15.0
- Build Number: 150.536.0.ga-150006001-56

4.1 Session Layer

ETI Message	Sender	FIX Message	MsgType (35)
Session Logon	Participant	Logon	A
Session Logon (Password encrypted)	Participant	Logon	A
Session Logon Response	ETI Gateway	Logon	A
Session Logout	Participant	Logout	5
Session Logout Response	ETI Gateway	Logout	5
Session Logout Notification	ETI Gateway	Logout	5
Heartbeat	Participant	Heartbeat	0
Heartbeat Notification	ETI Gateway	Heartbeat	0
Legal Notification	ETI Gateway	UserNotification	CB
User Logon	Participant	UserRequest	BE
User Logon (Password encrypted)	Participant	UserRequest	BE
User Logon Response	ETI Gateway	UserResponse	BF
User Logout	Participant	UserRequest	BE
User Logout Response	ETI Gateway	UserResponse	BF
User Logout Notification	ETI Gateway	Logout	5
Throttle Update Notification	ETI Gateway	UserNotification	CB
Subscribe	Participant	ApplicationMessageRequest	BW
Subscribe Response	ETI Gateway	ApplicationMessageRequestAck	BX
Unsubscribe	Participant	ApplicationMessageRequest	BW
Unsubscribe Response	ETI Gateway	ApplicationMessageRequestAck	BX
Retransmit	Participant	ApplicationMessageRequest	BW
Retransmit Response	ETI Gateway	ApplicationMessageRequestAck	BX
Retransmit (Order/Quote Event)	Participant	ApplicationMessageRequest	BW
Retransmit Response (Order/Quote Event)	ETI Gateway	ApplicationMessageRequestAck	BX
Reject	ETI Gateway	Reject	3
Session List Inquire	Participant	SessionDetailsListRequest	U5
Session List Inquire Response	ETI Gateway	SessionDetailsListResponse	U6
Trade Enrichment List Inquire	Participant	TradeEnrichmentListRequest	U7
Trade Enrichment List Inquire Response	ETI Gateway	TradeEnrichmentListReport	U9
User List Inquire	Participant	PartyDetailsListRequest	CF
User List Inquire Response	ETI Gateway	PartyDetailsListReport	CG

4.2 Order Handling

ETI Message	Sender	FIX Message	MsgType (35)
New Order Single or Multi Leg	Participant	NewOrderSingle	D
New Order Single or Multi Leg (short layout)	Participant	NewOrderSingle	D
New Order Response (Standard Order)	ETI Gateway	ExecutionReport	8
New Order Response (Lean Order)	ETI Gateway	ExecutionReport	8
Immediate Execution Response	ETI Gateway	ExecutionReport	8
Book Order Execution	ETI Gateway	ExecutionReport	8
Replace Order Single or Multi Leg	Participant	OrderCancelReplaceRequest	G
Replace Order Single or Multi Leg (short layout)	Participant	OrderCancelReplaceRequest	G
Replace Order Response (Lean Order)	ETI Gateway	ExecutionReport	8
Replace Order Response (Standard Order)	ETI Gateway	ExecutionReport	8
Cancel Order Single or Multi Leg	Participant	OrderCancelRequest	F
Cancel Order Response (Standard Order)	ETI Gateway	ExecutionReport	8
Cancel Order Response (Lean Order)	ETI Gateway	ExecutionReport	8
Cancel Order Notification	ETI Gateway	ExecutionReport	8
Order Mass Cancellation Request	Participant	OrderMassActionRequest	CA
Order Mass Cancellation Response	ETI Gateway	OrderMassActionReport	BZ
Order Mass Cancellation Response No Hits	ETI Gateway	OrderMassActionReport	BZ
Order Mass Cancellation Notification	ETI Gateway	OrderMassActionReport	BZ
Extended Order Information	ETI Gateway	ExecutionReport	8
Mass Order	Participant	MassOrder	DJ
Mass Order Ack	ETI Gateway	MassOrderAck	DK

4.3 Quote Handling

ETI Message	Sender	FIX Message	MsgType (35)
Mass Quote	Participant	MassQuote	i
Mass Quote Response	ETI Gateway	MassQuoteAcknowledgement	b
Quote Execution Notification	ETI Gateway	QuoteExecutionReport	U8
Quote Mass Cancellation Request	Participant	OrderMassActionRequest	CA
Quote Mass Cancellation Response	ETI Gateway	OrderMassActionReport	BZ
Quote Mass Cancellation Notification	ETI Gateway	OrderMassActionReport	BZ
Quote Activation Request	Participant	OrderMassActionRequest	CA
Quote Activation Response	ETI Gateway	OrderMassActionReport	BZ
Quote Activation Notification	ETI Gateway	OrderMassActionReport	BZ

ETI Message	Sender	FIX Message	MsgType (35)
Inquire Market Maker Parameters	Participant	MMPParameterRequest	U17
Inquire Market Maker Parameters Response	ETI Gateway	MMPParameterResponse	U18
Market Maker Parameter Definition	Participant	MMPParameterDefinitionRequest	U14
Market Maker Parameter Definition Response	ETI Gateway	RequestAcknowledge	U1

4.4 Strategy Creation

ETI Message	Sender	FIX Message	MsgType (35)
Create Strategy	Participant	SecurityDefinitionRequest	c
Create Strategy Response	ETI Gateway	SecurityDefinition	d

4.5 Flexible Instrument Creation

ETI Message	Sender	FIX Message	MsgType (35)
Create Flexible Instrument Request	Participant	SecurityDefinitionRequest	c
Create Flexible Instrument Response	ETI Gateway	SecurityDefinition	d

4.6 Scaled Simple Instrument Creation

ETI Message	Sender	FIX Message	MsgType (35)
Create Scaled Simple Instrument Request	Participant	SecurityDefinitionRequest	c
Create Scaled Simple Instrument Response	ETI Gateway	SecurityDefinition	d

4.7 Quote and Cross Request

ETI Message	Sender	FIX Message	MsgType (35)
Quote Request	Participant	QuoteRequest	R
Quote Request Response	ETI Gateway	RequestAcknowledge	U1
Cross Request	Participant	CrossRequest	DS
Cross Request Response	ETI Gateway	RequestAcknowledge	U1

4.8 CLIP Trading

ETI Message	Sender	FIX Message	MsgType (35)
CLIP Enter Request	Participant	CrossRequest	DS
Response to a CLIP Request	ETI Gateway	CrossRequestAck	DT

ETI Message	Sender	FIX Message	MsgType (35)
CLIP Execution Notification	ETI Gateway	ExecutionReport	8
CLIP Delete Request	Participant	CrossRequest	DS
CLIP Deletion Notification	ETI Gateway	ExecutionReport	8

4.9 Selective Request for Quote Service

ETI Message	Sender	FIX Message	MsgType (35)
SRQS Open Negotiation Request	Participant	QuoteRequest	R
SRQS Inquire Smart Respondent Request	Participant	PartyDetailsListRequest	CF
SRQS Inquire Smart Respondent Response	ETI Gateway	PartyDetailsListReport	CG
SRQS Quote Response	ETI Gateway	QuoteAck	CW
SRQS Quote Snapshot Notification	ETI Gateway	MassQuote	i
SRQS Quote Snapshot Request	Participant	QuoteRequest	R
SRQS Response	ETI Gateway	MassQuoteAcknowledgement	b
SRQS Open Negotiation Notification for Requester	ETI Gateway	QuoteStatusReport	AI
SRQS Open Negotiation Notification for Respondent	ETI Gateway	QuoteStatusReport	AI
SRQS Update Negotiation Request	Participant	QuoteRequest	R
SRQS Negotiation Notification for Requester	ETI Gateway	QuoteStatusReport	AI
SRQS Enter Quote Request	Participant	QuoteRequest	R
SRQS Quote Notification for Responder	ETI Gateway	Quote	S
SRQS Enter Quoting Status Request	Participant	MassQuoteAcknowledgement	b
SRQS Hit Quote Request	Participant	QuoteResponse	AJ
SRQS Deal Response	ETI Gateway	QuoteAck	CW
SRQS Create Deal Notification	ETI Gateway	TradeCaptureReport	AE
SRQS Update Deal Request	Participant	TradeCaptureReport	AE
SRQS Deal Notification	ETI Gateway	TradeCaptureReport	AE
SRQS Negotiation Status Notification	ETI Gateway	QuoteStatusReport	AI
SRQS Negotiation Notification for Respondent	ETI Gateway	QuoteStatusReport	AI
SRQS Status Notification	ETI Gateway	QuoteStatusReport	AI

4.10 TES Trading

ETI Message	Sender	FIX Message	MsgType (35)
Enter TES Trade Request	Participant	TradeCaptureReport	AE
TES Response	ETI Gateway	TradeCaptureReportAck	AR

ETI Message	Sender	FIX Message	MsgType (35)
TES Broadcast	ETI Gateway	TradeCaptureReport	AE
Modify TES Trade Request	Participant	TradeCaptureReport	AE
Delete TES Trade Request	Participant	TradeCaptureReport	AE
Delete TES Trade Broadcast	ETI Gateway	TradeCaptureReport	AE
Approve TES Trade Request	Participant	TradeCaptureReport	AE
Approve TES Trade Broadcast	ETI Gateway	TradeCaptureReport	AE
TES Status Broadcast	ETI Gateway	TradingSessionStatus	h
TES Execution Broadcast	ETI Gateway	TradeCaptureReport	AE
TES Trade Broadcast	ETI Gateway	TradeCaptureReport	AE
Reverse TES Trade Request	Participant	TradeCaptureReport	AE
Approve Reverse TES Trade Request	Participant	TradeCaptureReport	AE
TES Reversal Broadcast	ETI Gateway	TradeCaptureReport	AE
Upload TES Trade Request	Participant	TradeCaptureReport	AE
TES Trade Upload Broadcast	ETI Gateway	TradeCaptureReport	AE

4.11 Basket Trading

ETI Message	Sender	FIX Message	MsgType (35)
Enter Basket Trade Request	Participant	TradeMatchReport	DC
Basket Trading Response	ETI Gateway	TradeMatchReportAck	DD
Basket Trading Broadcast	ETI Gateway	TradeMatchReport	DC
Approve Basket Broadcast	ETI Gateway	TradeMatchReport	DC
Approve Basket Trade Request	Participant	TradeMatchReport	DC
Basket Execution Broadcast	ETI Gateway	TradeMatchReport	DC
Modify Basket Trade Request	Participant	TradeMatchReport	DC
Delete Basket Trade Request	Participant	TradeMatchReport	DC
Delete Basket Broadcast	ETI Gateway	TradeMatchReport	DC
Amend Basket Trade Request	Participant	TradeMatchReport	DC
Basket Roll Request	Participant	TradeMatchReport	DC
Basket Roll Broadcast	ETI Gateway	TradeMatchReport	DC

4.12 Other


ETI Message	Sender	FIX Message	MsgType (35)
Trade Notification	ETI Gateway	TradeCaptureReport	AE
Inquire Margin Based Risk Limit Request	Participant	PartyRiskLimitsRequest	CL
Inquire Margin Based Risk Limit Response	ETI Gateway	PartyRiskLimitsReport	CM
Status Broadcast	ETI Gateway	TradingSessionStatus	h
Trade Notification Status	ETI Gateway	TradingSessionStatus	h

ETI Message	Sender	FIX Message	MsgType (35)
Update Remaining Risk Allowance Base Request	Participant	PartyRiskLimitsDefinitionRequest	CS
Update Remaining Risk Allowance Base Response	ETI Gateway	PartyRiskLimitsDefinitionRequest-Ack	CT
Trading Session Event	ETI Gateway	TradingSessionStatus	h
Mass Cancellation Event	ETI Gateway	OrderMassActionReport	BZ
Pre-Trade Risk Limits Definition Request	Participant	PartyRiskLimitsRequest	CL
Pre-Trade Risk Limit Response	ETI Gateway	PartyRiskLimitsReport	CM
Inquire Pre-Trade Risk Limits Request	Participant	PartyRiskLimitsRequest	CL
Service Availability	ETI Gateway	UserNotification	CB
Service Availability Market	ETI Gateway	UserNotification	CB
News	ETI Gateway	News	B
Entitlement Notification	ETI Gateway	PartyEntitlementsUpdateReport	CZ
Party Action Report	ETI Gateway	PartyActionReport	DI
Risk Notification	ETI Gateway	PartyRiskLimitsUpdateReport	CR
Ping Request	Participant	TestRequest	1
Ping Response	ETI Gateway	Heartbeat	0
Gap Fill	ETI Gateway	ApplicationMessageReport	BY
TES Inquire Boundary Prices Request	Participant	PartyDetailsListRequest	CF
TES Inquire Boundary Prices Response	ETI Gateway	PartyDetailsListReport	CG
Trading Action Request	Participant	TradingActionRequest	U34
Trading Action Response	ETI Gateway	TradingActionReport	U35
Update Reference Price Request	Participant	PartyDetailsListRequest	CF
Update Reference Price Response	ETI Gateway	PartyDetailsListReport	CG

5 Session Layer

5.1 Session Logon

This message must be the first message sent by the participant to the assigned gateway authenticating the T7 ETI session. Password change is not supported. For more details, please refer to the ETI Manual, chapters Session Authentication and Logon.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10000 (Logon, MsgType = A)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Must be set to 1.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
108	HeartBtInt	N	4	24	unsigned int	Heartbeat (in milliseconds) interval 0 = gateway will not take any action for skipped heartbeats (only allowed for non-production environments) not set: gateway will define interval
20055	PartyIDSessionID	Y	4	28	unsigned int	Session ID
1408	DefaultCstmAppVer-ID	Y	30	32	Fixed String (0-terminable)	Indicates the ETI interface version the participant application uses. The interface version can be found in XML and C-Header files. Valid characters: \x20, \x22-\x7B, \x7D, \x7E

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
554	Password	Y	32	62	Fixed String (0-terminable)	not encrypted Valid characters: 0-9, A-Z, a-z, \x21, \x23, \x24, \x25, \x26, \x2A, \x2B, \x2D, \x2F, \x3D, \x40, \x5F
39020	Pad2	U	2	94	Fixed String	not used

5.2 Session Logon (Password encrypted)

ETI session logon with encrypted password. Password change is not supported. For more details, please refer to the ETI Manual, chapters Session Authentication and Logon.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 19000 (Logon, MsgType = A)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Must be set to 1.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
108	HeartBtInt	N	4	24	unsigned int	Heartbeat (in milliseconds) interval 0 = gateway will not take any action for skipped heartbeats (only allowed for non-production environments) not set: gateway will define interval
20055	PartyIDSessionID	Y	4	28	unsigned int	Session ID
1408	DefaultCstmApplVer-ID	Y	30	32	Fixed String (0-terminable)	Indicates the T7 ETI interface version the ETI gateway software uses. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
1402	EncryptedPassword	Y	684	62	Fixed String	Encrypted password. Valid characters: A-Z, a-z, 0-9, \x2B, \x2F, \x3D
39060	Pad6	U	6	746	Fixed String	not used

5.3 Session Logon Response


This message confirms the Session Logon request. For more details, please refer to the ETI Manual, chapters Session Authentication and Logon.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10001 (Logon, MsgType = A)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
1614	ThrottleTimeInterval	Y	8	32	signed int	Throttle time interval in number of milliseconds; applicable for transaction limit.
1613	ThrottleNoMsgs	Y	4	40	unsigned int	Transaction limit per ThrottleTimeInterval (1614). If set to 0, throttling will be switched off.
25002	ThrottleDisconnect-Limit	Y	4	44	unsigned int	Disconnect limit: maximum number of sequential message rejects due to throttle violation allowed by the T7 ETI.
108	HeartBtInt	Y	4	48	unsigned int	Actual heartbeat interval (in milliseconds), gateway overrides out of range value or sets to default if logon omits the field
25004	SessionInstanceID	Y	4	52	unsigned int	Unique ID for the session instance assigned by the T7 system during session logon; to be communicated to helpdesk for troubleshooting.
25243	LatestPublicKeySeq-No	N	4	56	unsigned int	Sequence number of latest public key.
25242	PublicKeyLen	N	2	60	Counter	Byte length of the public key.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
1301	MarketID	Y	2	62	unsigned int	Market ID.												
						Value	Description											
						1	XEUR											
						2	XEEE											
						12	NODX											
						*	More values											
339	TradSesMode	Y	1	64	unsigned int	Environment Type												
						Value	Description											
						1	Development											
						2	Simulation											
						3	Production											
						4	Acceptance											
1408	DefaultCstmApplVer-ID	Y	30	65	Fixed String (0-terminable)	Indicates the T7 ETI interface version the ETI gateway software uses. Valid characters: \x20, \x22-\x7B, \x7D, \x7E												
						28763	DefaultCstmApplVer-SubID	Y	5	95	Fixed String	ETI subversion. Identifies ETI changes within one ETI version.						
												Value	Description					
												D0002	Derivatives subversion					
												5948	PartitionID	N	2	100	unsigned int	Grouping of T7 products. Only set for ETI HF Sessions.
																		25233

5.4 Session Logout

Session Logout request. For more details, please refer to the ETI Manual, chapter Logout.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10002 (Logout, MsgType = 5)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used

5.5 Session Logout Response

This message confirms the Session Logout request. For more details, please refer to the ETI Manual, chapter Logout.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10003 (Logout, MsgType = 5)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used

5.6 Session Logout Notification

The Session Logout Notification message is used to inform about an unsolicited session logout triggered by the operator of the T7 system or by the T7 system itself. For more details, please refer to the ETI Manual, chapter Logout.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10012 (Logout, MsgType = 5)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway
<MessageBody>						
30354	VarTextLen	Y	2	16	Counter	Number of used bytes for field VarText (30355).
30355	VarText	Y	2000	18	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E

5.7 Heartbeat

The Heartbeat message is used by the T7 ETI gateway to monitor the status of the communication link to the ETI client during periods of inactivity. For more details, please refer to the ETI Manual, chapter Heartbeat.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10011 (Heartbeat, MsgType = 0)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used

5.8 Heartbeat Notification

The Heartbeat notification may be used by the ETI client to monitor the status of the communication link to the T7 ETI gateway during periods of inactivity. For more details, please refer to the ETI Manual, chapter Heartbeat.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10023 (Heartbeat, MsgType = 0)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway

5.9 Legal Notification


This message informs about the suspension from trading. For more details, please refer to the ETI Manual, chapter Risk Control.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10037 (User-Notification, MsgType = CB)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	U	4	24	unsigned int	not used						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
30354	VarTextLen	Y	2	48	Counter	Number of used bytes for field Var-Text (30355).						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
926	UserStatus	Y	1	50	unsigned int	The status of the User	
						Value	Description
						10	Admission to trading suspended
						11	Suspension revoked
30355	VarText	Y	2000	51	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E	

5.10 User Logon

Each user needs to logon to T7 via the User Logon message. For more details, please refer to the ETI Manual, chapter User Authentication.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10018 (User-Request, MsgType = BE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
553	Username	Y	4	24	unsigned int	The trader ID
554	Password	Y	32	28	Fixed String (0-terminable)	not encrypted Valid characters: 0-9, A-Z, a-z, \x21, \x23, \x24, \x25, \x26, \x2A, \x2B, \x2D, \x2F, \x3D, \x40, \x5F
39040	Pad4	U	4	60	Fixed String	not used

5.11 User Logon (Password encrypted)

Each user needs to logon to T7 via the User Logon message. This request requires an encrypted password. For more details, please refer to the ETI Manual, chapter User Authentication. Encrypted version of UserLoginRequest.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 19018 (User-Request, MsgType = BE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
553	Username	Y	4	24	unsigned int	The trader ID
1402	EncryptedPassword	Y	684	28	Fixed String	Encrypted password. Valid characters: A-Z, a-z, 0-9, \x2B, \x2F, \x3D


5.12 User Logon Response

The User Logon Response message is used to confirm a user logon. For more details, please refer to the ETI Manual, chapter User Authentication.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10019 (User-Response, MsgType = BF)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used

5.13 User Logout

Each user may logout from T7 via the User Logout message.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10029 (User-Request, MsgType = BE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
553	Username	Y	4	24	unsigned int	The trader ID
39040	Pad4	U	4	28	Fixed String	not used

5.14 User Logout Response

The User Logout Response message is used to confirm a user logout.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10024 (User-Response, MsgType = BF)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used

5.15 User Logout Notification

The User Logout Notification message is used to confirm the forced logout of a user from the session that receives the message. The logout is performed by the exchange on behalf of the participant's request (for example via telephone).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10043 (Logout, MsgType = 5)				
39020	Pad2	U	2	6	Fixed String	not used				
<NotifHeader>										
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway				
<MessageBody>										
553	Username	Y	4	16	unsigned int	The trader ID				
30354	VarTextLen	Y	2	20	Counter	Number of used bytes for field VarText (30355).				
926	UserStatus	Y	1	22	unsigned int	The status of the User <table><tr><th>Value</th><th>Description</th></tr><tr><td>7</td><td>Forced user logout by exchange</td></tr></table>	Value	Description	7	Forced user logout by exchange
Value	Description									
7	Forced user logout by exchange									
30355	VarText	Y	2000	23	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E				


5.16 Throttle Update Notification

This message informs about throttle parameters that have been updated intraday.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10028 (User-Notification, MsgType = CB)
39020	Pad2	U	2	6	Fixed String	not used
<NotifHeader>						
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway
<MessageBody>						
1614	ThrottleTimeInterval	Y	8	16	signed int	Throttle time interval in number of milliseconds; applicable for transaction limit.
1613	ThrottleNoMsgs	Y	4	24	unsigned int	Transaction limit per ThrottleTimeInterval (1614). If set to 0, throttling will be switched off.
25002	ThrottleDisconnect-Limit	Y	4	28	unsigned int	Disconnect limit: maximum number of sequential message rejects due to throttle violation allowed by the T7 ETI.

5.17 Subscribe

This message is used to subscribe to a T7 ETI broadcast. Multiple subscriptions to the same pair of RefApplId (1355) and SubscriptionScope (25001) are not allowed. For more details, please refer to the ETI Manual, chapter Broadcast.

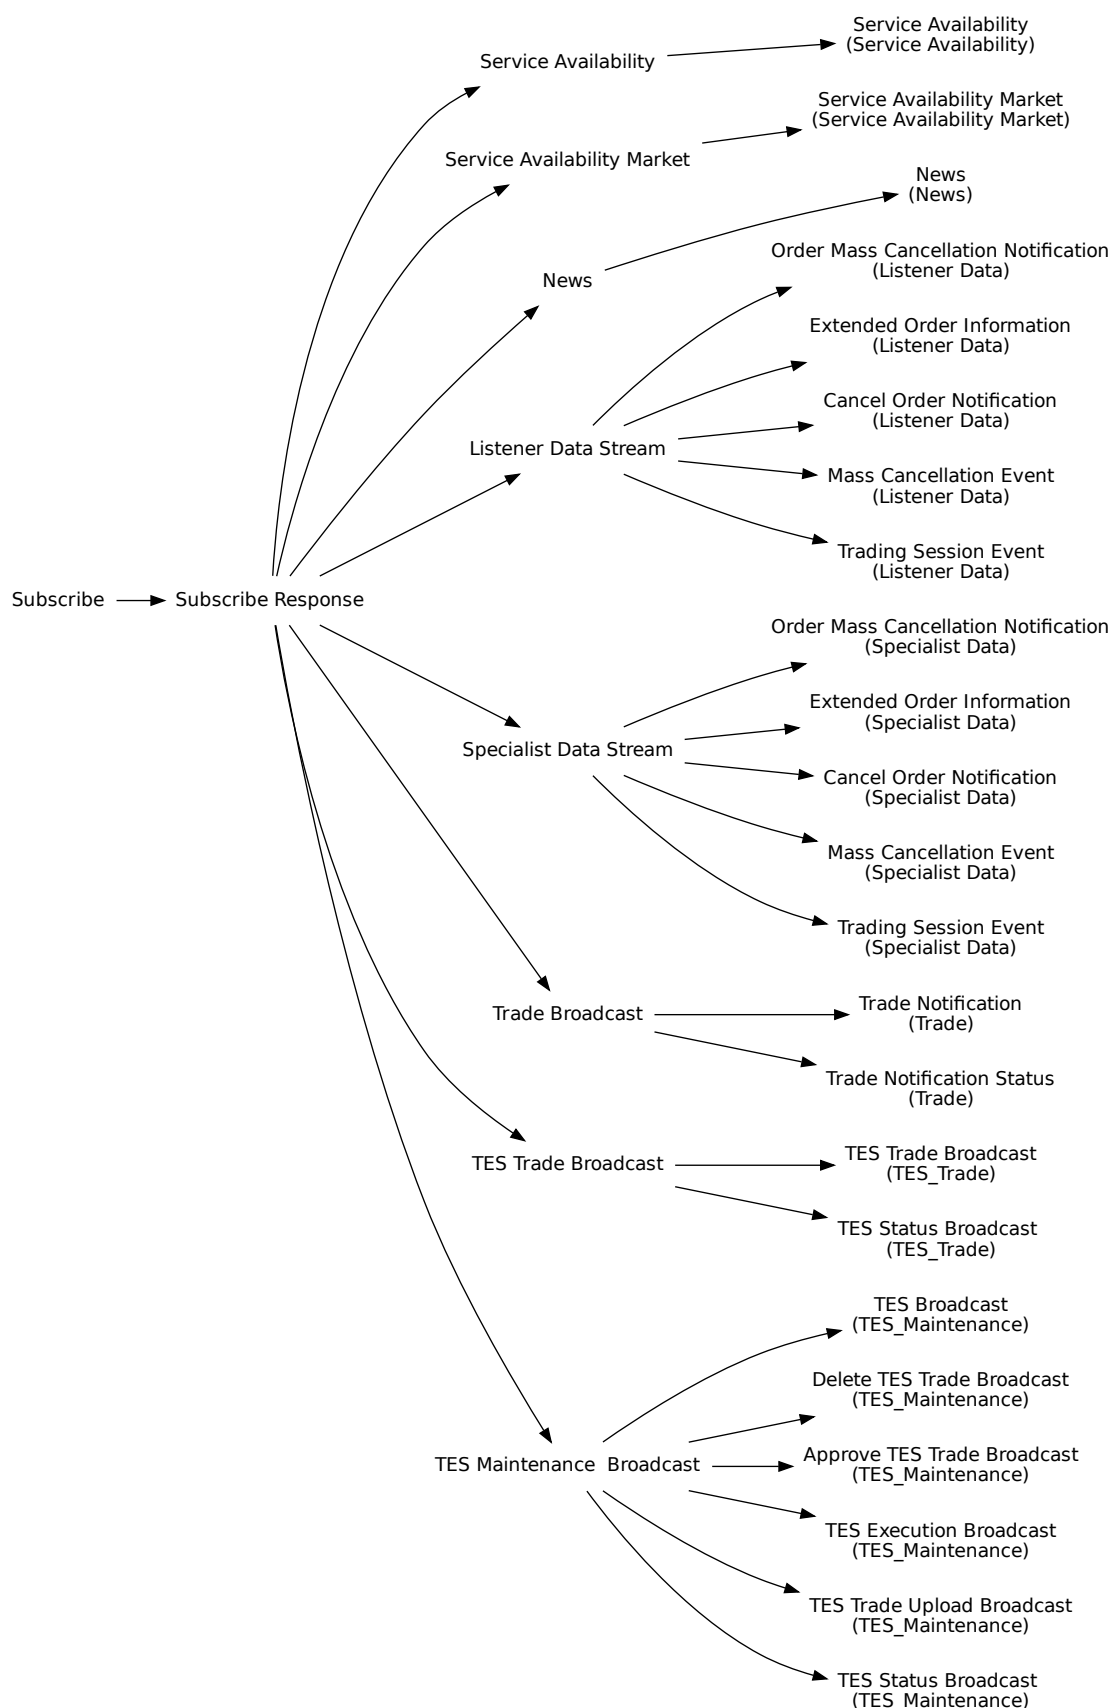

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderIn>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10025 (ApplicationMessageRequest, Msg-Type = BW)	
25028	NetworkMsgID	U	8	6	Fixed String	not used	
39020	Pad2	U	2	14	Fixed String	not used	
<RequestHeader>							
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.	
50	SenderSubID	U	4	20	unsigned int	not used	
<MessageBody>							
25001	SubscriptionScope	N	4	24	unsigned int	For filter criteria for broadcast subscription see the ETI Manual, chapter Broadcast.	
1355	RefApplID	Y	1	28	unsigned int	Application identifier of a T7 ETI data stream.	
						Value	Description
						1	Trade
						2	News
						3	Service Availability
						5	Listener Data
						7	TES Maintenance
						8	TES Trade
						9	SRQS Maintenance
10	Service Availability Market						
39030	Pad3	U	3	29	Fixed String	not used	


5.18 Subscribe Response

The Subscribe Broadcast Response message is used to confirm the broadcast subscription. For more details, please refer to the ETI Manual, chapter Broadcast.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10005 (ApplicationMessageRequestAck, MsgType = BX)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
28727	ApplSubID	Y	4	32	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.
39040	Pad4	U	4	36	Fixed String	not used

5.19 Unsubscribe

This message is used to revoke a broadcast subscription.



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10006 (ApplicationMessageRequest, Msg-Type = BW)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
28728	RefApplSubID	Y	4	24	unsigned int	Unique ID for the subscription instance assigned by the T7 system during broadcast subscription.
39040	Pad4	U	4	28	Fixed String	not used

5.20 Unsubscribe Response

The Unsubscribe Broadcast Response message is used to confirm the revocation of a broadcast subscription.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10007 (ApplicationMessageRequestAck, MsgType = BX)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used

5.21 Retransmit

This message is used for re-transmission of trade, TES trades, SRQS (Eurex/Xetra EnLight) maintenance data, risk control and news data for recovery purposes. The specified application sequence number range will lead to the retransmission of data whose application sequence number is $\geq$ ApplBegSeqNum (1182) and $\leq$ ApplEndSeqNum (1183). Depending on RefApplID (1355), the request is sent to the respective service:

- RefApplID = 1 (Trade) => request is sent to the Trades service
- RefApplID = 2 (News) => request is sent to the News service
- RefApplID = 6 (Risk Control) => request is sent to the Risk Control service
- RefApplID = 7 (TES Maintenance) => request is sent to the TES Retransmission Service
- RefApplID = 8 (TES Trades) => request is sent to the TES Retransmission service
- RefApplID = 9 (SRQS Maintenance) => request is sent to the SRQS service

For more details, please refer to the ETI Manual, chapter Retransmission.

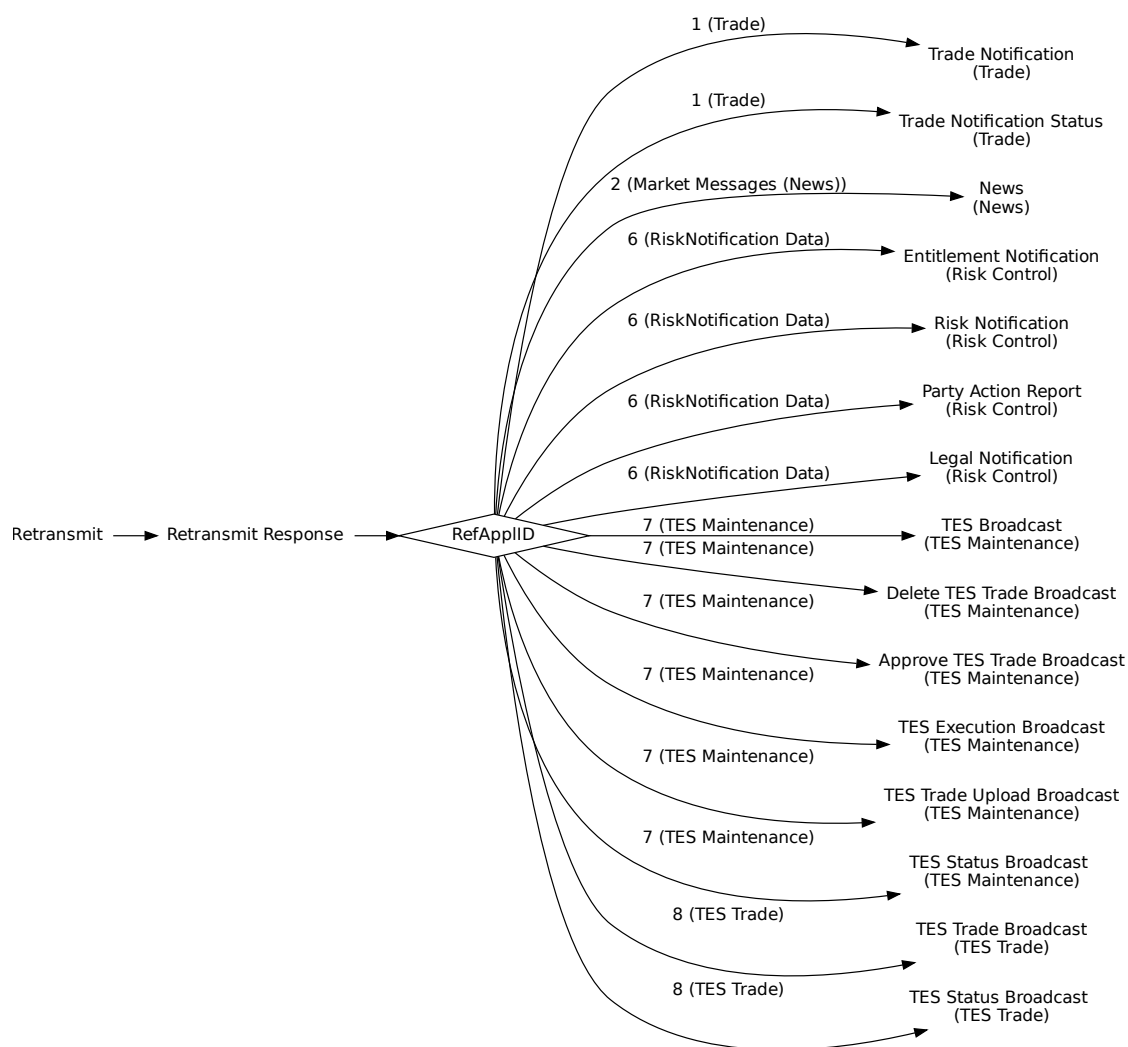

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderIn>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10008 (ApplicationMessageRequest, Msg-Type = BW)	
25028	NetworkMsgID	U	8	6	Fixed String	not used	
39020	Pad2	U	2	14	Fixed String	not used	
<RequestHeader>							
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.	
50	SenderSubID	U	4	20	unsigned int	not used	
<MessageBody>							
1182	ApplBegSeqNum	N	8	24	SeqNum	Beginning range of application sequence numbers. 'no value' means first known sequence number: 1	
1183	ApplEndSeqNum	N	8	32	SeqNum	Ending range of application sequence numbers.	
5948	PartitionID	N	2	40	unsigned int	The application sequence numbers are only unique per RefApplID, SubscriptionScope and Partion-ID. Therefore, the PartitionID is required to define the scope of a Retransmission Request. Not to be set for News, Risk Control, and SRQS Maintenance.	
1355	RefApplID	Y	1	42	unsigned int	Application identifier of a T7 ETI data stream.	
						Value	Description
						1	Trade
						2	News
						6	Risk Control
						7	TES Maintenance
						8	TES Trade
9	SRQS Maintenance						
39050	Pad5	U	5	43	Fixed String	not used	

5.22 Retransmit Response

The Retransmission Response message confirms the Retransmit request and delivers only a fixed number of the requested data packages. So the requesting client would have to send a new retransmission request (with updated sequence numbers) if the captured response does not contain all requested data. (See below: ApplEndSeqNum (1183)).

The field ApplTotalMessageCount (1349) indicates how many retransmitted broadcast messages will follow. For fragmented messages, each fragment counts as one message.

They will not be interrupted by other messages.

All these messages will consist of:

- <MessageHeaderOut>.
- <RBCHeader>, where ApplSubID (28727) is always set to 'no value' and ApplResendFlag (1352) is always set to True (indicating a retransmission message).
- <MessageBody>, which is specific for the TemplateID (28500) in <MessageHeaderOut>.

For more details, please refer to chapter Retransmission.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10009 (ApplicationMessageRequestAck, MsgType = BX)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
1183	ApplEndSeqNum	N	8	32	SeqNum	Ending range of application sequence numbers. If it is not set to the related request's ApplEndSeqNum, the client will have to send another retransmission request (with an updated ApplBegSeqNum). 'no value' means the requested data is not available.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
1357	RefApplLastSeqNum	N	8	40	SeqNum	Last application sequence number known by the T7 system for a certain scope of RefApplID, Subscription-Scope and PartitionID. 'no value' means that there is no data persisted yet for the requested stream subscription scope.
1349	ApplTotalMessage-Count	Y	2	48	unsigned int	Total number of messages (fragments) included in transmission.
39060	Pad6	U	6	50	Fixed String	not used

5.23 Retransmit (Order/Quote Event)

This message is used for re-transmission of recoverable order/quote event data for recovery purposes. The specified application message identifier range will lead to the retransmission of data whose application message identifier is > ApplBegMsgID (28718) and <= ApplEndMsgID (28719).

For more details, please refer to the ETI Manual, chapter Retransmission. This message is sent to the service "Retransmission of Order and Quote Events".



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10026 (ApplicationMessageRequest, Msg-Type = BW)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	U	4	20	unsigned int	not used						
<MessageBody>												
25001	SubscriptionScope	N	4	24	unsigned int	Retransmission scope (for the supported RefApplIDs): - Session Data: 'no value' - Listener Data: session ID						
5948	PartitionID	Y	2	28	unsigned int	Application message identifiers are only unique per RefApplID, SubscriptionScope and PartitionID. Therefore, the PartitionID is required to define the scope of a Retransmit request.						
1355	RefApplID	Y	1	30	unsigned int	Application identifier of a T7 ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
28718	ApplBegMsgID	N	16	31	data	Beginning range of application message identifiers; "no value" indicates first known application message identifier.						
28719	ApplEndMsgID	N	16	47	data	Ending range of application message identifiers; "no value" means last known application message identifier.						
39000	Pad1	U	1	63	Fixed String	not used						

5.24 Retransmit Response (Order/Quote Event)

This message confirms the Retransmit (Order/Quote Event) request and delivers only a fixed number of the requested data packages. So the requesting client would have to send a new Retransmit (Order/Quote Event) request (with updated application message identifiers), if the captured response does not contain all requested data. (See below: ApplEndMsgID (28719)). The field ApplTotalMessageCount (1349) indicates how many retransmitted broadcast messages will follow. For fragmented messages, each fragment counts as one message. They will not be interrupted by other messages.

All these messages will consist of:

- <MessageHeaderOut>.
- <RBCHeaderME>, where ApplSubID (28727) is always set to 'no value', TrdRegTSTimeOut (21003) is always set to 'no value', and ApplResendFlag (1352) is always set to True (indicating a retransmission message).
- <MessageBody>, which is specific for the TemplateID (28500) in <MessageHeaderOut>.

The retransmission message template used for order and quote events differs from the session data response template in the following cases:

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10027 (ApplicationMessageRequestAck, MsgType = BX)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
1349	ApplTotalMessage-Count	Y	2	32	unsigned int	Total number of messages (fragments) included in transmission.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
28719	ApplEndMsgID	N	16	34	data	Ending range of application message identifiers. If it is not set to the related request's ApplEndMsgID, the client will have to send another Retransmit request (with an updated ApplBegMsgID).
28722	RefApplLastMsgID	N	16	50	data	Last application message identifier known by the T7 system for a certain scope of RefApplID, Subscription-Scope and PartitionID.
39060	Pad6	U	6	66	Fixed String	not used

5.25 Reject

All rejections and errors on an application and session level are communicated via the FIX standard Reject (3) message; except for Mass Quote Response.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10010 (Reject, MsgType = 3)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	N	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
373	SessionRejectReason	Y	4	56	unsigned int	Error code. Valid values are listed after this table.				
30354	VarTextLen	Y	2	60	Counter	Values <100 are reserved by FIX. We will use user-defined values for application level errors as well				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1409	SessionStatus	Y	1	62	unsigned int	Session status.	
						Value	Description
						0	Session active
						4	Session logout complete
30355	VarText	Y	2000	63	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E	

Valid Values of SessionRejectReason (datatype SessionRejectReason)


Valid Value	Description
1	Required Tag Missing
5	Value is incorrect (out of range) for this tag
7	Decryption problem
11	Invalid TemplateID
16	Incorrect NumInGroup count for repeating group
99	Other
100	Throttle limit exceeded
101	Stale request was not forwarded to T7
102	Service temporarily not available
103	Service not available
105	Error converting response or broadcast
152	Heartbeat violation error
200	Internal technical error
210	Validation Error
211	User already logged in
216	Gateway is standby
217	Session login limit (per time interval) reached
223	User Entitlement Data time out
224	Session limit reached (per PS Gateway and Business Unit)
225	User login tries limit (per time interval) reached
226	Limit of outstanding session/user logins reached (per Business Unit)
227	Limit of outstanding session/user logins reached (per Session)
228	Password timestamp not in grace period
10000	Order not found
10001	Price not reasonable
10002	Duplicate Order (CISID)
10003	another quote activation request is pending for the same Product / Instrument Type / Session-ID
10006	Stop buy price not reasonable
10007	Stop sell price not reasonable

10008	GFD order is not executable on current business day
10010	Throttle limit for creation of complex instrument exceeded
10011	Order maintenance not allowed in current state
10013	Required min lot size not reached
10016	Pretrade Risk Limit exceeded

5.26 Session List Inquire

This message is used to get the list of sessions for the own business unit. These returned sessions (PartyIDSessionID (20055)) can be used as SubscriptionScope (25001) for retransmission and subscriptions requests to Listener Data (RefApplID (1355) = 4).

For more details, please refer to the ETI Manual, chapter Retransmission.

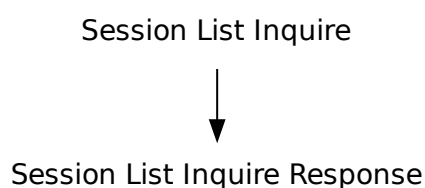

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10035 (SessionDetailsListRequest, MsgType = U5)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used

5.27 Session List Inquire Response

This message confirms the Session List Inquire request and provides information about sessions of the own business unit. The SessionSubMode (28735) is only set for LF sessions.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
<MessageHeaderOut>																
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.										
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10036 (SessionDetailsListResponse, MsgType = U6)										
39020	Pad2	U	2	6	Fixed String	not used										
<ResponseHeader>																
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.										
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway										
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.										
39040	Pad4	U	4	28	Fixed String	not used										
<MessageBody>																
28734	NoSessions	Y	2	32	Counter	Number of sessions in a response.										
39060	Pad6	U	6	34	Fixed String	not used										
<SessionsGrp> Cardinality: 1 - 1000, Record counter: NoSessions																
20055	>PartyIDSessionID	Y	4	40	unsigned int	Session ID.										
20359	>PartyIDSponsored-AccessUnit	N	4	44	unsigned int	Sponsored Access Unit ID.										
28730	>SessionMode	Y	1	48	unsigned int	Session type. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>ETI HF</td></tr><tr><td>2</td><td>ETI LF</td></tr><tr><td>3</td><td>GUI</td></tr><tr><td>4</td><td>FIX LF</td></tr></table>	Value	Description	1	ETI HF	2	ETI LF	3	GUI	4	FIX LF
Value	Description															
1	ETI HF															
2	ETI LF															
3	GUI															
4	FIX LF															
28735	>SessionSubMode	N	1	49	unsigned int	Set if SessionMode(28730) = 2(LF) <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Regular Trading Session</td></tr><tr><td>2</td><td>Regular Back Office Session</td></tr><tr><td>4</td><td>Sponsored Access Trading Session</td></tr><tr><td>5</td><td>Sponsored Access Back Of- fice Session</td></tr></table>	Value	Description	0	Regular Trading Session	2	Regular Back Office Session	4	Sponsored Access Trading Session	5	Sponsored Access Back Of- fice Session
Value	Description															
0	Regular Trading Session															
2	Regular Back Office Session															
4	Sponsored Access Trading Session															
5	Sponsored Access Back Of- fice Session															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
22359	>PartySponsored- AccessUnit	N	30	50	Fixed String	Sponsored Access Unit name. Valid characters: \x01-\x7E

5.28 Trade Enrichment List Inquire

This message is used to get the list of enrichment rules and enrichment rule IDs for the own business unit. To retrieve all enrichment rule data, in the first request LastEntityProcessed (25035) must be set to 'no value'. While the LastEntityProcessed (25035) received in the response is not 'no value', continue sending requests using the LastEntityProcessed (25035) obtained from the response.

Trade Enrichment List Inquire



Trade Enrichment List Inquire Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10040 (Trade-EnrichmentListRequest, MsgType = U7)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
25035	LastEntityProcessed	N	16	24	data	Paging key for reference data request.

5.29 Trade Enrichment List Inquire Response

This message confirms the Enrichment List Inquire request and provides information about enrichment rules of the own business unit.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10041 (Trade-EnrichmentListReport, MsgType = U9)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
39040	Pad4	U	4	28	Fixed String	not used						
<MessageBody>												
25035	LastEntityProcessed	N	16	32	data	Paging key for reference data request.						
28738	NoEnrichmentRules	Y	2	48	Counter	Number of enrichment rules in a response.						
39060	Pad6	U	6	50	Fixed String	not used						
<EnrichmentRulesGrp> Cardinality: 0 - 400, Record counter: NoEnrichmentRules												
20359	>PartyIDSponsored-AccessUnit	N	4	56	unsigned int	Sponsored Access Unit ID.						
25033	>EnrichmentRuleID	Y	2	60	unsigned int	Identifies an enrichment rule.						
20099	>PartyIDOrigination-Market	U	1	62	unsigned int	not used						
1	>Account	N	2	63	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
77	>PositionEffect	N	1	65	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
20096	>PartyIDTakeUp- TradingFirm	N	5	66	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
20013	>PartyIDOrder- OriginationFirm	N	7	71	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20032	>PartyIDBeneficiary	N	9	78	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20
22359	>PartySponsored- AccessUnit	N	30	87	Fixed String	Sponsored Access Unit name. Valid characters: \x01-\x7E
25007	>FreeText1	N	12	117	Fixed String	First free-format text field for trader specific or customer-related com- ments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E
25008	>FreeText2	N	12	129	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E
25009	>FreeText3	N	12	141	Fixed String	Third free-format text field for trader- specific or customer-related com- ments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E
39070	>Pad7	U	7	153	Fixed String	not used

5.30 User List Inquire

This message is used to get the list of traders of the own business unit. To retrieve all user data, in the first request LastEntityProcessed (25035) must be set to 'no value'. While the LastEntityProcessed (25035) received in the response is not 'no value', continue sending requests using the LastEntityProcessed (25035) obtained from the response.

User List Inquire



User List Inquire Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10038 (Party-DetailsListRequest, MsgType = CF)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	U	4	20	unsigned int	not used
<MessageBody>						
25035	LastEntityProcessed	N	16	24	data	Paging key for reference data request.

5.31 User List Inquire Response

This message confirms the User List Inquire request and provides information about the traders of the own business unit.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
<MessageHeaderOut>														
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.								
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10039 (PartyDetailsListReport, MsgType = CG)								
39020	Pad2	U	2	6	Fixed String	not used								
<ResponseHeader>														
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.								
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway								
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.								
39040	Pad4	U	4	28	Fixed String	not used								
<MessageBody>														
25035	LastEntityProcessed	N	16	32	data	Paging key for reference data request.								
1671	NoPartyDetails	Y	2	48	Counter	Number of PartyDetailsGrp repeating group.								
39060	Pad6	U	6	50	Fixed String	not used								
<PartyDetailsGrp> Cardinality: 0-1000, Record counter: NoPartyDetails														
20212	>PartyDetail- IDExecutingTrader	Y	4	56	unsigned int	Trader ID.								
20359	>PartyIDSponsored- AccessUnit	N	4	60	unsigned int	Sponsored Access Unit ID.								
22212	>PartyDetail- ExecutingTrader	Y	6	64	Fixed String	Trader name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
1674	>PartyDetailRole- Qualifier	Y	1	70	unsigned int	User Role <table><tr><th>Value</th><th>Description</th></tr><tr><td>10</td><td>Trader</td></tr><tr><td>11</td><td>Head Trader</td></tr><tr><td>12</td><td>Supervisor</td></tr></table>	Value	Description	10	Trader	11	Head Trader	12	Supervisor
Value	Description													
10	Trader													
11	Head Trader													
12	Supervisor													
1672	>PartyDetailStatus	Y	1	71	unsigned int	Member status. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr></table>	Value	Description	0	Active	1	Suspend		
Value	Description													
0	Active													
1	Suspend													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
22276	>PartyDetailDeskID	N	3	72	Fixed String	Trader Group. Valid characters: A-Z, 0-9, \x20
22359	>PartySponsored- AccessUnit	N	30	75	Fixed String	Sponsored Access Unit name. Valid characters: \x01-\x7E
39070	>Pad7	U	7	105	Fixed String	not used

6 Order Handling

6.1 New Order Single or Multi Leg

The New Order Request message is used by the participant to submit an order add for a Single or Multi Leg instrument. This message is sent to the service "Order and Quote Management".

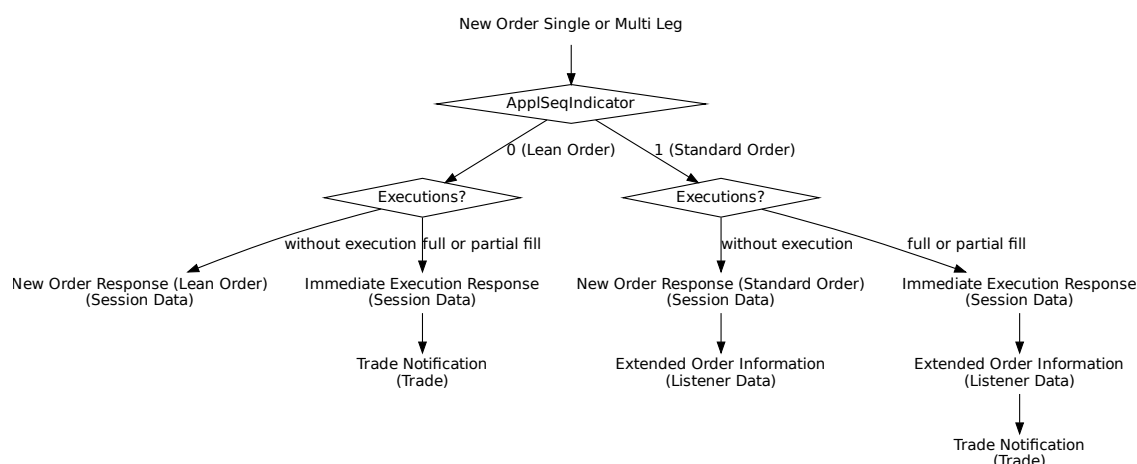

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10138 (New-OrderSingle, MsgType = D)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
11	ClOrdID	N	8	24	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
99	StopPx	N	8	32	PriceType	Stop price. Required if OrdType (40) is Stop (3) or used as the trigger price for an One-cancels-the-other order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20003	PartyIDClientID	N	8	40	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.								
25123	ExecutingTrader	N	8	48	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
28744	MatchInstCrossID	N	4	56	unsigned int	Self Match Prevention ID.								
432	ExpireDate	N	4	60	LocalMktDate	Date of order expiry. Required if TimeInForce (59) = 6.								
625	TradingSessionSubID	N	1	64	unsigned int	Marks a certain order to be included in a defined auction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>2</td><td>Opening or opening auction</td></tr><tr><td>4</td><td>Closing or closing auction</td></tr><tr><td>8</td><td>Any auction</td></tr></table>	Value	Description	2	Opening or opening auction	4	Closing or closing auction	8	Any auction
Value	Description													
2	Opening or opening auction													
4	Closing or closing auction													
8	Any auction													
2964	SelfMatchPrevention-Instruction	N	1	65	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><th>Value</th><th>Description</th></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
31625	CrossMatchInstruction	N	1	66	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order		
Value	Description															
1	Cancel incoming order															
2	Cancel resting order															
3	Reduce/Cancel both incoming and resting order															
28703	ApplSeqIndicator	Y	1	67	unsigned int	Indicates if the order is a Lean Order or a Standard Order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No Recovery Required</td></tr><tr><td>1</td><td>Recovery Required</td></tr></table>	Value	Description	0	No Recovery Required	1	Recovery Required				
Value	Description															
0	No Recovery Required															
1	Recovery Required															
40	OrdType	Y	1	68	unsigned int	Order type. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Market</td></tr><tr><td>2</td><td>Limit</td></tr><tr><td>3</td><td>Stop</td></tr><tr><td>4</td><td>Stop Limit</td></tr></table>	Value	Description	1	Market	2	Limit	3	Stop	4	Stop Limit
Value	Description															
1	Market															
2	Limit															
3	Stop															
4	Stop Limit															
28710	PriceValidityCheck-Type	Y	1	69	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory		
Value	Description															
0	None															
1	Optional															
2	Mandatory															
25126	ValueCheckTypeValue	Y	1	70	unsigned int	Indicator for checking the maximum order/quote value by the exchange. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check				
Value	Description															
0	Do not check															
1	Check															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1724	OrderOrigination	N	1	71	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
20096	PartyIDTakeUp-TradingFirm	N	5	72	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20						
20013	PartyIDOrder-OriginationFirm	N	7	77	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20						
20032	PartyIDBeneficiary	N	9	84	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						
1	Account	N	2	93	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20038	PartyIDPosition-Account	N	32	95	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						
77	PositionEffect	N	1	127	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
20075	PartyIDLocationID	N	2	128	Fixed String	Country code. Will be set to “XX” for non-capital letters. Valid characters: \x01-\x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	CustOrderHandling-Inst	N	1	130	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	ComplianceText	N	20	131	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
25007	FreeText1	N	12	151	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25008	FreeText2	N	12	163	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25009	FreeText3	N	12	175	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
30011	FIXCOrdID	N	20	187	Fixed String	User defined client order ID Valid characters: \x20-\x7E						
25241	PartyEndClient-Identification	N	20	207	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F						
25124	ExecutingTrader-Qualifier	Y	1	227	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	228	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
23003	OrderAttributeRisk-Reduction	N	1	229	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
39022	Pad2_2	U	2	230	Fixed String	not used						


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
20122	PartyIdInvestment-DecisionMaker	N	8	232	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.																												
23002	OrderAttribute-LiquidityProvision	Y	1	240	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision																						
Value	Description																																	
1	Liquidity provision																																	
0	No liquidity provision																																	
1815	TradingCapacity	Y	1	241	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker																				
Value	Description																																	
1	Customer (Agency)																																	
5	Principal (Proprietary)																																	
6	Market Maker																																	
1227	ProductComplex	Y	1	242	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	1	Simple instrument	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
1	Simple instrument																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
28555	NoLegOnbooks	Y	1	243	Counter	Number of InstrumentLeg repeating group instances. (only for on-book trades)												
1300	MarketSegmentID	Y	4	244	signed int	Product identifier.												
48	SecurityID	Y	8	248	signed int	Instrument identifier.												
38	OrderQty	Y	8	256	Qty	Total Order Quantity.												
44	Price	N	8	264	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).												
54	Side	Y	1	272	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell						
Value	Description																	
1	Buy																	
2	Sell																	
18	ExecInst	Y	1	273	unsigned int	Instructions for order handling. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Persistent Order (FIX value 'H')</td></tr><tr><td>2</td><td>Non-persistent Order (FIX value 'Q')</td></tr><tr><td>5</td><td>Persistent and Book or Cancel order (FIX value 'H 6')</td></tr><tr><td>6</td><td>Non-persistent and Book or Cancel order (FIX value 'Q 6')</td></tr></table>	Value	Description	1	Persistent Order (FIX value 'H')	2	Non-persistent Order (FIX value 'Q')	5	Persistent and Book or Cancel order (FIX value 'H 6')	6	Non-persistent and Book or Cancel order (FIX value 'Q 6')		
Value	Description																	
1	Persistent Order (FIX value 'H')																	
2	Non-persistent Order (FIX value 'Q')																	
5	Persistent and Book or Cancel order (FIX value 'H 6')																	
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')																	
59	TimelnForce	Y	1	274	unsigned int	Execution and trading restriction parameters supported by T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Day (GFD)</td></tr><tr><td>1</td><td>Good Till Cancelled (GTC) - Standard Orders only</td></tr><tr><td>3</td><td>Immediate or Cancel (IOC)</td></tr><tr><td>4</td><td>Fill Or Kill (FOK)</td></tr><tr><td>6</td><td>Good Till Date (GTD) - Standard Orders only</td></tr></table>	Value	Description	0	Day (GFD)	1	Good Till Cancelled (GTC) - Standard Orders only	3	Immediate or Cancel (IOC)	4	Fill Or Kill (FOK)	6	Good Till Date (GTD) - Standard Orders only
Value	Description																	
0	Day (GFD)																	
1	Good Till Cancelled (GTC) - Standard Orders only																	
3	Immediate or Cancel (IOC)																	
4	Fill Or Kill (FOK)																	
6	Good Till Date (GTD) - Standard Orders only																	
39000	Pad1	U	1	275	Fixed String	not used												
30010	ChecksumCorrection	N	2	276	unsigned int	Can be used by clients with FPGA or other hardware implementations to keep a pre-computed TCP checksum valid after the remaining ETI message fields have been populated.												
39023	Pad2_3	U	2	278	Fixed String	not used												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<LegOrdGrp> Cardinality: 0 - 144, Record counter: NoLegOnbooks												
2680	>LegAccount	N	2	280	Fixed String	Leg-specific account to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x4D, \x50						
564	>LegPositionEffect	Y	1	282	char	Leg-specific field used for T7 position management purposes and indicates whether the leg is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
39050	>Pad5	U	5	283	Fixed String	not used						

6.2 New Order Single or Multi Leg (short layout)

This short order message layout is used by the participant to submit an order in a Single or Multi Leg instrument. For more details, please refer to the ETI Manual, chapter Short Order Message Layouts. This message is sent to the service "Order and Quote Management".

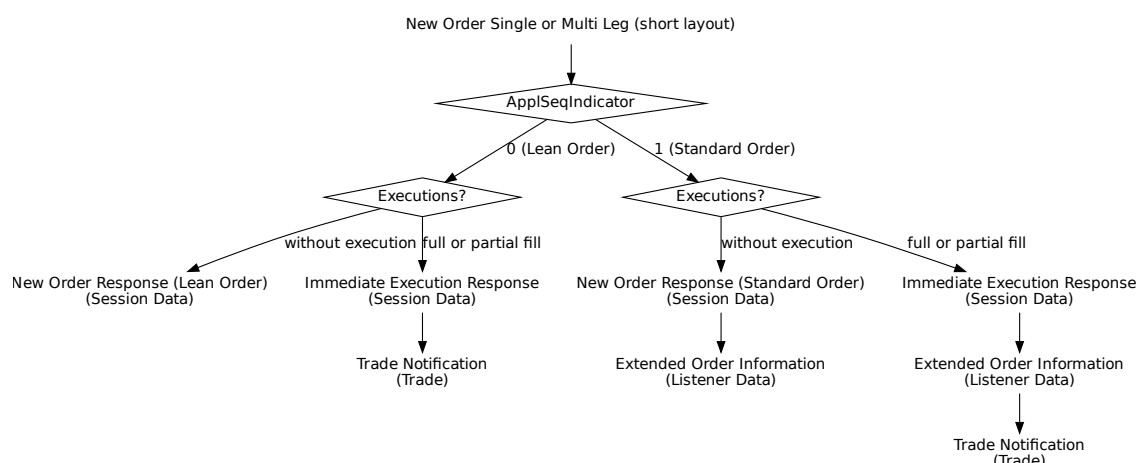

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10139 (New-OrderSingle, MsgType = D)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
11	ClOrdID	Y	8	24	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20003	PartyIDClientID	N	8	32	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.								
25123	ExecutingTrader	N	8	40	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
28744	MatchInstCrossID	N	4	48	unsigned int	Self Match Prevention ID.								
28703	ApplSeqIndicator	Y	1	52	unsigned int	Indicates if the order is a Lean Order or a Standard Order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No Recovery Required</td></tr><tr><td>1</td><td>Recovery Required</td></tr></table>	Value	Description	0	No Recovery Required	1	Recovery Required		
Value	Description													
0	No Recovery Required													
1	Recovery Required													
28710	PriceValidityCheck-Type	Y	1	53	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory
Value	Description													
0	None													
1	Optional													
2	Mandatory													
25126	ValueCheckTypeValue	Y	1	54	unsigned int	Indicator for checking the maximum order/quote value by the exchange. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	TradingCapacity	Y	1	55	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1724	OrderOrigination	N	1	56	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer		
Value	Description													
5	Order received from a direct access customer													
105	Order received from a sponsored access customer													
25124	ExecutingTrader- Qualifier	Y	1	57	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
21222	PartyIdInvestment- DecisionMaker- Qualifier	N	1	58	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
2404	ComplianceText	N	20	59	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																										
39000	Pad1	U	1	79	Fixed String	not used																										
20122	PartyIdInvestment-DecisionMaker	N	8	80	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.																										
25033	EnrichmentRuleID	N	2	88	unsigned int	Identifies an enrichment rule.																										
23002	OrderAttribute-LiquidityProvision	Y	1	90	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision																				
Value	Description																															
1	Liquidity provision																															
0	No liquidity provision																															
1227	ProductComplex	Y	1	91	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																															
1	Simple instrument																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
11	Commodity Strip																															
13	Non-Standard Volatility Strategy																															
14	Total Return Future Strategy																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2964	SelfMatchPrevention-Instruction	N	1	92	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	CrossMatchInstruction	N	1	93	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													
39021	Pad2_1	U	2	94	Fixed String	not used								
1300	MarketSegmentID	Y	4	96	signed int	Product identifier.								
39041	Pad4_1	U	4	100	Fixed String	not used								
48	SecurityID	Y	8	104	signed int	Instrument identifier.								
38	OrderQty	Y	8	112	Qty	Total Order Quantity.								
44	Price	Y	8	120	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).								
54	Side	Y	1	128	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell		
Value	Description													
1	Buy													
2	Sell													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
18	ExecInst	Y	1	129	unsigned int	Instructions for order handling. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Persistent Order (FIX value 'H')</td></tr><tr><td>2</td><td>Non-persistent Order (FIX value 'Q')</td></tr><tr><td>5</td><td>Persistent and Book or Cancel order (FIX value 'H 6')</td></tr><tr><td>6</td><td>Non-persistent and Book or Cancel order (FIX value 'Q 6')</td></tr></table>	Value	Description	1	Persistent Order (FIX value 'H')	2	Non-persistent Order (FIX value 'Q')	5	Persistent and Book or Cancel order (FIX value 'H 6')	6	Non-persistent and Book or Cancel order (FIX value 'Q 6')
Value	Description															
1	Persistent Order (FIX value 'H')															
2	Non-persistent Order (FIX value 'Q')															
5	Persistent and Book or Cancel order (FIX value 'H 6')															
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')															
59	TimeInForce	Y	1	130	unsigned int	Execution and trading restriction parameters supported by T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Day (GFD)</td></tr><tr><td>1</td><td>Good Till Cancelled (GTC) - Standard Orders only</td></tr><tr><td>3</td><td>Immediate or Cancel (IOC)</td></tr><tr><td>4</td><td>Fill Or Kill (FOK)</td></tr></table>	Value	Description	0	Day (GFD)	1	Good Till Cancelled (GTC) - Standard Orders only	3	Immediate or Cancel (IOC)	4	Fill Or Kill (FOK)
Value	Description															
0	Day (GFD)															
1	Good Till Cancelled (GTC) - Standard Orders only															
3	Immediate or Cancel (IOC)															
4	Fill Or Kill (FOK)															
39001	Pad1_1	U	1	131	Fixed String	not used										
30010	ChecksumCorrection	N	2	132	unsigned int	Can be used by clients with FPGA or other hardware implementations to keep a pre-computed TCP checksum valid after the remaining ETI message fields have been populated.										
39020	Pad2	U	2	134	Fixed String	not used										

6.3 New Order Response (Standard Order)

This message confirms a New Order request for a Standard Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10101 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
5948	PartitionID	Y	2	52	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
28704	ApplMsgID	N	16	55	data	Application message identifier assigned to an order or quote event.						
893	LastFragment	Y	1	71	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
37	OrderID	Y	8	72	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.												
11	ClOrdID	N	8	80	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.												
48	SecurityID	Y	8	88	signed int	Instrument identifier.												
17	ExecID	Y	8	96	UTCTimestamp	Transaction timestamp.												
151	LeavesQty	Y	8	104	Qty	Remaining quantity of an order.												
84	CxlQty	Y	8	112	Qty	Total quantity cancelled for this order.												
21009	TrdRegTSEntryTime	Y	8	120	UTCTimestamp	The entry timestamp is the time of the creation of the order.												
21008	TrdRegTSTime-Priority	Y	8	128	UTCTimestamp	Priority timestamp.												
39	OrdStatus	Y	1	136	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	4	Cancelled	9	Suspended				
Value	Description																	
0	New																	
4	Cancelled																	
9	Suspended																	
150	ExecType	Y	1	137	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>L</td><td>Triggered</td></tr></table>	Value	Description	0	New	4	Cancelled	L	Triggered				
Value	Description																	
0	New																	
4	Cancelled																	
L	Triggered																	
378	ExecRestatement-Reason	Y	2	138	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>101</td><td>Order add accepted</td></tr><tr><td>105</td><td>IOC Order accepted</td></tr><tr><td>212</td><td>Book or Cancel Order accepted</td></tr><tr><td>107</td><td>FOK Order accepted</td></tr><tr><td>114</td><td>Order has been changed to IOC</td></tr></table>	Value	Description	101	Order add accepted	105	IOC Order accepted	212	Book or Cancel Order accepted	107	FOK Order accepted	114	Order has been changed to IOC
Value	Description																	
101	Order add accepted																	
105	IOC Order accepted																	
212	Book or Cancel Order accepted																	
107	FOK Order accepted																	
114	Order has been changed to IOC																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
2523	CrossedIndicator	Y	1	140	unsigned int	Indicates SMP involvement.	
						Value	Description
						0	No crossing (Order not subject to crossing)
						1	Cross rejected (Order subject to crossing and match prevented)
1227	ProductComplex	Y	1	141	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
1823	Triggered	Y	1	142	unsigned int	Indicates if an order has been previously triggered.	
						Value	Description
						0	Not Triggered
						1	Triggered Stop
						2	Triggered OCO
25159	TransactionDelay-Indicator	Y	1	143	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
28790	NoOrderEvents	Y	1	144	Counter	Number of order events	
39070	Pad7	U	7	145	Fixed String	not used	
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1799	>OrderEventPx	N	8	152	PriceType	Price level for the order event.	
1800	>OrderEventQty	Y	8	160	Qty	Quantity for the order event.	
30060	>OrderEventMatchID	N	4	168	unsigned int	Unique identifier for each price level (match step) of an order event.	
1798	>OrderEventReason	Y	1	172	unsigned int	Action that caused the event to occur.	
						Value	Description
						100	SMP event
39030	>Pad3	U	3	173	Fixed String	not used	

6.4 New Order Response (Lean Order)

This message confirms a New Order request for a Lean Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10102 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
37	OrderID	Y	8	56	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.						
11	ClOrdID	N	8	64	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.						
48	SecurityID	Y	8	72	signed int	Instrument identifier.						
17	ExecID	Y	8	80	UTCTimestamp	Transaction timestamp.						
151	LeavesQty	Y	8	88	Qty	Remaining quantity of an order.						
84	CxlQty	Y	8	96	Qty	Total quantity cancelled for this order.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
39	OrdStatus	Y	1	104	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	4	Cancelled	9	Suspended				
Value	Description																	
0	New																	
4	Cancelled																	
9	Suspended																	
150	ExecType	Y	1	105	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>L</td><td>Triggered</td></tr></table>	Value	Description	0	New	4	Cancelled	L	Triggered				
Value	Description																	
0	New																	
4	Cancelled																	
L	Triggered																	
378	ExecRestatement-Reason	Y	2	106	unsigned int	Code to further qualify the field ExecType (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>101</td><td>Order add accepted</td></tr><tr><td>105</td><td>IOC Order accepted</td></tr><tr><td>212</td><td>Book or Cancel Order accepted</td></tr><tr><td>107</td><td>FOK Order accepted</td></tr><tr><td>114</td><td>Order has been changed to IOC</td></tr></table>	Value	Description	101	Order add accepted	105	IOC Order accepted	212	Book or Cancel Order accepted	107	FOK Order accepted	114	Order has been changed to IOC
Value	Description																	
101	Order add accepted																	
105	IOC Order accepted																	
212	Book or Cancel Order accepted																	
107	FOK Order accepted																	
114	Order has been changed to IOC																	
2523	CrossedIndicator	Y	1	108	unsigned int	Indicates SMP involvement. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No crossing (Order not subject to crossing)</td></tr><tr><td>1</td><td>Cross rejected (Order subject to crossing and match prevented)</td></tr></table>	Value	Description	0	No crossing (Order not subject to crossing)	1	Cross rejected (Order subject to crossing and match prevented)						
Value	Description																	
0	No crossing (Order not subject to crossing)																	
1	Cross rejected (Order subject to crossing and match prevented)																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	Y	1	109	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
1823	Triggered	Y	1	110	unsigned int	Indicates if an order has been previously triggered.	
						Value	Description
						0	Not Triggered
						1	Triggered Stop
						2	Triggered OCO
25159	TransactionDelay-Indicator	Y	1	111	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
28790	NoOrderEvents	Y	1	112	Counter	Number of order events	
39070	Pad7	U	7	113	Fixed String	not used	
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents							
1799	>OrderEventPx	N	8	120	PriceType	Price level for the order event.	
1800	>OrderEventQty	Y	8	128	Qty	Quantity for the order event.	
30060	>OrderEventMatchID	N	4	136	unsigned int	Unique identifier for each price level (match step) of an order event.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
1798	>OrderEventReason	Y	1	140	unsigned int	Action that caused the event to occur. <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>SMP event</td></tr></table>	Value	Description	100	SMP event
Value	Description									
100	SMP event									
39030	>Pad3	U	3	141	Fixed String	not used				

6.5 Immediate Execution Response

This message informs about the immediate execution of an incoming order or the execution of a book order due to a replace request. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10103 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
5948	PartitionID	Y	2	52	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
28704	ApplMsgID	N	16	55	data	Not set if the submitting session is not the owner of the executed order.						
893	LastFragment	Y	1	71	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
37	OrderID	Y	8	72	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.														
11	CIOrdID	N	8	80	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.														
41	OrigCIOrdID	N	8	88	unsigned int	CIOrdID (11) of the last successfully processed task (request) referring to the specific order.														
48	SecurityID	Y	8	96	signed int	Instrument identifier.														
17	ExecID	Y	8	104	UTCTimestamp	Transaction timestamp.														
21009	TrdRegTSEntryTime	N	8	112	UTCTimestamp	The entry timestamp is the time of the creation of the order.														
21008	TrdRegTSTime-Priority	N	8	120	UTCTimestamp	Priority timestamp.														
151	LeavesQty	Y	8	128	Qty	Remaining quantity of an order.														
14	CumQty	Y	8	136	Qty	Cumulated executed quantity of an order.														
84	CxlQty	Y	8	144	Qty	Total quantity cancelled for this order.														
1300	MarketSegmentID	Y	4	152	signed int	Product identifier.														
30555	NoLegExecs	Y	2	156	Counter	Number of InstrmntLegExec repeating group instances.														
378	ExecRestatement-Reason	Y	2	158	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>101</td><td>Order add accepted</td></tr><tr><td>102</td><td>Order modify accepted</td></tr><tr><td>105</td><td>IOC Order accepted</td></tr><tr><td>107</td><td>FOK Order accepted</td></tr><tr><td>181</td><td>Ownership Changed</td></tr><tr><td>114</td><td>Order has been changed to IOC</td></tr></table>	Value	Description	101	Order add accepted	102	Order modify accepted	105	IOC Order accepted	107	FOK Order accepted	181	Ownership Changed	114	Order has been changed to IOC
Value	Description																			
101	Order add accepted																			
102	Order modify accepted																			
105	IOC Order accepted																			
107	FOK Order accepted																			
181	Ownership Changed																			
114	Order has been changed to IOC																			
54	Side	Y	1	160	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell								
Value	Description																			
1	Buy																			
2	Sell																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
1227	ProductComplex	Y	1	161	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	
39	OrdStatus	Y	1	162	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>4</td><td>Cancelled</td></tr></table>	Value	Description	1	Partially filled	2	Filled	4	Cancelled																				
Value	Description																																	
1	Partially filled																																	
2	Filled																																	
4	Cancelled																																	
150	ExecType	Y	1	163	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>F</td><td>Trade</td></tr></table>	Value	Description	F	Trade																								
Value	Description																																	
F	Trade																																	
1823	Triggered	Y	1	164	unsigned int	Indicates if an order has been previously triggered. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Triggered</td></tr><tr><td>1</td><td>Triggered Stop</td></tr><tr><td>2</td><td>Triggered OCO</td></tr></table>	Value	Description	0	Not Triggered	1	Triggered Stop	2	Triggered OCO																				
Value	Description																																	
0	Not Triggered																																	
1	Triggered Stop																																	
2	Triggered OCO																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
2523	CrossedIndicator	Y	1	165	unsigned int	Indicates SMP involvement.	
						Value	Description
						0	No crossing (Order not subject to crossing)
						1	Cross rejected (Order subject to crossing and match prevented)
25159	TransactionDelay-Indicator	Y	1	166	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
1362	NoFills	Y	1	167	Counter	Specifies the number of partial fills included in this Execution Report.	
28790	NoOrderEvents	Y	1	168	Counter	Number of order events	
39070	Pad7	U	7	169	Fixed String	not used	
<FillsGrp> Cardinality: 0-100, Record counter: NoFills							
1364	>FillPx	Y	8	176	PriceType	Price of Fill.	
1365	>FillQty	Y	8	184	Qty	Quantity of Fill.	
28708	>FillMatchID	Y	4	192	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.	
1363	>FillExecID	Y	4	196	signed int	Private identifier of an order match step event, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.	
1443	>FillLiquidityInd	N	1	200	unsigned int	Indicates whether the order added or removed liquidity. Required only for execution reports generated for fills.	
						Value	Description
						2	Removed Liquidity
						5	Triggered Stop Order
39070	>Pad7	U	7	201	Fixed String	not used	
<InstrmntLegExecGrp> Cardinality: 0-600, Record counter: NoLegExecs							
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.	
637	>LegLastPx	Y	8	8	PriceType	Price of this leg fill.	
1418	>LegLastQty	Y	8	16	Qty	Quantity executed in this leg fill.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1893	>LegExecID	Y	4	24	signed int	Private identifier of a leg match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.						
624	>LegSide	N	1	28	unsigned int	The side of the individual leg of a strategy as defined in its signature. LegSide should always be mandatory, except for Scaled Simple Instrument, LegSide should be empty. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
2421	>FillRefID	Y	1	29	unsigned int	Reference to the corresponding Fills-Grp repeating group instance.						
39020	>Pad2	U	2	30	Fixed String	not used						
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents												
1799	>OrderEventPx	N	8	0	PriceType	Price level for the order event.						
1800	>OrderEventQty	Y	8	8	Qty	Quantity for the order event.						
30060	>OrderEventMatchID	Y	4	16	unsigned int	Unique identifier for each price level (match step) of an order event.						
1798	>OrderEventReason	Y	1	20	unsigned int	Action that caused the event to occur. <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>SMP event</td></tr></table>	Value	Description	100	SMP event		
Value	Description											
100	SMP event											
39030	>Pad3	U	3	21	Fixed String	not used						

6.6 Book Order Execution

This message informs about the execution of a resting book order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10104 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	U	4	32	unsigned int	not used						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	Y	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
37	OrderID	Y	8	64	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.																						
11	CIOrdID	N	8	72	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.																						
41	OrigCIOrdID	N	8	80	unsigned int	CIOrdID (11) of the last successfully processed task (request) referring to the specific order.																						
48	SecurityID	Y	8	88	signed int	Instrument identifier.																						
17	ExecID	Y	8	96	UTCTimestamp	Transaction timestamp.																						
151	LeavesQty	Y	8	104	Qty	Remaining quantity of an order.																						
14	CumQty	Y	8	112	Qty	Cumulated executed quantity of an order.																						
84	CxlQty	Y	8	120	Qty	Total quantity cancelled for this order.																						
1300	MarketSegmentID	Y	4	128	signed int	Product identifier.																						
2424	MassOrderReportID	N	4	132	unsigned int	Mass order response identifier generated by the exchange																						
30555	NoLegExecs	Y	2	136	Counter	Number of InstrmntLegExec repeating group instances.																						
378	ExecRestatement-Reason	Y	2	138	unsigned int	Code to further qualify the field ExecType (150) of the Execution Report (8) message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>101</td><td>Order add accepted</td></tr><tr><td>108</td><td>Book Order executed</td></tr><tr><td>135</td><td>Market Order triggered and executed</td></tr><tr><td>164</td><td>One-cancels-the-other Order has been triggered</td></tr><tr><td>172</td><td>Stop Order has been triggered</td></tr><tr><td>150</td><td>Closing Auction Order has been inactivated</td></tr><tr><td>152</td><td>Opening Auction Order has been inactivated</td></tr><tr><td>154</td><td>Any Auction Order has been inactivated</td></tr><tr><td>199</td><td>Pending order cancellation processed (end of FREEZE state)</td></tr><tr><td>181</td><td>Ownership Changed</td></tr></table>	Value	Description	101	Order add accepted	108	Book Order executed	135	Market Order triggered and executed	164	One-cancels-the-other Order has been triggered	172	Stop Order has been triggered	150	Closing Auction Order has been inactivated	152	Opening Auction Order has been inactivated	154	Any Auction Order has been inactivated	199	Pending order cancellation processed (end of FREEZE state)	181	Ownership Changed
Value	Description																											
101	Order add accepted																											
108	Book Order executed																											
135	Market Order triggered and executed																											
164	One-cancels-the-other Order has been triggered																											
172	Stop Order has been triggered																											
150	Closing Auction Order has been inactivated																											
152	Opening Auction Order has been inactivated																											
154	Any Auction Order has been inactivated																											
199	Pending order cancellation processed (end of FREEZE state)																											
181	Ownership Changed																											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
54	Side	Y	1	140	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																						
Value	Description																																	
1	Buy																																	
2	Sell																																	
1227	ProductComplex	Y	1	141	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	
39	OrdStatus	Y	1	142	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>9</td><td>Suspended</td></tr><tr><td>4</td><td>Cancelled</td></tr></table>	Value	Description	1	Partially filled	2	Filled	9	Suspended	4	Cancelled																		
Value	Description																																	
1	Partially filled																																	
2	Filled																																	
9	Suspended																																	
4	Cancelled																																	
150	ExecType	Y	1	143	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>F</td><td>Trade</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	F	Trade	9	Suspended																						
Value	Description																																	
F	Trade																																	
9	Suspended																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
1823	Triggered	Y	1	144	unsigned int	Indicates if an order has been previously triggered. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Triggered</td></tr><tr><td>1</td><td>Triggered Stop</td></tr><tr><td>2</td><td>Triggered OCO</td></tr></table>	Value	Description	0	Not Triggered	1	Triggered Stop	2	Triggered OCO				
Value	Description																	
0	Not Triggered																	
1	Triggered Stop																	
2	Triggered OCO																	
2523	CrossedIndicator	Y	1	145	unsigned int	Indicates SMP involvement. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No crossing (Order not subject to crossing)</td></tr><tr><td>1</td><td>Cross rejected (Order subject to crossing and match prevented)</td></tr></table>	Value	Description	0	No crossing (Order not subject to crossing)	1	Cross rejected (Order subject to crossing and match prevented)						
Value	Description																	
0	No crossing (Order not subject to crossing)																	
1	Cross rejected (Order subject to crossing and match prevented)																	
30011	FIXCOrdID	N	20	146	Fixed String	User defined client order ID Valid characters: \x20-\x7E												
1362	NoFills	Y	1	166	Counter	Specifies the number of partial fills included in this Execution Report.												
28790	NoOrderEvents	Y	1	167	Counter	Number of order events												
<FillsGrp> Cardinality: 0 - 100, Record counter: NoFills																		
1364	>FillPx	Y	8	168	PriceType	Price of Fill.												
1365	>FillQty	Y	8	176	Qty	Quantity of Fill.												
28708	>FillMatchID	Y	4	184	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.												
1363	>FillExecID	Y	4	188	signed int	Private identifier of an order match step event, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.												
1443	>FillLiquidityInd	N	1	192	unsigned int	Indicates whether the order added or removed liquidity. Required only for execution reports generated for fills. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Added Liquidity</td></tr><tr><td>4</td><td>Auction</td></tr><tr><td>5</td><td>Triggered Stop Order</td></tr><tr><td>6</td><td>Triggered OCO Order</td></tr><tr><td>7</td><td>Triggered Market Order</td></tr></table>	Value	Description	1	Added Liquidity	4	Auction	5	Triggered Stop Order	6	Triggered OCO Order	7	Triggered Market Order
Value	Description																	
1	Added Liquidity																	
4	Auction																	
5	Triggered Stop Order																	
6	Triggered OCO Order																	
7	Triggered Market Order																	
39070	>Pad7	U	7	193	Fixed String	not used												
<InstrmntLegExecGrp> Cardinality: 0 - 600, Record counter: NoLegExecs																		

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.						
637	>LegLastPx	Y	8	8	PriceType	Price of this leg fill.						
1418	>LegLastQty	Y	8	16	Qty	Quantity executed in this leg fill.						
1893	>LegExecID	Y	4	24	signed int	Private identifier of a leg match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.						
624	>LegSide	N	1	28	unsigned int	The side of the individual leg of a strategy as defined in its signature. LegSide should always be mandatory, except for Scaled Simple Instrument, LegSide should be empty. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
2421	>FillRefID	Y	1	29	unsigned int	Reference to the corresponding Fills-Grp repeating group instance.						
39020	>Pad2	U	2	30	Fixed String	not used						
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents												
1799	>OrderEventPx	N	8	0	PriceType	Price level for the order event.						
1800	>OrderEventQty	Y	8	8	Qty	Quantity for the order event.						
30060	>OrderEventMatchID	Y	4	16	unsigned int	Unique identifier for each price level (match step) of an order event.						
1798	>OrderEventReason	Y	1	20	unsigned int	Action that caused the event to occur. <table><tr><th>Value</th><th>Description</th></tr><tr><td>100</td><td>SMP event</td></tr></table>	Value	Description	100	SMP event		
Value	Description											
100	SMP event											
39030	>Pad3	U	3	21	Fixed String	not used						

6.7 Replace Order Single or Multi Leg

This message is used to replace an existing order in a Single or Multi Leg instrument. For more details, please refer to the ETI Manual, chapters Modification and Total Order Quantity Modification. This message is sent to the service "Order and Quote Management".

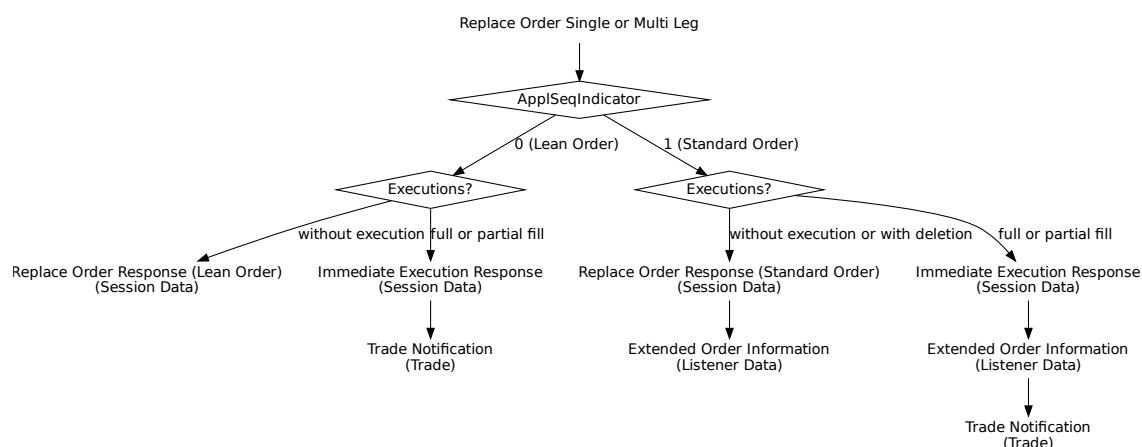

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10140 (OrderCancelReplaceRequest, MsgType = G)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
37	OrderID	N	8	24	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.
11	ClOrdID	N	8	32	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
41	OrigClOrdID	N	8	40	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
99	StopPx	N	8	48	PriceType	Stop price. Required if OrdType (40) is Stop (3) or used as the trigger price for an One-cancels-the-other order.								
20003	PartyIDClientID	N	8	56	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.								
25123	ExecutingTrader	N	8	64	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
28744	MatchInstCrossID	N	4	72	unsigned int	Self Match Prevention ID.								
432	ExpireDate	N	4	76	LocalMktDate	Date of order expiry. Required if TimeInForce (59) = 6.								
20655	TargetPartyIDSession-ID	N	4	80	unsigned int	Session ID.								
625	TradingSessionSubID	N	1	84	unsigned int	Marks a certain order to be included in a defined auction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>2</td><td>Opening or opening auction</td></tr><tr><td>4</td><td>Closing or closing auction</td></tr><tr><td>8</td><td>Any auction</td></tr></table>	Value	Description	2	Opening or opening auction	4	Closing or closing auction	8	Any auction
Value	Description													
2	Opening or opening auction													
4	Closing or closing auction													
8	Any auction													
28743	OwnershipIndicator	Y	1	85	unsigned int	Indicator to change the ownership of an order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not change ownership</td></tr><tr><td>1</td><td>Change ownership to executing party (User ID)</td></tr></table>	Value	Description	0	Do not change ownership	1	Change ownership to executing party (User ID)		
Value	Description													
0	Do not change ownership													
1	Change ownership to executing party (User ID)													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
28703	ApplSeqIndicator	Y	1	86	unsigned int	Indicates if the order is a Lean Order or a Standard Order.	
						Value	Description
						0	No Recovery Required
						1	Recovery Required
40	OrdType	Y	1	87	unsigned int	Order type.	
						Value	Description
						1	Market
						2	Limit
						3	Stop
28710	PriceValidityCheck-Type	Y	1	88	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check).	
						Value	Description
						0	None
						1	Optional
						2	Mandatory
25126	ValueCheckTypeValue	Y	1	89	unsigned int	Indicator for checking the maximum order/quote value by the exchange.	
						Value	Description
						0	Do not check
						1	Check
1724	OrderOrigination	N	1	90	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer	
						Value	Description
						5	Order received from a direct access customer
20096	PartyIDTakeUp-TradingFirm	N	5	91	Fixed String	Order received from a sponsored access customer	
						105	Order received from a sponsored access customer
20096	PartyIDTakeUp-TradingFirm	N	5	91	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20	
20013	PartyIDOrder-OriginationFirm	N	7	96	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20	
20032	PartyIDBeneficiary	N	9	103	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1	Account	N	2	112	Fixed String	Account mnemonic as agreed between buy and sell sides, e.g. broker and institution or investor/intermediary and fund manager. Only applicable for single leg instruments. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20038	PartyIDPosition-Account	N	32	114	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						
77	PositionEffect	N	1	146	char	Indicates whether the resulting position after a trade should be an opening position or closing position. Used for omnibus accounting - where accounts are held on a gross basis instead of being netted together. Mandatory for single leg instruments. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
20075	PartyIDLocationID	N	2	147	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	CustOrderHandling-Inst	N	1	149	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	ComplianceText	N	20	150	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
25007	FreeText1	N	12	170	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25008	FreeText2	N	12	182	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25009	FreeText3	N	12	194	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
30011	FIXCOrdID	N	20	206	Fixed String	User defined client order ID Valid characters: \x20-\x7E						
25241	PartyEndClient-Identification	N	20	226	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F						
25124	ExecutingTrader-Qualifier	N	1	246	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	247	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
20122	PartyIdInvestment-DecisionMaker	N	8	248	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
23002	OrderAttribute-LiquidityProvision	Y	1	256	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision																						
Value	Description																																	
1	Liquidity provision																																	
0	No liquidity provision																																	
1815	TradingCapacity	Y	1	257	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker																				
Value	Description																																	
1	Customer (Agency)																																	
5	Principal (Proprietary)																																	
6	Market Maker																																	
1227	ProductComplex	Y	1	258	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2964	SelfMatchPrevention-Instruction	N	1	259	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	CrossMatchInstruction	N	1	260	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													
28555	NoLegOnbooks	Y	1	261	Counter	Number of InstrumentLeg repeating group instances. (only for on-book trades) Must be zero for single leg instruments.								
39021	Pad2_1	U	2	262	Fixed String	not used								
1300	MarketSegmentID	Y	4	264	signed int	Product identifier.								
39040	Pad4	U	4	268	Fixed String	not used								
48	SecurityID	Y	8	272	signed int	Instrument identifier.								
38	OrderQty	Y	8	280	Qty	Total Order Quantity.								
44	Price	N	8	288	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).								
54	Side	Y	1	296	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell		
Value	Description													
1	Buy													
2	Sell													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
18	ExecInst	Y	1	297	unsigned int	Instructions for order handling.	
						Value	Description
						1	Persistent Order (FIX value 'H')
						2	Non-persistent Order (FIX value 'Q')
						5	Persistent and Book or Cancel order (FIX value 'H 6')
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')						
59	TimelnForce	Y	1	298	unsigned int	Execution and trading restriction parameters supported by T7.	
						Value	Description
						0	Day (GFD)
						1	Good Till Cancelled (GTC) - Standard Orders only
						3	Immediate or Cancel (IOC)
						4	Fill Or Kill (FOK)
6	Good Till Date (GTD) - Standard Orders only						
39001	Pad1_1	U	1	299	Fixed String	not used	
30010	ChecksumCorrection	N	2	300	unsigned int	Can be used by clients with FPGA or other hardware implementations to keep a pre-computed TCP checksum valid after the remaining ETI message fields have been populated.	
39022	Pad2_2	U	2	302	Fixed String	not used	
<LegOrdGrp> Cardinality: 0-144, Record counter: NoLegOnbooks							
2680	>LegAccount	N	2	304	Fixed String	Leg-specific account to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x4D, \x50	
564	>LegPositionEffect	Y	1	306	char	Leg-specific field used for T7 position management purposes and indicates whether the leg is submitted to open or close a position.	
						Value	Description
						C	Close
						O	Open

Deutsche Börse Group's T7 Release 15.0
Enhanced Trading Interface
Derivatives Message Reference


Deutsche Börse Group

Build 150.536.0.ga-150006001-56

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39050	>Pad5	U	5	307	Fixed String	not used

6.8 Replace Order Single or Multi Leg (short layout)

This short order message layout is used by the participant to replace an order in a Single or Multi Leg instrument. Selected order attributes are implicitly set. For more details, please refer to the ETI Manual, chapter Short Order Message Layouts. This message is sent to the service "Order and Quote Management".

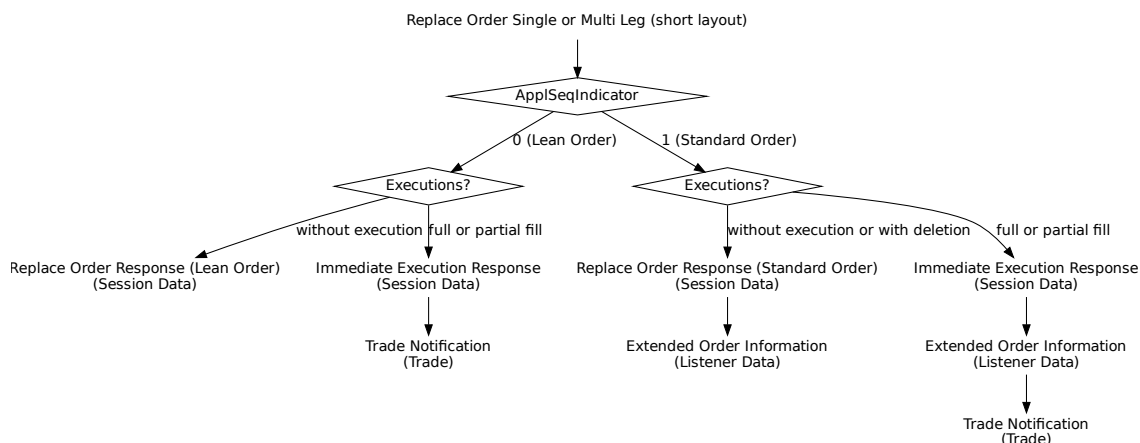

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10141 (OrderCancelReplaceRequest, MsgType = G)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
11	ClOrdID	N	8	24	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
41	OrigClOrdID	Y	8	32	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20003	PartyIDClientID	N	8	40	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.								
25123	ExecutingTrader	N	8	48	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
28744	MatchInstCrossID	N	4	56	unsigned int	Self Match Prevention ID.								
28703	ApplSeqIndicator	Y	1	60	unsigned int	Indicates if the order is a Lean Order or a Standard Order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No Recovery Required</td></tr><tr><td>1</td><td>Recovery Required</td></tr></table>	Value	Description	0	No Recovery Required	1	Recovery Required		
Value	Description													
0	No Recovery Required													
1	Recovery Required													
28710	PriceValidityCheck-Type	Y	1	61	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory
Value	Description													
0	None													
1	Optional													
2	Mandatory													
25126	ValueCheckTypeValue	Y	1	62	unsigned int	Indicator for checking the maximum order/quote value by the exchange. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	TradingCapacity	Y	1	63	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1724	OrderOrigination	N	1	64	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer		
Value	Description													
5	Order received from a direct access customer													
105	Order received from a sponsored access customer													
25124	ExecutingTrader- Qualifier	Y	1	65	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
21222	PartyIdInvestment- DecisionMaker- Qualifier	N	1	66	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
2404	ComplianceText	N	20	67	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																										
39000	Pad1	U	1	87	Fixed String	not used																										
20122	PartyIdInvestment-DecisionMaker	N	8	88	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.																										
25033	EnrichmentRuleID	N	2	96	unsigned int	Identifies an enrichment rule.																										
23002	OrderAttribute-LiquidityProvision	Y	1	98	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision																				
Value	Description																															
1	Liquidity provision																															
0	No liquidity provision																															
1227	ProductComplex	Y	1	99	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																															
1	Simple instrument																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
11	Commodity Strip																															
13	Non-Standard Volatility Strategy																															
14	Total Return Future Strategy																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2964	SelfMatchPrevention-Instruction	N	1	100	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	CrossMatchInstruction	N	1	101	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													
39021	Pad2_1	U	2	102	Fixed String	not used								
1300	MarketSegmentID	Y	4	104	signed int	Product identifier.								
39041	Pad4_1	U	4	108	Fixed String	not used								
48	SecurityID	Y	8	112	signed int	Instrument identifier.								
38	OrderQty	Y	8	120	Qty	Total Order Quantity.								
44	Price	N	8	128	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).								
54	Side	Y	1	136	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell		
Value	Description													
1	Buy													
2	Sell													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
18	ExecInst	Y	1	137	unsigned int	Instructions for order handling.	
						Value	Description
						1	Persistent Order (FIX value 'H')
						2	Non-persistent Order (FIX value 'Q')
						5	Persistent and Book or Cancel order (FIX value 'H 6')
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')						
59	TimeInForce	Y	1	138	unsigned int	Execution and trading restriction parameters supported by T7.	
						Value	Description
						0	Day (GFD)
						1	Good Till Cancelled (GTC) - Standard Orders only
						3	Immediate or Cancel (IOC)
4	Fill Or Kill (FOK)						
39001	Pad1_1	U	1	139	Fixed String	not used	
30010	ChecksumCorrection	N	2	140	unsigned int	Can be used by clients with FPGA or other hardware implementations to keep a pre-computed TCP checksum valid after the remaining ETI message fields have been populated.	
39020	Pad2	U	2	142	Fixed String	not used	

6.9 Replace Order Response (Lean Order)

This message confirms a Replace Order request for a Lean Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10108 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
37	OrderID	Y	8	56	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.						
11	ClOrdID	N	8	64	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.						
41	OrigClOrdID	N	8	72	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.						
48	SecurityID	Y	8	80	signed int	Instrument identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
17	ExecID	Y	8	88	UTCTimestamp	Transaction timestamp.														
151	LeavesQty	Y	8	96	Qty	Remaining quantity of an order.														
14	CumQty	Y	8	104	Qty	Cumulated executed quantity of an order.														
84	CxlQty	Y	8	112	Qty	Total quantity cancelled for this order.														
39	OrdStatus	Y	1	120	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	1	Partially filled	2	Filled	4	Cancelled	9	Suspended		
Value	Description																			
0	New																			
1	Partially filled																			
2	Filled																			
4	Cancelled																			
9	Suspended																			
150	ExecType	Y	1	121	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>5</td><td>Replaced</td></tr><tr><td>L</td><td>Triggered</td></tr></table>	Value	Description	4	Cancelled	5	Replaced	L	Triggered						
Value	Description																			
4	Cancelled																			
5	Replaced																			
L	Triggered																			
378	ExecRestatement-Reason	Y	2	122	unsigned int	Code to further qualify the field ExecType (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>102</td><td>Order modify accepted</td></tr><tr><td>105</td><td>IOC Order accepted</td></tr><tr><td>181</td><td>Ownership Changed</td></tr><tr><td>212</td><td>Book or Cancel Order accepted</td></tr><tr><td>107</td><td>FOK Order accepted</td></tr><tr><td>114</td><td>Order has been changed to IOC</td></tr></table>	Value	Description	102	Order modify accepted	105	IOC Order accepted	181	Ownership Changed	212	Book or Cancel Order accepted	107	FOK Order accepted	114	Order has been changed to IOC
Value	Description																			
102	Order modify accepted																			
105	IOC Order accepted																			
181	Ownership Changed																			
212	Book or Cancel Order accepted																			
107	FOK Order accepted																			
114	Order has been changed to IOC																			
2523	CrossedIndicator	Y	1	124	unsigned int	Indicates SMP involvement. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No crossing (Order not subject to crossing)</td></tr><tr><td>1</td><td>Cross rejected (Order subject to crossing and match prevented)</td></tr></table>	Value	Description	0	No crossing (Order not subject to crossing)	1	Cross rejected (Order subject to crossing and match prevented)								
Value	Description																			
0	No crossing (Order not subject to crossing)																			
1	Cross rejected (Order subject to crossing and match prevented)																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	Y	1	125	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
1823	Triggered	Y	1	126	unsigned int	Indicates if an order has been previously triggered.	
						Value	Description
						0	Not Triggered
						1	Triggered Stop
						2	Triggered OCO
25159	TransactionDelay-Indicator	Y	1	127	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
28790	NoOrderEvents	Y	1	128	Counter	Number of order events	
39070	Pad7	U	7	129	Fixed String	not used	
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents							
1799	>OrderEventPx	N	8	136	PriceType	Price level for the order event.	
1800	>OrderEventQty	Y	8	144	Qty	Quantity for the order event.	
30060	>OrderEventMatchID	N	4	152	unsigned int	Unique identifier for each price level (match step) of an order event.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
1798	>OrderEventReason	Y	1	156	unsigned int	Action that caused the event to occur. <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>SMP event</td></tr></table>	Value	Description	100	SMP event
Value	Description									
100	SMP event									
39030	>Pad3	U	3	157	Fixed String	not used				

6.10 Replace Order Response (Standard Order)

This message confirms a Replace Order request for a Standard Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10107 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
5948	PartitionID	Y	2	52	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
28704	ApplMsgID	N	16	55	data	Not set if the submitting session is not the owner of the replaced order.						
893	LastFragment	Y	1	71	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
<MessageBody>												


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
37	OrderID	Y	8	72	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.												
11	ClOrdID	N	8	80	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.												
41	OrigClOrdID	N	8	88	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.												
48	SecurityID	Y	8	96	signed int	Instrument identifier.												
17	ExecID	Y	8	104	UTCTimestamp	Transaction timestamp.												
151	LeavesQty	Y	8	112	Qty	Remaining quantity of an order.												
14	CumQty	Y	8	120	Qty	Cumulated executed quantity of an order.												
84	CxlQty	Y	8	128	Qty	Total quantity cancelled for this order.												
21008	TrdRegTSTime-Priority	Y	8	136	UTCTimestamp	Priority timestamp.												
39	OrdStatus	Y	1	144	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	1	Partially filled	2	Filled	4	Cancelled	9	Suspended
Value	Description																	
0	New																	
1	Partially filled																	
2	Filled																	
4	Cancelled																	
9	Suspended																	
150	ExecType	Y	1	145	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>5</td><td>Replaced</td></tr><tr><td>L</td><td>Triggered</td></tr></table>	Value	Description	4	Cancelled	5	Replaced	L	Triggered				
Value	Description																	
4	Cancelled																	
5	Replaced																	
L	Triggered																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
378	ExecRestatement-Reason	Y	2	146	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>102</td><td>Order modify accepted</td></tr><tr><td>105</td><td>IOC Order accepted</td></tr><tr><td>181</td><td>Ownership Changed</td></tr><tr><td>212</td><td>Book or Cancel Order accepted</td></tr><tr><td>107</td><td>FOK Order accepted</td></tr><tr><td>114</td><td>Order has been changed to IOC</td></tr></table>	Value	Description	102	Order modify accepted	105	IOC Order accepted	181	Ownership Changed	212	Book or Cancel Order accepted	107	FOK Order accepted	114	Order has been changed to IOC														
Value	Description																																	
102	Order modify accepted																																	
105	IOC Order accepted																																	
181	Ownership Changed																																	
212	Book or Cancel Order accepted																																	
107	FOK Order accepted																																	
114	Order has been changed to IOC																																	
2523	CrossedIndicator	Y	1	148	unsigned int	Indicates SMP involvement. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No crossing (Order not subject to crossing)</td></tr><tr><td>1</td><td>Cross rejected (Order subject to crossing and match prevented)</td></tr></table>	Value	Description	0	No crossing (Order not subject to crossing)	1	Cross rejected (Order subject to crossing and match prevented)																						
Value	Description																																	
0	No crossing (Order not subject to crossing)																																	
1	Cross rejected (Order subject to crossing and match prevented)																																	
1227	ProductComplex	Y	1	149	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1823	Triggered	Y	1	150	unsigned int	Indicates if an order has been previously triggered.	
						Value	Description
						0	Not Triggered
						1	Triggered Stop
					2	Triggered OCO	
25159	TransactionDelay-Indicator	Y	1	151	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
28790	NoOrderEvents	Y	1	152	Counter	Number of order events	
39070	Pad7	U	7	153	Fixed String	not used	
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents							
1799	>OrderEventPx	N	8	160	PriceType	Price level for the order event.	
1800	>OrderEventQty	Y	8	168	Qty	Quantity for the order event.	
30060	>OrderEventMatchID	N	4	176	unsigned int	Unique identifier for each price level (match step) of an order event.	
1798	>OrderEventReason	Y	1	180	unsigned int	Action that caused the event to occur.	
						Value	Description
						100	SMP event
39030	>Pad3	U	3	181	Fixed String	not used	

6.11 Cancel Order Single or Multi Leg

This message is used to cancel a single or complex order. For more details, please refer to the ETI Manual, chapter Cancellation. This message is sent to the service "Order and Quote Management".

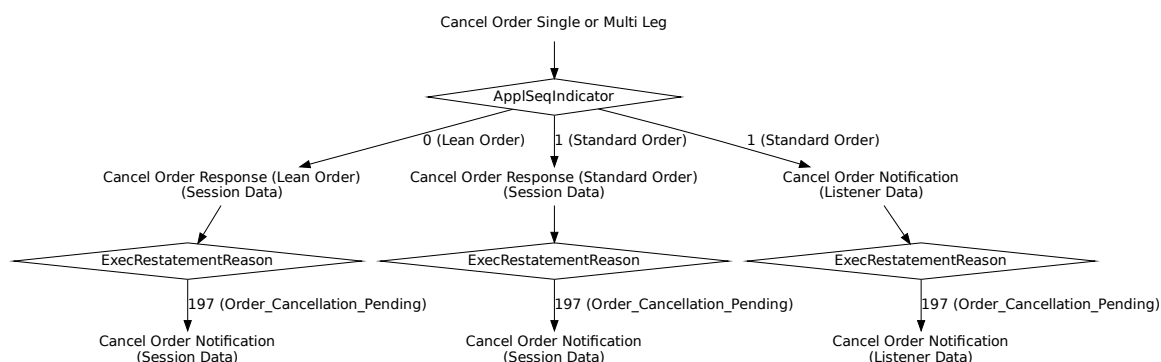

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10142 (Order-CancelRequest, MsgType = F)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
37	OrderID	N	8	24	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.
11	ClOrdID	N	8	32	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
41	OrigClOrdID	N	8	40	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.
48	SecurityID	Y	8	48	signed int	Instrument identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20122	PartyIdInvestment-DecisionMaker	N	8	56	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	ExecutingTrader	N	8	64	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.						
20655	TargetPartyIDSession-ID	N	4	76	unsigned int	Session ID.						
1724	OrderOrigination	N	1	80	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	81	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25124	ExecutingTrader- Qualifier	Y	1	82	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
30011	FIXCOrdID	N	20	83	Fixed String	User defined client order ID Valid characters: \x20-\x7E						
2404	ComplianceText	N	20	103	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
39050	Pad5	U	5	123	Fixed String	not used						

6.12 Cancel Order Response (Standard Order)

This message confirms the cancellation of a Standard Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10110 (ExecutionReport, MsgType = 8)				
39020	Pad2	U	2	6	Fixed String	not used				
<ResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
5948	PartitionID	Y	2	52	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.				
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data
Value	Description									
4	Session Data									
28704	ApplMsgID	N	16	55	data	Not set if the submitting session is not the owner of the cancelled order.				
893	LastFragment	Y	1	71	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
<MessageBody>										
37	OrderID	Y	8	72	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
11	CIOrdID	N	8	80	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.								
41	OrigCIOrdID	N	8	88	unsigned int	CIOrdID (11) of the last successfully processed task (request) referring to the specific order.								
48	SecurityID	Y	8	96	signed int	Instrument identifier.								
17	ExecID	Y	8	104	UTCTimestamp	Transaction timestamp.								
14	CumQty	Y	8	112	Qty	Cumulated executed quantity of an order.								
84	CxlQty	Y	8	120	Qty	Total quantity cancelled for this order.								
39	OrdStatus	Y	1	128	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (i.e. result of Order Cancel Request)</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (i.e. result of Order Cancel Request)	9	Suspended
Value	Description													
4	Cancelled													
6	Pending Cancel (i.e. result of Order Cancel Request)													
9	Suspended													
150	ExecType	Y	1	129	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (e.g. result of Order Cancel Request)</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (e.g. result of Order Cancel Request)		
Value	Description													
4	Cancelled													
6	Pending Cancel (e.g. result of Order Cancel Request)													
378	ExecRestatement-Reason	Y	2	130	unsigned int	Code to further qualify the field ExecType (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>103</td><td>Order delete accepted</td></tr><tr><td>197</td><td>Pending order deletion</td></tr><tr><td>199</td><td>Pending order cancellation processed (end of FREEZE state)</td></tr></table>	Value	Description	103	Order delete accepted	197	Pending order deletion	199	Pending order cancellation processed (end of FREEZE state)
Value	Description													
103	Order delete accepted													
197	Pending order deletion													
199	Pending order cancellation processed (end of FREEZE state)													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	Y	1	132	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
25159	TransactionDelay-Indicator	Y	1	133	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
39020	Pad2	U	2	134	Fixed String	not used	

6.13 Cancel Order Response (Lean Order)

This message confirms the cancellation of a Lean Order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10111 (ExecutionReport, MsgType = 8)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
37	OrderID	Y	8	56	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.				
11	ClOrdID	N	8	64	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.				
41	OrigClOrdID	N	8	72	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.				
48	SecurityID	Y	8	80	signed int	Instrument identifier.				
17	ExecID	Y	8	88	UTCTimestamp	Transaction timestamp.				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
14	CumQty	Y	8	96	Qty	Cumulated executed quantity of an order.								
84	CxlQty	Y	8	104	Qty	Total quantity cancelled for this order.								
39	OrdStatus	Y	1	112	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (i.e. result of Order Cancel Request)</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (i.e. result of Order Cancel Request)	9	Suspended
Value	Description													
4	Cancelled													
6	Pending Cancel (i.e. result of Order Cancel Request)													
9	Suspended													
150	ExecType	Y	1	113	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>6</td><td>Pending Cancel (e.g. result of Order Cancel Request)</td></tr></table>	Value	Description	4	Cancelled	6	Pending Cancel (e.g. result of Order Cancel Request)		
Value	Description													
4	Cancelled													
6	Pending Cancel (e.g. result of Order Cancel Request)													
378	ExecRestatement-Reason	Y	2	114	unsigned int	Code to further qualify the field ExecType (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>103</td><td>Order delete accepted</td></tr><tr><td>197</td><td>Pending order deletion</td></tr></table>	Value	Description	103	Order delete accepted	197	Pending order deletion		
Value	Description													
103	Order delete accepted													
197	Pending order deletion													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	Y	1	116	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
						14	Total Return Future Strategy
25159	TransactionDelay-Indicator	Y	1	117	unsigned int	Indicator for a delayed transaction.	
						Value	Description
						0	Transaction not delayed
						1	Transaction delayed
39020	Pad2	U	2	118	Fixed String	not used	

6.14 Cancel Order Notification

This message informs about an unsolicited cancellation of a single order. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10112 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	N	4	32	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	N	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplIID	N	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message										
Value	Description																			
1	Last Message																			
39070	Pad7	U	7	57	Fixed String	not used														
<MessageBody>																				
37	OrderID	Y	8	64	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.														
11	ClOrdID	N	8	72	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.														
41	OrigClOrdID	N	8	80	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.														
48	SecurityID	Y	8	88	signed int	Instrument identifier.														
17	ExecID	Y	8	96	UTCTimestamp	Transaction timestamp.														
14	CumQty	Y	8	104	Qty	Cumulated executed quantity of an order.														
84	CxlQty	Y	8	112	Qty	Total quantity cancelled for this order.														
1300	MarketSegmentID	Y	4	120	signed int	Product identifier.														
20036	PartyIDEntering- Trader	N	4	124	unsigned int	Entering User ID.														
20055	PartyIDSessionID	N	4	128	unsigned int	Session ID.														
378	ExecRestatement- Reason	Y	2	132	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>103</td><td>Order delete accepted</td></tr><tr><td>122</td><td>Instrument State Change</td></tr><tr><td>197</td><td>Pending order deletion</td></tr><tr><td>199</td><td>Pending order cancellation processed (end of FREEZE state)</td></tr><tr><td>261</td><td>Panic Cancel</td></tr><tr><td>302</td><td>Market Order uncrossing</td></tr></table>	Value	Description	103	Order delete accepted	122	Instrument State Change	197	Pending order deletion	199	Pending order cancellation processed (end of FREEZE state)	261	Panic Cancel	302	Market Order uncrossing
Value	Description																			
103	Order delete accepted																			
122	Instrument State Change																			
197	Pending order deletion																			
199	Pending order cancellation processed (end of FREEZE state)																			
261	Panic Cancel																			
302	Market Order uncrossing																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
20007	PartyIDEnteringFirm	N	1	134	unsigned int	Entering Entity ID.	
						Value	Description
						1	Participant
						2	Market Supervision
39	OrdStatus	Y	1	135	char	Conveys the current status of an order.	
						Value	Description
						4	Cancelled
						6	Pending Cancel (i.e. result of Order Cancel Request)
150	ExecType	Y	1	136	char	The reason why this message was generated.	
						Value	Description
						4	Cancelled
						6	Pending Cancel (e.g. result of Order Cancel Request)
1227	ProductComplex	Y	1	137	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
54	Side	Y	1	138	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
30011	FIXCOrdID	N	20	139	Fixed String	User defined client order ID Valid characters: \x20-\x7E	
39000	Pad1	U	1	159	Fixed String	not used	

6.15 Order Mass Cancellation Request

This message is used for mass cancellation of orders. For more details, please refer to the ETI Manual, chapter Order Mass Cancellation. This message is sent to the service "Order and Quote Management".

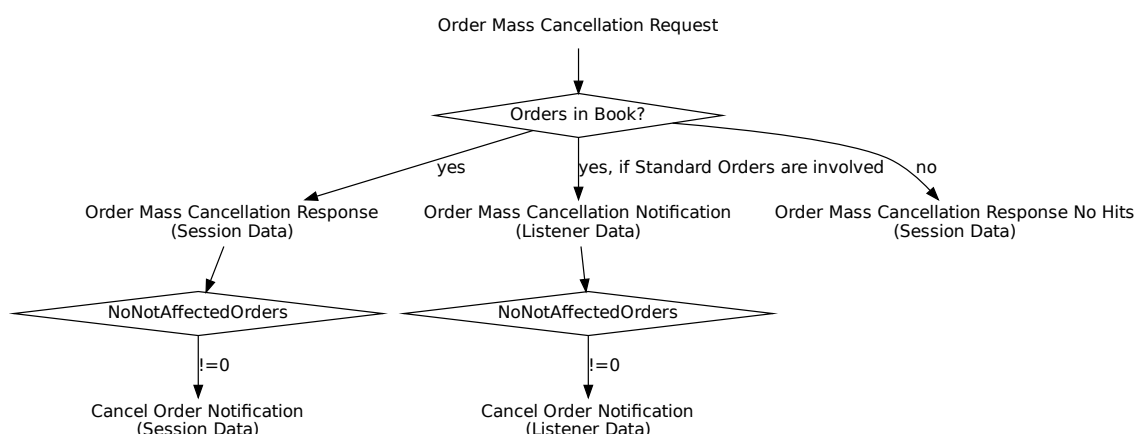

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10120 (Order-MassActionRequest, MsgType = CA)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	N	8	24	signed int	Instrument identifier.
44	Price	N	8	32	PriceType	Price boundary for deletion.
20122	PartyIDInvestment-DecisionMaker	N	8	40	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25123	ExecutingTrader	N	8	48	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
1300	MarketSegmentID	Y	4	56	signed int	Product identifier.						
20655	TargetPartyIDSession-ID	N	4	60	unsigned int	Session ID.						
20612	TargetParty-IDExecutingTrader	N	4	64	unsigned int	Owning User ID.						
54	Side	N	1	68	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
1724	OrderOrigination	N	1	69	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	70	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25124	ExecutingTrader- Qualifier	Y	1	71	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											

6.16 Order Mass Cancellation Response

This message confirms the Mass Cancellation request for orders. For more details, please refer to the ETI Manual, chapter Mass Cancellation Notification and Mass Cancellation Events.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10121 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
5948	PartitionID	Y	2	52	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
28704	ApplMsgID	Y	16	55	data	Application message identifier assigned to an order or quote event.						
893	LastFragment	Y	1	71	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
<MessageBody>												
1369	MassActionReportID	Y	8	72	UTCTimestamp	Transaction timestamp.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
1370	NoNotAffectedOrders	Y	2	80	Counter	Number of NotAffectedOrders repeating group instances.
28782	NoAffectedOrder-Requests	Y	2	82	Counter	Number of affected order transactions
39040	Pad4	U	4	84	Fixed String	not used
<NotAffectedOrdersGrp> Cardinality: 0-500, Record counter: NoNotAffectedOrders						
1371	>NotAffectedOrderID	Y	8	88	unsigned int	Exchange Order ID of an order whose cancellation is pending.
1372	>NotAffOrigCOrdID	N	8	96	unsigned int	Original Client Order ID of an order whose cancellation is pending.
<AffectedOrderRequestsGrp> Cardinality: 0-500, Record counter: NoAffectedOrderRequests						
28783	>AffectedOrder-RequestID	Y	4	0	unsigned int	ETI message sequence number affected by the transaction.
39040	>Pad4	U	4	4	Fixed String	not used

6.17 Order Mass Cancellation Response No Hits

This message confirms the Mass Cancellation request for orders if the order book of the session was not affected.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10124 (Order-MassActionReport, MsgType = BZ)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
1369	MassActionReportID	Y	8	56	UTCTimestamp	Transaction timestamp.

6.18 Order Mass Cancellation Notification

This message informs about an unsolicited mass cancellation event of orders. For more details, please refer to the ETI Manual, chapter Mass Cancellation Notification and Mass Cancellation Events.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10122 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	N	4	32	unsigned int	Only set for Listener Data.						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	Y	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
39070	Pad7	U	7	57	Fixed String	not used	
<MessageBody>							
1369	MassActionReportID	Y	8	64	UTCTimestamp	Transaction timestamp.	
48	SecurityID	N	8	72	signed int	Instrument identifier. Only set for mass cancellations on instrument (SecurityID) level.	
44	Price	N	8	80	PriceType	Price boundary for deletion.	
1300	MarketSegmentID	Y	4	88	signed int	Product identifier.	
20655	TargetPartyIDSession-ID	Y	4	92	unsigned int	Session ID.	
20612	TargetParty-IDExecutingTrader	N	4	96	unsigned int	Owning User ID.	
20036	PartyIDEntering-Trader	N	4	100	unsigned int	Entering User ID.	
1370	NoNotAffectedOrders	Y	2	104	Counter	Number of NotAffectedOrders repeating group instances.	
28782	NoAffectedOrder-Requests	Y	2	106	Counter	Number of affected order transactions	
20007	PartyIDEnteringFirm	N	1	108	unsigned int	Entering Entity ID.	
						Value	Description
						1	Participant
						2	Market Supervision

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
28721	MassActionReason	Y	1	109	unsigned int	Reason for mass cancellation.	
						Value	Description
						0	No special reason
						1	Trading was stopped
						2	Emergency
						3	Market Maker Protection
						6	Session loss or logout
						7	Duplicate Session Login
						8	Clearing Risk Control
						100	Internal connection loss
						107	Instrument Suspended
						117	Member has been disabled
						122	D-2 Order Cancellation
						123	User risk group has been disabled
						124	User Group Halt Trading due to Trading Action Request
						126	Risk Monitoring Session Loss
127	Risk Service Unavailable						
18	ExecInst	Y	1	110	unsigned int	Instructions for order handling.	
						Value	Description
						3	Persistent and non-persistent orders affected (FIX value 'H Q')
						2	Non-persistent Order (FIX value 'Q')
54	Side	N	1	111	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
<NotAffectedOrdersGrp> Cardinality: 0-500, Record counter: NoNotAffectedOrders							
1371	>NotAffectedOrderID	Y	8	112	unsigned int	Exchange Order ID of an order whose cancellation is pending.	
1372	>NotAffOrigClOrdID	N	8	120	unsigned int	Original Client Order ID of an order whose cancellation is pending.	
<AffectedOrderRequestsGrp> Cardinality: 0-500, Record counter: NoAffectedOrderRequests							
28783	>AffectedOrder-RequestID	Y	4	0	unsigned int	ETI message sequence number affected by the transaction.	
39040	>Pad4	U	4	4	Fixed String	not used	

6.19 Extended Order Information

This message format is used for order book restatement, retransmission of order events, the Listener Broadcast and for unsolicited order events within the session data. For more details, please refer to the ETI Manual, chapter Order Status and Execution Reports.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10117 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	N	4	32	unsigned int	Only set for Listener Data.						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	N	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39070	Pad7	U	7	57	Fixed String	not used
<MessageBody>						
37	OrderID	Y	8	64	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.
11	ClOrdID	N	8	72	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
41	OrigClOrdID	N	8	80	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.
48	SecurityID	Y	8	88	signed int	Instrument identifier.
17	ExecID	Y	8	96	UTCTimestamp	Transaction timestamp.
21009	TrdRegTSEntryTime	Y	8	104	UTCTimestamp	The entry timestamp is the time of the creation of the order.
21008	TrdRegTSTime-Priority	Y	8	112	UTCTimestamp	Priority timestamp.
44	Price	N	8	120	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).
151	LeavesQty	Y	8	128	Qty	Remaining quantity of an order.
14	CumQty	Y	8	136	Qty	Cumulated executed quantity of an order.
84	CxlQty	Y	8	144	Qty	Total quantity cancelled for this order.
38	OrderQty	Y	8	152	Qty	Total Order Quantity.
99	StopPx	N	8	160	PriceType	Stop price. Required if OrdType (40) is Stop (3) or used as the trigger price for an One-cancels-the-other order.
1300	MarketSegmentID	Y	4	168	signed int	Product identifier.
2424	MassOrderReportID	N	4	172	unsigned int	Mass order response identifier generated by the exchange
432	ExpireDate	N	4	176	LocalMktDate	Date of order expiry. Required if TimeInForce (59) = 6.
28744	MatchInstCrossID	N	4	180	unsigned int	Self Match Prevention ID.
20059	PartyIDExecutingUnit	N	4	184	unsigned int	Business Unit ID.
20055	PartyIDSessionID	N	4	188	unsigned int	Session ID.
20012	PartyIDExecuting-Trader	N	4	192	unsigned int	Owning User ID.
20036	PartyIDEntering-Trader	N	4	196	unsigned int	Entering User ID.
30555	NoLegExecs	Y	2	200	Counter	Number of InstrmntLegExec repeating group instances.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
378	ExecRestatement-Reason	Y	2	202	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. Valid values are listed after this table.																												
20007	PartyIDEnteringFirm	N	1	204	unsigned int	Entering Entity ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Participant</td></tr><tr><td>2</td><td>Market Supervision</td></tr></table>	Value	Description	1	Participant	2	Market Supervision																						
Value	Description																																	
1	Participant																																	
2	Market Supervision																																	
2964	SelfMatchPrevention-Instruction	N	1	205	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatch-PreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level																						
Value	Description																																	
100	Reject cross on business unit level																																	
101	Reject cross on market level																																	
1227	ProductComplex	Y	1	206	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
39	OrdStatus	Y	1	207	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>9</td><td>Suspended</td></tr></table>	Value	Description	0	New	1	Partially filled	2	Filled	4	Cancelled	9	Suspended				
Value	Description																					
0	New																					
1	Partially filled																					
2	Filled																					
4	Cancelled																					
9	Suspended																					
150	ExecType	Y	1	208	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>5</td><td>Replaced</td></tr><tr><td>9</td><td>Suspended</td></tr><tr><td>D</td><td>Restated</td></tr><tr><td>L</td><td>Triggered</td></tr><tr><td>F</td><td>Trade</td></tr></table>	Value	Description	0	New	4	Cancelled	5	Replaced	9	Suspended	D	Restated	L	Triggered	F	Trade
Value	Description																					
0	New																					
4	Cancelled																					
5	Replaced																					
9	Suspended																					
D	Restated																					
L	Triggered																					
F	Trade																					
54	Side	Y	1	209	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell										
Value	Description																					
1	Buy																					
2	Sell																					
40	OrdType	Y	1	210	unsigned int	Order type. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Market</td></tr><tr><td>2</td><td>Limit</td></tr><tr><td>3</td><td>Stop</td></tr><tr><td>4</td><td>Stop Limit</td></tr></table>	Value	Description	1	Market	2	Limit	3	Stop	4	Stop Limit						
Value	Description																					
1	Market																					
2	Limit																					
3	Stop																					
4	Stop Limit																					
1815	TradingCapacity	Y	1	211	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker								
Value	Description																					
1	Customer (Agency)																					
5	Principal (Proprietary)																					
6	Market Maker																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
59	TimeInForce	N	1	212	unsigned int	Execution and trading restriction parameters supported by T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Day (GFD)</td></tr><tr><td>1</td><td>Good Till Cancelled (GTC) - Standard Orders only</td></tr><tr><td>3</td><td>Immediate or Cancel (IOC)</td></tr><tr><td>4</td><td>Fill Or Kill (FOK)</td></tr><tr><td>6</td><td>Good Till Date (GTD) - Standard Orders only</td></tr></table>	Value	Description	0	Day (GFD)	1	Good Till Cancelled (GTC) - Standard Orders only	3	Immediate or Cancel (IOC)	4	Fill Or Kill (FOK)	6	Good Till Date (GTD) - Standard Orders only
Value	Description																	
0	Day (GFD)																	
1	Good Till Cancelled (GTC) - Standard Orders only																	
3	Immediate or Cancel (IOC)																	
4	Fill Or Kill (FOK)																	
6	Good Till Date (GTD) - Standard Orders only																	
18	ExecInst	N	1	213	unsigned int	Instructions for order handling. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Persistent Order (FIX value 'H')</td></tr><tr><td>2</td><td>Non-persistent Order (FIX value 'Q')</td></tr><tr><td>5</td><td>Persistent and Book or Cancel order (FIX value 'H 6')</td></tr><tr><td>6</td><td>Non-persistent and Book or Cancel order (FIX value 'Q 6')</td></tr></table>	Value	Description	1	Persistent Order (FIX value 'H')	2	Non-persistent Order (FIX value 'Q')	5	Persistent and Book or Cancel order (FIX value 'H 6')	6	Non-persistent and Book or Cancel order (FIX value 'Q 6')		
Value	Description																	
1	Persistent Order (FIX value 'H')																	
2	Non-persistent Order (FIX value 'Q')																	
5	Persistent and Book or Cancel order (FIX value 'H 6')																	
6	Non-persistent and Book or Cancel order (FIX value 'Q 6')																	
625	TradingSessionSubID	N	1	214	unsigned int	Marks a certain order to be included in a defined auction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Opening or opening auction</td></tr><tr><td>4</td><td>Closing or closing auction</td></tr><tr><td>8</td><td>Any auction</td></tr></table>	Value	Description	2	Opening or opening auction	4	Closing or closing auction	8	Any auction				
Value	Description																	
2	Opening or opening auction																	
4	Closing or closing auction																	
8	Any auction																	
28703	ApplSeqIndicator	N	1	215	unsigned int	Indicates if the order is a Lean Order or a Standard Order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No Recovery Required</td></tr><tr><td>1</td><td>Recovery Required</td></tr></table>	Value	Description	0	No Recovery Required	1	Recovery Required						
Value	Description																	
0	No Recovery Required																	
1	Recovery Required																	
1	Account	N	2	216	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52												
20038	PartyIDPosition-Account	N	32	218	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
77	PositionEffect	N	1	250	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
20096	PartyIDTakeUp- TradingFirm	N	5	251	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20																
20013	PartyIDOrder- OriginationFirm	N	7	256	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20																
20032	PartyIDBeneficiary	N	9	263	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20																
20075	PartyIDLocationID	N	2	272	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	CustOrderHandling- Inst	N	1	274	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2404	ComplianceText	N	20	275	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
25007	FreeText1	N	12	295	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
25008	FreeText2	N	12	307	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
25009	FreeText3	N	12	319	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
30011	FIXCOrdID	N	20	331	Fixed String	User defined client order ID Valid characters: \x20-\x7E								
1362	NoFills	Y	1	351	Counter	Specifies the number of partial fills included in this Execution Report.								
28555	NoLegOnbooks	Y	1	352	Counter	Number of InstrumentLeg repeating group instances. (only for on-book trades)								
28790	NoOrderEvents	Y	1	353	Counter	Number of order events								
1823	Triggered	Y	1	354	unsigned int	Indicates if an order has been previously triggered. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Triggered</td></tr><tr><td>1</td><td>Triggered Stop</td></tr><tr><td>2</td><td>Triggered OCO</td></tr></table>	Value	Description	0	Not Triggered	1	Triggered Stop	2	Triggered OCO
Value	Description													
0	Not Triggered													
1	Triggered Stop													
2	Triggered OCO													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
2523	CrossedIndicator	Y	1	355	unsigned int	Indicates SMP involvement.						
						Value	Description					
						0	No crossing (Order not subject to crossing)					
						1	Cross rejected (Order subject to crossing and match prevented)					
39040	Pad4	U	4	356	Fixed String	not used						
<LegOrdGrp> Cardinality: 0 - 144, Record counter: NoLegOnbooks												
2680	>LegAccount	N	2	360	Fixed String	Leg-specific account to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x4D, \x50						
564	>LegPositionEffect	Y	1	362	char	Leg-specific field used for T7 position management purposes and indicates whether the leg is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
39050	>Pad5	U	5	363	Fixed String	not used						
<FillsGrp> Cardinality: 0 - 100, Record counter: NoFills												
1364	>FillPx	Y	8	0	PriceType	Price of Fill.						
1365	>FillQty	N	8	8	Qty	Quantity of Fill.						
28708	>FillMatchID	Y	4	16	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.						
1363	>FillExecID	Y	4	20	signed int	Private identifier of an order match step event, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
1443	>FillLiquidityInd	N	1	24	unsigned int	Indicates whether the order added or removed liquidity. Required only for execution reports generated for fills. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Added Liquidity</td></tr><tr><td>2</td><td>Removed Liquidity</td></tr><tr><td>4</td><td>Auction</td></tr><tr><td>5</td><td>Triggered Stop Order</td></tr><tr><td>6</td><td>Triggered OCO Order</td></tr><tr><td>7</td><td>Triggered Market Order</td></tr></table>	Value	Description	1	Added Liquidity	2	Removed Liquidity	4	Auction	5	Triggered Stop Order	6	Triggered OCO Order	7	Triggered Market Order
Value	Description																			
1	Added Liquidity																			
2	Removed Liquidity																			
4	Auction																			
5	Triggered Stop Order																			
6	Triggered OCO Order																			
7	Triggered Market Order																			
39070	>Pad7	U	7	25	Fixed String	not used														
<InstrmntLegExecGrp> Cardinality: 0-600, Record counter: NoLegExecs																				
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.														
637	>LegLastPx	Y	8	8	PriceType	Price of this leg fill.														
1418	>LegLastQty	Y	8	16	Qty	Quantity executed in this leg fill.														
1893	>LegExecID	Y	4	24	signed int	Private identifier of a leg match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.														
624	>LegSide	N	1	28	unsigned int	The side of the individual leg of a strategy as defined in its signature. LegSide should always be mandatory, except for Scaled Simple Instrument, LegSide should be empty. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell								
Value	Description																			
1	Buy																			
2	Sell																			
2421	>FillRefID	Y	1	29	unsigned int	Reference to the corresponding Fills-Grp repeating group instance.														
39020	>Pad2	U	2	30	Fixed String	not used														
<OrderEventGrp> Cardinality: 0-100, Record counter: NoOrderEvents																				
1799	>OrderEventPx	N	8	0	PriceType	Price level for the order event.														
1800	>OrderEventQty	Y	8	8	Qty	Quantity for the order event.														
30060	>OrderEventMatchID	N	4	16	unsigned int	Unique identifier for each price level (match step) of an order event.														

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1798	>OrderEventReason	Y	1	20	unsigned int	Action that caused the event to occur.	
						Value	Description
						100	SMP event
39030	>Pad3	U	3	21	Fixed String	not used	

Valid Values of ExecRestatementReason (datatype ExecRestatementReason)

Valid Value	Description
1	Order book restatement
101	Order add accepted
102	Order modify accepted
103	Order delete accepted
105	IOC Order accepted
107	FOK Order accepted
122	Instrument State Change
108	Book Order executed
135	Market Order triggered and executed
149	Closing Auction Order has been activated
150	Closing Auction Order has been inactivated
151	Opening Auction Order has been activated
152	Opening Auction Order has been inactivated
153	Any Auction Order has been activated
154	Any Auction Order has been inactivated
164	One-cancels-the-other Order has been triggered
172	Stop Order has been triggered
212	Book or Cancel Order accepted
197	Pending order deletion
199	Pending order cancellation processed (end of FREEZE state)
181	Ownership Changed
114	Order has been changed to IOC
117	Member has been disabled
340	CLIP execution after improvement period
343	CLIP Request deleted by arrangement time out
344	CLIP Request deleted by arrangement validation
346	Cross order added
347	Cross order cancelled

6.20 Mass Order

This message is sent to the service "Order and Quote Management".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10115 (Mass-Order, MsgType = DJ)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
2423	MassOrderRequestID	N	8	24	unsigned int	Customer defined mass order identifier
20003	PartyIDClientID	N	8	32	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A)) used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.
20122	PartyIDInvestment-DecisionMaker	N	8	40	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.
25123	ExecutingTrader	N	8	48	unsigned int	MiFID field: Executing Trader data Field (ESMA Field 5 (Section A)) used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20096	PartyIDTakeUp- TradingFirm	N	5	56	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20								
20013	PartyIDOrder- OriginationFirm	N	7	61	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20								
20032	PartyIDBeneficiary	N	9	68	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20								
28710	PriceValidityCheck- Type	Y	1	77	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory
Value	Description													
0	None													
1	Optional													
2	Mandatory													
25126	ValueCheckTypeValue	Y	1	78	unsigned int	Indicator for checking the maximum order/quote value by the exchange. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													
23002	OrderAttribute- LiquidityProvision	Y	1	79	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision		
Value	Description													
1	Liquidity provision													
0	No liquidity provision													
23003	OrderAttributeRisk- Reduction	N	1	80	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction		
Value	Description													
1	Risk reduction													
0	No risk reduction													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
625	TradingSessionSubID	N	1	81	unsigned int	Marks a certain order to be included in a defined auction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Opening or opening auction</td></tr><tr><td>4</td><td>Closing or closing auction</td></tr><tr><td>8</td><td>Any auction</td></tr></table>	Value	Description	2	Opening or opening auction	4	Closing or closing auction	8	Any auction
Value	Description													
2	Opening or opening auction													
4	Closing or closing auction													
8	Any auction													
1815	TradingCapacity	Y	1	82	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1724	OrderOrigination	N	1	83	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer		
Value	Description													
5	Order received from a direct access customer													
105	Order received from a sponsored access customer													
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	84	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
25124	ExecutingTrader-Qualifier	Y	1	85	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1	Account	N	2	86	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52																
20038	PartyIDPosition-Account	N	32	88	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A																
77	PositionEffect	Y	1	120	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
20075	PartyIDLocationID	N	2	121	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	CustOrderHandling-Inst	N	1	123	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
2404	ComplianceText	N	20	124	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
25007	FreeText1	N	12	144	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	FreeText2	N	12	156	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	FreeText3	N	12	168	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25241	PartyEndClient-Identification	N	20	180	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F						
2428	NoOrderEntries	Y	1	200	Counter	Number of order entries						
39070	Pad7	U	7	201	Fixed String	not used						
<OrderEntryGrp> Cardinality: 2-12, Record counter: NoOrderEntries												
44	>Price	Y	8	208	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).						
38	>OrderQty	Y	8	216	Qty	Total Order Quantity.						
1300	>MarketSegmentID	Y	4	224	signed int	Product identifier.						
39040	>Pad4	U	4	228	Fixed String	not used						
48	>SecurityID	Y	8	232	signed int	Instrument identifier.						
54	>Side	Y	1	240	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																														
1227	>ProductComplex	Y	1	241	unsigned int	This field qualifies an instrument type on T7.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	10	Flexible Simple Instrument	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																			
1	Simple instrument																																			
2	Standard Option Strategy																																			
3	Non-Standard Option Strategy																																			
4	Volatility Strategy																																			
5	Futures Spread																																			
6	Inter-Product Spread																																			
7	Standard Future Strategy																																			
8	Pack and Bundle																																			
9	Strip																																			
10	Flexible Simple Instrument																																			
11	Commodity Strip																																			
12	Scaled Simple Instrument																																			
13	Non-Standard Volatility Strategy																																			
14	Total Return Future Strategy																																			
39060	>Pad6	U	6	242	Fixed String	not used																														


6.21 Mass Order Ack

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10116 (MassOrderAck, MsgType = DK)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
2423	MassOrderRequestID	N	8	56	unsigned int	Customer defined mass order identifier				
2424	MassOrderReportID	Y	4	64	unsigned int	Mass order response identifier generated by the exchange				
39040	Pad4	U	4	68	Fixed String	not used				

7 Quote Handling

7.1 Mass Quote

Quotes are entered using the Mass Quote message. For more details, please refer to the ETI Manual, chapter Maintaining Quotes. This message is sent to the service "Order and Quote Management".

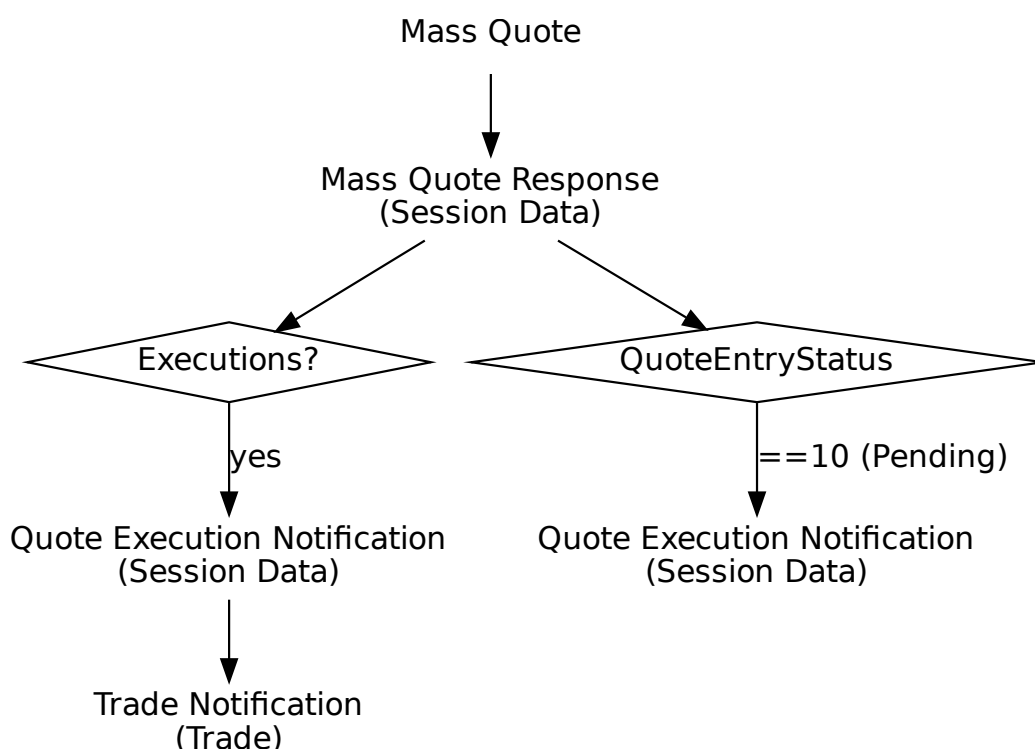

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10405 (Mass-Quote, MsgType = i)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
50	SenderSubID	Y	4	20	unsigned int	User ID.								
<MessageBody>														
117	QuoteID	Y	8	24	unsigned int	Customer defined mass quote identifier.								
20122	PartyIdInvestment-DecisionMaker	N	8	32	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.								
25123	ExecutingTrader	N	8	40	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.								
28744	MatchInstCrossID	N	4	52	unsigned int	Self Match Prevention ID.								
25033	EnrichmentRuleID	N	2	56	unsigned int	Identifies an enrichment rule.								
2964	SelfMatchPrevention-Instruction	N	1	58	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatchPreventionInstruction is 100(Reject cross on business unit level) <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	CrossMatchInstruction	N	1	59	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatchInstruction is not set the default value is defined by the exchange <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
28710	PriceValidityCheck-Type	Y	1	60	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory
Value	Description													
0	None													
1	Optional													
2	Mandatory													
25126	ValueCheckTypeValue	Y	1	61	unsigned int	Indicator for checking the maximum order/quote value by the exchange. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													
28723	QuoteSizeType	Y	1	62	unsigned int	Identifies the quoting model. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Total Size (Quote Modification)</td></tr><tr><td>2</td><td>Open Size(Quote Entry)</td></tr></table>	Value	Description	1	Total Size (Quote Modification)	2	Open Size(Quote Entry)		
Value	Description													
1	Total Size (Quote Modification)													
2	Open Size(Quote Entry)													
537	QuoteType	Y	1	63	unsigned int	Quote Type <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)</td></tr><tr><td>1</td><td>Tradeable</td></tr><tr><td>100</td><td>Tradeable(BOC)</td></tr></table>	Value	Description	0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)	1	Tradeable	100	Tradeable(BOC)
Value	Description													
0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)													
1	Tradeable													
100	Tradeable(BOC)													
23002	OrderAttribute-LiquidityProvision	Y	1	64	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision		
Value	Description													
1	Liquidity provision													
0	No liquidity provision													
295	NoQuoteEntries	Y	1	65	Counter	The number of quote entries for a Mass Quote.								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	66	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
25124	ExecutingTrader-Qualifier	Y	1	67	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
39040	Pad4	U	4	68	Fixed String	not used						
<QuoteEntryGrp> Cardinality: 0-100, Record counter: NoQuoteEntries												
48	>SecurityID	Y	8	72	signed int	Instrument identifier.						
132	>BidPx	N	8	80	PriceType	Bid price/rate.						
134	>BidSize	N	8	88	Qty	Quantity of bid.						
133	>OfferPx	N	8	96	PriceType	Offer price/rate.						
135	>OfferSize	N	8	104	Qty	Quantity of offer.						

7.2 Mass Quote Response

This message is the acknowledgement for a Mass Quote request. For more details, please refer to the ETI Manual, chapter Maintaining Quotes. For a list of scenarios for the valid values of QuoteEntryStatus, please refer to the ETI Manual, chapter Quote Entry Status.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10406 (MassQuoteAcknowledgement, MsgType = b)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
117	QuoteID	Y	8	56	unsigned int	Customer defined mass quote identifier.				
693	QuoteResponseID	Y	8	64	UTCTimestamp	Mass quote response identifier generated by the exchange.				
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.				
28789	NoQuoteSideEntries	Y	1	76	Counter	Number of quote sides				
39030	Pad3	U	3	77	Fixed String	not used				
<QuoteEntryAckGrp> Cardinality: 0-200, Record counter: NoQuoteSideEntries										
48	>SecurityID	Y	8	80	signed int	Instrument identifier.				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
28788	>CxlSize	N	8	88	Qty	Cancelled quantity										
368	>QuoteEntryRejectReason	N	4	96	unsigned int	Reason code indicating why the quote entry has been rejected. Valid values are listed after this table.										
1167	>QuoteEntryStatus	Y	1	100	unsigned int	Identifies the status of an individual quote. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted with warning</td></tr><tr><td>5</td><td>Rejected</td></tr><tr><td>6</td><td>Removed from Market</td></tr><tr><td>10</td><td>Pending</td></tr></table>	Value	Description	0	Accepted with warning	5	Rejected	6	Removed from Market	10	Pending
Value	Description															
0	Accepted with warning															
5	Rejected															
6	Removed from Market															
10	Pending															
54	>Side	Y	1	101	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell				
Value	Description															
1	Buy															
2	Sell															
39020	>Pad2	U	2	102	Fixed String	not used										

Valid Values of QuoteEntryRejectReason (datatype QuoteEntryRejectReason)

Valid Value	Description
1	Unknown security
6	Duplicate quote
8	Invalid price
16	Reference price not available
100	Single sided quotes not allowed
103	Invalid usage of quoting model
106	Invalid size
107	Invalid underlying price
108	Bid price not reasonable
109	Ask price not reasonable
110	Bid price exceeds extended price range
111	Ask price exceeds extended price range
115	Instrument state freeze
116	Deletion already pending
119	Entitlement not assigned for underlying
124	Instrument is currently not tradeable on book
125	Quantity exceeds trader specific limit
126	Value exceeds trader specific limit

127	Invalid quote spread
128	Book-or-Cancel quote type
131	Instrument state does not allow processing
134	Invalid quote type
143	Trading indication running for trader
144	On-Book trading disabled for instrument type
147	Liquidity provider protection bid side cancelled
148	Liquidity provider protection ask side cancelled
155	Quote entry outside quoting period not allowed
156	Match price resulting from entry of the matching quote is not a valid price step
161	Quantity exceeds transaction size limit
163	Too many orders and quotes in order book
166	Contract cannot be traded due to insufficient eligibility
167	the VF underlying price timed out, rejection of quote
168	the BU is suspended due to an ARP level 3 soft breach
169	incoming quote pair rejected due to no clearing product assignment
170	Value exceeds Product specific limit
171	D-2 Order Cancellation
*	More values

7.3 Quote Execution Notification

This message informs about quote match events. For more details, please refer to the ETI Manual, chapter Maintaining Quotes.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10407 (Quote-ExecutionReport, MsgType = U8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	U	4	32	unsigned int	not used						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	N	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
17	ExecID	Y	8	64	UTCTimestamp	Transaction timestamp.										
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.										
30555	NoLegExecs	Y	2	76	Counter	Number of InstrmntLegExec repeating group instances.										
28706	NoQuoteEvents	Y	1	78	Counter	Number of QuoteEvent repeating group instances.										
39000	Pad1	U	1	79	Fixed String	not used										
<QuoteEventGrp> Cardinality: 1-100, Record counter: NoQuoteEvents																
48	>SecurityID	Y	8	80	signed int	Instrument identifier.										
28553	>QuoteEventPx	N	8	88	PriceType	Price of this fill.										
28542	>QuoteEventQty	N	8	96	Qty	Quantity executed in this fill.										
1166	>QuoteMsgID	Y	8	104	unsigned int	Customer defined mass quote identifier.										
28714	>QuoteEventMatch-ID	N	4	112	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.										
28711	>QuoteEventExecID	N	4	116	signed int	Private identifier of a quote match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.										
28539	>QuoteEventType	Y	1	120	unsigned int	Conveys the quote event type. <table><tr><td>Value</td><td>Description</td></tr><tr><td>3</td><td>Removed Quote Side</td></tr><tr><td>4</td><td>Partially Filled</td></tr><tr><td>5</td><td>Filled</td></tr><tr><td>6</td><td>Quantity removed</td></tr></table>	Value	Description	3	Removed Quote Side	4	Partially Filled	5	Filled	6	Quantity removed
Value	Description															
3	Removed Quote Side															
4	Partially Filled															
5	Filled															
6	Quantity removed															
28581	>QuoteEventSide	Y	1	121	unsigned int	Side of the quote. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell				
Value	Description															
1	Buy															
2	Sell															
28641	>QuoteEvent-LiquidityInd	N	1	122	unsigned int	Indicates whether the quote added or removed liquidity. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Added Liquidity</td></tr><tr><td>2</td><td>Removed Liquidity</td></tr><tr><td>4</td><td>Auction</td></tr></table>	Value	Description	1	Added Liquidity	2	Removed Liquidity	4	Auction		
Value	Description															
1	Added Liquidity															
2	Removed Liquidity															
4	Auction															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
28733	>QuoteEventReason	N	1	123	unsigned int	Additional information why quote side was removed. <table><tr><td>Value</td><td>Description</td></tr><tr><td>14</td><td>Pending Cancellation Executed</td></tr><tr><td>15</td><td>Invalid Price</td></tr><tr><td>16</td><td>Quote subject to crossing and match prevented</td></tr><tr><td>17</td><td>Quote deleted due to Book-or-Cancel quote type</td></tr><tr><td>18</td><td>Quote deleted due to passive liquidity protection</td></tr></table>	Value	Description	14	Pending Cancellation Executed	15	Invalid Price	16	Quote subject to crossing and match prevented	17	Quote deleted due to Book-or-Cancel quote type	18	Quote deleted due to passive liquidity protection
Value	Description																	
14	Pending Cancellation Executed																	
15	Invalid Price																	
16	Quote subject to crossing and match prevented																	
17	Quote deleted due to Book-or-Cancel quote type																	
18	Quote deleted due to passive liquidity protection																	
39040	>Pad4	U	4	124	Fixed String	not used												
<QuoteLegExecGrp> Cardinality: 0 - 600, Record counter: NoLegExecs																		
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.												
637	>LegLastPx	Y	8	8	PriceType	Price of this leg fill.												
1418	>LegLastQty	Y	8	16	Qty	Quantity executed in this leg fill.												
1893	>LegExecID	Y	4	24	signed int	Private identifier of a leg match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.												
624	>LegSide	Y	1	28	unsigned int	The side of the individual leg of a strategy as defined in its signature. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell						
Value	Description																	
1	Buy																	
2	Sell																	
25011	>NoQuoteEvents-Index	Y	1	29	unsigned int	Reference to the corresponding QuoteEvent repeating group instance.												
39020	>Pad2	U	2	30	Fixed String	not used												

7.4 Quote Mass Cancellation Request

This message is used for the mass cancellation of quotes. For more details, please refer to the ETI Manual, chapter Maintaining Quotes. This message is sent to the service "Order and Quote Management".

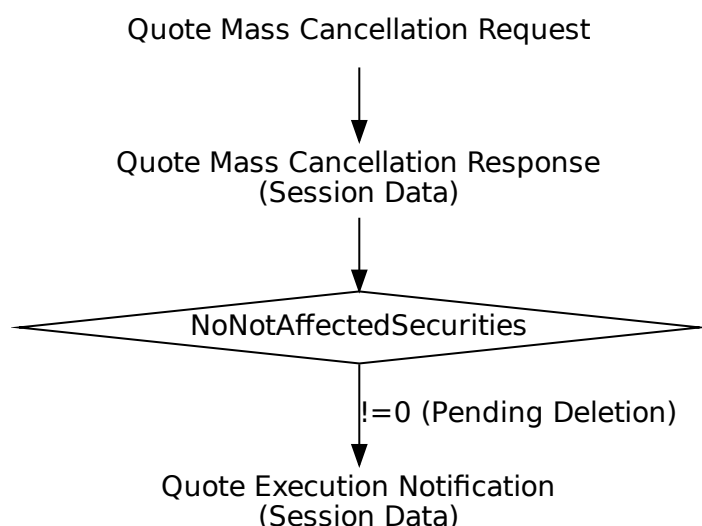

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10408 (Order-MassActionRequest, MsgType = CA)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20122	PartyIdInvestment-DecisionMaker	N	8	24	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	ExecutingTrader	N	8	32	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
1300	MarketSegmentID	Y	4	40	signed int	Product identifier.						
20655	TargetPartyIDSession-ID	N	4	44	unsigned int	Session ID.						
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	48	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
25124	ExecutingTrader-Qualifier	Y	1	49	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
39060	Pad6	U	6	50	Fixed String	not used						

7.5 Quote Mass Cancellation Response

This message confirms a Quote Mass Cancellation request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10409 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
1369	MassActionReportID	Y	8	56	UTCTimestamp	Transaction timestamp.						
28707	NoNotAffectedSecurities	Y	2	64	Counter	Number of NotAffectedSecurities repeating group instances.						
39060	Pad6	U	6	66	Fixed String	not used						
<NotAffectedSecuritiesGrp> Cardinality: 0-500, Record counter: NoNotAffectedSecurities												
28702	>NotAffectedSecurityID	Y	8	72	signed int	Instrument ID whose quote mass cancellation is pending.						

7.6 Quote Mass Cancellation Notification


This message informs about an unsolicited Quote Mass Cancellation event. For more details, please refer to the ETI Manual, chapter Mass Cancellation Notification and Mass Cancellation Events.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10410 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	U	4	32	unsigned int	not used						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	N	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageBody>							
1369	MassActionReportID	Y	8	64	UTCTimestamp	Transaction timestamp.	
48	SecurityID	U	8	72	signed int	not used	
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.	
20655	TargetPartyIDSession-ID	Y	4	84	unsigned int	Session ID.	
20036	PartyIDEntering-Trader	N	4	88	unsigned int	Entering User ID.	
20612	TargetParty-IDExecutingTrader	N	4	92	unsigned int	Owning User ID.	
28707	NoNotAffected-Securities	Y	2	96	Counter	Number of NotAffectedSecurities repeating group instances.	
28721	MassActionReason	Y	1	98	unsigned int	Reason for mass cancellation.	
						Value	Description
						0	No special reason
						1	Trading was stopped
						2	Emergency
						3	Market Maker Protection
						6	Session loss or logout
						7	Duplicate Session Login
						8	Clearing Risk Control
						100	Internal connection loss
						117	Member has been disabled
						122	D-2 Order Cancellation
123	User risk group has been disabled						
20007	PartyIDEnteringFirm	N	1	99	unsigned int	Entering Entity ID.	
						Value	Description
						1	Participant
						2	Market Supervision
20676	TargetPartyIDDeskID	N	3	100	Fixed String	Trader Group. Valid characters: A-Z, 0-9, \x20	
39000	Pad1	U	1	103	Fixed String	not used	
<NotAffectedSecuritiesGrp> Cardinality: 0-500, Record counter: NoNotAffectedSecurities							
28702	>NotAffected-SecurityID	Y	8	104	signed int	Instrument ID whose quote mass cancellation or activation is pending.	

7.7 Quote Activation Request

This message is used for inactivation and activation of quotes of a session within the product scope. For more details, please refer to the ETI Manual, chapter Quote Activation/Inactivation. This message is sent to the service "Order and Quote Management".

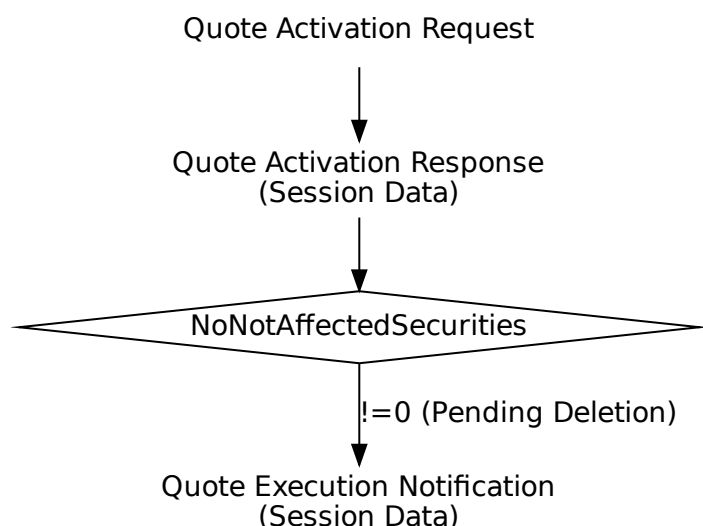

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10403 (Order-MassActionRequest, MsgType = CA)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
20122	PartyIdInvestment-DecisionMaker	N	8	24	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.								
25123	ExecutingTrader	N	8	32	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.								
1300	MarketSegmentID	Y	4	40	signed int	Product identifier.								
20655	TargetPartyIDSession-ID	Y	4	44	unsigned int	Session ID.								
1373	MassActionType	Y	1	48	unsigned int	Specifies the type of action requested. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Suspend quotes</td></tr><tr><td>2</td><td>Release quotes from suspension</td></tr><tr><td>3</td><td>Suspend and delete Quotes</td></tr></table>	Value	Description	1	Suspend quotes	2	Release quotes from suspension	3	Suspend and delete Quotes
Value	Description													
1	Suspend quotes													
2	Release quotes from suspension													
3	Suspend and delete Quotes													
28768	MassActionSubType	N	1	49	unsigned int	Restriction for MassActionType(1373) = Release_quotes(2). <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Book or cancel</td></tr></table>	Value	Description	1	Book or cancel				
Value	Description													
1	Book or cancel													
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	50	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25124	ExecutingTrader- Qualifier	Y	1	51	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
39040	Pad4	U	4	52	Fixed String	not used						

7.8 Quote Activation Response

The Quote Activation Response message confirms a Quote Activation Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10404 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
1369	MassActionReportID	Y	8	56	UTCTimestamp	Transaction timestamp.						
28707	NoNotAffectedSecurities	Y	2	64	Counter	Number of NotAffectedSecurities repeating group instances.						
39060	Pad6	U	6	66	Fixed String	not used						
<NotAffectedSecuritiesGrp> Cardinality: 0-500, Record counter: NoNotAffectedSecurities												
28702	>NotAffectedSecurityID	Y	8	72	signed int	Instrument ID whose quote mass cancellation or activation is pending.						

7.9 Quote Activation Notification

This message informs about an unsolicited inactivation and activation of quotes.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10411 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	U	4	32	unsigned int	not used						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	Y	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplIID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						
<MessageBody>												
1369	MassActionReportID	Y	8	64	UTCTimestamp	Transaction timestamp.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.	
20036	PartyIDEntering-Trader	N	4	76	unsigned int	Entering User ID.	
28707	NoNotAffected-Securities	Y	2	80	Counter	Number of NotAffectedSecurities repeating group instances.	
20007	PartyIDEnteringFirm	N	1	82	unsigned int	Entering Entity ID.	
						Value	Description
						1	Participant
						2	Market Supervision
1373	MassActionType	Y	1	83	unsigned int	Specifies the type of action requested.	
						Value	Description
						1	Suspend quotes
						2	Release quotes from suspension
						3	Suspend and delete Quotes
28768	MassActionSubType	N	1	84	unsigned int	Restriction for MassAction-Type(1373) = Release_quotes(2).	
						Value	Description
						1	Book or cancel
28721	MassActionReason	Y	1	85	unsigned int	Reason for mass cancellation.	
						Value	Description
						0	No special reason
						3	Market Maker Protection
39020	Pad2	U	2	86	Fixed String	not used	
<NotAffectedSecuritiesGrp> Cardinality: 0-500, Record counter: NoNotAffectedSecurities							
28702	>NotAffected-SecurityID	Y	8	88	signed int	Instrument ID whose quote mass cancellation or activation is pending.	

7.10 Inquire Market Maker Parameters

This message is used to inquire for the Market Maker Parameters currently active for a session. For more details, please refer to the ETI Manual, chapter Market Maker Protection. This message is sent to the service "Order and Quote Management".

Inquire Market Maker Parameters



Inquire Market Maker Parameters Response
(Session Data)

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10305 (MMPParameterRequest, MsgType = U17)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.
20655	TargetPartyIDSession-ID	N	4	28	unsigned int	Session ID.

7.11 Inquire Market Maker Parameters Response

This message is the positive response to the Inquire Market Maker Parameters request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10306 (MMPParameterResponse, MsgType = U18)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
28717	MMPParameterReport-ID	Y	8	56	UTCTimestamp	Transaction timestamp.				
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.				
28705	NoMMPParameters	Y	1	68	Counter	Number of MMPParameters repeating group instances.				
39030	Pad3	U	3	69	Fixed String	not used				
<MMPParameterGrp> Cardinality: 0-9, Record counter: NoMMPParameters										
1629	>ExposureDuration	Y	8	72	signed int	Participant defined time frame (in milliseconds) the risk protection parameters should be counted.				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
14	>CumQty	Y	8	80	Qty	Volume threshold: total number of traded contracts.						
7966	>Delta	Y	8	88	Qty	The Delta counter holds for futures the difference of bought future contracts and sold future contracts.For options it is the the difference of (long calls + short puts) and (short calls + long puts).						
7968	>Vega	Y	8	96	Qty	Absolute number of contracts purchased reduced by the number of contracts sold (for options only)						
28615	>PctCount	Y	4	104	signed int	The Percent counter sums up each trade as a percentage of the original volume.						
20655	>TargetParty- IDSessionID	N	4	108	unsigned int	Session ID.						
25253	>MMRiskLimit- ActionType	Y	1	112	unsigned int	Action for reaching risk limit. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Quote inactivate</td></tr><tr><td>2</td><td>Quote inactivate and delete</td></tr></table>	Value	Description	1	Quote inactivate	2	Quote inactivate and delete
Value	Description											
1	Quote inactivate											
2	Quote inactivate and delete											
39070	>Pad7	U	7	113	Fixed String	not used						

7.12 Market Maker Parameter Definition

This message is used for definition of market maker protection parameters for a session. For more details, please refer to the ETI Manual, chapter Market Maker Protection. This message is sent to the service "Order and Quote Management".

Market Maker Parameter Definition



Market Maker Parameter Definition Response (Session Data)

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10303 (MMPParameterDefinitionRequest, MsgType = U14)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
1629	ExposureDuration	Y	8	24	signed int	Participant defined time frame (in milliseconds) the risk protection parameters should be counted.
14	CumQty	Y	8	32	Qty	Volume threshold: total number of traded contracts.
7966	Delta	Y	8	40	Qty	The Delta counter holds for futures the difference of bought future contracts and sold future contracts. For options it is the the difference of (long calls + short puts) and (short calls + long puts).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
7968	Vega	Y	8	48	Qty	Absolute number of contracts purchased reduced by the number of contracts sold (for options only)	
1300	MarketSegmentID	Y	4	56	signed int	Product identifier.	
20655	TargetPartyIDSession-ID	N	4	60	unsigned int	Session ID.	
28615	PctCount	Y	4	64	signed int	The Percent counter sums up each trade as a percentage of the original volume.	
25253	MMRiskLimitAction-Type	Y	1	68	unsigned int	Action for reaching risk limit.	
						Value	Description
						1	Quote inactivate
						2	Quote inactivate and delete
39030	Pad3	U	3	69	Fixed String	not used	

7.13 Market Maker Parameter Definition Response


This message confirms a Market Maker Parameter Definition request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10304 (Request-Acknowledge, MsgType = U1)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
17	ExecID	N	8	56	UTCTimestamp	Transaction timestamp.				

8 Strategy Creation

8.1 Create Strategy

The Security Definition Request message is used to create a strategy on T7. For more details, please refer to the ETI Manual, chapter Creation of a Strategy. This message is sent to the service "Order and Quote Management".

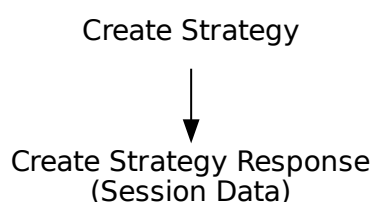

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10301 (Security-DefinitionRequest, MsgType = c)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
28908	RelatedPx	N	8	24	PriceType	Basis Price or Custom Underlying Price for Total Return Future Strategy
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.
762	SecuritySubType	N	4	36	signed int	Strategy Type. Required for Product-Complex (1227) = 2=Standard Option Strategy, 4=Option Volatility Strategy, 6=Inter Product Spread, 7=Standard Future Strategy, 8=Pack and Bundle, 14 = Total Return Future Strategy

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
28907	QuantityScalingFactor	N	2	40	unsigned int	Quantity Scaling Factor for Scaled Instruments.																										
1227	ProductComplex	Y	1	42	unsigned int	This field qualifies an instrument type on T7.<table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
11	Commodity Strip																															
12	Scaled Simple Instrument																															
13	Non-Standard Volatility Strategy																															
14	Total Return Future Strategy																															
28555	NoLegOnbooks	Y	1	43	Counter	Number of InstrumentLeg repeating group instances. (only for on-book trades)																										
1377	MultilegModel	N	1	44	unsigned int	Specifies if a strategy is temporarily (user-defined) or permanently (predefined) available.<table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Predefined Multileg Security</td></tr><tr><td>1</td><td>User-defined Multileg Security</td></tr></table>	Value	Description	0	Predefined Multileg Security	1	User-defined Multileg Security																				
Value	Description																															
0	Predefined Multileg Security																															
1	User-defined Multileg Security																															
28803	EnableCustom-CommodityStrip	N	1	45	unsigned int	Flag to enable customer defined commodity strips. Only for Nodal Market Supervision users.<table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	1	Yes																						
Value	Description																															
1	Yes																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
2404	ComplianceText	N	20	46	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
28699	DisplayNameAlias	N	190	66	Fixed String	User-defined aliases for the complex instrument name. Only for Nodal Market Supervision users. Valid characters: \x20, \x23-\x25, \x28-\x2B, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
28802	PeriodAlias	N	45	256	Fixed String	User-defined aliases for the period of a complex instrument. Only for Nodal Market Supervision users. Valid characters: \x20, \x23-\x25, \x28-\x2B, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39030	Pad3	U	3	301	Fixed String	not used						
<InstrmtLegGrp> Cardinality: 0 - 144, Record counter: NoLegOnbooks												
602	>LegSecurityID	Y	8	304	signed int	Instrument identifier of the leg security.						
566	>LegPrice	N	8	312	PriceType	Strategy leg underlying price						
600	>LegSymbol	N	4	320	signed int	Product identifier of the leg security						
623	>LegRatioQty	Y	4	324	unsigned int	The ratio of quantity for this individual leg relative to the entire multileg security.						
624	>LegSide	Y	1	328	unsigned int	The side of the individual leg of a strategy as defined in its signature. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
609	>LegSecurityType	Y	1	329	unsigned int	Indicates type of leg. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Multileg Instrument</td></tr><tr><td>2</td><td>Underlying Leg</td></tr></table>	Value	Description	1	Multileg Instrument	2	Underlying Leg
Value	Description											
1	Multileg Instrument											
2	Underlying Leg											
39060	>Pad6	U	6	330	Fixed String	not used						

8.2 Create Strategy Response

This message confirms the creation of a strategy or returns the parameters of an existing strategy. For more details, please refer to the ETI Manual, chapter Creation of a Strategy.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10302 (Security-Definition, MsgType = d)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
1148	LowLimitPrice	N	8	56	PriceType	Allowable low limit price for the trading day. A key parameter in validating order price. Used as the lower band for validating order prices. Orders submitted with prices below the lower limit will be rejected.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1149	HighLimitPrice	N	8	64	PriceType	Allowable high limit price for the trading day. A key parameter in validating order price. Used as the upper band for validating order prices. Orders submitted with prices above the upper limit will be rejected.						
28908	RelatedPx	N	8	72	PriceType	Basis Price or Custom Underlying Price for Total Return Future Strategy						
48	SecurityID	Y	8	80	signed int	Instrument identifier.						
779	LastUpdateTime	Y	8	88	UTCTimestamp	Creation timestamp of the strategy.						
322	SecurityResponseID	Y	8	96	UTCTimestamp	Identifier for the Security Definition message.						
1300	MarketSegmentID	Y	4	104	signed int	Product identifier.						
28614	NumberOfSecurities	Y	4	108	signed int	Number of strategies that have been created per session, product, instrument type and business day.						
762	SecuritySubType	N	4	112	signed int	Sub-type qualification/identification of the SecurityType						
28907	QuantityScalingFactor	N	2	116	unsigned int	Quantity Scaling Factor for Scaled Instruments.						
1377	MultilegModel	Y	1	118	unsigned int	Specifies if a strategy is temporarily (user-defined) or permanently (predefined) available. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Predefined Multileg Security</td></tr><tr><td>1</td><td>User-defined Multileg Security</td></tr></table>	Value	Description	0	Predefined Multileg Security	1	User-defined Multileg Security
Value	Description											
0	Predefined Multileg Security											
1	User-defined Multileg Security											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
1144	ImpliedMarket-Indicator	Y	1	119	unsigned int	Indicates that an implied market to be created for either the legs of a multi-leg instrument (Implied-in) or for the multi-leg instrument based on the existence of the legs (Implied-out).Determination as to whether implied markets should be created is generally done at the level of the multi-leg instrument.Commonly used in listed derivatives. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not implied</td></tr><tr><td>3</td><td>Both Implied-in and Implied-out</td></tr></table>	Value	Description	0	Not implied	3	Both Implied-in and Implied-out																				
Value	Description																															
0	Not implied																															
3	Both Implied-in and Implied-out																															
1227	ProductComplex	Y	1	120	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
11	Commodity Strip																															
12	Scaled Simple Instrument																															
13	Non-Standard Volatility Strategy																															
14	Total Return Future Strategy																															
28555	NoLegOnbooks	Y	1	121	Counter	Number of InstrumentLeg repeating group instances. (only for on-book trades)																										
39060	Pad6	U	6	122	Fixed String	not used																										
<InstrmtLegGrp> Cardinality: 0-144, Record counter: NoLegOnbooks																																
602	>LegSecurityID	Y	8	128	signed int	Instrument identifier of the leg security.																										
566	>LegPrice	N	8	136	PriceType	Strategy leg underlying price																										
600	>LegSymbol	N	4	144	signed int	Product identifier of the leg security																										

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
623	>LegRatioQty	Y	4	148	unsigned int	The ratio of quantity for this individual leg relative to the entire multileg security.						
624	>LegSide	Y	1	152	unsigned int	The side of the individual leg of a strategy as defined in its signature.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
609	>LegSecurityType	Y	1	153	unsigned int	Indicates type of leg.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Multileg Instrument</td></tr><tr><td>2</td><td>Underlying Leg</td></tr></table>	Value	Description	1	Multileg Instrument	2	Underlying Leg
Value	Description											
1	Multileg Instrument											
2	Underlying Leg											
39060	>Pad6	U	6	154	Fixed String	not used						

9 Flexible Instrument Creation

9.1 Create Flexible Instrument Request

This message is used to create a flexible instrument on T7. This message is sent to the service "Order and Quote Management".

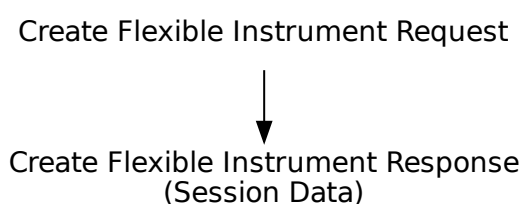

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10309 (Security-DefinitionRequest, MsgType = c)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
202	StrikePrice	N	8	24	PriceType	Strike Price for an Option.						
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.						
541	MaturityDate	N	4	36	LocalMktDate	Date of maturity.						
30866	ContractDate	N	4	40	LocalMktDate	Business date to identify an instrument						
1193	SettlMethod	Y	1	44	char	Settlement method for a contract or instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Cash Settlement</td></tr><tr><td>P</td><td>Physical Settlement</td></tr></table>	Value	Description	C	Cash Settlement	P	Physical Settlement
Value	Description											
C	Cash Settlement											
P	Physical Settlement											
206	OptAttribute	N	1	45	unsigned int	Version of option contract.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
201	PutOrCall	N	1	46	unsigned int	Indicates whether an option contract is a put or call. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Put</td></tr><tr><td>1</td><td>Call</td></tr></table>	Value	Description	0	Put	1	Call
Value	Description											
0	Put											
1	Call											
1194	ExerciseStyle	N	1	47	unsigned int	Type of exercise of an instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>European</td></tr><tr><td>1</td><td>American</td></tr></table>	Value	Description	0	European	1	American
Value	Description											
0	European											
1	American											
2404	ComplianceText	N	20	48	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
39040	Pad4	U	4	68	Fixed String	not used						

9.2 Create Flexible Instrument Response

This message confirms the creation of a flexible instrument.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10310 (Security-Definition, MsgType = d)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
322	SecurityResponseID	Y	8	56	UTCTimestamp	Identifier for the Security Definition message.
48	SecurityID	Y	8	64	signed int	Instrument identifier.
202	StrikePrice	N	8	72	PriceType	Strike Price for an Option.
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.
541	MaturityDate	N	4	84	LocalMktDate	Date of maturity.
30866	ContractDate	N	4	88	LocalMktDate	Business date to identify an instrument

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1227	ProductComplex	N	1	92	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr></table>	Value	Description	10	Flexible Simple Instrument		
Value	Description											
10	Flexible Simple Instrument											
1193	SettlMethod	Y	1	93	char	Settlement method for a contract or instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Cash Settlement</td></tr><tr><td>P</td><td>Physical Settlement</td></tr></table>	Value	Description	C	Cash Settlement	P	Physical Settlement
Value	Description											
C	Cash Settlement											
P	Physical Settlement											
206	OptAttribute	N	1	94	unsigned int	Version of option contract.						
201	PutOrCall	N	1	95	unsigned int	Indicates whether an option contract is a put or call. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Put</td></tr><tr><td>1</td><td>Call</td></tr></table>	Value	Description	0	Put	1	Call
Value	Description											
0	Put											
1	Call											
1194	ExerciseStyle	N	1	96	unsigned int	Type of exercise of an instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>European</td></tr><tr><td>1</td><td>American</td></tr></table>	Value	Description	0	European	1	American
Value	Description											
0	European											
1	American											
39070	Pad7	U	7	97	Fixed String	not used						

10 Scaled Simple Instrument Creation

10.1 Create Scaled Simple Instrument Request

This message is sent to the service "Order and Quote Management".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10327 (Security-DefinitionRequest, MsgType = c)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
1650	RelatedSecurityID	Y	8	24	signed int	Instrument identifier of the original T7 strategy.						
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.						
28907	QuantityScalingFactor	Y	2	36	unsigned int	Quantity Scaling Factor for Scaled Instruments.						
1377	MultilegModel	N	1	38	unsigned int	Specifies if a strategy is temporarily (user-defined) or permanently (predefined) available. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Predefined Multileg Security</td></tr><tr><td>1</td><td>User-defined Multileg Security</td></tr></table>	Value	Description	0	Predefined Multileg Security	1	User-defined Multileg Security
Value	Description											
0	Predefined Multileg Security											
1	User-defined Multileg Security											
28699	DisplayNameAlias	N	190	39	Fixed String	User-defined aliases for the complex instrument name. Only for Nodal Market Supervision users. Valid characters: \x20, \x23-\x25, \x28-\x2B, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
28802	PeriodAlias	N	45	229	Fixed String	User-defined aliases for the period of a complex instrument. Only for Nodal Market Supervision users. Valid characters: \x20, \x23-\x25, \x28-\x2B, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
39060	Pad6	U	6	274	Fixed String	not used

10.2 Create Scaled Simple Instrument Response


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10328 (Security-Definition, MsgType = d)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
1650	RelatedSecurityID	Y	8	56	signed int	Instrument identifier of the original T7 strategy.
48	SecurityID	Y	8	64	signed int	Instrument identifier.
779	LastUpdateTime	Y	8	72	UTCTimestamp	Creation timestamp of the strategy.
322	SecurityResponseID	Y	8	80	UTCTimestamp	Identifier for the Security Definition message.
1300	MarketSegmentID	Y	4	88	signed int	Product identifier.
28907	QuantityScalingFactor	Y	2	92	unsigned int	Quantity Scaling Factor for Scaled Instruments.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1377	MultilegModel	Y	1	94	unsigned int	Specifies if a strategy is temporarily (user-defined) or permanently (predefined) available. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Predefined Multileg Security</td></tr><tr><td>1</td><td>User-defined Multileg Security</td></tr></table>	Value	Description	0	Predefined Multileg Security	1	User-defined Multileg Security
Value	Description											
0	Predefined Multileg Security											
1	User-defined Multileg Security											
1144	ImpliedMarket-Indicator	Y	1	95	unsigned int	Indicates that an implied market to be created for either the legs of a multi-leg instrument (Implied-in) or for the multi-leg instrument based on the existence of the legs (Implied-out).Determination as to whether implied markets should be created is generally done at the level of the multi-leg instrument.Commonly used in listed derivatives. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Not implied</td></tr><tr><td>3</td><td>Both Implied-in and Implied-out</td></tr></table>	Value	Description	0	Not implied	3	Both Implied-in and Implied-out
Value	Description											
0	Not implied											
3	Both Implied-in and Implied-out											
1227	ProductComplex	Y	1	96	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr></table>	Value	Description	12	Scaled Simple Instrument		
Value	Description											
12	Scaled Simple Instrument											
39070	Pad7	U	7	97	Fixed String	not used						

11 Quote and Cross Request

11.1 Quote Request

This message is used to send a Quote Request. For more details, please refer to the ETI Manual, chapter Request for Quote. This message is sent to the service "Order and Quote Management".

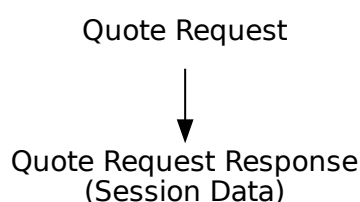

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderIn>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10401 (Quote-Request, MsgType = R)	
25028	NetworkMsgID	U	8	6	Fixed String	not used	
39020	Pad2	U	2	14	Fixed String	not used	
<RequestHeader>							
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.	
50	SenderSubID	Y	4	20	unsigned int	User ID.	
<MessageBody>							
48	SecurityID	Y	8	24	signed int	Instrument identifier.	
38	OrderQty	N	8	32	Qty	Total Order Quantity.	
1300	MarketSegmentID	Y	4	40	signed int	Product identifier.	
54	Side	N	1	44	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
2404	ComplianceText	N	20	45	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E
39070	Pad7	U	7	65	Fixed String	not used


11.2 Quote Request Response

This message confirms a Quote Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10402 (Request-Acknowledge, MsgType = U1)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
17	ExecID	Y	8	56	UTCTimestamp	Transaction timestamp.				

11.3 Cross Request

This message is used to create a Cross Request. For more details, please refer to the ETI Manual, chapter Cross Request. This message is sent to the service "Order and Quote Management".



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10118 (Cross-Request, MsgType = DS)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	Y	8	24	signed int	Instrument identifier.
38	OrderQty	Y	8	32	Qty	Total Order Quantity.
1300	MarketSegmentID	Y	4	40	signed int	Product identifier.
2404	ComplianceText	N	20	44	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E

11.4 Cross Request Response


This message confirms a Cross Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10119 (Request-Acknowledge, MsgType = U1)				
39020	Pad2	U	2	6	Fixed String	not used				
<NRResponseHeaderME>										
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway				
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.				
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.				
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.				
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway				
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39030	Pad3	U	3	53	Fixed String	not used				
<MessageBody>										
17	ExecID	Y	8	56	UTCTimestamp	Transaction timestamp.				

12 CLIP Trading

12.1 CLIP Enter Request

This message is sent to the service "Order and Quote Management".

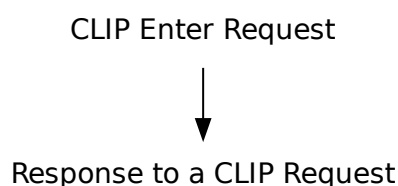

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10131 (Cross-Request, MsgType = DS)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
48	SecurityID	Y	8	24	signed int	Instrument identifier.						
44	Price	Y	8	32	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).						
38	OrderQty	Y	8	40	Qty	Total Order Quantity.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						
548	CrossID	N	4	52	signed int	User defined CLIP arrangement ID.						
2672	CrossRequestID	N	4	56	signed int	User defined transaction ID.						
552	NoSides	Y	1	60	Counter							
1829	NoCrossLegs	Y	1	61	Counter							
28771	CrossRequestType	Y	1	62	unsigned int	Type of the Cross Request. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Cross Announcement</td></tr><tr><td>2</td><td>Liquidity Improvement Cross</td></tr></table>	Value	Description	1	Cross Announcement	2	Liquidity Improvement Cross
Value	Description											
1	Cross Announcement											
2	Liquidity Improvement Cross											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
549	CrossType	N	1	63	unsigned int	Type of cross being submitted to a market. Mandatory for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>2</td><td>Immediate-or-cancel-cross</td></tr><tr><td>3</td><td>One sided cross - unfilled quantity remains active after crossing. Only applicable for CrossRequestType(28771) = 1(Cross Announcement)</td></tr></table>	Value	Description	2	Immediate-or-cancel-cross	3	One sided cross - unfilled quantity remains active after crossing. Only applicable for CrossRequestType(28771) = 1(Cross Announcement)
Value	Description											
2	Immediate-or-cancel-cross											
3	One sided cross - unfilled quantity remains active after crossing. Only applicable for CrossRequestType(28771) = 1(Cross Announcement)											
550	CrossPrioritization	N	1	64	unsigned int	Prioritization of a cross order. Mandatory for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy side is prioritized</td></tr><tr><td>2</td><td>Sell side is prioritized</td></tr></table>	Value	Description	1	Buy side is prioritized	2	Sell side is prioritized
Value	Description											
1	Buy side is prioritized											
2	Sell side is prioritized											
25130	SideDisclosure-Instruction	N	1	65	unsigned int	Instruction to show side. Only supported for CrossRequestType(28771) = 2(Liquidity Improvement Cross) <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25131	PriceDisclosure-Instruction	N	1	66	unsigned int	Instruction to show price. Only supported for CrossRequestType(28771) = 2(Liquidity Improvement Cross) <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25136	OrderQtyDisclosure-Instruction	N	1	67	unsigned int	Instruction to show total quantity. Only supported for CrossRequestType(28771) = 2(Liquidity Improvement Cross) <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
28710	PriceValidityCheck-Type	N	1	68	unsigned int	Indicator how price validity check should be performed by the exchange(see the ETI Manual, chapter Price Reasonability Check). Mandatory for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>Optional</td></tr><tr><td>2</td><td>Mandatory</td></tr></table>	Value	Description	0	None	1	Optional	2	Mandatory
Value	Description													
0	None													
1	Optional													
2	Mandatory													
25126	ValueCheckTypeValue	N	1	69	unsigned int	Indicator for checking the maximum order/quote value by the exchange. Mandatory for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check		
Value	Description													
0	Do not check													
1	Check													
22417	RootPartyContraFirm	N	5	70	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20								
22437	RootPartyContra-Trader	N	6	75	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20								
39070	Pad7	U	7	81	Fixed String	not used								
<CrossRequestSideGrp> Cardinality: 1-2, Record counter: NoSides														
11	>COrdID	N	8	88	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.								
20003	>PartyIDClientID	N	8	96	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20122	>PartyIdInvestment-DecisionMaker	N	8	104	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	>ExecutingTrader	N	8	112	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
28773	>MaximumPrice	N	8	120	PriceType	Maximum Price. Only applicable for CrossRequestType(28771) = 2(Liquidity Improvement Cross)						
28744	>MatchInstCrossID	N	4	128	unsigned int	Self Match Prevention ID. Only applicable for CrossRequestType(28771) = 1(Cross Announcement)						
979	>InputSource	N	1	132	unsigned int	Role on/for a message Only applicable for CrossRequestType(28771) = 2(Liquidity Improvement Cross) <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Client Broker</td></tr><tr><td>2</td><td>Proprietary Broker</td></tr></table>	Value	Description	1	Client Broker	2	Proprietary Broker
Value	Description											
1	Client Broker											
2	Proprietary Broker											
54	>Side	Y	1	133	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
2964	>SelfMatch-PreventionInstruction	N	1	134	unsigned int	Indicate the instruction for SMP. If MatchInstCrossID (28744) is set then the default value for SelfMatch-PreventionInstruction is 100(Reject cross on business unit level) Only applicable for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>100</td><td>Reject cross on business unit level</td></tr><tr><td>101</td><td>Reject cross on market level</td></tr></table>	Value	Description	100	Reject cross on business unit level	101	Reject cross on market level		
Value	Description													
100	Reject cross on business unit level													
101	Reject cross on market level													
31625	>CrossMatch-Instruction	N	1	135	unsigned int	Indicate the instruction for SMP. Applicable only when MatchInstCrossID (28744) is set. When CrossMatch-Instruction is not set the default value is defined by the exchange Only applicable for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Cancel incoming order</td></tr><tr><td>2</td><td>Cancel resting order</td></tr><tr><td>3</td><td>Reduce/Cancel both incoming and resting order</td></tr></table>	Value	Description	1	Cancel incoming order	2	Cancel resting order	3	Reduce/Cancel both incoming and resting order
Value	Description													
1	Cancel incoming order													
2	Cancel resting order													
3	Reduce/Cancel both incoming and resting order													
1815	>TradingCapacity	Y	1	136	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
25124	>ExecutingTrader-Qualifier	Y	1	137	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
23002	>OrderAttribute-LiquidityProvision	Y	1	138	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision
Value	Description											
1	Liquidity provision											
0	No liquidity provision											
21222	>PartyIdInvestment-DecisionMaker-Qualifier	N	1	139	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
23003	>OrderAttributeRisk-Reduction	N	1	140	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
1724	>OrderOrigination	N	1	141	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
77	>PositionEffect	N	1	142	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
1031	>CustOrderHandling-Inst	N	1	143	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
1	>Account	N	2	144	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52																
20038	>PartyIDPosition-Account	N	32	146	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A																
25007	>FreeText1	N	12	178	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
25008	>FreeText2	N	12	190	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E										
25009	>FreeText3	N	12	202	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E										
20013	>PartyIDOrder-OriginationFirm	N	7	214	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20										
20032	>PartyIDBeneficiary	N	9	221	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20										
20096	>PartyIDTakeUp-TradingFirm	N	5	230	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20										
28774	>SideComplianceText	N	20	235	Fixed String	Valid characters: \x20, \x22-\x7B, \x7D, \x7E										
20075	>PartyIDLocationID	N	2	255	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E										
25241	>PartyEndClient-Identification	N	20	257	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F										
39030	>Pad3	U	3	277	Fixed String	not used										
<SideCrossLegGrp> Cardinality: 0-40, Record counter: NoCrossLegs																
25153	>LegInputSource	Y	1	0	unsigned int	Role on/for a message. Client Broker(1) and Proprietary Broker(2) for CrossRequestType(28771) = 2(Liquidity Improvement Cross); Buy side(3) and Sell side(4) for CrossRequestType(28771) = 1(Cross Announcement) <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Client Broker</td></tr><tr><td>2</td><td>Proprietary Broker</td></tr><tr><td>3</td><td>Buy side</td></tr><tr><td>4</td><td>Sell side</td></tr></table>	Value	Description	1	Client Broker	2	Proprietary Broker	3	Buy side	4	Sell side
Value	Description															
1	Client Broker															
2	Proprietary Broker															
3	Buy side															
4	Sell side															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
564	>LegPositionEffect	Y	1	1	char	Leg-specific field used for T7 position management purposes and indicates whether the leg is submitted to open or close a position. <table><tr><th>Value</th><th>Description</th></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
2680	>LegAccount	N	2	2	Fixed String	Leg-specific account to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x4D, \x50						
39040	>Pad4	U	4	4	Fixed String	not used						

12.2 Response to a CLIP Request

CLIP Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10133 (Cross-RequestAck, MsgType = DT)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
17	ExecID	Y	8	56	UTCTimestamp	Transaction timestamp.
48	SecurityID	Y	8	64	signed int	Instrument identifier.
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.
2672	CrossRequestID	N	4	76	signed int	User defined transaction ID.
552	NoSides	Y	1	80	Counter	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25244	ImpliedCheckPrice-Indicator	N	1	81	unsigned int	Indicates whether a option strategy synthetic BBO is used for the price improvement check <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
39060	Pad6	U	6	82	Fixed String	not used						
<CrossRequestAckSideGrp> Cardinality: 1-2, Record counter: NoSides												
37	>OrderID	Y	8	88	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.						
11	>ClOrdID	N	8	96	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.						
979	>InputSource	N	1	104	unsigned int	Role on/for a message <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Client Broker</td></tr><tr><td>2</td><td>Proprietary Broker</td></tr></table>	Value	Description	1	Client Broker	2	Proprietary Broker
Value	Description											
1	Client Broker											
2	Proprietary Broker											
54	>Side	Y	1	105	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39060	>Pad6	U	6	106	Fixed String	not used						

12.3 CLIP Execution Notification

CLIP Execution Notification

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10135 (ExecutionReport, MsgType = 8)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	U	4	32	unsigned int	not used						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	Y	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data		
Value	Description											
4	Session Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr></table>	Value	Description	0	False		
Value	Description											
0	False											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						
<MessageBody>												


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
11	CIOrdID	N	8	64	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.				
41	OrigCIOrdID	N	8	72	unsigned int	CIOrdID (11) of the last successfully processed task (request) referring to the specific order.				
37	OrderID	Y	8	80	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.				
17	ExecID	Y	8	88	UTCTimestamp	Transaction timestamp.				
48	SecurityID	Y	8	96	signed int	Instrument identifier.				
84	CxlQty	Y	8	104	Qty	Total quantity cancelled for this order.				
151	LeavesQty	Y	8	112	Qty	Remaining quantity of an order.				
14	CumQty	Y	8	120	Qty	Cumulated executed quantity of an order.				
1300	MarketSegmentID	Y	4	128	signed int	Product identifier.				
378	ExecRestatement-Reason	Y	2	132	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>340</td><td>CLIP execution after improvement period</td></tr></table>	Value	Description	340	CLIP execution after improvement period
Value	Description									
340	CLIP execution after improvement period									
30555	NoLegExecs	Y	2	134	Counter	Number of InstrmntLegExec repeating group instances.				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
1227	ProductComplex	Y	1	136	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	
54	Side	Y	1	137	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																						
Value	Description																																	
1	Buy																																	
2	Sell																																	
39	OrdStatus	Y	1	138	char	Conveys the current status of an order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>1</td><td>Partially filled</td></tr><tr><td>2</td><td>Filled</td></tr></table>	Value	Description	4	Cancelled	1	Partially filled	2	Filled																				
Value	Description																																	
4	Cancelled																																	
1	Partially filled																																	
2	Filled																																	
150	ExecType	Y	1	139	char	The reason why this message was generated. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Cancelled</td></tr><tr><td>F</td><td>Trade</td></tr></table>	Value	Description	4	Cancelled	F	Trade																						
Value	Description																																	
4	Cancelled																																	
F	Trade																																	
574	MatchType	Y	1	140	unsigned int	The point in the matching process at which this trade was matched. <table><tr><td>Value</td><td>Description</td></tr><tr><td>13</td><td>Liquidity Improvement Cross</td></tr></table>	Value	Description	13	Liquidity Improvement Cross																								
Value	Description																																	
13	Liquidity Improvement Cross																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1362	NoFills	Y	1	141	Counter	Specifies the number of partial fills included in this Execution Report.						
39020	Pad2	U	2	142	Fixed String	not used						
<FillsGrp> Cardinality: 0 - 100, Record counter: NoFills												
1364	>FillPx	Y	8	144	PriceType	Price of Fill.						
1365	>FillQty	Y	8	152	Qty	Quantity of Fill.						
28708	>FillMatchID	Y	4	160	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.						
1363	>FillExecID	Y	4	164	signed int	Private identifier of an order match step event, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.						
1443	>FillLiquidityInd	N	1	168	unsigned int	Indicates whether the order added or removed liquidity. Required only for execution reports generated for fills. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Removed Liquidity</td></tr><tr><td>1</td><td>Added Liquidity</td></tr></table>	Value	Description	2	Removed Liquidity	1	Added Liquidity
Value	Description											
2	Removed Liquidity											
1	Added Liquidity											
39070	>Pad7	U	7	169	Fixed String	not used						
<InstrmntLegExecGrp> Cardinality: 0 - 600, Record counter: NoLegExecs												
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.						
637	>LegLastPx	Y	8	8	PriceType	Price of this leg fill.						
1418	>LegLastQty	Y	8	16	Qty	Quantity executed in this leg fill.						
1893	>LegExecID	Y	4	24	signed int	Private identifier of a leg match step, which can be reconciled with the field SideTradeID (1506) in the Trade Notification.						
624	>LegSide	N	1	28	unsigned int	The side of the individual leg of a strategy as defined in its signature. LegSide should always be mandatory, except for Scaled Simple Instrument, LegSide should be empty. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
2421	>FillRefID	Y	1	29	unsigned int	Reference to the corresponding Fills-Grp repeating group instance.						
39020	>Pad2	U	2	30	Fixed String	not used						

12.4 CLIP Delete Request

This message is sent to the service "Order and Quote Management".

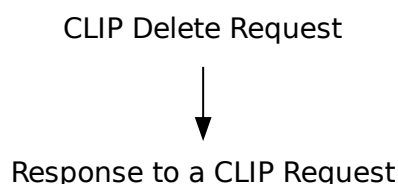

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10132 (Cross-Request, MsgType = DS)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
11	ClOrdID	N	8	24	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.
37	OrderID	N	8	32	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.
48	SecurityID	Y	8	40	signed int	Instrument identifier.
20122	PartyIDInvestment-DecisionMaker	N	8	48	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25123	ExecutingTrader	N	8	56	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.						
2672	CrossRequestID	N	4	68	signed int	User defined transaction ID.						
25124	ExecutingTrader- Qualifier	Y	1	72	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
21222	PartyIdInvestment- DecisionMaker- Qualifier	N	1	73	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
39060	Pad6	U	6	74	Fixed String	not used						

12.5 CLIP Deletion Notification

CLIP Deletion Notification

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderOut>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10134 (ExecutionReport, MsgType = 8)				
39020	Pad2	U	2	6	Fixed String	not used				
<RBCHHeaderME>										
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.				
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.				
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway				
28727	ApplSubID	U	4	32	unsigned int	not used				
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.				
28704	ApplMsgID	U	16	38	data	not used				
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr></table>	Value	Description	4	Session Data
Value	Description									
4	Session Data									
1352	ApplResendFlag	U	1	55	unsigned int	not used				
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message
Value	Description									
1	Last Message									
39070	Pad7	U	7	57	Fixed String	not used				
<MessageBody>										
11	ClOrdID	N	8	64	unsigned int	Client Order ID: Unique participant defined order request identifier; used for client order id chaining.				
41	OrigClOrdID	N	8	72	unsigned int	ClOrdID (11) of the last successfully processed task (request) referring to the specific order.				


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																												
37	OrderID	Y	8	80	unsigned int	Exchange Order ID generated by the T7 System; it remains constant over the lifetime of an order.																												
17	ExecID	Y	8	88	UTCTimestamp	Transaction timestamp.																												
48	SecurityID	Y	8	96	signed int	Instrument identifier.																												
84	CxlQty	Y	8	104	Qty	Total quantity cancelled for this order.																												
1300	MarketSegmentID	Y	4	112	signed int	Product identifier.																												
378	ExecRestatement-Reason	Y	2	116	unsigned int	Code to further qualify the field Exec-Type (150) of the Execution Report (8) message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>343</td><td>CLIP Request deleted by arrangement time out</td></tr><tr><td>344</td><td>CLIP Request deleted by arrangement validation</td></tr><tr><td>340</td><td>CLIP execution after improvement period</td></tr><tr><td>122</td><td>Instrument State Change</td></tr><tr><td>117</td><td>Member has been disabled</td></tr></table>	Value	Description	343	CLIP Request deleted by arrangement time out	344	CLIP Request deleted by arrangement validation	340	CLIP execution after improvement period	122	Instrument State Change	117	Member has been disabled																
Value	Description																																	
343	CLIP Request deleted by arrangement time out																																	
344	CLIP Request deleted by arrangement validation																																	
340	CLIP execution after improvement period																																	
122	Instrument State Change																																	
117	Member has been disabled																																	
1227	ProductComplex	Y	1	118	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																	
1	Simple instrument																																	
2	Standard Option Strategy																																	
3	Non-Standard Option Strategy																																	
4	Volatility Strategy																																	
5	Futures Spread																																	
6	Inter-Product Spread																																	
7	Standard Future Strategy																																	
8	Pack and Bundle																																	
9	Strip																																	
11	Commodity Strip																																	
12	Scaled Simple Instrument																																	
13	Non-Standard Volatility Strategy																																	
14	Total Return Future Strategy																																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
54	Side	Y	1	119	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
39	OrdStatus	Y	1	120	char	Conveys the current status of an order.	
						Value	Description
						4	Cancelled
150	ExecType	Y	1	121	char	The reason why this message was generated.	
						Value	Description
						4	Cancelled
						F	Trade
39060	Pad6	U	6	122	Fixed String	not used	

13 Selective Request for Quote Service

13.1 SRQS Open Negotiation Request

By submitting this message the requester (typically a broker) sends a RfQ (request for quotes) to targeted respondents (market makers). Bid Price (132) and Offer (Ask) Price (133) in the SRQS Negotiation are used by the requester to provide indicative prices to selected respondents in order to receive from them quotes within these indicative prices. No validation is done on these prices with respect to the side (54) of the SRQS Negotiation. This message is sent to the service "Selective Request for Quote Service".

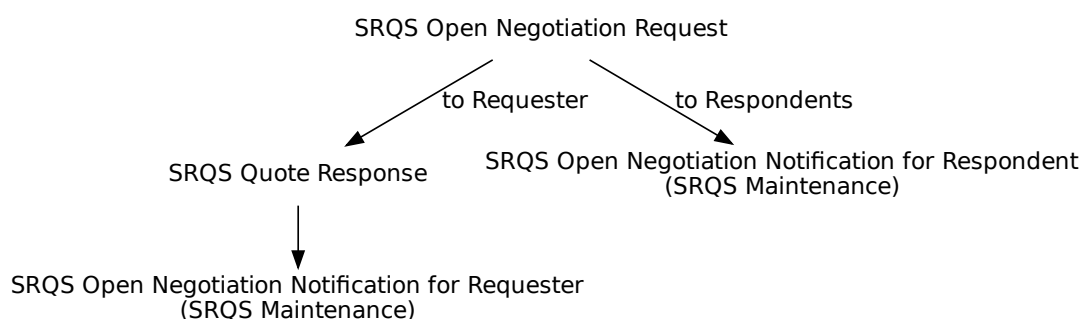

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10700 (Quote-Request, MsgType = R)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	N	8	24	signed int	Instrument identifier.
132	BidPx	N	8	32	PriceType	Bid price/rate.
133	OfferPx	N	8	40	PriceType	Offer price/rate.
38	OrderQty	N	8	48	Qty	Open/total quantity of the SRQS negotiation.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
28759	QuoteRefPrice	N	8	56	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.																
25149	UnderlyingDelta-Percentage	N	8	64	floatDecimal4	The effective underlying delta of a Vola-Strategy.																
62	ValidUntilTime	N	8	72	UTCTimestamp	Time until an entity is valid.																
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.																
762	SecuritySubType	N	4	84	signed int	Sub-type qualification/identification of the SecurityType																
537	QuoteType	N	1	88	unsigned int	<table><tr><td colspan="2">Quote Type</td></tr><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)</td></tr><tr><td>1</td><td>Tradeable</td></tr></table>	Quote Type		Value	Description	0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)	1	Tradeable								
Quote Type																						
Value	Description																					
0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)																					
1	Tradeable																					
28786	QuoteSubType	N	1	89	unsigned int	<table><tr><td colspan="2">Sub-type of QuoteType</td></tr><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Working Delta</td></tr><tr><td>2</td><td>Basis Trade</td></tr><tr><td>3</td><td>Regular LDS Negotiation</td></tr><tr><td>4</td><td>Negotiate the underlying outside the exchange</td></tr><tr><td>5</td><td>Option Volatility Strategy with fixed Underlying price and delta</td></tr><tr><td>6</td><td>Option Volatility Strategy - Underlying price is negotiated on exchange</td></tr></table>	Sub-type of QuoteType		Value	Description	1	Working Delta	2	Basis Trade	3	Regular LDS Negotiation	4	Negotiate the underlying outside the exchange	5	Option Volatility Strategy with fixed Underlying price and delta	6	Option Volatility Strategy - Underlying price is negotiated on exchange
Sub-type of QuoteType																						
Value	Description																					
1	Working Delta																					
2	Basis Trade																					
3	Regular LDS Negotiation																					
4	Negotiate the underlying outside the exchange																					
5	Option Volatility Strategy with fixed Underlying price and delta																					
6	Option Volatility Strategy - Underlying price is negotiated on exchange																					
555	NoLegs	N	1	90	Counter	Number of QuoteReqLegs repeating group instances.																
1461	NoTargetPartyIDs	Y	1	91	Counter	Number of TargetParties records.																
25145	NumberOfResp-DisclosureInstruction	N	1	92	unsigned int	<table><tr><td colspan="2">Instruction to show total number of Respondents in an EnLight event.</td></tr><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Instruction to show total number of Respondents in an EnLight event.		Value	Description	0	No	1	Yes								
Instruction to show total number of Respondents in an EnLight event.																						
Value	Description																					
0	No																					
1	Yes																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
54	Side	N	1	93	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																				
Value	Description																															
1	Buy																															
2	Sell																															
1227	ProductComplex	N	1	94	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	10	Flexible Simple Instrument	11	Commodity Strip	13	Non-Standard Volatility Strategy
Value	Description																															
1	Simple instrument																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
10	Flexible Simple Instrument																															
11	Commodity Strip																															
13	Non-Standard Volatility Strategy																															
1172	RespondentType	N	1	95	unsigned int	Specifies the type of respondents requested. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Respondents are known during a negotiation</td></tr><tr><td>102</td><td>Respondents are anonymized after negotiation start, Requester will remain anonymous from start</td></tr></table>	Value	Description	1	Respondents are known during a negotiation	102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start																				
Value	Description																															
1	Respondents are known during a negotiation																															
102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start																															
25194	ShowLastDealOn-Closure	N	1	96	unsigned int	Instruction to show last deal information after negotiation closure <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes																				
Value	Description																															
0	No																															
1	Yes																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25206	BidPxIsLocked	N	1	97	unsigned int	BidPx is locked.	
						Value	Description
						0	No
						1	Yes
25207	OfferPxIsLocked	N	1	98	unsigned int	OfferPx is locked.	
						Value	Description
						0	No
						1	Yes
25208	SidelsLocked	N	1	99	unsigned int	Side is locked.	
						Value	Description
						0	No
						1	Yes
25209	OrderQtyIsLocked	N	1	100	unsigned int	OrderQty is locked.	
						Value	Description
						0	No
						1	Yes
2788	TradeAggregation-TransType	N	1	101	unsigned int	Trade Aggregation Identifier.	
						Value	Description
						0	New
276	QuoteCondition	Y	1	102	char	Status of the quote.	
						Value	Description
						A	Active
						z	Suspended
22001	PartyExecutingFirm	Y	5	103	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20	
22012	PartyExecutingTrader	Y	6	108	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20	
25172	FreeText5	N	132	114	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
131	QuoteReqID	N	20	246	Fixed String	SRQS negotiation report ID Valid characters: \x01-\x7E	
22011	PartyOrder-OriginationTrader	N	132	266	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25225	ChargeID	N	132	398	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
39060	Pad6	U	6	530	Fixed String	not used						
<QuotReqLegsGrp> Cardinality: 0-20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	536	signed int	Instrument identifier of the leg security.						
623	>LegRatioQty	N	4	544	unsigned int	The ratio of quantity for this individual leg relative to the entire multileg security.						
600	>LegSymbol	N	4	548	signed int	Product identifier of the leg security						
609	>LegSecurityType	Y	1	552	unsigned int	Indicates type of leg. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Multileg Instrument</td></tr><tr><td>2</td><td>Underlying Leg</td></tr></table>	Value	Description	1	Multileg Instrument	2	Underlying Leg
Value	Description											
1	Multileg Instrument											
2	Underlying Leg											
624	>LegSide	N	1	553	unsigned int	The side of the individual leg of a strategy as defined in its signature. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39060	>Pad6	U	6	554	Fixed String	not used						
<TargetParties> Cardinality: 0-50, Record counter: NoTargetPartyIDs												
20612	>TargetParty- IDExecutingTrader	U	4	0	unsigned int	not used						
25130	>SideDisclosure- Instruction	Y	1	4	unsigned int	Instruction to show side. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25131	>PriceDisclosure- Instruction	Y	1	5	unsigned int	Instruction to show price. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25137	>LeavesQty- DisclosureInstruction	Y	1	6	unsigned int	Instruction to show leaves quantity. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25146	>LastPxDisclosure-Instruction	U	1	7	unsigned int	not used	
25147	>LastQtyDisclosure-Instruction	U	1	8	unsigned int	not used	
31814	>Free-Text5Disclosure-Instruction	Y	1	9	unsigned int	Instruction to show FreeText5.	
						Value	Description
						0	No
						1	Yes
25190	>PartyOrder-OriginationDisclosure-Instruction	Y	1	10	unsigned int	Instruction to show buy-side user information.	
						Value	Description
						0	No
						1	Yes
25138	>QuoteInstruction	U	1	11	unsigned int	not used	
25226	>ChargeIDDisclosure-Instruction	Y	1	12	unsigned int	Instruction to show Charge ID.	
						Value	Description
						0	No
						1	Yes
22601	>TargetParty-ExecutingFirm	Y	5	13	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20	
22602	>TargetParty-ExecutingTrader	Y	6	18	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20	
1672	>PartyDetailStatus	U	1	24	unsigned int	not used	
25185	>PartyDetailStatus-Information	U	1	25	unsigned int	not used	
39060	>Pad6	U	6	26	Fixed String	not used	

13.2 SRQS Inquire Smart Respondent Request

This message is used to inquire all smart respondents for a XetraEnLight negotiation. This message is sent to the service "Selective Request for Quote Service".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderIn>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10718 (PartyDetailsListRequest, MsgType = CF)	
25028	NetworkMsgID	U	8	6	Fixed String	not used	
39020	Pad2	U	2	14	Fixed String	not used	
<RequestHeader>							
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.	
50	SenderSubID	Y	4	20	unsigned int	User ID.	
<MessageBody>							
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.	
25176	EurexVolumeRanking	Y	1	28	unsigned int	Eurex Volume Ranking.	
						Value	Description
						1	Low
						2	Medium
						3	High
25177	EnlightRFQAvgRespTimeRanking	Y	1	29	unsigned int	Enlight RFQ Average Response Time Ranking.	
						Value	Description
						1	Low
						2	Medium
						3	High
25178	EnlightRFQAvgRespRateRanking	Y	1	30	unsigned int	Enlight RFQ Average Response Rate Ranking	
						Value	Description
						1	Low
						2	Medium
						3	High

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
25179	TradeToQuoteRatio-Ranking	Y	1	31	unsigned int	Trade to Quote Ratio (TQR) Ranking. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Low</td></tr><tr><td>2</td><td>Medium</td></tr><tr><td>3</td><td>High</td></tr></table>	Value	Description	1	Low	2	Medium	3	High
Value	Description													
1	Low													
2	Medium													
3	High													

13.3 SRQS Inquire Smart Respondent Response

This message informs about all smart respondents for a XetraEnLight negotiation.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10719 (PartyDetailsListReport, MsgType = CG)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.
1671	NoPartyDetails	Y	2	36	Counter	Number of PartyDetailsGrp repeating group.
39020	Pad2	U	2	38	Fixed String	not used
<SmartPartyDetailGrp> Cardinality: 0-1000, Record counter: NoPartyDetails						
22259	>PartyDetail-ExecutingUnit	Y	5	40	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20
22212	>PartyDetail-ExecutingTrader	Y	6	45	Fixed String	Trader name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
39050	>Pad5	U	5	51	Fixed String	not used

13.4 SRQS Quote Response

This message confirms SRQS Open Negotiation, SRQS Update Negotiation and SRQS Enter Quote requests.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10703 (Quote-Ack, MsgType = CW)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
117	QuoteID	N	8	32	unsigned int	System defined unique quote identifier
28758	NegotiationID	Y	4	40	unsigned int	ID of a SRQS negotiation.
131	QuoteReqID	N	20	44	Fixed String	SRQS negotiation report ID Valid characters: \x01-\x7E

13.5 SRQS Quote Snapshot Notification


This message informs about SRQS quote book information.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10723 (MassQuote, MsgType = i)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	U	8	16	unsigned int	not used						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
295	NoQuoteEntries	N	1	40	Counter	The number of quote entries for a Mass Quote.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1011	MessageEventSource	Y	1	41	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>R</td><td>Broadcast to requestor</td></tr><tr><td>Q</td><td>Broadcast to quote submitter</td></tr></table>	Value	Description	R	Broadcast to requestor	Q	Broadcast to quote submitter		
Value	Description													
R	Broadcast to requestor													
Q	Broadcast to quote submitter													
39060	Pad6	U	6	42	Fixed String	not used								
<SRQSQuoteEntryGrp> Cardinality: 0-100, Record counter: NoQuoteEntries														
60	>TransactTime	Y	8	48	UTCTimestamp	Transaction timestamp.								
126	>ExpireTime	N	8	56	UTCTimestamp	Time an entity expires.								
117	>QuotelD	N	8	64	unsigned int	System defined unique quote identifier								
1751	>SecondaryQuotelD	U	8	72	unsigned int	not used								
132	>BidPx	N	8	80	PriceType	Bid price/rate.								
134	>BidSize	N	8	88	Qty	Quantity of bid.								
133	>OfferPx	N	8	96	PriceType	Offer price/rate.								
135	>OfferSize	N	8	104	Qty	Quantity of offer.								
810	>UnderlyingPx	N	8	112	PriceType	Underlying price associated with a derivative instrument.								
25149	>UnderlyingDelta-Percentage	N	8	120	floatDecimal4	The effective underlying delta of a Vola-Strategy.								
28759	>QuoteRefPrice	N	8	128	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.								
20012	>PartyIDExecuting-Trader	N	4	136	unsigned int	Anonymous SmartRFQ user ID								
28758	>NegotiationID	Y	4	140	unsigned int	ID of a SRQS negotiation.								
28787	>QuotingStatus	Y	1	144	unsigned int	Quoting status for the executing party <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Open/Active</td></tr><tr><td>2</td><td>Open/Working</td></tr><tr><td>3</td><td>Closed/Inactive</td></tr></table>	Value	Description	1	Open/Active	2	Open/Working	3	Closed/Inactive
Value	Description													
1	Open/Active													
2	Open/Working													
3	Closed/Inactive													
28762	>FirmNegotiationID	N	20	145	Fixed String	User defined ID of a SRQS negotiation. Valid characters: \x01-\x7E								
22001	>PartyExecutingFirm	N	5	165	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20								
22012	>PartyExecuting-Trader	N	6	170	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20								
22036	>PartyEnteringTrader	N	6	176	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20								
39020	>Pad2	U	2	182	Fixed String	not used								

13.6 SRQS Quote Snapshot Request

This message is used to request a snapshot of SRQS quote book information. This message is sent to the service "Selective Request for Quote Service".

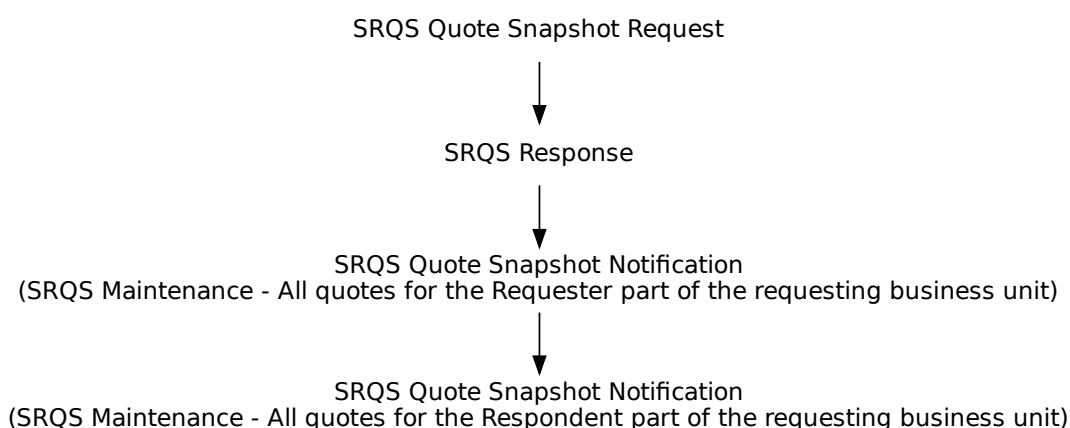

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10720 (Quote-Request, MsgType = R)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.

13.7 SRQS Response

This message confirms a SRQS Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10722 (MassQuoteAcknowledgement, MsgType = b)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used

13.8 SRQS Open Negotiation Notification for Requester

This message informs the requester about a new SRQS negotiation.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10710 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
48	SecurityID	N	8	48	signed int	Instrument identifier.						
132	BidPx	N	8	56	PriceType	Bid price/rate.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
133	OfferPx	N	8	64	PriceType	Offer price/rate.	
38	OrderQty	N	8	72	Qty	Open/total quantity of the SRQS negotiation.	
31	LastPx	N	8	80	PriceType	Price of this fill.	
32	LastQty	N	8	88	Qty	Quantity executed in this fill.	
28759	QuoteRefPrice	N	8	96	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.	
25149	UnderlyingDelta-Percentage	N	8	104	floatDecimal4	The effective underlying delta of a Vola-Strategy.	
126	ExpireTime	N	8	112	UTCTimestamp	Time an entity expires.	
25184	TradeToRequestRatio	N	8	120	floatDecimal4	Ratio indicating amount of Trades to RFQ requested.	
28758	NegotiationID	Y	4	128	unsigned int	ID of a SRQS negotiation.	
1300	MarketSegmentID	Y	4	132	signed int	Product identifier.	
762	SecuritySubType	N	4	136	signed int	Sub-type qualification/identification of the SecurityType	
25150	NumberOf-Respondents	N	4	140	unsigned int	Total number of Respondents in a SRQS event.	
537	QuoteType	Y	1	144	unsigned int	Quote Type	
						Value	Description
						0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)
						1	Tradeable
28786	QuoteSubType	Y	1	145	unsigned int	Sub-type of QuoteType	
						Value	Description
						1	Working Delta
						2	Basis Trade
						3	Regular LDS Negotiation
						4	Negotiate the underlying outside the exchange
						5	Option Volatility Strategy with fixed Underlying price and delta
6	Option Volatility Strategy - Underlying price is negotiated on exchange						
555	NoLegs	Y	1	146	Counter	Number of QuotReqLegs repeating group instances.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
1461	NoTargetPartyIDs	Y	1	147	Counter	Number of TargetParties records.																										
54	Side	N	1	148	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																				
Value	Description																															
1	Buy																															
2	Sell																															
1227	ProductComplex	N	1	149	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strat- egy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strat- egy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	10	Flexible Simple Instrument	11	Commodity Strip	13	Non-Standard Volatility Strategy
Value	Description																															
1	Simple instrument																															
2	Standard Option Strategy																															
3	Non-Standard Option Strat- egy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
10	Flexible Simple Instrument																															
11	Commodity Strip																															
13	Non-Standard Volatility Strategy																															
25145	NumberOfResp-DisclosureInstruction	Y	1	150	unsigned int	Instruction to show total number of Respondents in an EnLight event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes																				
Value	Description																															
0	No																															
1	Yes																															
1172	RespondentType	N	1	151	unsigned int	Specifies the type of respondents re- quested. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Respondents are known dur- ing a negotiation</td></tr><tr><td>102</td><td>Respondents are anonymized after negotiation start, Re- quester will remain anony- mous from start</td></tr></table>	Value	Description	1	Respondents are known dur- ing a negotiation	102	Respondents are anonymized after negotiation start, Re- quester will remain anony- mous from start																				
Value	Description																															
1	Respondents are known dur- ing a negotiation																															
102	Respondents are anonymized after negotiation start, Re- quester will remain anony- mous from start																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25194	ShowLastDealOn-Closure	Y	1	152	unsigned int	Instruction to show last deal information after negotiation closure	
						Value	Description
						0	No
						1	Yes
25206	BidPxIsLocked	N	1	153	unsigned int	BidPx is locked.	
						Value	Description
						0	No
						1	Yes
25207	OfferPxIsLocked	N	1	154	unsigned int	OfferPx is locked.	
						Value	Description
						0	No
						1	Yes
25208	SidelsLocked	N	1	155	unsigned int	Side is locked.	
						Value	Description
						0	No
						1	Yes
25209	OrderQtyIsLocked	N	1	156	unsigned int	OrderQty is locked.	
						Value	Description
						0	No
						1	Yes
2788	TradeAggregation-TransType	N	1	157	unsigned int	Trade Aggregation Identifier.	
						Value	Description
						0	New
276	QuoteCondition	Y	1	158	char	Status of the quote.	
						Value	Description
						A	Active
						z	Suspended
22001	PartyExecutingFirm	Y	5	159	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20	
22012	PartyExecutingTrader	Y	6	164	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20	
22036	PartyEnteringTrader	Y	6	170	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28762	FirmNegotiationID	N	20	176	Fixed String	User defined ID of a SRQS negotia- tion. Valid characters: \x01-\x7E						
25172	FreeText5	N	132	196	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E						
22011	PartyOrder- OriginationTrader	N	132	328	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E						
25225	ChargeID	N	132	460	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
<QuotReqLegsGrp> Cardinality: 0-20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	592	signed int	Instrument identifier of the leg secu- rity.						
623	>LegRatioQty	N	4	600	unsigned int	The ratio of quantity for this individ- ual leg relative to the entire multileg security.						
600	>LegSymbol	N	4	604	signed int	Product identifier of the leg security						
609	>LegSecurityType	Y	1	608	unsigned int	Indicates type of leg. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Multileg Instrument</td></tr><tr><td>2</td><td>Underlying Leg</td></tr></table>	Value	Description	1	Multileg Instrument	2	Underlying Leg
Value	Description											
1	Multileg Instrument											
2	Underlying Leg											
624	>LegSide	N	1	609	unsigned int	The side of the individual leg of a strategy as defined in its signature. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39060	>Pad6	U	6	610	Fixed String	not used						
<TargetParties> Cardinality: 0-50, Record counter: NoTargetPartyIDs												
20612	>TargetParty- IDExecutingTrader	N	4	0	unsigned int	Anonymous user ID						
25130	>SideDisclosure- Instruction	Y	1	4	unsigned int	Instruction to show side. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25131	>PriceDisclosure-Instruction	Y	1	5	unsigned int	Instruction to show price.	
						Value	Description
						0	No
						1	Yes
25137	>LeavesQty-DisclosureInstruction	Y	1	6	unsigned int	Instruction to show leaves quantity.	
						Value	Description
						0	No
						1	Yes
25146	>LastPxDisclosure-Instruction	U	1	7	unsigned int	not used	
25147	>LastQtyDisclosure-Instruction	U	1	8	unsigned int	not used	
31814	>Free-Text5Disclosure-Instruction	Y	1	9	unsigned int	Instruction to show FreeText5.	
						Value	Description
						0	No
						1	Yes
25190	>PartyOrder-OriginationDisclosure-Instruction	Y	1	10	unsigned int	Instruction to show buy-side user information.	
						Value	Description
						0	No
						1	Yes
25138	>QuoteInstruction	U	1	11	unsigned int	not used	
25226	>ChargeIDDisclosure-Instruction	Y	1	12	unsigned int	Instruction to show Charge ID.	
						Value	Description
						0	No
						1	Yes
22601	>TargetParty-ExecutingFirm	N	5	13	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20	
22602	>TargetParty-ExecutingTrader	N	6	18	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20	
1672	>PartyDetailStatus	N	1	24	unsigned int	Member status.	
						Value	Description
						0	Active
						1	Suspend
						2	Rejected

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25185	>PartyDetailStatus- Information	N	1	25	unsigned int	Reason for a responder reject
						Value Description
						1 High TRR (TradeToRequest- Ratio) threshold
						2 Anonymous negotiation blocked by responder
39060	>Pad6	U	6	26	Fixed String	not used

13.9 SRQS Open Negotiation Notification for Respondent

This message informs the (targeted) respondents about a new negotiation.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10711 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
28764	NegotiationStartTime	N	8	48	UTCTimestamp	Start time of SRQS negotiation.						
48	SecurityID	N	8	56	signed int	Instrument identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
132	BidPx	N	8	64	PriceType	Bid price/rate.						
133	OfferPx	N	8	72	PriceType	Offer price/rate.						
151	LeavesQty	N	8	80	Qty	Open quantity of the SRQS negotia- tion.						
32	LastQty	N	8	88	Qty	Quantity executed in this fill.						
31	LastPx	N	8	96	PriceType	Price of this fill.						
28759	QuoteRefPrice	N	8	104	PriceType	Depending upon Negotiation work- flow this price can either be a refer- ence price or an underlying price.						
25149	UnderlyingDelta- Percentage	N	8	112	floatDecimal4	The effective underlying delta of a Vola-Strategy.						
126	ExpireTime	N	8	120	UTCTimestamp	Time an entity expires.						
25184	TradeToRequestRatio	N	8	128	floatDecimal4	Ratio indicating amount of Trades to RFQ requested.						
25201	TradeToQuoteRatio	N	8	136	floatDecimal4	Ratio of Trades to Quotes.						
28758	NegotiationID	Y	4	144	unsigned int	ID of a SRQS negotiation.						
1300	MarketSegmentID	Y	4	148	signed int	Product identifier.						
762	SecuritySubType	N	4	152	signed int	Sub-type qualification/identification of the SecurityType						
25150	NumberOf- Respondents	N	4	156	unsigned int	Total number of Respondents in a SRQS event.						
25202	TradeToQuoteRatio- Position	N	2	160	unsigned int	Ranking position of Ratio of Trades to Quotes.						
537	QuoteType	Y	1	162	unsigned int	Quote Type <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)</td></tr><tr><td>1</td><td>Tradeable</td></tr></table>	Value	Description	0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)	1	Tradeable
Value	Description											
0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)											
1	Tradeable											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
28786	QuoteSubType	Y	1	163	unsigned int	Sub-type of QuoteType	
						Value	Description
						1	Working Delta
						2	Basis Trade
						3	Regular LDS Negotiation
						4	Negotiate the underlying out-side the exchange
						5	Option Volatility Strategy with fixed Underlying price and delta
						6	Option Volatility Strategy - Underlying price is negoti-ated on exchange
555	NoLegs	Y	1	164	Counter	Number of QuotReqLegs repeating group instances.	
54	Side	N	1	165	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
1227	ProductComplex	N	1	166	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strat-egy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						10	Flexible Simple Instrument
						11	Commodity Strip
						13	Non-Standard Volatility Strategy

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1172	RespondentType	Y	1	167	unsigned int	Specifies the type of respondents requested.	
						Value	Description
						1	Respondents are known during a negotiation
						102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start
2788	TradeAggregation-TransType	N	1	168	unsigned int	Trade Aggregation Identifier.	
						Value	Description
						0	New
276	QuoteCondition	Y	1	169	char	Status of the quote.	
						Value	Description
						A	Active
22001	PartyExecutingFirm	N	5	170	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20	
22012	PartyExecutingTrader	N	6	175	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20	
22036	PartyEnteringTrader	N	6	181	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20	
22601	TargetPartyExecuting-Firm	N	5	187	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20	
22602	TargetPartyExecuting-Trader	N	6	192	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20	
28762	FirmNegotiationID	N	20	198	Fixed String	User defined ID of a SRQS negotiation. Valid characters: \x01-\x7E	
25172	FreeText5	N	132	218	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
22011	PartyOrder-OriginationTrader	N	132	350	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
25225	ChargeID	N	132	482	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
39020	Pad2	U	2	614	Fixed String	not used						
<QuotReqLegsGrp> Cardinality: 0-20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	616	signed int	Instrument identifier of the leg security.						
623	>LegRatioQty	N	4	624	unsigned int	The ratio of quantity for this individual leg relative to the entire multileg security.						
600	>LegSymbol	N	4	628	signed int	Product identifier of the leg security						
609	>LegSecurityType	Y	1	632	unsigned int	Indicates type of leg. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Multileg Instrument</td></tr><tr><td>2</td><td>Underlying Leg</td></tr></table>	Value	Description	1	Multileg Instrument	2	Underlying Leg
Value	Description											
1	Multileg Instrument											
2	Underlying Leg											
624	>LegSide	N	1	633	unsigned int	The side of the individual leg of a strategy as defined in its signature. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39060	>Pad6	U	6	634	Fixed String	not used						

13.10 SRQS Update Negotiation Request

This message is submitted by the requester in order to modify a SRQS negotiation. This message is sent to the service "Selective Request for Quote Service".

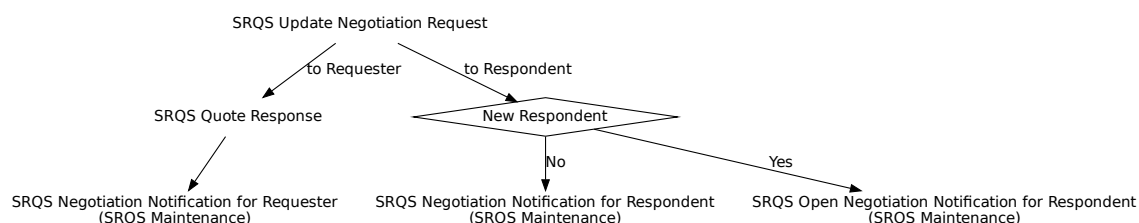

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10701 (Quote-Request, MsgType = R)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
28759	QuoteRefPrice	N	8	24	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.
25149	UnderlyingDelta-Percentage	N	8	32	floatDecimal4	The effective underlying delta of a Vola-Strategy.
132	BidPx	N	8	40	PriceType	Bid price/rate.
133	OfferPx	N	8	48	PriceType	Offer price/rate.
38	OrderQty	N	8	56	Qty	Total quantity of the SRQS negotiation.
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.
28758	NegotiationID	Y	4	68	unsigned int	ID of a SRQS negotiation.
1461	NoTargetPartyIDs	Y	1	72	Counter	Number of TargetParties records.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25145	NumberOfResp-DisclosureInstruction	Y	1	73	unsigned int	Instruction to show total number of Respondents in an EnLight event.	
						Value	Description
						0	No
						1	Yes
54	Side	N	1	74	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
25194	ShowLastDealOn-Closure	Y	1	75	unsigned int	Instruction to show last deal information after negotiation closure	
						Value	Description
						0	No
						1	Yes
537	QuoteType	N	1	76	unsigned int	Quote Type	
						Value	Description
						0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)
						1	Tradeable
28786	QuoteSubType	N	1	77	unsigned int	Sub-type of QuoteType	
						Value	Description
						1	Working Delta
						2	Basis Trade
						3	Regular LDS Negotiation
						4	Negotiate the underlying outside the exchange
						5	Option Volatility Strategy with fixed Underlying price and delta
						6	Option Volatility Strategy - Underlying price is negotiated on exchange

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1172	RespondentType	N	1	78	unsigned int	Specifies the type of respondents requested.	
						Value	Description
						1	Respondents are known during a negotiation
						102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start
2788	TradeAggregation-TransType	N	1	79	unsigned int	Trade Aggregation Identifier.	
						Value	Description
						0	New
276	QuoteCondition	Y	1	80	char	Status of the quote.	
						Value	Description
						A	Active
						B	Closed
22001	PartyExecutingFirm	Y	5	81	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20	
22012	PartyExecutingTrader	Y	6	86	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20	
25172	FreeText5	N	132	92	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
22011	PartyOrder-OriginationTrader	N	132	224	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
25225	ChargeID	N	132	356	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
<TargetParties> Cardinality: 0-50, Record counter: NoTargetPartyIDs							
20612	>TargetParty-IDExecutingTrader	N	4	488	unsigned int	Anonymous user ID	
25130	>SideDisclosure-Instruction	Y	1	492	unsigned int	Instruction to show side.	
						Value	Description
						0	No
						1	Yes

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25131	>PriceDisclosure-Instruction	Y	1	493	unsigned int	Instruction to show price.	
						Value	Description
						0	No
						1	Yes
25137	>LeavesQty-DisclosureInstruction	Y	1	494	unsigned int	Instruction to show leaves quantity.	
						Value	Description
						0	No
						1	Yes
25146	>LastPxDisclosure-Instruction	Y	1	495	unsigned int	Instruction to show last deal price.	
						Value	Description
						0	No
						1	Yes
25147	>LastQtyDisclosure-Instruction	Y	1	496	unsigned int	Instruction to show last deal quantity. Can only be set to 1 (Yes) if LastQty-DisclosureInstruction = 1(Yes).	
						Value	Description
						0	No
						1	Yes
31814	>Free-Text5Disclosure-Instruction	Y	1	497	unsigned int	Instruction to show FreeText5.	
						Value	Description
						0	No
						1	Yes
25190	>PartyOrder-OriginationDisclosure-Instruction	Y	1	498	unsigned int	Instruction to show buy-side user information.	
						Value	Description
						0	No
						1	Yes
25138	>QuoteInstruction	Y	1	499	unsigned int	Quoting instruction.	
						Value	Description
						0	Do not re-quote
						1	(Re-)Quote

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25226	>ChargeIDDisclosure-Instruction	Y	1	500	unsigned int	Instruction to show Charge ID.	
						Value	Description
						0	No
						1	Yes
22601	>TargetParty-ExecutingFirm	N	5	501	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20	
22602	>TargetParty-ExecutingTrader	N	6	506	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20	
1672	>PartyDetailStatus	U	1	512	unsigned int	not used	
25185	>PartyDetailStatus-Information	U	1	513	unsigned int	not used	
39060	>Pad6	U	6	514	Fixed String	not used	

13.11 SRQS Negotiation Notification for Requester

This message informs the requester about SRQS negotiation updates.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10712 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
21001	TrdRegTSExecution-Time	N	8	48	UTCTimestamp	Time of the last SRQS Deal						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
28759	QuoteRefPrice	N	8	56	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.														
25149	UnderlyingDelta-Percentage	N	8	64	floatDecimal4	The effective underlying delta of a Vola-Strategy.														
132	BidPx	N	8	72	PriceType	Bid price/rate.														
133	OfferPx	N	8	80	PriceType	Offer price/rate.														
38	OrderQty	N	8	88	Qty	Total quantity of the SRQS negotiation.														
31	LastPx	N	8	96	PriceType	Price of this fill.														
151	LeavesQty	N	8	104	Qty	Open quantity of the SRQS negotiation.														
32	LastQty	N	8	112	Qty	Quantity executed in this fill.														
168	EffectiveTime	N	8	120	UTCTimestamp	Time an SRQS STP deal is executed														
779	LastUpdateTime	N	8	128	UTCTimestamp	Creation timestamp of the strategy.														
25184	TradeToRequestRatio	N	8	136	floatDecimal4	Ratio indicating amount of Trades to RFQ requested.														
28758	NegotiationID	Y	4	144	unsigned int	ID of a SRQS negotiation.														
25150	NumberOf-Respondents	N	4	148	unsigned int	Total number of Respondents in a SRQS event.														
537	QuoteType	Y	1	152	unsigned int	Quote Type <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)</td></tr><tr><td>1</td><td>Tradeable</td></tr></table>	Value	Description	0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)	1	Tradeable								
Value	Description																			
0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)																			
1	Tradeable																			
28786	QuoteSubType	Y	1	153	unsigned int	Sub-type of QuoteType <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Working Delta</td></tr><tr><td>2</td><td>Basis Trade</td></tr><tr><td>3</td><td>Regular LDS Negotiation</td></tr><tr><td>4</td><td>Negotiate the underlying outside the exchange</td></tr><tr><td>5</td><td>Option Volatility Strategy with fixed Underlying price and delta</td></tr><tr><td>6</td><td>Option Volatility Strategy - Underlying price is negotiated on exchange</td></tr></table>	Value	Description	1	Working Delta	2	Basis Trade	3	Regular LDS Negotiation	4	Negotiate the underlying outside the exchange	5	Option Volatility Strategy with fixed Underlying price and delta	6	Option Volatility Strategy - Underlying price is negotiated on exchange
Value	Description																			
1	Working Delta																			
2	Basis Trade																			
3	Regular LDS Negotiation																			
4	Negotiate the underlying outside the exchange																			
5	Option Volatility Strategy with fixed Underlying price and delta																			
6	Option Volatility Strategy - Underlying price is negotiated on exchange																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1172	RespondentType	N	1	154	unsigned int	Specifies the type of respondents requested. Set for activation of a suspended negotiation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Respondents are known during a negotiation</td></tr><tr><td>102</td><td>Respondents are anonymized after negotiation start, Requester will remain anonymous from start</td></tr></table>	Value	Description	1	Respondents are known during a negotiation	102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start
Value	Description											
1	Respondents are known during a negotiation											
102	Respondents are anonymized after negotiation start, Requester will remain anonymous from start											
1461	NoTargetPartyIDs	Y	1	155	Counter	Number of TargetParties records.						
25145	NumberOfResp-DisclosureInstruction	Y	1	156	unsigned int	Instruction to show total number of Respondents in an EnLight event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
54	Side	N	1	157	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25194	ShowLastDealOn-Closure	Y	1	158	unsigned int	Instruction to show last deal information after negotiation closure <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
2788	TradeAggregation-TransType	N	1	159	unsigned int	Trade Aggregation Identifier. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr></table>	Value	Description	0	New		
Value	Description											
0	New											
276	QuoteCondition	Y	1	160	char	Status of the quote. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Active</td></tr><tr><td>B</td><td>Closed</td></tr></table>	Value	Description	A	Active	B	Closed
Value	Description											
A	Active											
B	Closed											
22001	PartyExecutingFirm	Y	5	161	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	PartyExecutingTrader	Y	6	166	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
22036	PartyEnteringTrader	Y	6	172	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20						
28762	FirmNegotiationID	N	20	178	Fixed String	User defined ID of a SRQS negotia- tion. Valid characters: \x01-\x7E						
25172	FreeText5	N	132	198	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E						
22011	PartyOrder- OriginationTrader	N	132	330	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41- \x5F, \x61-\x7B, \x7D, \x7E						
25225	ChargeID	N	132	462	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
39060	Pad6	U	6	594	Fixed String	not used						
<TargetParties> Cardinality: 0-50, Record counter: NoTargetPartyIDs												
20612	>TargetParty- IDExecutingTrader	N	4	600	unsigned int	Anonymous user ID						
25130	>SideDisclosure- Instruction	Y	1	604	unsigned int	Instruction to show side. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25131	>PriceDisclosure- Instruction	Y	1	605	unsigned int	Instruction to show price. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25137	>LeavesQty- DisclosureInstruction	Y	1	606	unsigned int	Instruction to show leaves quantity. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25146	>LastPxDisclosure- Instruction	Y	1	607	unsigned int	Instruction to show last deal price. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
25147	>LastQtyDisclosure-Instruction	Y	1	608	unsigned int	Instruction to show last deal quantity. Can only be set to 1 (Yes) if LastQty-DisclosureInstruction = 1(Yes). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes		
Value	Description													
0	No													
1	Yes													
31814	>Free-Text5Disclosure-Instruction	Y	1	609	unsigned int	Instruction to show FreeText5. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes		
Value	Description													
0	No													
1	Yes													
25190	>PartyOrder-OriginationDisclosure-Instruction	Y	1	610	unsigned int	Instruction to show buy-side user in-formation. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes		
Value	Description													
0	No													
1	Yes													
25138	>QuoteInstruction	Y	1	611	unsigned int	Quoting instruction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not re-quote</td></tr><tr><td>1</td><td>(Re-)Quote</td></tr></table>	Value	Description	0	Do not re-quote	1	(Re-)Quote		
Value	Description													
0	Do not re-quote													
1	(Re-)Quote													
25226	>ChargeIDDisclosure-Instruction	Y	1	612	unsigned int	Instruction to show Charge ID. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes		
Value	Description													
0	No													
1	Yes													
22601	>TargetParty-ExecutingFirm	N	5	613	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20								
22602	>TargetParty-ExecutingTrader	N	6	618	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20								
1672	>PartyDetailStatus	N	1	624	unsigned int	Member status. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr><tr><td>2</td><td>Rejected</td></tr></table>	Value	Description	0	Active	1	Suspend	2	Rejected
Value	Description													
0	Active													
1	Suspend													
2	Rejected													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25185	>PartyDetailStatus- Information	N	1	625	unsigned int	Reason for a responder reject
						Value Description
						1 High TRR (TradeToRequest- Ratio) threshold
						2 Anonymous negotiation blocked by responder
39060	>Pad6	U	6	626	Fixed String	not used

13.12 SRQS Enter Quote Request

This message is submitted by any (targeted) respondent within the context of a SRQS negotiation (in order to respond to a RfQ). This message is sent to the service "Selective Request for Quote Service".

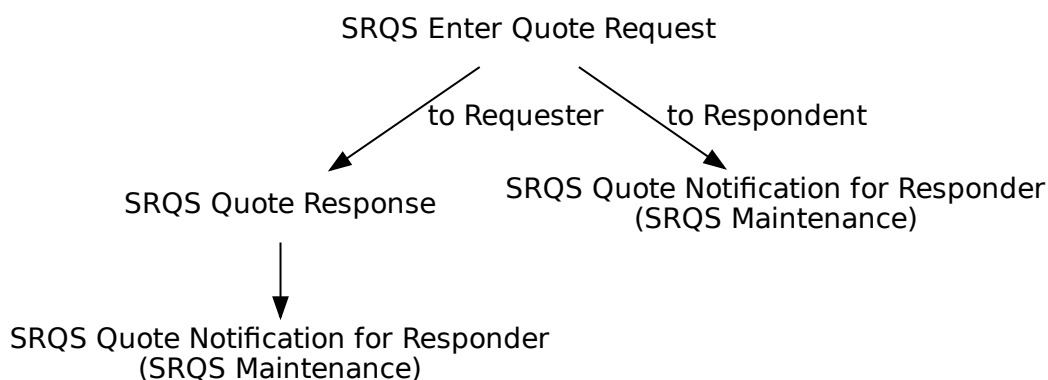

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10702 (Quote-Request, MsgType = R)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
132	BidPx	N	8	24	PriceType	Bid price/rate.
133	OfferPx	N	8	32	PriceType	Offer price/rate.
25149	UnderlyingDelta-Percentage	N	8	40	floatDecimal4	The effective underlying delta of a Vola-Strategy.
134	BidSize	N	8	48	Qty	Quantity of bid.
135	OfferSize	N	8	56	Qty	Quantity of offer.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	PartyIDClientID	N	8	64	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	PartyIDInvestment-DecisionMaker	N	8	72	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	ExecutingTrader	N	8	80	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
28759	QuoteRefPrice	N	8	88	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.						
62	ValidUntilTime	N	8	96	UTCTimestamp	Time until an entity is valid.						
1300	MarketSegmentID	Y	4	104	signed int	Product identifier.						
28758	NegotiationID	Y	4	108	unsigned int	ID of a SRQS negotiation.						
23002	OrderAttribute-LiquidityProvision	N	1	112	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision
Value	Description											
1	Liquidity provision											
0	No liquidity provision											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
25124	ExecutingTrader- Qualifier	N	1	113	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
21222	PartyIdInvestment- DecisionMaker- Qualifier	N	1	114	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
1815	TradingCapacity	N	1	115	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
22001	PartyExecutingFirm	Y	5	116	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20								
22012	PartyExecutingTrader	Y	6	121	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20								
25007	FreeText1	N	12	127	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
25008	FreeText2	N	12	139	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
25009	FreeText3	N	12	151	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25172	FreeText5	N	132	163	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
77	PositionEffect	N	1	295	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
1	Account	N	2	296	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52																
20032	PartyIDBeneficiary	N	9	298	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20																
1031	CustOrderHandling-Inst	N	1	307	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
20013	PartyIDOrder- OriginationFirm	N	7	308	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20038	PartyIDPosition- Account	N	32	315	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A
20075	PartyIDLocationID	N	2	347	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E
2404	ComplianceText	N	20	349	Fixed String	This field is used to provide addi- tional regulatory information (accord- ing to respective rules & regs, circu- lars and/or bilateral coordination be- tween participant and Trading Surveil- lance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E
20096	PartyIDTakeUp- TradingFirm	N	5	369	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
39020	Pad2	U	2	374	Fixed String	not used

13.13 SRQS Quote Notification for Responder

This message informs both, requester and quote submitting respondent about a quote entry within the context of a SRQS negotiation.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10707 (Quote, MsgType = S)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	U	8	16	unsigned int	not used						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
117	QuoteID	N	8	48	unsigned int	System defined unique quote identifier						
1751	SecondaryQuoteID	N	8	56	unsigned int	Identifier of the replaced quote.						
132	BidPx	N	8	64	PriceType	Bid price/rate.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
134	BidSize	N	8	72	Qty	Quantity of bid.								
133	OfferPx	N	8	80	PriceType	Offer price/rate.								
135	OfferSize	N	8	88	Qty	Quantity of offer.								
25149	UnderlyingDelta-Percentage	N	8	96	floatDecimal4	The effective underlying delta of a Vola-Strategy.								
28759	QuoteRefPrice	N	8	104	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.								
126	ExpireTime	N	8	112	UTCTimestamp	Time an entity expires.								
28758	NegotiationID	Y	4	120	unsigned int	ID of a SRQS negotiation.								
28787	QuotingStatus	Y	1	124	unsigned int	Quoting status for the executing party <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Open/Active</td></tr><tr><td>2</td><td>Open/Working</td></tr><tr><td>3</td><td>Closed/Inactive</td></tr></table>	Value	Description	1	Open/Active	2	Open/Working	3	Closed/Inactive
Value	Description													
1	Open/Active													
2	Open/Working													
3	Closed/Inactive													
1011	MessageEventSource	Y	1	125	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>R</td><td>Broadcast to requestor</td></tr><tr><td>Q</td><td>Broadcast to quote submitter</td></tr></table>	Value	Description	R	Broadcast to requestor	Q	Broadcast to quote submitter		
Value	Description													
R	Broadcast to requestor													
Q	Broadcast to quote submitter													
1815	TradingCapacity	N	1	126	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
28747	QuoteCancelReason	N	1	127	unsigned int	Reason for quote cancellation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Expired</td></tr></table>	Value	Description	5	Expired				
Value	Description													
5	Expired													
20012	PartyIDExecuting-Trader	N	4	128	unsigned int	Anonymous user ID								
22001	PartyExecutingFirm	N	5	132	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20								
22012	PartyExecutingTrader	N	6	137	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20								
22036	PartyEnteringTrader	N	6	143	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
131	QuoteReqID	N	20	149	Fixed String	SRQS negotiation report ID Valid characters: \x01-\x7E						
25007	FreeText1	N	12	169	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	FreeText2	N	12	181	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	FreeText3	N	12	193	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25172	FreeText5	N	132	205	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
77	PositionEffect	N	1	337	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
1	Account	N	2	338	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20032	PartyIDBeneficiary	N	9	340	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	CustOrderHandling-Inst	N	1	349	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
20013	PartyIDOrder-OriginationFirm	N	7	350	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20																
20038	PartyIDPosition-Account	N	32	357	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A																
20075	PartyIDLocationID	N	2	389	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
2404	ComplianceText	N	20	391	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
20096	PartyIDTakeUp-TradingFirm	N	5	411	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20																


13.14 SRQS Enter Quoting Status Request

This message is used to enter a SRQS quoting status. This message is sent to the service "Selective Request for Quote Service".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10717 (MassQuoteAcknowledgement, MsgType = b)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.						
28758	NegotiationID	Y	4	28	unsigned int	ID of a SRQS negotiation.						
28787	QuotingStatus	N	1	32	unsigned int	Quoting status for the executing party <table><tr><th>Value</th><th>Description</th></tr><tr><td>2</td><td>Open/Working</td></tr><tr><td>3</td><td>Closed/Inactive</td></tr></table>	Value	Description	2	Open/Working	3	Closed/Inactive
Value	Description											
2	Open/Working											
3	Closed/Inactive											
22001	PartyExecutingFirm	Y	5	33	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	PartyExecutingTrader	Y	6	38	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
25172	FreeText5	N	132	44	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						

13.15 SRQS Hit Quote Request

The message is submitted by the requester in order to create a SRQS deal by targeting a specific quote side of one of the respondents. This message is sent to the service "Selective Request for Quote Service".

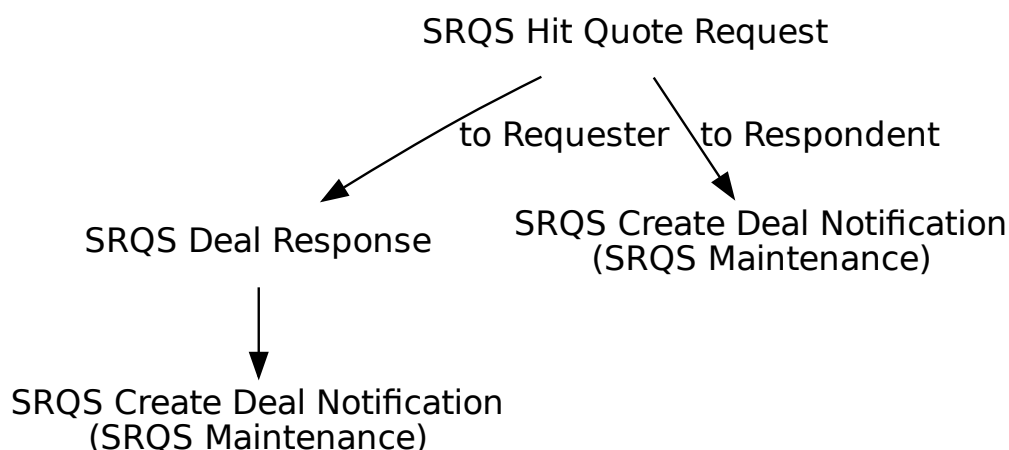

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10704 (Quote-Response, MsgType = AJ)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
62	ValidUntilTime	N	8	24	UTCTimestamp	Time until an entity is valid.
879	UnderlyingQty	N	8	32	Qty	Nominal value of an underlying
30889	UnderlyingPriceStip-Value	N	8	40	PriceType	Limit price for the underlying price

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	PartyIDClientID	N	8	48	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	PartyIDInvestment-DecisionMaker	N	8	56	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	ExecutingTrader	N	8	64	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
1300	MarketSegmentID	Y	4	72	signed int	Product identifier.						
28758	NegotiationID	Y	4	76	unsigned int	ID of a SRQS negotiation.						
23002	OrderAttribute-LiquidityProvision	N	1	80	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision
Value	Description											
1	Liquidity provision											
0	No liquidity provision											
25124	ExecutingTrader-Qualifier	N	1	81	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	82	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
1815	TradingCapacity	N	1	83	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1390	TradePublishIndicator	N	1	84	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade		
Value	Description													
0	Do not publish trade													
1	Publish trade													
1724	OrderOrigination	N	1	85	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer		
Value	Description													
5	Order received from a direct access customer													
105	Order received from a sponsored access customer													
30059	HedgingInstruction	N	1	86	unsigned int	Indication for the hedge transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Execute hedge transaction in the closing auction of the underlying</td></tr></table>	Value	Description	1	Execute hedge transaction in the closing auction of the underlying				
Value	Description													
1	Execute hedge transaction in the closing auction of the underlying													
25218	NoSRQSQuoteGrps	Y	1	87	Counter	Number of SRQS quotes								
22001	PartyExecutingFirm	Y	5	88	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
22012	PartyExecutingTrader	Y	6	93	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
1041	FirmTradeID	N	20	99	Fixed String	User defined deal ID Valid characters: \x01-\x7E						
25007	FreeText1	N	12	119	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	FreeText2	N	12	131	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	FreeText3	N	12	143	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25172	FreeText5	N	132	155	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
77	PositionEffect	N	1	287	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
1	Account	N	2	288	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20032	PartyIDBeneficiary	N	9	290	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1031	CustOrderHandling-Inst	N	1	299	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only.	
						Value	Description
						W	Desk
						Y	Electronic
						C	Vendor-provided Platform billed by Executing Broker
						G	Sponsored Access via Exchange API or FIX provided by Executing Broker
						H	Premium Algorithmic Trading Provider billed by Executing Broker
						D	Other, including Other-provided Screen
*	More values						
20013	PartyIDOrder-OriginationFirm	N	7	300	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20	
20038	PartyIDPosition-Account	N	32	307	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A	
20075	PartyIDLocationID	N	2	339	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E	
2404	ComplianceText	N	20	341	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
20096	PartyIDTakeUp-TradingFirm	N	5	361	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20	
25241	PartyEndClient-Identification	N	20	366	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F	
39060	Pad6	U	6	386	Fixed String	not used	
<SRQSHitQuoteGrp> Cardinality: 0 - 30, Record counter: NoSRQSQuoteGrps							
38	>OrderQty	Y	8	392	Qty	Total Order Quantity.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
44	>Price	N	8	400	PriceType	Threshold for random allocation selection. Selected price needs to be better or equal.						
117	>QuotelD	N	8	408	unsigned int	System defined unique quote identifier						
54	>Side	Y	1	416	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
39070	>Pad7	U	7	417	Fixed String	not used						

13.16 SRQS Deal Response

This message confirms the SRQS Hit Quote and SRQS Update Deal requests.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10705 (Quote-Ack, MsgType = CW)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
48	SecurityID	N	8	32	signed int	Instrument identifier.
28758	NegotiationID	Y	4	40	unsigned int	ID of a SRQS negotiation.
1003	TradeID	N	4	44	unsigned int	System defined SRQS deal identifier.
1040	SecondaryTradeID	N	4	48	unsigned int	Second system defined SRQS deal identifier. Please refer to the functional reference for the details.
25218	NoSRQSQuoteGrps	Y	1	52	Counter	Number of SRQS quotes
1041	FirmTradeID	N	20	53	Fixed String	User defined deal ID Valid characters: \x01-\x7E
28762	FirmNegotiationID	N	20	73	Fixed String	User defined ID of a SRQS negotiation. Valid characters: \x01-\x7E
39030	Pad3	U	3	93	Fixed String	not used
<SRQSQuoteGrp> Cardinality: 0-30, Record counter: NoSRQSQuoteGrps						
117	>QuoteID	Y	8	96	unsigned int	System defined unique quote identifier

13.17 SRQS Create Deal Notification

This message informs both, requester and respondent about the creation of a SRQS deal.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10708 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
31	LastPx	Y	8	48	PriceType	Price of this fill.						
32	LastQty	Y	8	56	Qty	Quantity of the SRQS deal.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
48	SecurityID	N	8	64	signed int	Instrument identifier.						
126	ExpireTime	N	8	72	UTCTimestamp	Time an entity expires.						
810	UnderlyingPx	N	8	80	PriceType	Underlying price associated with a derivative instrument.						
25149	UnderlyingDelta-Percentage	N	8	88	floatDecimal4	The effective underlying delta of a Vola-Strategy.						
25151	UnderlyingEffective-DeltaPercentage	N	8	96	floatDecimal4	The effective underlying delta of a Vola-Strategy.						
879	UnderlyingQty	N	8	104	Qty	Nominal value of an underlying						
30889	UnderlyingPriceStip-Value	N	8	112	PriceType	Limit price for the underlying price						
28758	NegotiationID	Y	4	120	unsigned int	ID of a SRQS negotiation.						
1003	TradeID	Y	4	124	unsigned int	System defined SRQS deal ID.						
1126	OrigTradeID	N	4	128	unsigned int	In case of a trade reversal/modification this field provides the original trade identifier.						
939	TrdRptStatus	Y	1	132	unsigned int	Status of the SRQS deal. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr></table>	Value	Description	0	Accepted	4	Pending new
Value	Description											
0	Accepted											
4	Pending new											
856	TradeReportType	N	1	133	unsigned int	Used for negotiations for working delta or basis trades. Only for TrdRptStatus = 'Accepted' <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr></table>	Value	Description	5	No/Was (Replaced)		
Value	Description											
5	No/Was (Replaced)											
1011	MessageEventSource	Y	1	134	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>R</td><td>Broadcast to requestor</td></tr><tr><td>Q</td><td>Broadcast to quote submitter</td></tr></table>	Value	Description	R	Broadcast to requestor	Q	Broadcast to quote submitter
Value	Description											
R	Broadcast to requestor											
Q	Broadcast to quote submitter											
54	Side	Y	1	135	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
28769	NoOrderBookItems	N	1	136	Counter							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	TradingCapacity	N	1	137	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1390	TradePublishIndicator	N	1	138	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade		
Value	Description													
0	Do not publish trade													
1	Publish trade													
30059	HedgingInstruction	N	1	139	unsigned int	Indication for the hedge transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Execute hedge transaction in the closing auction of the underlying</td></tr></table>	Value	Description	1	Execute hedge transaction in the closing auction of the underlying				
Value	Description													
1	Execute hedge transaction in the closing auction of the underlying													
25219	NoSRQSTargetParty-TrdGrps	Y	1	140	Counter	Number of SRQS deals								
22401	RootPartyExecuting-Firm	N	5	141	Fixed String	Business unit name of the requester. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
22412	RootPartyExecuting-Trader	N	6	146	Fixed String	Owning trader name of the SRQS negotiation. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
22436	RootPartyEntering-Trader	N	6	152	Fixed String	Entering trader name of the requester. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
1041	FirmTradeID	N	20	158	Fixed String	User defined deal ID Valid characters: \x01-\x7E								
28762	FirmNegotiationID	N	20	178	Fixed String	User defined ID of a SRQS negotiation. Valid characters: \x01-\x7E								


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25007	FreeText1	N	12	198	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	FreeText2	N	12	210	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	FreeText3	N	12	222	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25172	FreeText5	N	132	234	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
77	PositionEffect	N	1	366	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><th>Value</th><th>Description</th></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
1	Account	N	2	367	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20032	PartyIDBeneficiary	N	9	369	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1031	CustOrderHandling-Inst	N	1	378	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only.	
						Value	Description
						W	Desk
						Y	Electronic
						C	Vendor-provided Platform billed by Executing Broker
						G	Sponsored Access via Exchange API or FIX provided by Executing Broker
						H	Premium Algorithmic Trading Provider billed by Executing Broker
						D	Other, including Other-provided Screen
*	More values						
20013	PartyIDOrder-OriginationFirm	N	7	379	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20	
20038	PartyIDPosition-Account	N	32	386	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A	
20075	PartyIDLocationID	N	2	418	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E	
2404	ComplianceText	N	20	420	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
20096	PartyIDTakeUp-TradingFirm	N	5	440	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20	
39030	Pad3	U	3	445	Fixed String	not used	
<OrderBookItemGrp> Cardinality: 0-26, Record counter: NoOrderBookItems							
48	>SecurityID	Y	8	448	signed int	Instrument identifier.	
25132	>BestBidPx	N	8	456	PriceType	On-book trading best bid price.	
25134	>BestBidSize	N	8	464	Qty	On-book trading best bid quantity.	
25133	>BestOfferPx	N	8	472	PriceType	On-book trading best offer price.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25135	>BestOfferSize	N	8	480	Qty	On-book trading best ask quantity.						
1024	>MDBookType	Y	1	488	unsigned int	Type of market data <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Top of book</td></tr><tr><td>2</td><td>Price depth (aggregated)</td></tr></table>	Value	Description	1	Top of book	2	Price depth (aggregated)
Value	Description											
1	Top of book											
2	Price depth (aggregated)											
1173	>MDSubBookType	N	1	489	unsigned int	Sub-type/qualifier of market data <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Implied</td></tr><tr><td>2</td><td>Volume Weighted Average</td></tr></table>	Value	Description	1	Implied	2	Volume Weighted Average
Value	Description											
1	Implied											
2	Volume Weighted Average											
39060	>Pad6	U	6	490	Fixed String	not used						
<SRQSTargetPartyTrdGrp> Cardinality: 1 - 30, Record counter: NoSRQSTargetPartyTrdGrps												
1009	>SideLastQty	Y	8	0	Qty	Fill quantity for the original T7 strategy.						
117	>QuoteID	Y	8	8	unsigned int	System defined unique quote identifier						
20612	>TargetParty- IDExecutingTrader	N	4	16	unsigned int	Owning User ID.						
22601	>TargetParty- ExecutingFirm	N	5	20	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20						
22602	>TargetParty- ExecutingTrader	N	6	25	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20						
22636	>TargetParty- EnteringTrader	N	6	31	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20						
39030	>Pad3	U	3	37	Fixed String	not used						

13.18 SRQS Update Deal Request

This message is used to change the state of a SRQS deal. The message flow below does not reflect "working delta". Please refer to the appendix for more details. This message is sent to the service "Selective Request for Quote Service".

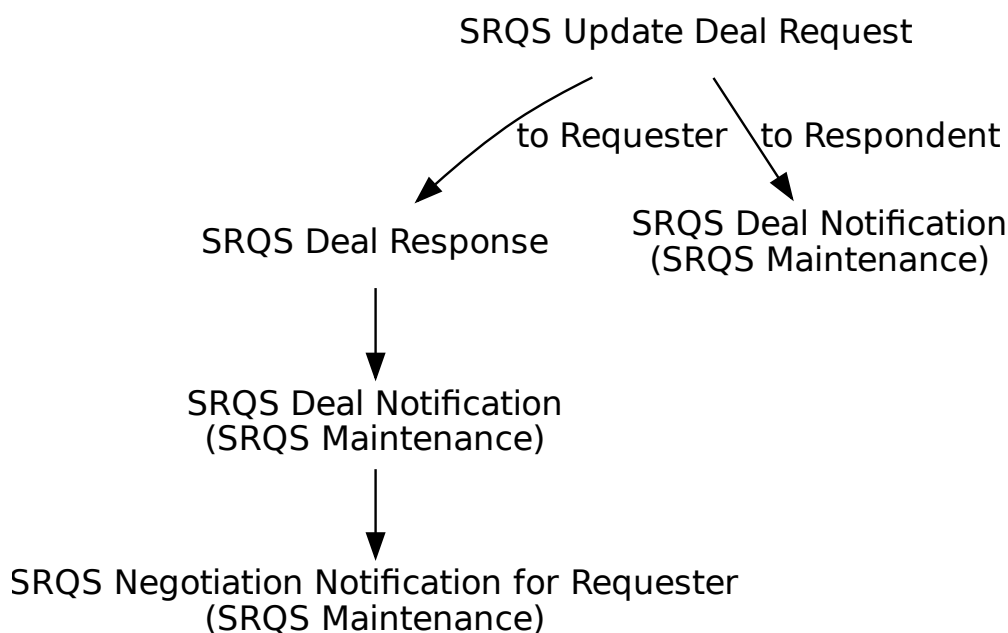

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10706 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
30889	UnderlyingPriceStip-Value	N	8	24	PriceType	Limit price for the underlying price

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
810	UnderlyingPx	N	8	32	PriceType	Underlying price associated with a derivative instrument.								
32	LastQty	N	8	40	Qty	Quantity executed in this fill.								
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.								
28758	NegotiationID	Y	4	52	unsigned int	ID of a SRQS negotiation.								
1003	TradeID	Y	4	56	unsigned int	System defined SRQS deal ID.								
856	TradeReportType	Y	1	60	unsigned int	The TradeReportType is used to finalize a pending deal (Accept) or to reject a pending deal (Trade_report_cancel) or to reject a pending cancelled deal (Decline). <table><tr><th>Value</th><th>Description</th></tr><tr><td>2</td><td>Accept</td></tr><tr><td>3</td><td>Decline</td></tr><tr><td>6</td><td>Trade Report Cancel</td></tr></table>	Value	Description	2	Accept	3	Decline	6	Trade Report Cancel
Value	Description													
2	Accept													
3	Decline													
6	Trade Report Cancel													
939	TrdRptStatus	N	1	61	unsigned int	Used for negotiations for working delta or basis trades. It is used to set a negotiation to working status (Deemed_verified) or to set a pending/working deal to final (Accepted). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr><tr><td>9</td><td>Deemed verified</td></tr></table>	Value	Description	0	Accepted	4	Pending new	9	Deemed verified
Value	Description													
0	Accepted													
4	Pending new													
9	Deemed verified													
22001	PartyExecutingFirm	Y	5	62	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20								
22012	PartyExecutingTrader	Y	6	67	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20								
25172	FreeText5	N	132	73	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
39030	Pad3	U	3	205	Fixed String	not used								

13.19 SRQS Deal Notification

This message informs about the change of a SRQS deal state.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10709 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
30889	UnderlyingPriceStip-Value	N	8	48	PriceType	Limit price for the underlying price						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
810	UnderlyingPx	N	8	56	PriceType	Underlying price associated with a derivative instrument.												
31	LastPx	N	8	64	PriceType	Price of this fill.												
32	LastQty	N	8	72	Qty	Quantity executed in this fill.												
28758	NegotiationID	Y	4	80	unsigned int	ID of a SRQS negotiation.												
1003	TradeID	Y	4	84	unsigned int	System defined SRQS deal ID.												
1663	RequestingPartySub-IDType	N	2	88	unsigned int	Party type initiating SRQS deal deletion <table><tr><td>Value</td><td>Description</td></tr><tr><td>5000</td><td>Requester</td></tr><tr><td>5001</td><td>Responder</td></tr><tr><td>5002</td><td>Both (Requester and Responder)</td></tr><tr><td>5003</td><td>System</td></tr></table>	Value	Description	5000	Requester	5001	Responder	5002	Both (Requester and Responder)	5003	System		
Value	Description																	
5000	Requester																	
5001	Responder																	
5002	Both (Requester and Responder)																	
5003	System																	
939	TrdRptStatus	Y	1	90	unsigned int	Status of the SRQS deal. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr><tr><td>2</td><td>Cancelled</td></tr><tr><td>7</td><td>Terminated</td></tr><tr><td>9</td><td>Deemed verified</td></tr></table>	Value	Description	0	Accepted	4	Pending new	2	Cancelled	7	Terminated	9	Deemed verified
Value	Description																	
0	Accepted																	
4	Pending new																	
2	Cancelled																	
7	Terminated																	
9	Deemed verified																	
749	TradeRequestResult	N	1	91	unsigned int	Trade request transaction type <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Deal cancellation pending</td></tr><tr><td>101</td><td>Deal cancellation declined</td></tr><tr><td>102</td><td>Deal cancellation approved</td></tr></table>	Value	Description	100	Deal cancellation pending	101	Deal cancellation declined	102	Deal cancellation approved				
Value	Description																	
100	Deal cancellation pending																	
101	Deal cancellation declined																	
102	Deal cancellation approved																	
1011	MessageEventSource	Y	1	92	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>R</td><td>Broadcast to requestor</td></tr><tr><td>Q</td><td>Broadcast to quote submitter</td></tr></table>	Value	Description	R	Broadcast to requestor	Q	Broadcast to quote submitter						
Value	Description																	
R	Broadcast to requestor																	
Q	Broadcast to quote submitter																	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	TradingCapacity	N	1	93	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
25219	NoSRQSTargetParty-TrdGrps	N	1	94	Counter	Number of SRQS deals								
22401	RootPartyExecuting-Firm	N	5	95	Fixed String	Business unit name of the requester. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
22412	RootPartyExecuting-Trader	N	6	100	Fixed String	Owning trader name of the SRQS negotiation. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
22436	RootPartyEntering-Trader	N	6	106	Fixed String	Entering trader name of the requester. Valid characters: \x20, \x22-\x7B, \x7D, \x7E								
1041	FirmTradeID	N	20	112	Fixed String	User defined deal ID Valid characters: \x01-\x7E								
28762	FirmNegotiationID	N	20	132	Fixed String	User defined ID of a SRQS negotiation. Valid characters: \x01-\x7E								
25007	FreeText1	N	12	152	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								
25008	FreeText2	N	12	164	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
25009	FreeText3	N	12	176	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25172	FreeText5	N	132	188	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
77	PositionEffect	N	1	320	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
1	Account	N	2	321	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52																
20032	PartyIDBeneficiary	N	9	323	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20																
1031	CustOrderHandling-Inst	N	1	332	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
20013	PartyIDOrder- OriginationFirm	N	7	333	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20038	PartyIDPosition- Account	N	32	340	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A
20075	PartyIDLocationID	N	2	372	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E
2404	ComplianceText	N	20	374	Fixed String	This field is used to provide addi- tional regulatory information (accord- ing to respective rules & regs, circu- lars and/or bilateral coordination be- tween participant and Trading Surveil- lance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E
20096	PartyIDTakeUp- TradingFirm	N	5	394	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
39000	Pad1	U	1	399	Fixed String	not used
<SRQSTargetPartyTrdGrp> Cardinality: 1 - 30, Record counter: NoSRQSTargetPartyTrdGrps						
1009	>SideLastQty	U	8	400	Qty	not used
117	>QuotelD	U	8	408	unsigned int	not used
20612	>TargetParty- IDExecutingTrader	N	4	416	unsigned int	Owning User ID.
22601	>TargetParty- ExecutingFirm	N	5	420	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20
22602	>TargetParty- ExecutingTrader	N	6	425	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20
22636	>TargetParty- EnteringTrader	N	6	431	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20
39030	>Pad3	U	3	437	Fixed String	not used

13.20 SRQS Negotiation Status Notification

This message informs about a SRQS negotiation state change.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10715 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
168	EffectiveTime	N	8	48	UTCTimestamp	Time an SRQS STP deal is executed						
28758	NegotiationID	Y	4	56	unsigned int	ID of a SRQS negotiation.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
276	QuoteCondition	Y	1	60	char	Status of the quote.	
						Value	Description
						8	Expired
28762	FirmNegotiationID	N	20	61	Fixed String	User defined ID of a SRQS negotia- tion. Valid characters: \x01-\x7E	
39070	Pad7	U	7	81	Fixed String	not used	

13.21 SRQS Negotiation Notification for Respondent

This message informs the targeted respondents about SRQS negotiation updates.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10713 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
28759	QuoteRefPrice	N	8	48	PriceType	Depending upon Negotiation workflow this price can either be a reference price or an underlying price.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
25149	UnderlyingDelta-Percentage	N	8	56	floatDecimal4	The effective underlying delta of a Vola-Strategy.														
132	BidPx	N	8	64	PriceType	Bid price/rate.														
133	OfferPx	N	8	72	PriceType	Offer price/rate.														
31	LastPx	N	8	80	PriceType	Price of this fill.														
151	LeavesQty	N	8	88	Qty	Open quantity of the SRQS negotiation.														
32	LastQty	N	8	96	Qty	Quantity executed in this fill.														
168	EffectiveTime	N	8	104	UTCTimestamp	Time an SRQS STP deal is executed														
779	LastUpdateTime	N	8	112	UTCTimestamp	Creation timestamp of the strategy.														
25201	TradeToQuoteRatio	N	8	120	floatDecimal4	Ratio of Trades to Quotes.														
28758	NegotiationID	Y	4	128	unsigned int	ID of a SRQS negotiation.														
25150	NumberOf-Respondents	N	4	132	unsigned int	Total number of Respondents in a SRQS event.														
25202	TradeToQuoteRatio-Position	N	2	136	unsigned int	Ranking position of Ratio of Trades to Quotes.														
537	QuoteType	Y	1	138	unsigned int	Quote Type <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)</td></tr><tr><td>1</td><td>Tradeable</td></tr></table>	Value	Description	0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)	1	Tradeable								
Value	Description																			
0	Indicative (for Continuous Auction Issuer trading model and Eurex/Xetra EnLight only)																			
1	Tradeable																			
28786	QuoteSubType	Y	1	139	unsigned int	Sub-type of QuoteType <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Working Delta</td></tr><tr><td>2</td><td>Basis Trade</td></tr><tr><td>3</td><td>Regular LDS Negotiation</td></tr><tr><td>4</td><td>Negotiate the underlying outside the exchange</td></tr><tr><td>5</td><td>Option Volatility Strategy with fixed Underlying price and delta</td></tr><tr><td>6</td><td>Option Volatility Strategy - Underlying price is negotiated on exchange</td></tr></table>	Value	Description	1	Working Delta	2	Basis Trade	3	Regular LDS Negotiation	4	Negotiate the underlying outside the exchange	5	Option Volatility Strategy with fixed Underlying price and delta	6	Option Volatility Strategy - Underlying price is negotiated on exchange
Value	Description																			
1	Working Delta																			
2	Basis Trade																			
3	Regular LDS Negotiation																			
4	Negotiate the underlying outside the exchange																			
5	Option Volatility Strategy with fixed Underlying price and delta																			
6	Option Volatility Strategy - Underlying price is negotiated on exchange																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25138	QuoteInstruction	Y	1	140	unsigned int	Quoting instruction.	
						Value	Description
						0	Do not re-quote
						1	(Re-)Quote
54	Side	N	1	141	unsigned int	Side of the order.	
						Value	Description
						1	Buy
						2	Sell
2788	TradeAggregation-TransType	N	1	142	unsigned int	Trade Aggregation Identifier.	
						Value	Description
						0	New
276	QuoteCondition	Y	1	143	char	Status of the quote.	
						Value	Description
						A	Active
						B	Closed
22001	PartyExecutingFirm	N	5	144	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20	
22012	PartyExecutingTrader	N	6	149	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20	
22036	PartyEnteringTrader	N	6	155	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20	
22601	TargetPartyExecuting-Firm	N	5	161	Fixed String	Name of target business unit. Valid characters: A-Z, 0-9, \x20	
22602	TargetPartyExecuting-Trader	N	6	166	Fixed String	Name of target user/trader. Valid characters: A-Z, 0-9, \x20	
28762	FirmNegotiationID	N	20	172	Fixed String	User defined ID of a SRQS negotia- tion. Valid characters: \x01-\x7E	
25172	FreeText5	N	132	192	Fixed String	Text field Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
22011	PartyOrder-OriginationTrader	N	132	324	Fixed String	Buy-side user information. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
25225	ChargeID	N	132	456	Fixed String	Charge ID of Third Party Platform. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	

Deutsche Börse Group's T7 Release 15.0
Enhanced Trading Interface
Derivatives Message Reference

Deutsche Börse Group

Build 150.536.0.ga-150006001-56

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39040	Pad4	U	4	588	Fixed String	not used

13.22 SRQS Status Notification

The SRQS Status Notification informs about SRQS service state changes. TradSesEvent set to either 105 (Service Resumed) or 104 (End of Service) implies that the open SRQS Negotiations are not accessible anymore and should be treated by the ETI applications as closed. The existing SRQS Quotes are not longer accessible and should be treated by ETI applications as deleted. The pending SRQS Deals cannot be accepted or rejected and should be treated by ETI applications as rejected.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10714 (Quote-StatusReport, MsgType = AI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	U	2	28	unsigned int	not used						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>9</td><td>SRQS Maintenance</td></tr></table>	Value	Description	9	SRQS Maintenance		
Value	Description											
9	SRQS Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
<MessageBody>														
75	TradeDate	N	4	40	LocalMktDate	Business date.								
1368	TradSesEvent	Y	1	44	unsigned int	Trading session event type. <table><tr><th>Value</th><th>Description</th></tr><tr><td>101</td><td>Start of Service</td></tr><tr><td>104</td><td>End of Service</td></tr><tr><td>105</td><td>Service Resumed</td></tr></table>	Value	Description	101	Start of Service	104	End of Service	105	Service Resumed
Value	Description													
101	Start of Service													
104	End of Service													
105	Service Resumed													
39030	Pad3	U	3	45	Fixed String	not used								

14 TES Trading

14.1 Enter TES Trade Request

This message is submitted by the Initiator and allows the entry of a TES trade. It specifies all users involved on the buy and sell side of the TES trade (approving users). The general TES trade information is visible to all approving users. After the request has successfully been accepted, the executing user will become the initiating user of the TES trade. This message is sent to the service "T7 Entry".

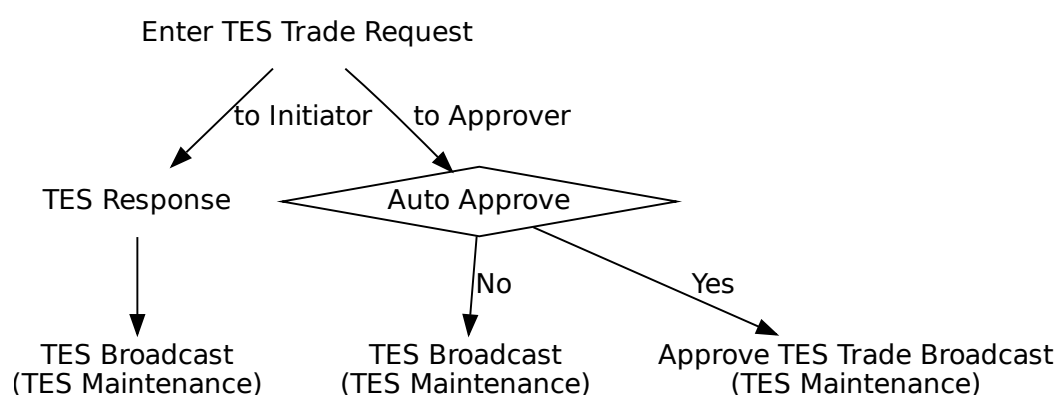

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10600 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	Y	8	24	signed int	Instrument identifier.
31	LastPx	Y	8	32	PriceType	Price of TES trade.
483	TransBkdTime	N	8	40	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
810	UnderlyingPx	N	8	48	PriceType	Underlying price associated with a derivative instrument.																
2589	RelatedClosePrice	N	8	56	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].																
1860	RelatedTradeQuantity	N	8	64	Qty	Quantity of the related trade. To be set for TrdType (1000) Vola Trade [mandatory].																
879	UnderlyingQty	N	8	72	Qty	Nominal value of an underlying (for an EFS or EFP Index Trade in units of thousand).																
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.																
987	UnderlyingSettlement-Date	N	4	84	LocalMktDate	Date the underlying instrument will settle. To be set for TrdType (1) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional].																
542	UnderlyingMaturity-Date	N	4	88	LocalMktDate	Underlying security's maturity date. To be set for TrdType (1001) EFP-Fin Trade [mandatory].																
1856	RelatedTradeID	N	4	92	unsigned int	Identifier of a related trade. To be set for TrdType (1000) Vola Trade [mandatory].																
2546	RelatedMarket-SegmentID	N	4	96	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																
828	TrdType	Y	2	100	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	N	1	102	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						10	Flexible Simple Instrument
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
856	TradeReportType	Y	1	103	unsigned int	Type of Trade Report	
						Value	Description
						0	Submit
1390	TradePublishIndicator	Y	1	104	unsigned int	Indicates if a trade should be reported via the market reporting service.	
						Value	Description
						0	Do not publish trade
						1	Publish trade
28709	NoSideAllocs	Y	1	105	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.	
864	NoEvents	Y	1	106	Counter	Number of repeating EventType entries.	
555	NoLegs	Y	1	107	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).	
870	NoInstrAttrib	Y	1	108	Counter	Number of repeating InstrAttribType entries.	
887	NoUnderlyingStips	Y	1	109	Counter	Number of underlying stipulation entries.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
20010	PartyIDSettlement-Location	N	1	110	unsigned int	ID of settlement location.				
						Value	Description			
						1	Clearstrem Banking Frankfurt			
						2	Clearstrem Banking Luxemburg			
						3	CLS Group			
						4	Euroclear			
29008	HedgeType	N	1	111	unsigned int	Hedging method.				
						To be set for TrdType (12) Exchange for Swap [mandatory], (1001) EFP-Fin Trade [mandatory]and (1002) EFI-Index Futures Trade [mandatory].				
						Value	Description			
						0	Duration Hedge			
						1	Nominal Hedge			
						2	Price Factor Hedge			
25199	SwapClearer	N	1	112	unsigned int	Swap clearer for EFS Trades only.				
						Value	Description			
						0	Eurex Clearing			
						1	Non-Eurex Clearing			
28583	TradeReportText	N	20	113	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E				
571	TradeReportID	N	20	133	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E				
309	UnderlyingSecurityID	N	12	153	ISIN	Underlying security's ID (ISIN). To be set for TrdType (1001) EFP-Fin Trade [mandatory]. Valid characters: A-Z, 0-9, \x20				
307	UnderlyingSecurity-Desc	N	30	165	Fixed String	Description of the Underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
318	UnderlyingCurrency	N	3	195	CurrencyType	Underlying security's currency. To be set for TrdType (12) Exchange for Swap [optional]and (1001) EFP-Fin Trade [optional]. Valid characters: A-Z, 0-9, \x20						
306	UnderlyingIssuer	N	30	198	Fixed String	The issuer or name of the underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
39040	Pad4	U	4	228	Fixed String	not used						
<SideAllocGrp> Cardinality: 1 - 99, Record counter: NoSideAllocs												
80	>AllocQty	Y	8	232	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	U	4	240	unsigned int	not used						
25180	>TESEnrichment-RuleID	N	4	244	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).						
54	>Side	Y	1	248	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
22001	>PartyExecutingFirm	Y	5	249	Fixed String	Approving business unit. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	254	Fixed String	Approving user name. Valid characters: A-Z, 0-9, \x20						
39040	>Pad4	U	4	260	Fixed String	not used						
<TrdInstrmntLegGrp> Cardinality: 0 - 20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.						
566	>LegPrice	Y	8	8	PriceType	User provided leg trade price (not for underlying leg).						
687	>LegQty	U	8	16	Qty	not used						
<InstrumentEventGrp> Cardinality: 0 - 2, Record counter: NoEvents												
866	>EventDate	Y	4	0	LocalMktDate	Date of event. To be set for TrdType (12) Exchange for Swap [mandatory].						
865	>EventType	Y	1	4	unsigned int	Identifier for an Instrument Event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>Swap Start Date</td></tr><tr><td>9</td><td>Swap End Date</td></tr></table>	Value	Description	8	Swap Start Date	9	Swap End Date
Value	Description											
8	Swap Start Date											
9	Swap End Date											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
39030	>Pad3	U	3	5	Fixed String	not used														
<InstrumentAttributeGrp> Cardinality: 0-6, Record counter: NoInstrAttrib																				
871	>InstrAttribType	Y	1	0	unsigned int	Code to represent the type of instrument attribute. To be set for TrdType (12) Exchange for Swap[Swap, Customer_1, Swap_Customer_2 Variable_Rate, Offset_to-the_variable_coupon_rate: optional], (1001) EFP-Fin Trade [Coupon_Rate: optional]and (1002) EFP-Index Futures Trade[Cash_Basket_Reference: mandatory]. <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Variable rate</td></tr><tr><td>100</td><td>Coupon rate</td></tr><tr><td>101</td><td>Offset to the variable coupon rate</td></tr><tr><td>102</td><td>Swap Customer 1</td></tr><tr><td>103</td><td>Swap Customer 2</td></tr><tr><td>104</td><td>Cash Basket Reference</td></tr></table>	Value	Description	5	Variable rate	100	Coupon rate	101	Offset to the variable coupon rate	102	Swap Customer 1	103	Swap Customer 2	104	Cash Basket Reference
Value	Description																			
5	Variable rate																			
100	Coupon rate																			
101	Offset to the variable coupon rate																			
102	Swap Customer 1																			
103	Swap Customer 2																			
104	Cash Basket Reference																			
872	>InstrAttribValue	Y	32	1	Fixed String	Attribute value appropriate to the InstrAttribType field. To be set for TrdTyp (12) Exchange for Swap [optional], (1001) EFP-Fin Trade [optional] and (1002) EFP-Index Futures Trade [mandatory]. Valid characters: \x01-\x7E														
39070	>Pad7	U	7	33	Fixed String	not used														
<UnderlyingStipGrp> Cardinality: 0-1, Record counter: NoUnderlyingStips																				
889	>UnderlyingStipValue	Y	32	0	Fixed String	Value of stipulation. In case of coupon frequency , fill the field with coupon frequency value. To be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E														

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
888	>UnderlyingStipType	Y	7	32	Fixed String	Type of stipulation. e.g. to denote coupon frequency. Pay_Frequency to be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PAYFREQ</td><td>Pay_Frequency</td></tr></table>	Value	Description	PAYFREQ	Pay_Frequency
Value	Description									
PAYFREQ	Pay_Frequency									
39000	>Pad1	U	1	39	Fixed String	not used				

14.2 TES Response

This message confirms Enter TES Trade, Modify TES Trade, Delete TES Trade, Approve TES Trade, and Upload TES Trade requests.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10611 (Trade-CaptureReportAck, MsgType = AR)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
30017	TESExecID	Y	4	32	unsigned int	System transaction identifier for a T7 Entry Service transaction.
571	TradeReportID	N	20	36	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E

14.3 TES Broadcast

This message informs about entered, modified or uploaded TES Trades.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10604 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
31	LastPx	Y	8	48	PriceType	Price of TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
60	TransactTime	Y	8	56	UTCTimestamp	Transaction timestamp.
810	UnderlyingPx	N	8	64	PriceType	Underlying price associated with a derivative instrument.
483	TransBkdTime	N	8	72	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.
2589	RelatedClosePrice	N	8	80	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].
1860	RelatedTradeQuantity	N	8	88	Qty	Quantity of the related trade. To be set for TrdType (1000) Vola Trade [mandatory].
879	UnderlyingQty	N	8	96	Qty	Nominal value of an underlying (for an EFS or EFP Index Trade in units of thousand).
1300	MarketSegmentID	Y	4	104	signed int	Product identifier.
2489	PackagelD	Y	4	108	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
30017	TESExecID	Y	4	112	unsigned int	System transaction identifier for a T7 Entry Service transaction.
987	UnderlyingSettlement-Date	N	4	116	LocalMktDate	Date the underlying instrument will settle. To be set for TrdType (1) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional].
542	UnderlyingMaturity-Date	N	4	120	LocalMktDate	Underlying security's maturity date. To be set for TrdType (1001) EFP-Fin Trade [mandatory].
1856	RelatedTradeID	N	4	124	unsigned int	Identifier of a related trade. To be set for TrdType (1000) Vola Trade [mandatory].
2546	RelatedMarket-SegmentID	N	4	128	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].
25181	AutoApprovalRuleID	N	4	132	unsigned int	Auto Approval rule id - only in case of erroneous Auto Approval processing

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
828	TrdType	Y	2	136	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTIPI BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTIPI BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTIPI BLOCK TRADE																					
1004	Trade at Market																					
30354	VarTextLen	N	2	138	Counter	Number of used bytes for field Var-Text (30355).																
856	TradeReportType	Y	1	140	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>2</td><td>Accept</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr><tr><td>11</td><td>Alleged New</td></tr><tr><td>13</td><td>Alleged No/Was</td></tr></table>	Value	Description	0	Submit	2	Accept	5	No/Was (Replaced)	11	Alleged New	13	Alleged No/Was				
Value	Description																					
0	Submit																					
2	Accept																					
5	No/Was (Replaced)																					
11	Alleged New																					
13	Alleged No/Was																					
939	TrdRptStatus	N	1	141	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr><tr><td>9</td><td>Deemed verified</td></tr></table>	Value	Description	0	Accepted	4	Pending new	9	Deemed verified								
Value	Description																					
0	Accepted																					
4	Pending new																					
9	Deemed verified																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	N	1	142	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						10	Flexible Simple Instrument
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
1390	TradePublishIndicator	Y	1	143	unsigned int	Indicates if a trade should be reported via the market reporting service.	
						Value	Description
						0	Do not publish trade
						1	Publish trade
864	NoEvents	Y	1	144	Counter	Number of repeating EventType entries.	
870	NoInstrAttrib	Y	1	145	Counter	Number of repeating InstrAttribType entries.	
887	NoUnderlyingStips	Y	1	146	Counter	Number of underlying stipulation entries.	
28709	NoSideAllocs	Y	1	147	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.	
555	NoLegs	Y	1	148	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).	
31555	NoLegClearingPrices	Y	1	149	Counter	Number of ClearingPriceLeg repeating group instances.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
20010	PartyIDSettlement-Location	N	1	150	unsigned int	ID of settlement location.	
						Value	Description
						1	Clearstream Banking Frankfurt
						2	Clearstream Banking Luxembourg
						3	CLS Group
						4	Euroclear
29008	HedgeType	N	1	151	unsigned int	Hedging method.	
						To be set for TrdType (12) Exchange for Swap [mandatory], (1001) EFP-Fin Trade [mandatory]and (1002) EFI-Index Futures Trade [mandatory].	
						Value	Description
						0	Duration Hedge
						1	Nominal Hedge
						2	Price Factor Hedge
25199	SwapClearer	N	1	152	unsigned int	Swap clearer for EFS Trades only.	
						Value	Description
						0	Eurex Clearing
						1	Non-Eurex Clearing
1011	MessageEventSource	Y	1	153	char	Receiver of a message.	
						Value	Description
						I	Broadcast to initiator
						A	Broadcast to approver
28583	TradeReportText	N	20	154	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
571	TradeReportID	N	20	174	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E	
22401	RootPartyExecuting-Firm	Y	5	194	Fixed String	Participant Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
22412	RootPartyExecuting-Trader	Y	6	199	Fixed String	Owning User Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
309	UnderlyingSecurityID	N	12	205	ISIN	Underlying security's ID (ISIN). To be set for TrdType (1001) EFP-Fin Trade [mandatory]. Valid characters: A-Z, 0-9, \x20						
307	UnderlyingSecurity-Desc	N	30	217	Fixed String	Description of the Underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
318	UnderlyingCurrency	N	3	247	CurrencyType	Underlying security's currency. To be set for TrdType (12) Exchange for Swap [optional]and (1001) EFP-Fin Trade [optional]. Valid characters: A-Z, 0-9, \x20						
306	UnderlyingIssuer	N	30	250	Fixed String	The issuer or name of the underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
<SideAllocGrpBC> Cardinality: 1 - 99, Record counter: NoSideAllocs												
80	>AllocQty	Y	8	280	Qty	Quantity of the particular trade side in the TES trade.						
25198	>ReversalApproval-Time	U	8	288	UTCTimestamp	not used						
467	>IndividualAllocID	Y	4	296	unsigned int	Unique identifier for a TES trade side.						
25180	>TESEnrichment-RuleID	N	4	300	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).						
22001	>PartyExecutingFirm	Y	5	304	Fixed String	Approving business unit. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	309	Fixed String	Approving user name. Valid characters: A-Z, 0-9, \x20						
54	>Side	Y	1	315	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
1840	>TradeAllocStatus	Y	1	316	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
39030	>Pad3	U	3	317	Fixed String	not used																						
<TrdInstrmntLegGrp> Cardinality: 0-20, Record counter: NoLegs																												
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.																						
566	>LegPrice	Y	8	8	PriceType	User provided leg trade price (not for underlying leg).																						
687	>LegQty	N	8	16	Qty	Quantity for leg of a multileg																						
<InstrumentEventGrp> Cardinality: 0-2, Record counter: NoEvents																												
866	>EventDate	Y	4	0	LocalMktDate	Date of event. To be set for TrdType (12) Exchange for Swap [mandatory].																						
865	>EventType	Y	1	4	unsigned int	Identifier for an Instrument Event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>Swap Start Date</td></tr><tr><td>9</td><td>Swap End Date</td></tr></table>	Value	Description	8	Swap Start Date	9	Swap End Date																
Value	Description																											
8	Swap Start Date																											
9	Swap End Date																											
39030	>Pad3	U	3	5	Fixed String	not used																						
<TrdClearingPriceLegGrp> Cardinality: 0-20, Record counter: NoLegClearingPrices																												
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.																						
31596	>LegClearingTrade-Price	Y	8	8	PriceType																							
<InstrumentAttributeGrp> Cardinality: 0-6, Record counter: NoInstrAttrib																												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
871	>InstrAttribType	Y	1	0	unsigned int	Code to represent the type of instrument attribute. To be set for TrdType (12) Exchange for Swap[Swap, Customer_1, Swap_Customer_2 Variable_Rate, Offset_to-the_variable_coupon_rate: optional], (1001) EFP-Fin Trade [Coupon_Rate: optional]and (1002) EFP-Index Futures Trade[Cash_Basket_Reference: mandatory]. <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Variable rate</td></tr><tr><td>100</td><td>Coupon rate</td></tr><tr><td>101</td><td>Offset to the variable coupon rate</td></tr><tr><td>102</td><td>Swap Customer 1</td></tr><tr><td>103</td><td>Swap Customer 2</td></tr><tr><td>104</td><td>Cash Basket Reference</td></tr></table>	Value	Description	5	Variable rate	100	Coupon rate	101	Offset to the variable coupon rate	102	Swap Customer 1	103	Swap Customer 2	104	Cash Basket Reference
Value	Description																			
5	Variable rate																			
100	Coupon rate																			
101	Offset to the variable coupon rate																			
102	Swap Customer 1																			
103	Swap Customer 2																			
104	Cash Basket Reference																			
872	>InstrAttribValue	Y	32	1	Fixed String	Attribute value appropriate to the InstrAttribType field. To be set for TrdTyp (12) Exchange for Swap [optional], (1001) EFP-Fin Trade [optional] and (1002) EFP-Index Futures Trade [mandatory]. Valid characters: \x01-\x7E														
39070	>Pad7	U	7	33	Fixed String	not used														
<UnderlyingStipGrp> Cardinality: 0-1, Record counter: NoUnderlyingStips																				
889	>UnderlyingStipValue	Y	32	0	Fixed String	Value of stipulation. In case of coupon frequency , fill the field with coupon frequency value. To be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E														

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
888	>UnderlyingStipType	Y	7	32	Fixed String	Type of stipulation. e.g. to denote coupon frequency. Pay_Frequency to be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PAYFREQ</td><td>Pay_Frequency</td></tr></table>	Value	Description	PAYFREQ	Pay_Frequency
Value	Description									
PAYFREQ	Pay_Frequency									
39000	>Pad1	U	1	39	Fixed String	not used				
30355	VarText	N	2000	0	Variable String	Reason for erroneous Auto Approval processing Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E				

14.4 Modify TES Trade Request

This message allows the modification of a pending TES trade by its initiating user. As long as the TES trade is not approved by all of its approving users, the modification of the general TES trade information except instrument Id and external references is supported. This also includes the approving users and the number of the approving users involved on the TES trade sides. This message is sent to the service "T7 Entry".

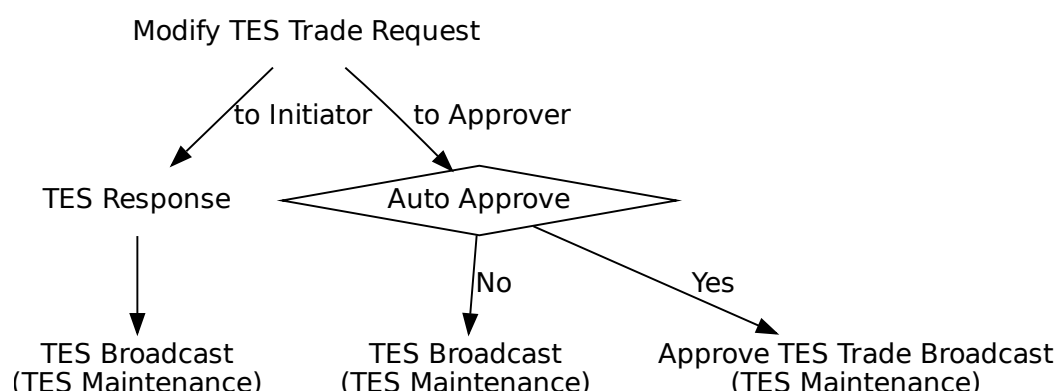


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10601 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
31	LastPx	Y	8	24	PriceType	Price of TES trade.
483	TransBkdTime	N	8	32	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.
2589	RelatedClosePrice	N	8	40	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
2489	PackageID	Y	4	52	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.																
30017	TESExecID	Y	4	56	unsigned int	System transaction identifier for a T7 Entry Service transaction. The latest value available to the Initiator for the corresponding TES Trade needs to be provided.																
2546	RelatedMarket-SegmentID	N	4	60	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																
828	TrdType	Y	2	64	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					
856	TradeReportType	Y	1	66	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr></table>	Value	Description	5	No/Was (Replaced)												
Value	Description																					
5	No/Was (Replaced)																					
1390	TradePublishIndicator	Y	1	67	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade										
Value	Description																					
0	Do not publish trade																					
1	Publish trade																					
28709	NoSideAllocs	Y	1	68	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.																
555	NoLegs	Y	1	69	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).																
25199	SwapClearer	N	1	70	unsigned int	Swap clearer for EFS Trades only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Eurex Clearing</td></tr><tr><td>1</td><td>Non-Eurex Clearing</td></tr></table>	Value	Description	0	Eurex Clearing	1	Non-Eurex Clearing										
Value	Description																					
0	Eurex Clearing																					
1	Non-Eurex Clearing																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28583	TradeReportText	N	20	71	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
571	TradeReportID	N	20	91	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
39000	Pad1	U	1	111	Fixed String	not used						
<SideAllocGrp> Cardinality: 1-99, Record counter: NoSideAllocs												
80	>AllocQty	Y	8	112	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	N	4	120	unsigned int	Unique identifier for a TES trade side.						
25180	>TESEnrichment-RuleID	N	4	124	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).						
54	>Side	Y	1	128	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
22001	>PartyExecutingFirm	Y	5	129	Fixed String	Approving business unit. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	134	Fixed String	Approving user name. Valid characters: A-Z, 0-9, \x20						
39040	>Pad4	U	4	140	Fixed String	not used						
<TrdInstrmntLegGrp> Cardinality: 0-20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.						
566	>LegPrice	Y	8	8	PriceType	User provided leg trade price (not for underlying leg).						
687	>LegQty	U	8	16	Qty	not used						

14.5 Delete TES Trade Request

This message allows the deletion of a pending TES trade by its initiating user. This message is sent to the service "T7 Entry".

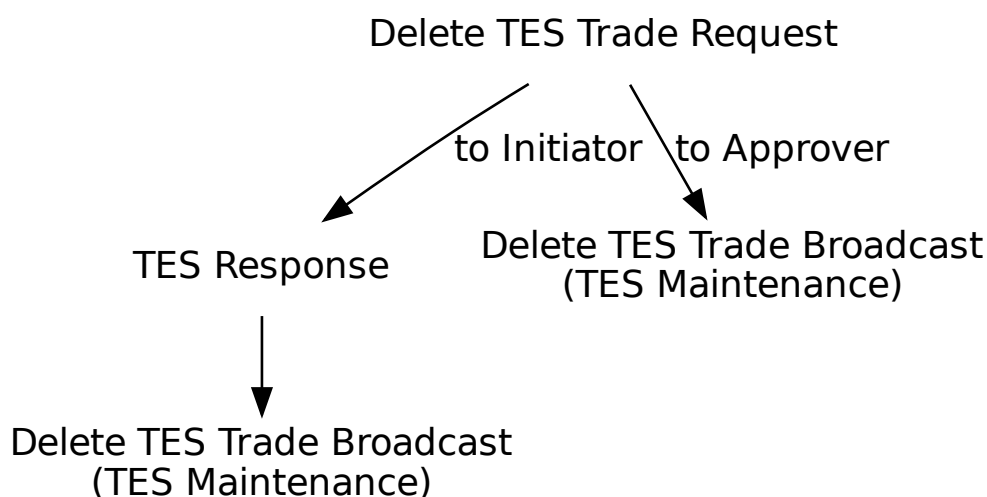

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10602 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
2489	PackageID	Y	4	24	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
1300	MarketSegmentID	Y	4	28	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
30017	TESExecID	Y	4	32	unsigned int	System transaction identifier for a T7 Entry Service transaction. The latest value available to the Initiator for the corresponding TES Trade needs to be provided.																
2546	RelatedMarket-SegmentID	N	4	36	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																
828	TrdType	Y	2	40	unsigned int	Type of TES trade. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					
856	TradeReportType	Y	1	42	unsigned int	Type of Trade Report <table><tr><th>Value</th><th>Description</th></tr><tr><td>6</td><td>Trade Report Cancel</td></tr></table>	Value	Description	6	Trade Report Cancel												
Value	Description																					
6	Trade Report Cancel																					
571	TradeReportID	N	20	43	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E																
39000	Pad1	U	1	63	Fixed String	not used																

14.6 Delete TES Trade Broadcast

This message informs initiator and approvers about TES Trade deletions.


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10606 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																				
2489	PackageID	Y	4	52	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.																				
30017	TESExecID	Y	4	56	unsigned int	System transaction identifier for a T7 Entry Service transaction.																				
828	TrdType	Y	2	60	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTIPI BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTIPI BLOCK TRADE	1004	Trade at Market				
Value	Description																									
1	Block Trade																									
12	Exchange for Swap																									
1000	Vola Trade																									
1001	EFP-Fin Trade																									
1002	EFP-Index Futures Trade																									
1007	QTIPI BLOCK TRADE																									
1004	Trade at Market																									
285	DeleteReason	Y	1	62	unsigned int	Reason for deletion. <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Deletion via the TES Delete Request</td></tr><tr><td>101</td><td>Automatic deletion due to TES Activity State Change</td></tr><tr><td>102</td><td>Automatic deletion due to instrument expiration</td></tr><tr><td>103</td><td>Deletion caused by Clearing/Risk stop</td></tr><tr><td>104</td><td>Deletion caused by Trading stop</td></tr><tr><td>105</td><td>Deletion of Instrument</td></tr><tr><td>106</td><td>Suspension of Instrument</td></tr><tr><td>107</td><td>Deletion caused by a pre-trade risk event</td></tr><tr><td>112</td><td>D-2 Order Cancellation</td></tr></table>	Value	Description	100	Deletion via the TES Delete Request	101	Automatic deletion due to TES Activity State Change	102	Automatic deletion due to instrument expiration	103	Deletion caused by Clearing/Risk stop	104	Deletion caused by Trading stop	105	Deletion of Instrument	106	Suspension of Instrument	107	Deletion caused by a pre-trade risk event	112	D-2 Order Cancellation
Value	Description																									
100	Deletion via the TES Delete Request																									
101	Automatic deletion due to TES Activity State Change																									
102	Automatic deletion due to instrument expiration																									
103	Deletion caused by Clearing/Risk stop																									
104	Deletion caused by Trading stop																									
105	Deletion of Instrument																									
106	Suspension of Instrument																									
107	Deletion caused by a pre-trade risk event																									
112	D-2 Order Cancellation																									
856	TradeReportType	Y	1	63	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Trade Report Cancel</td></tr></table>	Value	Description	6	Trade Report Cancel																
Value	Description																									
6	Trade Report Cancel																									
939	TrdRptStatus	N	1	64	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Cancelled</td></tr></table>	Value	Description	2	Cancelled																
Value	Description																									
2	Cancelled																									

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1011	MessageEventSource	Y	1	65	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>I</td><td>Broadcast to initiator</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	I	Broadcast to initiator	A	Broadcast to approver
Value	Description											
I	Broadcast to initiator											
A	Broadcast to approver											
571	TradeReportID	N	20	66	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
39020	Pad2	U	2	86	Fixed String	not used						

14.7 Approve TES Trade Request

This message allows the approval of a pending TES trade side by its approving user. All TES trade side specific information (e.g. trading capacity, open/close indicator, text fields) needs to be specified in this request. A TES trade also needs to be approved by the initiating user if the initiating user is identical to an approving user, i.e. if the user who was initiating the TES trade is also involved on any side of the same TES trade. This message is sent to the service "T7 Entry".

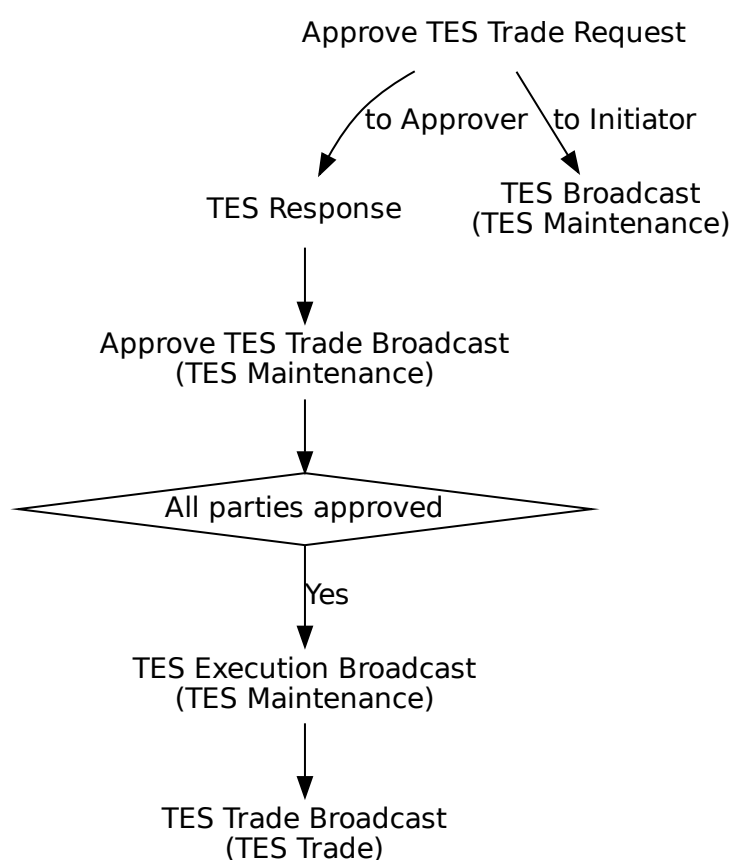

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10603 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
20003	PartyIDClientID	N	8	24	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A)) used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.
20122	PartyIDInvestment-DecisionMaker	N	8	32	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.
25123	ExecutingTrader	N	8	40	unsigned int	MiFID field: Executing Trader data Field (ESMA Field 5 (Section A)) used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.
80	AllocQty	Y	8	48	Qty	Quantity of the particular trade side in the TES trade.
2489	PackagelD	Y	4	56	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
70	AllocID	Y	4	60	unsigned int	Unique identifier for a TES Trade side.
30017	TESExecID	Y	4	64	unsigned int	System transaction identifier for a T7 Entry Service transaction. The latest value available to the Approver for the corresponding TES Trade side needs to be provided.
1300	MarketSegmentID	Y	4	68	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
2546	RelatedMarket-SegmentID	N	4	72	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																
828	TrdType	Y	2	76	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					
1815	TradingCapacity	Y	1	78	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker								
Value	Description																					
1	Customer (Agency)																					
5	Principal (Proprietary)																					
6	Market Maker																					
856	TradeReportType	Y	1	79	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr></table>	Value	Description	2	Accept												
Value	Description																					
2	Accept																					
54	Side	Y	1	80	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell										
Value	Description																					
1	Buy																					
2	Sell																					
23002	OrderAttribute-LiquidityProvision	Y	1	81	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision										
Value	Description																					
1	Liquidity provision																					
0	No liquidity provision																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
21222	PartyIdInvestment-DecisionMaker-Qualifier	N	1	82	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
25124	ExecutingTrader-Qualifier	N	1	83	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
23003	OrderAttributeRisk-Reduction	N	1	84	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
1724	OrderOrigination	N	1	85	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
571	TradeReportID	N	20	86	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
77	PositionEffect	Y	1	106	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
22001	PartyExecutingFirm	Y	5	107	Fixed String	Approving business unit. Valid characters: A-Z, 0-9, \x20						
22012	PartyExecutingTrader	Y	6	112	Fixed String	Approving user name. Valid characters: A-Z, 0-9, \x20						
1	Account	N	2	118	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
25007	FreeText1	N	12	120	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	FreeText2	N	12	132	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	FreeText3	N	12	144	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
20096	PartyIDTakeUp-TradingFirm	N	5	156	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20						
20038	PartyIDPosition-Account	N	32	161	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						
20013	PartyIDOrder-OriginationFirm	N	7	193	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20						
20032	PartyIDBeneficiary	N	9	200	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
20075	PartyIDLocationID	N	2	209	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	CustOrderHandling-Inst	N	1	211	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	ComplianceText	N	20	212	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
25241	PartyEndClient-Identification	N	20	232	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F																
39040	Pad4	U	4	252	Fixed String	not used																

14.8 Approve TES Trade Broadcast

This message informs about approved TES Trades.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10607 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
31	LastPx	Y	8	48	PriceType	Price of TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
80	AllocQty	Y	8	56	Qty	Quantity of the particular trade side in the TES trade.
60	TransactTime	Y	8	64	UTCTimestamp	Transaction timestamp.
810	UnderlyingPx	N	8	72	PriceType	Underlying price associated with a derivative instrument.
483	TransBkdTime	N	8	80	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.
2589	RelatedClosePrice	N	8	88	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].
1860	RelatedTradeQuantity	N	8	96	Qty	Quantity of the related trade. To be set for TrdType (1000) Vola Trade [mandatory].
879	UnderlyingQty	N	8	104	Qty	Nominal value of an underlying (for an EFS or EFP Index Trade in units of thousand).
1300	MarketSegmentID	Y	4	112	signed int	Product identifier.
2489	PackageID	Y	4	116	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
30017	TESExecID	Y	4	120	unsigned int	System transaction identifier for a T7 Entry Service transaction.
70	AllocID	Y	4	124	unsigned int	Unique identifier for a TES Trade side.
987	UnderlyingSettlement-Date	N	4	128	LocalMktDate	Date the underlying instrument will settle. To be set for TrdType (1) Echange for Swap [optional] and (1001) EFP-Fin Trade [optional].
542	UnderlyingMaturity-Date	N	4	132	LocalMktDate	Underlying security's maturity date. To be set for TrdType (1001) EFP-Fin Trade [mandatory].
1856	RelatedTradeID	N	4	136	unsigned int	Identifier of a related trade. To be set for TrdType (1000) Vola Trade [mandatory].
2546	RelatedMarket-SegmentID	N	4	140	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].
28758	NegotiationID	N	4	144	unsigned int	ID of a SRQS negotiation.
25180	TESEnrichmentRule-ID	N	4	148	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).
25181	AutoApprovalRuleID	N	4	152	unsigned int	Auto Approval Rule ID applied for TES trade approval

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
828	TrdType	Y	2	156	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					
30354	VarTextLen	N	2	158	Counter	Number of used bytes for field Var-Text (30355).																
54	Side	Y	1	160	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell										
Value	Description																					
1	Buy																					
2	Sell																					
1390	TradePublishIndicator	Y	1	161	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade										
Value	Description																					
0	Do not publish trade																					
1	Publish trade																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																														
1227	ProductComplex	N	1	162	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	10	Flexible Simple Instrument	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																			
1	Simple instrument																																			
2	Standard Option Strategy																																			
3	Non-Standard Option Strategy																																			
4	Volatility Strategy																																			
5	Futures Spread																																			
6	Inter-Product Spread																																			
7	Standard Future Strategy																																			
8	Pack and Bundle																																			
9	Strip																																			
10	Flexible Simple Instrument																																			
11	Commodity Strip																																			
12	Scaled Simple Instrument																																			
13	Non-Standard Volatility Strategy																																			
14	Total Return Future Strategy																																			
856	TradeReportType	Y	1	163	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr></table>	Value	Description	2	Accept																										
Value	Description																																			
2	Accept																																			
939	TrdRptStatus	N	1	164	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Pending new</td></tr></table>	Value	Description	4	Pending new																										
Value	Description																																			
4	Pending new																																			
1815	TradingCapacity	Y	1	165	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker																						
Value	Description																																			
1	Customer (Agency)																																			
5	Principal (Proprietary)																																			
6	Market Maker																																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
20010	PartyIDSettlement-Location	N	1	166	unsigned int	ID of settlement location.	
						Value	Description
						1	Clearstream Banking Frankfurt
						2	Clearstream Banking Luxembourg
						3	CLS Group
						4	Euroclear
1840	TradeAllocStatus	Y	1	167	unsigned int	Status of an allocation in a T7 Entry Service trade.	
						Value	Description
						1	Pending
						2	Approved
						3	Auto Approved
						4	Uploaded
						5	Canceled
						7	Pending Reversal
						8	Side Approved Reversal
						9	Reversed
						10	Cancelled Reversal
						11	Auto Approved Reversal
29008	HedgeType	N	1	168	unsigned int	Hedging method.	
						To be set for TrdType (12) Exchange for Swap [mandatory], (1001) EFP-Fin Trade [mandatory]and (1002) EFI-Index Futures Trade [mandatory].	
						Value	Description
						0	Duration Hedge
						1	Nominal Hedge
						2	Price Factor Hedge
555	NoLegs	Y	1	169	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).	
864	NoEvents	Y	1	170	Counter	Number of repeating EventType entries.	
870	NoInstrAttrib	Y	1	171	Counter	Number of repeating InstrAttribType entries.	
887	NoUnderlyingStips	Y	1	172	Counter	Number of underlying stipulation entries.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1011	MessageEventSource	Y	1	173	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>I</td><td>Broadcast to initiator</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	I	Broadcast to initiator	A	Broadcast to approver
Value	Description											
I	Broadcast to initiator											
A	Broadcast to approver											
571	TradeReportID	N	20	174	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
22001	PartyExecutingFirm	Y	5	194	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	PartyExecutingTrader	Y	6	199	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
20007	PartyIDEnteringFirm	Y	1	205	unsigned int	Entering Entity ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Participant</td></tr><tr><td>2</td><td>Market Supervision</td></tr></table>	Value	Description	1	Participant	2	Market Supervision
Value	Description											
1	Participant											
2	Market Supervision											
22036	PartyEnteringTrader	Y	6	206	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20						
77	PositionEffect	Y	1	212	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
22401	RootPartyExecuting-Firm	N	5	213	Fixed String	Participant Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
22412	RootPartyExecuting-Trader	N	6	218	Fixed String	Owning User Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E						
25007	FreeText1	N	12	224	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25008	FreeText2	N	12	236	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
25009	FreeText3	N	12	248	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
20096	PartyIDTakeUp- TradingFirm	N	5	260	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
1	Account	N	2	265	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52
20038	PartyIDPosition- Account	N	32	267	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A
20013	PartyIDOrder- OriginationFirm	N	7	299	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20032	PartyIDBeneficiary	N	9	306	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20
20075	PartyIDLocationID	N	2	315	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	CustOrderHandling-Inst	N	1	317	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	ComplianceText	N	20	318	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
309	UnderlyingSecurityID	N	12	338	ISIN	Underlying security's ID (ISIN). To be set for TrdType (1001) EFP-Fin Trade [mandatory]. Valid characters: A-Z, 0-9, \x20																
307	UnderlyingSecurity-Desc	N	30	350	Fixed String	Description of the Underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E																
318	UnderlyingCurrency	N	3	380	CurrencyType	Underlying security's currency. To be set for TrdType (12) Exchange for Swap [optional]and (1001) EFP-Fin Trade [optional]. Valid characters: A-Z, 0-9, \x20																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
306	UnderlyingIssuer	N	30	383	Fixed String	The issuer or name of the underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
39030	Pad3	U	3	413	Fixed String	not used						
<TrdInstrmntLegGrp> Cardinality: 0-20, Record counter: NoLegs												
602	>LegSecurityID	Y	8	416	signed int	Instrument identifier of the leg security.						
566	>LegPrice	Y	8	424	PriceType	User provided leg trade price (not for underlying leg).						
687	>LegQty	U	8	432	Qty	not used						
<InstrumentEventGrp> Cardinality: 0-2, Record counter: NoEvents												
866	>EventDate	Y	4	0	LocalMktDate	Date of event. To be set for TrdType (12) Exchange for Swap [mandatory].						
865	>EventType	Y	1	4	unsigned int	Identifier for an Instrument Event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>Swap Start Date</td></tr><tr><td>9</td><td>Swap End Date</td></tr></table>	Value	Description	8	Swap Start Date	9	Swap End Date
Value	Description											
8	Swap Start Date											
9	Swap End Date											
39030	>Pad3	U	3	5	Fixed String	not used						
<InstrumentAttributeGrp> Cardinality: 0-6, Record counter: NoInstrAttrib												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
871	>InstrAttribType	Y	1	0	unsigned int	Code to represent the type of instrument attribute. To be set for TrdType (12) Exchange for Swap[Swap, Customer_1, Swap_Customer_2 Variable_Rate, Offset_to-the_variable_coupon_rate: optional], (1001) EFP-Fin Trade [Coupon_Rate: optional]and (1002) EFP-Index Futures Trade[Cash_Basket_Reference: mandatory]. <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Variable rate</td></tr><tr><td>100</td><td>Coupon rate</td></tr><tr><td>101</td><td>Offset to the variable coupon rate</td></tr><tr><td>102</td><td>Swap Customer 1</td></tr><tr><td>103</td><td>Swap Customer 2</td></tr><tr><td>104</td><td>Cash Basket Reference</td></tr></table>	Value	Description	5	Variable rate	100	Coupon rate	101	Offset to the variable coupon rate	102	Swap Customer 1	103	Swap Customer 2	104	Cash Basket Reference
Value	Description																			
5	Variable rate																			
100	Coupon rate																			
101	Offset to the variable coupon rate																			
102	Swap Customer 1																			
103	Swap Customer 2																			
104	Cash Basket Reference																			
872	>InstrAttribValue	Y	32	1	Fixed String	Attribute value appropriate to the InstrAttribType field. To be set for TrdTyp (12) Exchange for Swap [optional], (1001) EFP-Fin Trade [optional] and (1002) EFP-Index Futures Trade [mandatory]. Valid characters: \x01-\x7E														
39070	>Pad7	U	7	33	Fixed String	not used														
<UnderlyingStipGrp> Cardinality: 0-1, Record counter: NoUnderlyingStips																				
889	>UnderlyingStipValue	Y	32	0	Fixed String	Value of stipulation. In case of coupon frequency , fill the field with coupon frequency value. To be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E														

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
888	>UnderlyingStipType	Y	7	32	Fixed String	Type of stipulation. e.g. to denote coupon frequency. Pay_Frequency to be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PAYFREQ</td><td>Pay_Frequency</td></tr></table>	Value	Description	PAYFREQ	Pay_Frequency
Value	Description									
PAYFREQ	Pay_Frequency									
39000	>Pad1	U	1	39	Fixed String	not used				
30355	VarText	N	2000	0	Variable String	Reason for erroneous Auto Approval processing Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E				

14.9 TES Status Broadcast

This message informs about the TES status.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10615 (TradingSessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr><tr><td>8</td><td>TES Trade</td></tr></table>	Value	Description	7	TES Maintenance	8	TES Trade
Value	Description											
7	TES Maintenance											
8	TES Trade											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
75	TradeDate	N	4	40	LocalMktDate	Business date.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1368	TradSesEvent	Y	1	44	unsigned int	Trading session event type.	
						Value	Description
						101	Start of Service
						104	End of Service
39030	Pad3	U	3	45	Fixed String	not used	

14.10 TES Execution Broadcast

This message indicates that all parties have approved the TES trade.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10610 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
2489	PackageID	Y	4	52	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.																
30017	TESExecID	Y	4	56	unsigned int	System transaction identifier for a T7 Entry Service transaction.																
70	AllocID	Y	4	60	unsigned int	Unique identifier for a TES Trade side.																
828	TrdType	Y	2	64	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					
856	TradeReportType	Y	1	66	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr></table>	Value	Description	2	Accept												
Value	Description																					
2	Accept																					
54	Side	Y	1	67	unsigned int	Side of the TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell										
Value	Description																					
1	Buy																					
2	Sell																					
939	TrdRptStatus	N	1	68	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr></table>	Value	Description	0	Accepted												
Value	Description																					
0	Accepted																					
1011	MessageEventSource	Y	1	69	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	A	Broadcast to approver												
Value	Description																					
A	Broadcast to approver																					
39020	Pad2	U	2	70	Fixed String	not used																

14.11 TES Trade Broadcast

This messages provides the TES Trade notification.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10614 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>TES Trade</td></tr></table>	Value	Description	8	TES Trade		
Value	Description											
8	TES Trade											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
31	LastPx	Y	8	48	PriceType	Price of TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
32	LastQty	Y	8	56	Qty	Quantity executed in this fill.
1596	ClearingTradePrice	N	8	64	PriceType	Price in clearing notation which can be preliminary or final depending on TradeReportType (856).
28736	ClearingTradeQty	N	8	72	Qty	Quantity in clearing notation.
60	TransactTime	Y	8	80	UTCTimestamp	Transaction timestamp.
1650	RelatedSecurityID	N	8	88	signed int	Instrument identifier of the original T7 strategy.
20403	RootPartyIDClientID	N	8	96	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A)) used to identify the client of an order for agent account of the member or participant of the trading venue.
25123	ExecutingTrader	N	8	104	unsigned int	MiFID field: Executing Trader data Field (ESMA Field 5 (Section A)) used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.
20522	RootParty-IDInvestmentDecision-Maker	N	8	112	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.
25161	BasketTrdMatchID	N	8	120	unsigned int	System defined Basket ID.
25248	OrigBasketTrdMatch-ID	N	8	128	unsigned int	System defined Original Basket ID.
28585	SideLastPx	N	8	136	PriceType	Fill price for the original T7 strategy.
1009	SideLastQty	N	8	144	Qty	Fill quantity for the original T7 strategy.
2589	RelatedClosePrice	N	8	152	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].
30017	TESExecID	N	4	160	unsigned int	System transaction identifier for a T7 Entry Service transaction.
2489	PackageID	Y	4	164	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
1300	MarketSegmentID	Y	4	168	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
1003	TradeID	Y	4	172	unsigned int	Uniquely Identifies all TES Trade Sides executed as part of a TES Trade per simple instrument.
75	TradeDate	Y	4	176	LocalMktDate	Business date.
1506	SideTradeID	Y	4	180	unsigned int	Private trade identifier of an executed TES Trade Side per simple instrument.
20455	RootPartyIDSessionID	N	4	184	unsigned int	Session ID.
1126	OrigTradeID	N	4	188	unsigned int	In case of a trade reversal/modification this field provides the original trade identifier.
20459	RootParty- IDExecutingUnit	Y	4	192	unsigned int	Business Unit ID.
20412	RootParty- IDExecutingTrader	Y	4	196	unsigned int	Owning User ID.
25026	RootPartyIDClearing- Unit	N	4	200	unsigned int	Clearing Business Unit ID.
1851	StrategyLinkID	N	4	204	unsigned int	Corresponds to the Alloc-ID/IndividualAllocID (unique identifier for a TES Trade side).
1649	RelatedSymbol	N	4	208	signed int	Product identifier of the original T7 strategy.
748	TotNumTradeReports	N	4	212	signed int	Number of leg executions of the original strategy order.
28758	NegotiationID	N	4	216	unsigned int	ID of a SRQS negotiation.
25152	SRQSRelatedTradeID	N	4	220	unsigned int	Trade ID out of a SRQS Negotiation Event.
28899	BasketProfileID	N	4	224	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).
762	SecuritySubType	N	4	228	signed int	Sub-type qualification/identification of the SecurityType

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
828	TrdType	N	2	232	unsigned int	Type of TES trade.	
						Value	Description
						1	Block Trade
						12	Exchange for Swap
						1000	Vola Trade
						1001	EFP-Fin Trade
						1002	EFP-Index Futures Trade
						1007	QTPIP BLOCK TRADE
						1004	Trade at Market
1006	Eurex/Xetra Enlight triggered trade						
1227	ProductComplex	N	1	234	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						10	Flexible Simple Instrument
28587	RelatedProduct-Complex	N	1	235	unsigned int	Instrument type of the original T7 strategy.	
						Value	Description
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
						14	Total Return Future Strategy
54	Side	Y	1	236	unsigned int	Side of the TES trade.	
						Value	Description
						1	Buy
						2	Sell

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
1815	TradingCapacity	N	1	237	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker		
Value	Description															
1	Customer (Agency)															
5	Principal (Proprietary)															
6	Market Maker															
856	TradeReportType	Y	1	238	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>1</td><td>Alleged</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr><tr><td>7</td><td>(Locked-In) Trade Break</td></tr></table>	Value	Description	0	Submit	1	Alleged	5	No/Was (Replaced)	7	(Locked-In) Trade Break
Value	Description															
0	Submit															
1	Alleged															
5	No/Was (Replaced)															
7	(Locked-In) Trade Break															
830	TransferReason	Y	1	239	unsigned int	Identifies the role for which the trade notification is received. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Owner</td></tr><tr><td>2</td><td>Clearer</td></tr></table>	Value	Description	1	Owner	2	Clearer				
Value	Description															
1	Owner															
2	Clearer															
1390	TradePublishIndicator	Y	1	240	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Deferred publication to market</td></tr><tr><td>3</td><td>Published to market</td></tr></table>	Value	Description	2	Deferred publication to market	3	Published to market				
Value	Description															
2	Deferred publication to market															
3	Published to market															
25247	OptionalEarlyTerminationIndicator	N	1	241	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
442	MultiLegReportingType	N	1	242	unsigned int	Indicates if the trade resulted from a single order or a multi leg instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Single instrument</td></tr><tr><td>2</td><td>Complex instrument</td></tr></table>	Value	Description	1	Single instrument	2	Complex instrument				
Value	Description															
1	Single instrument															
2	Complex instrument															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
77	PositionEffect	N	1	243	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
28750	MultilegPriceModel	N	1	244	unsigned int	Price decomposition method for legs of a complex instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>leg level prices provided by system</td></tr><tr><td>1</td><td>leg level prices provided by user</td></tr></table>	Value	Description	0	leg level prices provided by system	1	leg level prices provided by user
Value	Description											
0	leg level prices provided by system											
1	leg level prices provided by user											
23002	OrderAttribute-LiquidityProvision	N	1	245	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision
Value	Description											
1	Liquidity provision											
0	No liquidity provision											
23003	OrderAttributeRisk-Reduction	N	1	246	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
25124	ExecutingTrader-Qualifier	N	1	247	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
21622	RootParty-IDInvestmentDecision-MakerQualifier	N	1	248	unsigned int	MiFID field: Qualifier for field Party-IdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><td>Value</td><td>Description</td></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
1724	OrderOrigination	N	1	249	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
700	ReversalIndicator	N	1	250	unsigned int	Indicator whether the reversal of the TES trade is electronically requested or not <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
2788	TradeAggregation-TransType	N	1	251	unsigned int	Trade Aggregation Identifier. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>New</td></tr></table>	Value	Description	0	New		
Value	Description											
0	New											
1	Account	N	2	252	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20438	RootPartyIDPosition-Account	N	32	254	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	CustOrderHandling-Inst	N	1	286	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
25007	FreeText1	N	12	287	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25008	FreeText2	N	12	299	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25009	FreeText3	N	12	311	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
22401	RootPartyExecuting-Firm	Y	5	323	Fixed String	Participant Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
22412	RootPartyExecuting-Trader	Y	6	328	Fixed String	Owning User Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
22404	RootPartyClearing-Firm	N	5	334	Fixed String	Clearing Member Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
22421	RootPartyClearing-Organization	Y	4	339	Fixed String	Clearing House Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
20432	RootParty-IDBeneficiary	N	9	343	Fixed String	Final Beneficiary. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
20496	RootPartyIDTakeUp-TradingFirm	N	5	352	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
20413	RootPartyIDOrder-OriginationFirm	N	7	357	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20473	RootParty-IDExecutionVenue	N	4	364	Fixed String	Market Segment Identification Code Valid characters: \x20, \x22-\x7B, \x7D, \x7E
1903	RegulatoryTradeID	N	52	368	Fixed String	TVTIC - Trading Venue Transaction Identification Code Valid characters: 0-9, A-Z, a-z, \x20
25182	BasketPartyContra-Firm	N	5	420	Fixed String	The identifier of the basket member counterparty institution. Valid characters: A-Z, 0-9, \x20
26162	BasketSideTrade-ReportID	N	20	425	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E
32999	FeeDntCode	N	15	445	Fixed String	This field indicates the Fee Code associated with the transaction. Valid characters: \x41-\x45, \x47, \x4B, \x4D, \x4E, \x50, \x52, \x53, \x54, \x56, \x57, \x58
39040	Pad4	U	4	460	Fixed String	not used

14.12 Reverse TES Trade Request

This message is sent to the service "T7 Entry".

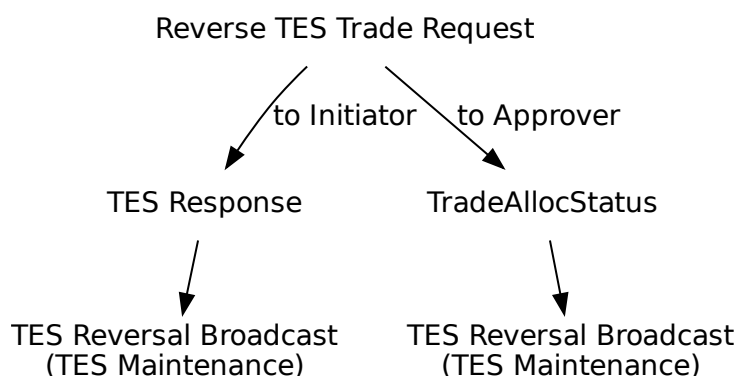


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10630 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.
2489	PackageID	Y	4	28	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
30017	TESExecID	Y	4	32	unsigned int	System transaction identifier for a T7 Entry Service transaction.
2546	RelatedMarket-SegmentID	N	4	36	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
828	TrdType	Y	2	40	unsigned int	Type of TES trade.	
						Value	Description
						1	Block Trade
						12	Exchange for Swap
						1000	Vola Trade
						1001	EFP-Fin Trade
						1002	EFP-Index Futures Trade
						1007	QTPIP BLOCK TRADE
						1004	Trade at Market
1006	Eurex/Xetra Enlight triggered trade						
571	TradeReportID	N	20	42	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E	
25196	ReversalReasonText	N	132	62	Fixed String	Reversal Reason Text. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
39060	Pad6	U	6	194	Fixed String	not used	

14.13 Approve Reverse TES Trade Request

This message is sent to the service "T7 Entry".

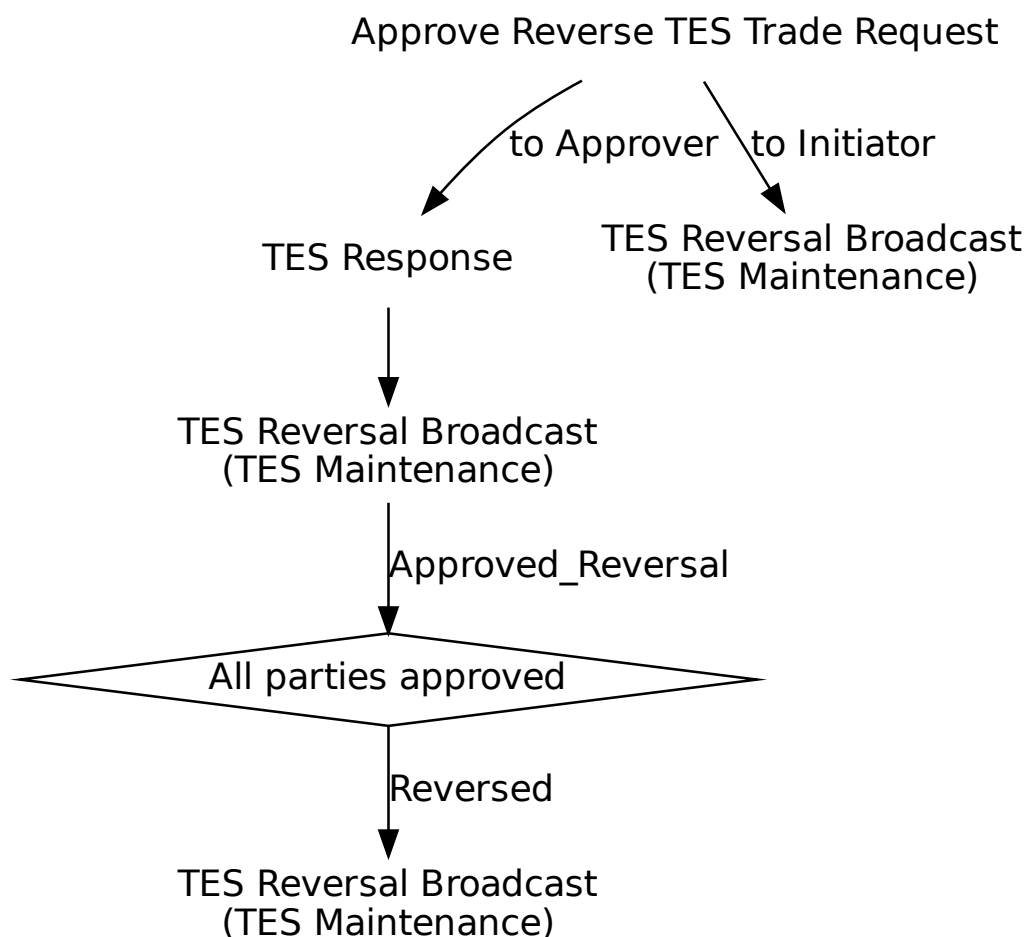

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10631 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.																		
50	SenderSubID	Y	4	20	unsigned int	User ID.																		
<MessageBody>																								
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.																		
2489	PackagelD	Y	4	28	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.																		
70	AllocID	Y	4	32	unsigned int	Unique identifier for a TES Trade side.																		
30017	TESExecID	Y	4	36	unsigned int	System transaction identifier for a T7 Entry Service transaction.																		
2546	RelatedMarket-SegmentID	N	4	40	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																		
828	TrdType	Y	2	44	unsigned int	Type of TES trade. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr><tr><td>1006</td><td>Eurex/Xetra Enlight triggered trade</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market	1006	Eurex/Xetra Enlight triggered trade
Value	Description																							
1	Block Trade																							
12	Exchange for Swap																							
1000	Vola Trade																							
1001	EFP-Fin Trade																							
1002	EFP-Index Futures Trade																							
1007	QTPIP BLOCK TRADE																							
1004	Trade at Market																							
1006	Eurex/Xetra Enlight triggered trade																							
571	TradeReportID	N	20	46	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E																		
39060	Pad6	U	6	66	Fixed String	not used																		

14.14 TES Reversal Broadcast


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10632 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25197	ReversalInitiationTime	N	8	40	UTCTimestamp	Reversal Initiation Time.						
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
2489	PackageID	Y	4	52	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.																		
30017	TESExecID	Y	4	56	unsigned int	System transaction identifier for a T7 Entry Service transaction.																		
2546	RelatedMarket-SegmentID	N	4	60	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																		
828	TrdType	Y	2	64	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr><tr><td>1006</td><td>Eurex/Xetra Enlight triggered trade</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market	1006	Eurex/Xetra Enlight triggered trade
Value	Description																							
1	Block Trade																							
12	Exchange for Swap																							
1000	Vola Trade																							
1001	EFP-Fin Trade																							
1002	EFP-Index Futures Trade																							
1007	QTPIP BLOCK TRADE																							
1004	Trade at Market																							
1006	Eurex/Xetra Enlight triggered trade																							
939	TrdRptStatus	N	1	66	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>7</td><td>Terminated</td></tr><tr><td>5</td><td>Pending Cancel</td></tr></table>	Value	Description	0	Accepted	7	Terminated	5	Pending Cancel										
Value	Description																							
0	Accepted																							
7	Terminated																							
5	Pending Cancel																							
25195	ReversalCancellation-Reason	N	1	67	unsigned int	Reversal Cancellation Reason <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>TES Activity State Change</td></tr><tr><td>2</td><td>Instrument Expiration</td></tr><tr><td>3</td><td>Instrument Deletion</td></tr><tr><td>4</td><td>Instrument Suspension</td></tr></table>	Value	Description	1	TES Activity State Change	2	Instrument Expiration	3	Instrument Deletion	4	Instrument Suspension								
Value	Description																							
1	TES Activity State Change																							
2	Instrument Expiration																							
3	Instrument Deletion																							
4	Instrument Suspension																							
28709	NoSideAllocs	Y	1	68	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.																		
571	TradeReportID	N	20	69	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E																		
25196	ReversalReasonText	N	132	89	Fixed String	Reversal Reason Text. Valid characters: \x20, \x22-\x7B, \x7D, \x7E																		
39030	Pad3	U	3	221	Fixed String	not used																		

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
<SideAllocGrpBC> Cardinality: 1 - 99, Record counter: NoSideAllocs																												
80	>AllocQty	U	8	224	Qty	not used																						
25198	>ReversalApproval-Time	N	8	232	UTCTimestamp	Reversal Approval Time																						
467	>IndividualAllocID	Y	4	240	unsigned int	Unique identifier for a TES trade side.																						
25180	>TESEnrichment-RuleID	U	4	244	unsigned int	not used																						
22001	>PartyExecutingFirm	U	5	248	Fixed String	not used																						
22012	>PartyExecuting-Trader	U	6	253	Fixed String	not used																						
54	>Side	U	1	259	unsigned int	not used																						
1840	>TradeAllocStatus	Y	1	260	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
39030	>Pad3	U	3	261	Fixed String	not used																						

14.15 Upload TES Trade Request

This message is used to upload TES Trades. This message is sent to the service "T7 Entry".

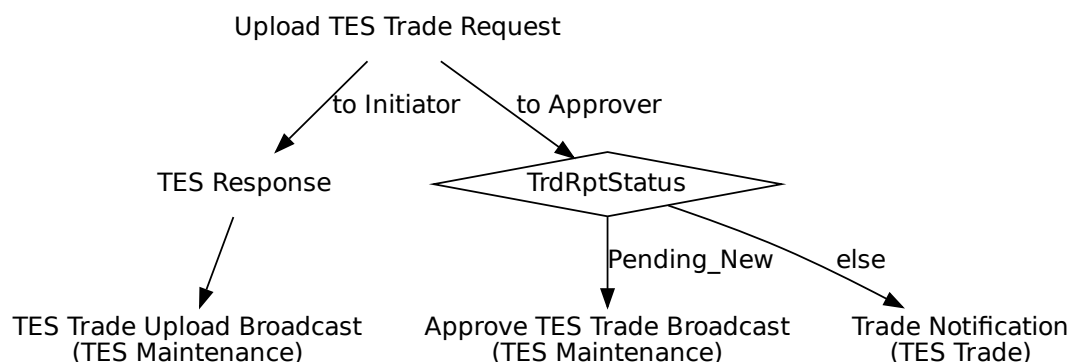

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10612 (Trade-CaptureReport, MsgType = AE)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	Y	8	24	signed int	Instrument identifier.
31	LastPx	Y	8	32	PriceType	Price of TES trade.
483	TransBkdTime	N	8	40	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.
810	UnderlyingPx	N	8	48	PriceType	Underlying price associated with a derivative instrument.
2589	RelatedClosePrice	N	8	56	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1860	RelatedTradeQuantity	N	8	64	Qty	Quantity of the related trade. To be set for TrdType (1000) Vola Trade [mandatory].																
879	UnderlyingQty	N	8	72	Qty	Nominal value of an underlying (for an EFS or EFP Index Trade in units of thousand).																
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.																
987	UnderlyingSettlement-Date	N	4	84	LocalMktDate	Date the underlying instrument will settle. To be set for TrdType (1) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional].																
542	UnderlyingMaturity-Date	N	4	88	LocalMktDate	Underlying security's maturity date. To be set for TrdType (1001) EFP-Fin Trade [mandatory].																
1856	RelatedTradeID	N	4	92	unsigned int	Identifier of a related trade. To be set for TrdType (1000) Vola Trade [mandatory].																
2546	RelatedMarket-SegmentID	N	4	96	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].																
828	TrdType	Y	2	100	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market
Value	Description																					
1	Block Trade																					
12	Exchange for Swap																					
1000	Vola Trade																					
1001	EFP-Fin Trade																					
1002	EFP-Index Futures Trade																					
1007	QTPIP BLOCK TRADE																					
1004	Trade at Market																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	ProductComplex	N	1	102	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						10	Flexible Simple Instrument
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
14	Total Return Future Strategy						
856	TradeReportType	Y	1	103	unsigned int	Type of Trade Report	
						Value	Description
						0	Submit
1390	TradePublishIndicator	Y	1	104	unsigned int	Indicates if a trade should be reported via the market reporting service.	
						Value	Description
						0	Do not publish trade
						1	Publish trade
28709	NoSideAllocs	Y	1	105	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.	
555	NoLegs	Y	1	106	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).	
864	NoEvents	Y	1	107	Counter	Number of repeating EventType entries.	
870	NoInstrAttrib	Y	1	108	Counter	Number of repeating InstrAttribType entries.	
887	NoUnderlyingStips	Y	1	109	Counter	Number of underlying stipulation entries.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
25034	SkipValidations	Y	1	110	unsigned int	Indicator to skip validations. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True				
Value	Description															
0	False															
1	True															
939	TrdRptStatus	N	1	111	unsigned int	Can only be used for EEX <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr></table>	Value	Description	0	Accepted	4	Pending new				
Value	Description															
0	Accepted															
4	Pending new															
25160	TradePlatform	N	1	112	unsigned int	Indicates trade platform. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Off-Book</td></tr><tr><td>1</td><td>On-Book</td></tr></table>	Value	Description	0	Off-Book	1	On-Book				
Value	Description															
0	Off-Book															
1	On-Book															
29008	HedgeType	N	1	113	unsigned int	Hedging method. To be set for TrdType (12) Exchange for Swap [mandatory], (1001) EFP-Fin Trade [mandatory]and (1002) EFI-Index Futures Trade [mandatory]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Duration Hedge</td></tr><tr><td>1</td><td>Nominal Hedge</td></tr><tr><td>2</td><td>Price Factor Hedge</td></tr></table>	Value	Description	0	Duration Hedge	1	Nominal Hedge	2	Price Factor Hedge		
Value	Description															
0	Duration Hedge															
1	Nominal Hedge															
2	Price Factor Hedge															
20010	PartyIDSettlement-Location	N	1	114	unsigned int	ID of settlement location. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Clearstrem Banking Frankfurt</td></tr><tr><td>2</td><td>Clearstrem Banking Luxemburg</td></tr><tr><td>3</td><td>CLS Group</td></tr><tr><td>4</td><td>Euroclear</td></tr></table>	Value	Description	1	Clearstrem Banking Frankfurt	2	Clearstrem Banking Luxemburg	3	CLS Group	4	Euroclear
Value	Description															
1	Clearstrem Banking Frankfurt															
2	Clearstrem Banking Luxemburg															
3	CLS Group															
4	Euroclear															
25175	ValueCheckTypeMin-LotSize	N	1	115	unsigned int	Indicator for checking the Minimum Lot Size by the exchange. Mandatory if TrdRptStatus=4(Pending_New) <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check				
Value	Description															
0	Do not check															
1	Check															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
571	TradeReportID	N	20	116	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
28583	TradeReportText	N	20	136	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
309	UnderlyingSecurityID	N	12	156	ISIN	Underlying security's ID (ISIN). To be set for TrdType (1001) EFP-Fin Trade [mandatory]. Valid characters: A-Z, 0-9, \x20						
307	UnderlyingSecurity-Desc	N	30	168	Fixed String	Description of the Underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
318	UnderlyingCurrency	N	3	198	CurrencyType	Underlying security's currency. To be set for TrdType (12) Exchange for Swap [optional]and (1001) EFP-Fin Trade [optional]. Valid characters: A-Z, 0-9, \x20						
306	UnderlyingIssuer	N	30	201	Fixed String	The issuer or name of the underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E						
25199	SwapClearer	N	1	231	unsigned int	Swap clearer for EFS Trades only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Eurex Clearing</td></tr><tr><td>1</td><td>Non-Eurex Clearing</td></tr></table>	Value	Description	0	Eurex Clearing	1	Non-Eurex Clearing
Value	Description											
0	Eurex Clearing											
1	Non-Eurex Clearing											
<SideAllocExtGrp> Cardinality: 1 - 99, Record counter: NoSideAllocs												
80	>AllocQty	Y	8	232	Qty	Quantity of the particular trade side in the TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	>PartyIDClientID	N	8	240	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	>PartyIDInvestment-DecisionMaker	N	8	248	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	>ExecutingTrader	N	8	256	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
467	>IndividualAllocID	U	4	264	unsigned int	not used						
22001	>PartyExecutingFirm	Y	5	268	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting- Trader	Y	6	273	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39000	>Pad1	U	1	279	Fixed String	not used						
25180	>TESEnrichment- RuleID	N	4	280	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).						
54	>Side	Y	1	284	unsigned int	Side of the TES trade. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
1840	>TradeAllocStatus	U	1	285	unsigned int	not used						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	>TradingCapacity	N	1	286	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
77	>PositionEffect	N	1	287	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><th>Value</th><th>Description</th></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open		
Value	Description													
C	Close													
O	Open													
23002	>OrderAttribute-LiquidityProvision	N	1	288	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision		
Value	Description													
1	Liquidity provision													
0	No liquidity provision													
25124	>ExecutingTrader-Qualifier	N	1	289	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
21222	>PartyIdInvestment-DecisionMaker-Qualifier	N	1	290	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
23003	>OrderAttributeRisk-Reduction	N	1	291	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
1724	>OrderOrigination	N	1	292	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
1	>Account	N	2	293	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20038	>PartyIDPosition-Account	N	32	295	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						
20096	>PartyIDTakeUp-TradingFirm	N	5	327	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20						
25007	>FreeText1	N	12	332	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	>FreeText2	N	12	344	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
25009	>FreeText3	N	12	356	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
20013	>PartyIDOrder-OriginationFirm	N	7	368	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20																
20032	>PartyIDBeneficiary	N	9	375	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20																
20075	>PartyIDLocationID	N	2	384	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	>CustOrderHandling-Inst	N	1	386	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><th>Value</th><th>Description</th></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	>ComplianceText	N	20	387	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
25241	>PartyEndClient-Identification	N	20	407	Fixed String	End client identifier. Valid characters: A-Z, 0-9, \x20, \x5F																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
39050	>Pad5	U	5	427	Fixed String	not used														
<TrdInstrmntLegGrp> Cardinality: 0-20, Record counter: NoLegs																				
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.														
566	>LegPrice	Y	8	8	PriceType	User provided leg trade price (not for underlying leg).														
687	>LegQty	U	8	16	Qty	not used														
<InstrumentEventGrp> Cardinality: 0-2, Record counter: NoEvents																				
866	>EventDate	Y	4	0	LocalMktDate	Date of event. To be set for TrdType (12) Exchange for Swap [mandatory].														
865	>EventType	Y	1	4	unsigned int	Identifier for an Instrument Event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>Swap Start Date</td></tr><tr><td>9</td><td>Swap End Date</td></tr></table>	Value	Description	8	Swap Start Date	9	Swap End Date								
Value	Description																			
8	Swap Start Date																			
9	Swap End Date																			
39030	>Pad3	U	3	5	Fixed String	not used														
<InstrumentAttributeGrp> Cardinality: 0-6, Record counter: NoInstrAttrib																				
871	>InstrAttribType	Y	1	0	unsigned int	Code to represent the type of instrument attribute. To be set for TrdType (12) Exchange for Swap[Swap, Customer_1, Swap_Customer_2 Variable_Rate, Offset_to-the_variable_coupon_rate: optional], (1001) EFP-Fin Trade [Coupon_Rate: optional]and (1002) EFP-Index Futures Trade[Cash_Basket_Reference: mandatory]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Variable rate</td></tr><tr><td>100</td><td>Coupon rate</td></tr><tr><td>101</td><td>Offset to the variable coupon rate</td></tr><tr><td>102</td><td>Swap Customer 1</td></tr><tr><td>103</td><td>Swap Customer 2</td></tr><tr><td>104</td><td>Cash Basket Reference</td></tr></table>	Value	Description	5	Variable rate	100	Coupon rate	101	Offset to the variable coupon rate	102	Swap Customer 1	103	Swap Customer 2	104	Cash Basket Reference
Value	Description																			
5	Variable rate																			
100	Coupon rate																			
101	Offset to the variable coupon rate																			
102	Swap Customer 1																			
103	Swap Customer 2																			
104	Cash Basket Reference																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
872	>InstrAttribValue	Y	32	1	Fixed String	Attribute value appropriate to the InstrAttribType field. To be set for TrdType (12) Exchange for Swap [optional], (1001) EFP-Fin Trade [optional] and (1002) EFP-Index Futures Trade [mandatory]. Valid characters: \x01-\x7E				
39070	>Pad7	U	7	33	Fixed String	not used				
<UnderlyingStipGrp> Cardinality: 0-1, Record counter: NoUnderlyingStips										
889	>UnderlyingStipValue	Y	32	0	Fixed String	Value of stipulation. In case of coupon frequency , fill the field with coupon frequency value. To be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E				
888	>UnderlyingStipType	Y	7	32	Fixed String	Type of stipulation. e.g. to denote coupon frequency. Pay_Frequency to be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PAYFREQ</td><td>Pay_Frequency</td></tr></table>	Value	Description	PAYFREQ	Pay_Frequency
Value	Description									
PAYFREQ	Pay_Frequency									
39000	>Pad1	U	1	39	Fixed String	not used				

14.16 TES Trade Upload Broadcast

This message informs about uploaded TES Trades.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10613 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
48	SecurityID	Y	8	40	signed int	Instrument identifier.						
31	LastPx	Y	8	48	PriceType	Price of TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
483	TransBkdTime	N	8	56	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.
60	TransactTime	Y	8	64	UTCTimestamp	Transaction timestamp.
810	UnderlyingPx	N	8	72	PriceType	Underlying price associated with a derivative instrument.
2589	RelatedClosePrice	N	8	80	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].
1860	RelatedTradeQuantity	N	8	88	Qty	Quantity of the related trade. To be set for TrdType (1000) Vola Trade [mandatory].
879	UnderlyingQty	N	8	96	Qty	Nominal value of an underlying (for an EFS or EFP Index Trade in units of thousand).
1300	MarketSegmentID	Y	4	104	signed int	Product identifier.
2489	PackagelD	Y	4	108	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.
30017	TESExecID	Y	4	112	unsigned int	System transaction identifier for a T7 Entry Service transaction.
987	UnderlyingSettlement-Date	N	4	116	LocalMktDate	Date the underlying instrument will settle. To be set for TrdType (1) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional].
542	UnderlyingMaturity-Date	N	4	120	LocalMktDate	Underlying security's maturity date. To be set for TrdType (1001) EFP-Fin Trade [mandatory].
1856	RelatedTradeID	N	4	124	unsigned int	Identifier of a related trade. To be set for TrdType (1000) Vola Trade [mandatory].
2546	RelatedMarket-SegmentID	N	4	128	signed int	Identifies a related product. Set for TrdType (1000) Vola Trade [mandatory].

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																														
828	TrdType	Y	2	132	unsigned int	Type of TES trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Block Trade</td></tr><tr><td>12</td><td>Exchange for Swap</td></tr><tr><td>1000</td><td>Vola Trade</td></tr><tr><td>1001</td><td>EFP-Fin Trade</td></tr><tr><td>1002</td><td>EFP-Index Futures Trade</td></tr><tr><td>1007</td><td>QTPIP BLOCK TRADE</td></tr><tr><td>1004</td><td>Trade at Market</td></tr></table>	Value	Description	1	Block Trade	12	Exchange for Swap	1000	Vola Trade	1001	EFP-Fin Trade	1002	EFP-Index Futures Trade	1007	QTPIP BLOCK TRADE	1004	Trade at Market														
Value	Description																																			
1	Block Trade																																			
12	Exchange for Swap																																			
1000	Vola Trade																																			
1001	EFP-Fin Trade																																			
1002	EFP-Index Futures Trade																																			
1007	QTPIP BLOCK TRADE																																			
1004	Trade at Market																																			
1227	ProductComplex	N	1	134	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>10</td><td>Flexible Simple Instrument</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	1	Simple instrument	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	10	Flexible Simple Instrument	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																																			
1	Simple instrument																																			
2	Standard Option Strategy																																			
3	Non-Standard Option Strategy																																			
4	Volatility Strategy																																			
5	Futures Spread																																			
6	Inter-Product Spread																																			
7	Standard Future Strategy																																			
8	Pack and Bundle																																			
9	Strip																																			
10	Flexible Simple Instrument																																			
11	Commodity Strip																																			
12	Scaled Simple Instrument																																			
13	Non-Standard Volatility Strategy																																			
14	Total Return Future Strategy																																			
856	TradeReportType	Y	1	135	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr><tr><td>0</td><td>Submit</td></tr></table>	Value	Description	2	Accept	0	Submit																								
Value	Description																																			
2	Accept																																			
0	Submit																																			
939	TrdRptStatus	N	1	136	unsigned int	Overall status of the TES trade, for Initiator only <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Accepted</td></tr><tr><td>4</td><td>Pending new</td></tr><tr><td>9</td><td>Deemed verified</td></tr></table>	Value	Description	0	Accepted	4	Pending new	9	Deemed verified																						
Value	Description																																			
0	Accepted																																			
4	Pending new																																			
9	Deemed verified																																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
1390	TradePublishIndicator	Y	1	137	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade				
Value	Description															
0	Do not publish trade															
1	Publish trade															
25160	TradePlatform	Y	1	138	unsigned int	Indicates trade platform. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Off-Book</td></tr><tr><td>1</td><td>On-Book</td></tr></table>	Value	Description	0	Off-Book	1	On-Book				
Value	Description															
0	Off-Book															
1	On-Book															
28709	NoSideAllocs	Y	1	139	Counter	Number of allocation in a T7 Entry Service trade. Number of TES trade sides in a TES trade.										
555	NoLegs	Y	1	140	Counter	Number of repeating TrdInstrmntLeg-Grp entries (number of legs for user provided leg trade prices).										
864	NoEvents	Y	1	141	Counter	Number of repeating EventType entries.										
870	NoInstrAttrib	Y	1	142	Counter	Number of repeating InstrAttribType entries.										
887	NoUnderlyingStips	Y	1	143	Counter	Number of underlying stipulation entries.										
29008	HedgeType	N	1	144	unsigned int	Hedging method. To be set for TrdType (12) Exchange for Swap [mandatory], (1001) EFP-Fin Trade [mandatory]and (1002) EFI-Index Futures Trade [mandatory]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Duration Hedge</td></tr><tr><td>1</td><td>Nominal Hedge</td></tr><tr><td>2</td><td>Price Factor Hedge</td></tr></table>	Value	Description	0	Duration Hedge	1	Nominal Hedge	2	Price Factor Hedge		
Value	Description															
0	Duration Hedge															
1	Nominal Hedge															
2	Price Factor Hedge															
20010	PartyIDSettlement-Location	N	1	145	unsigned int	ID of settlement location. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Clearstrem Banking Frankfurt</td></tr><tr><td>2</td><td>Clearstrem Banking Luxemburg</td></tr><tr><td>3</td><td>CLS Group</td></tr><tr><td>4</td><td>Euroclear</td></tr></table>	Value	Description	1	Clearstrem Banking Frankfurt	2	Clearstrem Banking Luxemburg	3	CLS Group	4	Euroclear
Value	Description															
1	Clearstrem Banking Frankfurt															
2	Clearstrem Banking Luxemburg															
3	CLS Group															
4	Euroclear															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25199	SwapClearer	N	1	146	unsigned int	Swap clearer for EFS Trades only.	
						Value	Description
						0	Eurex Clearing
						1	Non-Eurex Clearing
1011	MessageEventSource	Y	1	147	char	Receiver of a message.	
						Value	Description
						I	Broadcast to initiator
						A	Broadcast to approver
571	TradeReportID	N	20	148	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E	
22401	RootPartyExecuting-Firm	N	5	168	Fixed String	Participant Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
22412	RootPartyExecuting-Trader	N	6	173	Fixed String	Owning User Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E	
309	UnderlyingSecurityID	N	12	179	ISIN	Underlying security's ID (ISIN). To be set for TrdType (1001) EFP-Fin Trade [mandatory]. Valid characters: A-Z, 0-9, \x20	
307	UnderlyingSecurity-Desc	N	30	191	Fixed String	Description of the Underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E	
318	UnderlyingCurrency	N	3	221	CurrencyType	Underlying security's currency. To be set for TrdType (12) Exchange for Swap [optional]and (1001) EFP-Fin Trade [optional]. Valid characters: A-Z, 0-9, \x20	
306	UnderlyingIssuer	N	30	224	Fixed String	The issuer or name of the underlying security. To be set for TrdType (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E	
39020	Pad2	U	2	254	Fixed String	not used	
<SideAllocExtGrp> Cardinality: 1 - 99, Record counter: NoSideAllocs							
80	>AllocQty	Y	8	256	Qty	Quantity of the particular trade side in the TES trade.	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	>PartyIDClientID	N	8	264	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	>PartyIDInvestment-DecisionMaker	N	8	272	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	>ExecutingTrader	N	8	280	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
467	>IndividualAllocID	Y	4	288	unsigned int	Unique identifier for a TES trade side.						
22001	>PartyExecutingFirm	Y	5	292	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting- Trader	Y	6	297	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39000	>Pad1	U	1	303	Fixed String	not used						
25180	>TESEnrichment- RuleID	N	4	304	unsigned int	Enrichment Rule ID for TES trades (to be used only in case of Auto Approval).						
54	>Side	Y	1	308	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
1840	>TradeAllocStatus	Y	1	309	unsigned int	Status of an allocation in a T7 Entry Service trade.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
1815	>TradingCapacity	Y	1	310	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker														
Value	Description																											
1	Customer (Agency)																											
5	Principal (Proprietary)																											
6	Market Maker																											
77	>PositionEffect	Y	1	311	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position.<table><tr><th>Value</th><th>Description</th></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open																
Value	Description																											
C	Close																											
O	Open																											
23002	>OrderAttribute-LiquidityProvision	N	1	312	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy.<table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision																
Value	Description																											
1	Liquidity provision																											
0	No liquidity provision																											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25124	>ExecutingTrader- Qualifier	N	1	313	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
21222	>PartyIdInvestment- DecisionMaker- Qualifier	N	1	314	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
23003	>OrderAttributeRisk- Reduction	N	1	315	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
1724	>OrderOrigination	N	1	316	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
1	>Account	N	2	317	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
20038	>PartyIDPosition-Account	N	32	319	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A
20096	>PartyIDTakeUp-TradingFirm	N	5	351	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20
25007	>FreeText1	N	12	356	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
25008	>FreeText2	N	12	368	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
25009	>FreeText3	N	12	380	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E
20013	>PartyIDOrder-OriginationFirm	N	7	392	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20
20032	>PartyIDBeneficiary	N	9	399	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20
20075	>PartyIDLocationID	N	2	408	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
1031	>CustOrderHandling-Inst	N	1	410	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	>ComplianceText	N	20	411	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
25241	>PartyEndClient-Identification	U	20	431	Fixed String	not used																
39050	>Pad5	U	5	451	Fixed String	not used																
<TrdInstrmntLegGrp> Cardinality: 0-20, Record counter: NoLegs																						
602	>LegSecurityID	Y	8	0	signed int	Instrument identifier of the leg security.																
566	>LegPrice	Y	8	8	PriceType	User provided leg trade price (not for underlying leg).																
687	>LegQty	N	8	16	Qty	Quantity for leg of a multileg																
<InstrumentEventGrp> Cardinality: 0-2, Record counter: NoEvents																						
866	>EventDate	Y	4	0	LocalMktDate	Date of event. To be set for TrdType (12) Exchange for Swap [mandatory].																


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
865	>EventType	Y	1	4	unsigned int	Identifier for an Instrument Event. <table><tr><td>Value</td><td>Description</td></tr><tr><td>8</td><td>Swap Start Date</td></tr><tr><td>9</td><td>Swap End Date</td></tr></table>	Value	Description	8	Swap Start Date	9	Swap End Date								
Value	Description																			
8	Swap Start Date																			
9	Swap End Date																			
39030	>Pad3	U	3	5	Fixed String	not used														
<InstrumentAttributeGrp> Cardinality: 0-6, Record counter: NoInstrAttrib																				
871	>InstrAttribType	Y	1	0	unsigned int	Code to represent the type of instrument attribute. To be set for TrdType (12) Exchange for Swap[Swap, Customer_1, Swap_Customer_2 Variable_Rate, Offset_to-the_variable_coupon_rate: optional], (1001) EFP-Fin Trade [Coupon_Rate: optional]and (1002) EFP-Index Futures Trade[Cash_Basket_Reference: mandatory]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>Variable rate</td></tr><tr><td>100</td><td>Coupon rate</td></tr><tr><td>101</td><td>Offset to the variable coupon rate</td></tr><tr><td>102</td><td>Swap Customer 1</td></tr><tr><td>103</td><td>Swap Customer 2</td></tr><tr><td>104</td><td>Cash Basket Reference</td></tr></table>	Value	Description	5	Variable rate	100	Coupon rate	101	Offset to the variable coupon rate	102	Swap Customer 1	103	Swap Customer 2	104	Cash Basket Reference
Value	Description																			
5	Variable rate																			
100	Coupon rate																			
101	Offset to the variable coupon rate																			
102	Swap Customer 1																			
103	Swap Customer 2																			
104	Cash Basket Reference																			
872	>InstrAttribValue	Y	32	1	Fixed String	Attribute value appropriate to the InstrAttribType field. To be set for TrdTyp (12) Exchange for Swap [optional], (1001) EFP-Fin Trade [optional] and (1002) EFP-Index Futures Trade [mandatory]. Valid characters: \x01-\x7E														
39070	>Pad7	U	7	33	Fixed String	not used														
<UnderlyingStipGrp> Cardinality: 0-1, Record counter: NoUnderlyingStips																				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
889	>UnderlyingStipValue	Y	32	0	Fixed String	Value of stipulation. In case of coupon frequency , fill the field with coupon frequency value. To be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. Valid characters: \x01-\x7E				
888	>UnderlyingStipType	Y	7	32	Fixed String	Type of stipulation. e.g. to denote coupon frequency. Pay_Frequency to be set for TrdType (12) Exchange for Swap [optional] and (1001) EFP-Fin Trade [optional]. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PAYFREQ</td><td>Pay_Frequency</td></tr></table>	Value	Description	PAYFREQ	Pay_Frequency
Value	Description									
PAYFREQ	Pay_Frequency									
39000	>Pad1	U	1	39	Fixed String	not used				

15 Basket Trading

15.1 Enter Basket Trade Request

This message is sent to the service "T7 Entry".

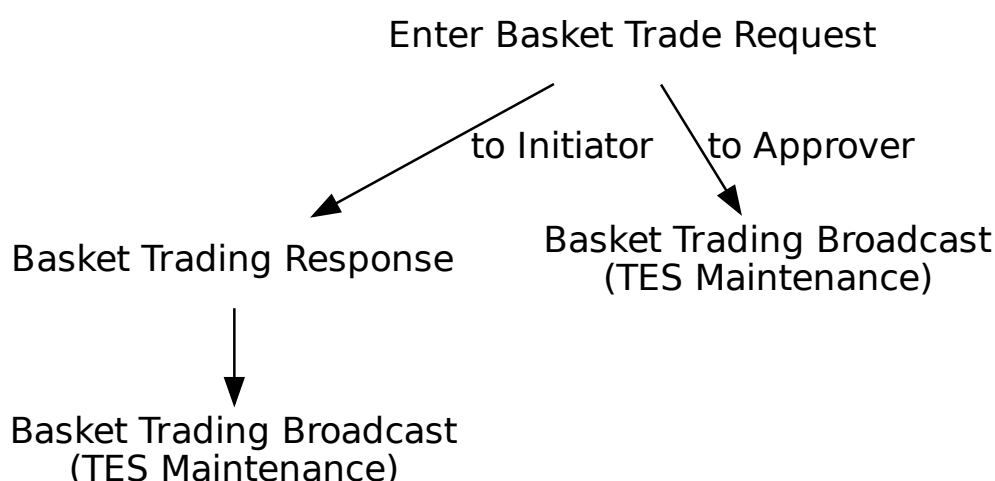

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10620 (Trade-MatchReport, MsgType = DC)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.
200	MaturityMonthYear	Y	4	28	LocalMonth-YearCod	Month year code for expiry YYYYMM

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28899	BasketProfileID	N	4	32	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).						
828	TrdType	Y	2	36	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets
Value	Description											
1010	Basket of Equity Total Return Futures											
1011	Equity Bespoke Baskets											
25169	NoBasketSideAlloc	Y	2	38	Counter	Number of trade match sides						
856	TradeReportType	Y	1	40	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr></table>	Value	Description	0	Submit		
Value	Description											
0	Submit											
25173	BasketTradeReport-Type	Y	1	41	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr></table>	Value	Description	0	Submit		
Value	Description											
0	Submit											
25247	OptionalEarly-TerminationIndicator	N	1	42	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25165	NoBasketRootParty-Grps	Y	1	43	Counter	Number of Basket Root Parties						
1889	NoInstrmtMatchSides	Y	1	44	Counter	Number of instrument match sides						
31091	BasketAnonymity	N	1	45	unsigned int	Used to indicate anonymized trades in baskets. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25168	BasketTradeReport-Text	N	20	46	Fixed String	User defined text message field. Valid characters: \x01-\x7E						
571	TradeReportID	N	20	66	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
39020	Pad2	U	2	86	Fixed String	not used						
<BasketRootPartyGrp> Cardinality: 1-2, Record counter: NoBasketRootPartyGrps												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1122	>RootPartySub-IDType	Y	2	88	unsigned int	RootParty sub-type	
						Value	Description
						4001	Buyer
						4002	Seller
22417	>RootPartyContra-Firm	Y	5	90	Fixed String	The identifier of the member counter-party institution. Valid characters: A-Z, 0-9, \x20	
22437	>RootPartyContra-Trader	Y	6	95	Fixed String	The identifier of the trader counter-party. Valid characters: A-Z, 0-9, \x20	
26162	>BasketSideTrade-ReportID	N	20	101	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E	
39070	>Pad7	U	7	121	Fixed String	not used	
<InstrmtMatchSideGrp> Cardinality: 1 - 199, Record counter: NolInstrmtMatchSides							
48	>SecurityID	Y	8	0	signed int	Instrument identifier.	
31	>LastPx	Y	8	8	PriceType	Price of this fill.	
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.	
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].	
1596	>ClearingTradePrice	U	8	32	PriceType	not used	
2489	>PackageID	U	4	40	unsigned int	not used	
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID	
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type	
						Value	Description
						2001	Block Trade
						2004	Trade at Market
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<BasketSideAllocGrp> Cardinality: 1-398, Record counter: NoBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	U	4	8	unsigned int	not used						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25166	>InstrmtMatchSideID	Y	1	15	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
1840	>TradeAllocStatus	U	1	16	unsigned int	not used						
22001	>PartyExecutingFirm	Y	5	17	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	22	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39040	>Pad4	U	4	28	Fixed String	not used						

15.2 Basket Trading Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10624 (Trade-MatchReportAck, MsgType = DD)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
25167	BasketExecID	Y	4	32	unsigned int	System generated transaction ID for a Basket transaction.
571	TradeReportID	N	20	36	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E

15.3 Basket Trading Broadcast

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10625 (Trade-MatchReport, MsgType = DC)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25161	BasketTrdMatchID	Y	8	40	unsigned int	System defined Basket ID.						
60	TransactTime	Y	8	48	UTCTimestamp	Transaction timestamp.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
25167	BasketExecID	Y	4	56	unsigned int	System generated transaction ID for a Basket transaction.										
1300	MarketSegmentID	Y	4	60	signed int	Product identifier.										
200	MaturityMonthYear	Y	4	64	LocalMonth-YearCod	Month year code for expiry YYYYMM										
28899	BasketProfileID	N	4	68	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).										
25169	NoBasketSideAlloc	Y	2	72	Counter	Number of trade match sides										
828	TrdType	Y	2	74	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets				
Value	Description															
1010	Basket of Equity Total Return Futures															
1011	Equity Bespoke Baskets															
856	TradeReportType	Y	1	76	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr></table>	Value	Description	0	Submit	5	No/Was (Replaced)				
Value	Description															
0	Submit															
5	No/Was (Replaced)															
25173	BasketTradeReport-Type	Y	1	77	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>4</td><td>Addendum</td></tr><tr><td>5</td><td>No/Was (Substitute)</td></tr><tr><td>19</td><td>Terminate</td></tr></table>	Value	Description	0	Submit	4	Addendum	5	No/Was (Substitute)	19	Terminate
Value	Description															
0	Submit															
4	Addendum															
5	No/Was (Substitute)															
19	Terminate															
1011	MessageEventSource	Y	1	78	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>I</td><td>Broadcast to initiator</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	I	Broadcast to initiator	A	Broadcast to approver				
Value	Description															
I	Broadcast to initiator															
A	Broadcast to approver															
25171	NoBasketRootParty-GrpsBC	Y	1	79	Counter	Number of Basket Root Parties										
1889	NoInstrmtMatchSides	Y	1	80	Counter	Number of instrument match sides										
31091	BasketAnonymity	N	1	81	unsigned int	Used to indicate anonymized trades in baskets. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
25247	OptionalEarly-TerminationIndicator	N	1	82	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes		
Value	Description													
0	No													
1	Yes													
25168	BasketTradeReport-Text	N	20	83	Fixed String	User defined text message field. Valid characters: \x01-\x7E								
571	TradeReportID	N	20	103	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E								
39050	Pad5	U	5	123	Fixed String	not used								
<BasketRootPartyGrp> Cardinality: 2-3, Record counter: NoBasketRootPartyGrpsBC														
1122	>RootPartySub-IDType	Y	2	128	unsigned int	RootParty sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>4001</td><td>Buyer</td></tr><tr><td>4002</td><td>Seller</td></tr><tr><td>4003</td><td>Broker</td></tr></table>	Value	Description	4001	Buyer	4002	Seller	4003	Broker
Value	Description													
4001	Buyer													
4002	Seller													
4003	Broker													
22417	>RootPartyContra-Firm	Y	5	130	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20								
22437	>RootPartyContra-Trader	Y	6	135	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20								
26162	>BasketSideTrade-ReportID	N	20	141	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E								
39070	>Pad7	U	7	161	Fixed String	not used								
<InstrmtMatchSideGrp> Cardinality: 1-199, Record counter: NoInstrmtMatchSides														
48	>SecurityID	Y	8	0	signed int	Instrument identifier.								
31	>LastPx	Y	8	8	PriceType	Price of this fill.								
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.								
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].								
1596	>ClearingTradePrice	N	8	32	PriceType	Price in clearing notation which can be preliminary or final depending on TradeReportType (856).								
2489	>PackageID	Y	4	40	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID						
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<BasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	Y	4	8	unsigned int	Unique identifier for a TES trade side.						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																
Value	Description																											
1	Buy																											
2	Sell																											
25166	>InstrmtMatchSideID	Y	1	15	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.																						
1840	>TradeAllocStatus	Y	1	16	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
22001	>PartyExecutingFirm	Y	5	17	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20																						
22012	>PartyExecuting- Trader	Y	6	22	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20																						
39040	>Pad4	U	4	28	Fixed String	not used																						

15.4 Approve Basket Broadcast

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10627 (Trade-MatchReport, MsgType = DC)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplIID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25161	BasketTrdMatchID	Y	8	40	unsigned int	System defined Basket ID.						
25248	OrigBasketTrdMatchID	N	8	48	unsigned int	System defined Original Basket ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
60	TransactTime	Y	8	56	UTCTimestamp	Transaction timestamp.	
25167	BasketExecID	Y	4	64	unsigned int	System generated transaction ID for a Basket transaction.	
1300	MarketSegmentID	Y	4	68	signed int	Product identifier.	
28899	BasketProfileID	N	4	72	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).	
828	TrdType	Y	2	76	unsigned int	Type of Basket trade.	
						Value	Description
						1010	Basket of Equity Total Return Futures
						1011	Equity Bespoke Baskets
25169	NoBasketSideAlloc	Y	2	78	Counter	Number of trade match sides	
856	TradeReportType	Y	1	80	unsigned int	Type of Trade Report	
						Value	Description
						2	Accept
25173	BasketTradeReport-Type	Y	1	81	unsigned int	Basket operation	
						Value	Description
						0	Submit
						4	Addendum
						5	No/Was (Substitute)
						19	Terminate
25247	OptionalEarly-TerminationIndicator	N	1	82	unsigned int	Indicates whether the counterparties have the right for early termination.	
						Value	Description
						0	No
						1	Yes
1011	MessageEventSource	Y	1	83	char	Receiver of a message.	
						Value	Description
						A	Broadcast to approver
25165	NoBasketRootParty-Grps	Y	1	84	Counter	Number of Basket Root Parties	
20007	PartyIDEnteringFirm	Y	1	85	unsigned int	Entering Entity ID.	
						Value	Description
						1	Participant
						2	Market Supervision

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
22036	PartyEnteringTrader	Y	6	86	Fixed String	The entering user Valid characters: A-Z, 0-9, \x20	
25168	BasketTradeReport-Text	N	20	92	Fixed String	User defined text message field. Valid characters: \x01-\x7E	
571	TradeReportID	N	20	112	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E	
39040	Pad4	U	4	132	Fixed String	not used	
<BasketRootPartyGrp> Cardinality: 1-2, Record counter: NoBasketRootPartyGrps							
1122	>RootPartySub-IDType	Y	2	136	unsigned int	RootParty sub-type	
						Value	Description
						4001	Buyer
						4002	Seller
						4003	Broker
22417	>RootPartyContra-Firm	Y	5	138	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20	
22437	>RootPartyContra-Trader	Y	6	143	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20	
26162	>BasketSideTrade-ReportID	N	20	149	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E	
39070	>Pad7	U	7	169	Fixed String	not used	
<BasketSideAllocExtBCGrp> Cardinality: 1-398, Record counter: NoBasketSideAlloc							
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.	
48	>SecurityID	Y	8	8	signed int	Instrument identifier.	
31	>LastPx	Y	8	16	PriceType	Price of this fill.	
483	>TransBkdTime	N	8	24	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.	
2589	>RelatedClosePrice	N	8	32	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].	
2489	>PackageID	Y	4	40	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.	
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID	
70	>AllocID	Y	4	48	unsigned int	Unique identifier for a TES Trade side.	


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1008	>SideTrdSubTyp	Y	2	52	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market		
Value	Description													
2001	Block Trade													
2004	Trade at Market													
803	>PartySubIDType	Y	2	54	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller		
Value	Description													
14001	Buyer													
14002	Seller													
54	>Side	Y	1	56	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell		
Value	Description													
1	Buy													
2	Sell													
77	>PositionEffect	Y	1	57	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open		
Value	Description													
C	Close													
O	Open													
25163	>EffectOnBasket	N	1	58	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume		
Value	Description													
1	Add volume													
2	Remove volume													
1815	>TradingCapacity	Y	1	59	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1840	>TradeAllocStatus	Y	1	60	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Approved</td></tr></table>	Value	Description	2	Approved				
Value	Description													
2	Approved													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1227	>ProductComplex	Y	1	61	unsigned int	This field qualifies an instrument type on T7. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	62	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
22001	>PartyExecutingFirm	Y	5	63	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	68	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
1	>Account	N	2	74	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
25007	>FreeText1	N	12	76	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	>FreeText2	N	12	88	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25009	>FreeText3	N	12	100	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
20096	>PartyIDTakeUp-TradingFirm	N	5	112	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20						
20013	>PartyIDOrder-OriginationFirm	N	7	117	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20						
20032	>PartyIDBeneficiary	N	9	124	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
20038	>PartyIDPosition-Account	N	32	133	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A																
20075	>PartyIDLocationID	N	2	165	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	>CustOrderHandling-Inst	N	1	167	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
2404	>ComplianceText	N	20	168	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E																
39040	>Pad4	U	4	188	Fixed String	not used																

15.5 Approve Basket Trade Request

This message is sent to the service "T7 Entry".

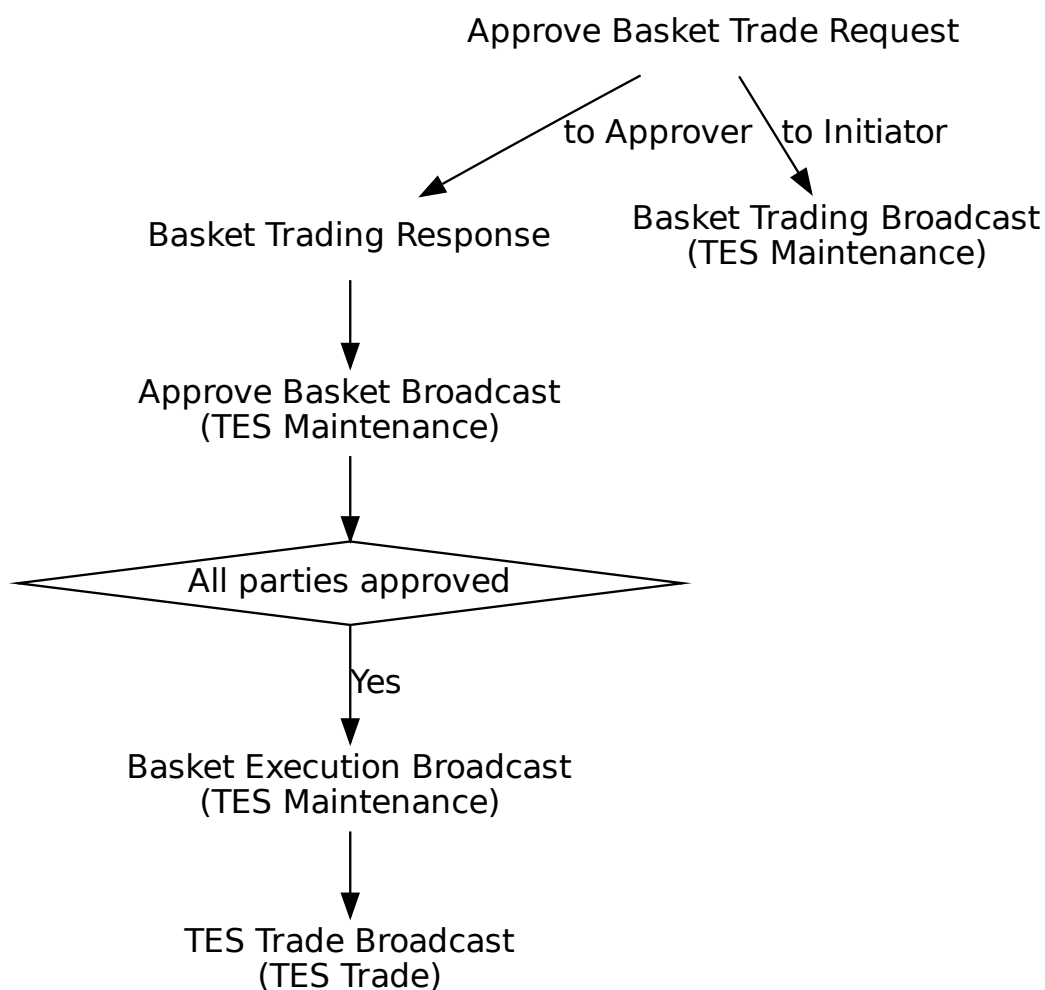

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10623 (Trade-MatchReport, MsgType = DC)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
25161	BasketTrdMatchID	Y	8	24	unsigned int	System defined Basket ID.						
25167	BasketExecID	Y	4	32	unsigned int	System generated transaction ID for a Basket transaction.						
1300	MarketSegmentID	Y	4	36	signed int	Product identifier.						
1122	RootPartySubIDType	Y	2	40	unsigned int	RootParty sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>4001</td><td>Buyer</td></tr><tr><td>4002</td><td>Seller</td></tr></table>	Value	Description	4001	Buyer	4002	Seller
Value	Description											
4001	Buyer											
4002	Seller											
25169	NoBasketSideAlloc	Y	2	42	Counter	Number of trade match sides						
828	TrdType	Y	2	44	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets
Value	Description											
1010	Basket of Equity Total Return Futures											
1011	Equity Bespoke Baskets											
856	TradeReportType	Y	1	46	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr></table>	Value	Description	2	Accept		
Value	Description											
2	Accept											
25168	BasketTradeReport-Text	N	20	47	Fixed String	User defined text message field. Valid characters: \x01-\x7E						
571	TradeReportID	N	20	67	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
26162	BasketSideTrade-ReportID	N	20	87	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E						
39050	Pad5	U	5	107	Fixed String	not used						
<BasketSideAllocExtGrp> Cardinality: 1 - 398, Record counter: NoBasketSideAlloc												
80	>AllocQty	Y	8	112	Qty	Quantity of the particular trade side in the TES trade.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
20003	>PartyIDClientID	N	8	120	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A))used to identify the client of an order for agent account of the member or participant of the trading venue. If the Client Identifier field is not provided for agent orders, then they will be rejected. For orders sent with Trading Capacity Proprietary or Market Making, the Client Identifier field may remain empty.						
20122	>PartyIdInvestment-DecisionMaker	N	8	128	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.						
25123	>ExecutingTrader	N	8	136	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.						
2489	>PackageID	Y	4	144	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.						
1898	>SideMarket-SegmentID	Y	4	148	signed int	Product ID						
70	>AllocID	Y	4	152	unsigned int	Unique identifier for a TES Trade side.						
54	>Side	Y	1	156	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
77	>PositionEffect	Y	1	157	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><th>Value</th><th>Description</th></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1815	>TradingCapacity	Y	1	158	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
23002	>OrderAttribute-LiquidityProvision	Y	1	159	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision		
Value	Description													
1	Liquidity provision													
0	No liquidity provision													
25124	>ExecutingTrader-Qualifier	Y	1	160	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													
21222	>PartyIdInvestment-DecisionMaker-Qualifier	N	1	161	unsigned int	MiFID field: Qualifier for field PartyIdInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person		
Value	Description													
22	Algo													
24	Human/Natural person													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
23003	>OrderAttributeRisk-Reduction	N	1	162	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
1724	>OrderOrigination	N	1	163	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer
Value	Description											
5	Order received from a direct access customer											
105	Order received from a sponsored access customer											
22001	>PartyExecutingFirm	Y	5	164	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	169	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
1	>Account	N	2	175	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
25007	>FreeText1	N	12	177	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
25008	>FreeText2	N	12	189	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
25009	>FreeText3	N	12	201	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
20096	>PartyIDTakeUp-TradingFirm	N	5	213	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20																
20013	>PartyIDOrder-OriginationFirm	N	7	218	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20																
20032	>PartyIDBeneficiary	N	9	225	Fixed String	Final Beneficiary. Valid characters: A-Z, 0-9, \x20																
20038	>PartyIDPosition-Account	N	32	234	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A																
20075	>PartyIDLocationID	N	2	266	Fixed String	Country code. Will be set to "XX" for non-capital letters. Valid characters: \x01-\x7E																
1031	>CustOrderHandling-Inst	N	1	268	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
2404	>ComplianceText	N	20	269	Fixed String	This field is used to provide additional regulatory information (according to respective rules & regs, circulars and/or bilateral coordination between participant and Trading Surveillance Office). Valid characters: \x20, \x22-\x7B, \x7D, \x7E
39070	>Pad7	U	7	289	Fixed String	not used

15.6 Basket Execution Broadcast

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10628 (Trade-MatchReport, MsgType = DC)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25161	BasketTrdMatchID	Y	8	40	unsigned int	System defined Basket ID.						
25248	OrigBasketTrdMatchID	N	8	48	unsigned int	System defined Original Basket ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
60	TransactTime	Y	8	56	UTCTimestamp	Transaction timestamp.						
25167	BasketExecID	Y	4	64	unsigned int	System generated transaction ID for a Basket transaction.						
1300	MarketSegmentID	Y	4	68	signed int	Product identifier.						
28899	BasketProfileID	N	4	72	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).						
828	TrdType	Y	2	76	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets
Value	Description											
1010	Basket of Equity Total Return Futures											
1011	Equity Bespoke Baskets											
856	TradeReportType	Y	1	78	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Accept</td></tr></table>	Value	Description	2	Accept		
Value	Description											
2	Accept											
25247	OptionalEarly-TerminationIndicator	N	1	79	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
1889	NoInstrmtMatchSides	Y	1	80	Counter	Number of instrument match sides						
1011	MessageEventSource	Y	1	81	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	A	Broadcast to approver		
Value	Description											
A	Broadcast to approver											
26162	BasketSideTrade-ReportID	N	20	82	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E						
39020	Pad2	U	2	102	Fixed String	not used						
<BasketExecGrp> Cardinality: 1-199, Record counter: NoInstrmtMatchSides												
2489	>PackageID	Y	4	104	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.						
1898	>SideMarket-SegmentID	Y	4	108	signed int	Product ID						
70	>AllocID	Y	4	112	unsigned int	Unique identifier for a TES Trade side.						
1008	>SideTrdSubTyp	Y	2	116	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											

Deutsche Börse Group's T7 Release 15.0
Enhanced Trading Interface
Derivatives Message Reference


Deutsche Börse Group

Build 150.536.0.ga-150006001-56

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39020	>Pad2	U	2	118	Fixed String	not used

15.7 Modify Basket Trade Request

This message is sent to the service "T7 Entry".

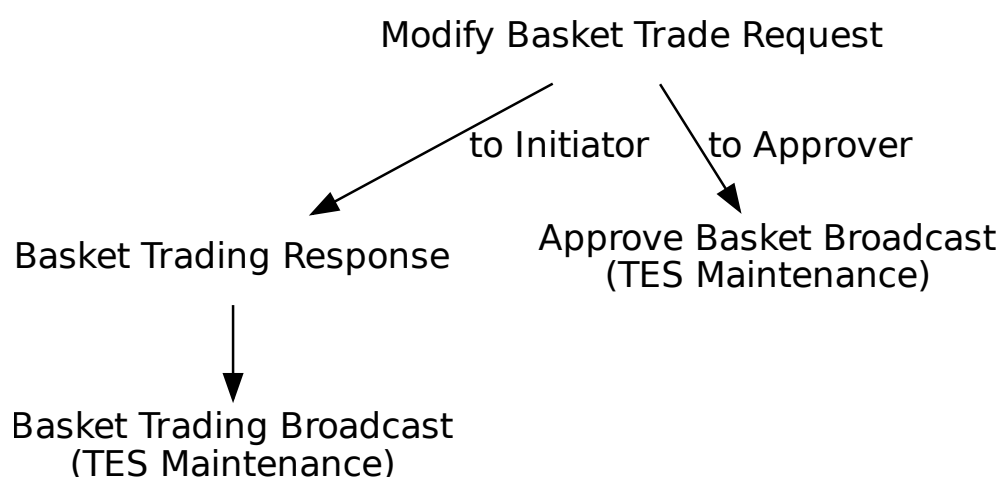

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10621 (Trade-MatchReport, MsgType = DC)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
25161	BasketTrdMatchID	Y	8	24	unsigned int	System defined Basket ID.
25167	BasketExecID	Y	4	32	unsigned int	System generated transaction ID for a Basket transaction.
1300	MarketSegmentID	Y	4	36	signed int	Product identifier.
200	MaturityMonthYear	Y	4	40	LocalMonth-YearCod	Month year code for expiry YYYYMM


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28899	BasketProfileID	N	4	44	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).						
828	TrdType	Y	2	48	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets
Value	Description											
1010	Basket of Equity Total Return Futures											
1011	Equity Bespoke Baskets											
25169	NoBasketSideAlloc	Y	2	50	Counter	Number of trade match sides						
856	TradeReportType	Y	1	52	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr></table>	Value	Description	5	No/Was (Replaced)		
Value	Description											
5	No/Was (Replaced)											
25165	NoBasketRootParty-Grps	Y	1	53	Counter	Number of Basket Root Parties						
1889	NoInstrmtMatchSides	Y	1	54	Counter	Number of instrument match sides						
25247	OptionalEarly-TerminationIndicator	N	1	55	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25168	BasketTradeReport-Text	N	20	56	Fixed String	User defined text message field. Valid characters: \x01-\x7E						
571	TradeReportID	N	20	76	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
<BasketRootPartyGrp> Cardinality: 1-2, Record counter: NoBasketRootPartyGrps												
1122	>RootPartySub-IDType	Y	2	96	unsigned int	RootParty sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>4001</td><td>Buyer</td></tr><tr><td>4002</td><td>Seller</td></tr></table>	Value	Description	4001	Buyer	4002	Seller
Value	Description											
4001	Buyer											
4002	Seller											
22417	>RootPartyContra-Firm	Y	5	98	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20						
22437	>RootPartyContra-Trader	Y	6	103	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20						
26162	>BasketSideTrade-ReportID	N	20	109	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
39070	>Pad7	U	7	129	Fixed String	not used						
<InstrmtMatchSideGrp> Cardinality: 1 - 199, Record counter: NolnstrmtMatchSides												
48	>SecurityID	Y	8	0	signed int	Instrument identifier.						
31	>LastPx	Y	8	8	PriceType	Price of this fill.						
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.						
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].						
1596	>ClearingTradePrice	U	8	32	PriceType	not used						
2489	>PackageID	N	4	40	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.						
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID						
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatchSideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<BasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	N	4	8	unsigned int	Unique identifier for a TES trade side.						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><th>Value</th><th>Description</th></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25166	>InstrmtMatchSideID	Y	1	15	unsigned int	ID to map element of InstrmtMatchSideGrp and BasketSideAllocGrp.						
1840	>TradeAllocStatus	U	1	16	unsigned int	not used						
22001	>PartyExecutingFirm	Y	5	17	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	22	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39040	>Pad4	U	4	28	Fixed String	not used						

15.8 Delete Basket Trade Request

This message is sent to the service "T7 Entry".

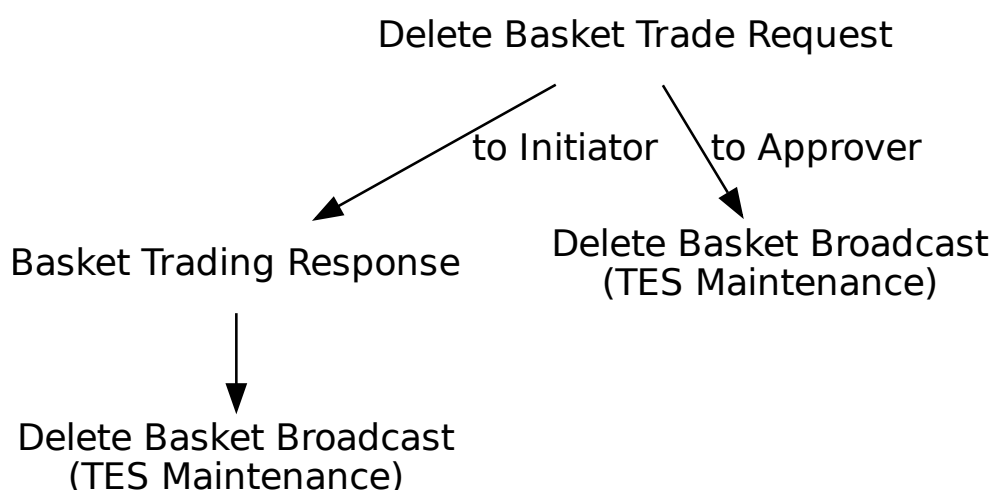

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10622 (Trade-MatchReport, MsgType = DC)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
25161	BasketTrdMatchID	Y	8	24	unsigned int	System defined Basket ID.
25167	BasketExecID	Y	4	32	unsigned int	System generated transaction ID for a Basket transaction.
1300	MarketSegmentID	Y	4	36	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
828	TrdType	Y	2	40	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets
Value	Description											
1010	Basket of Equity Total Return Futures											
1011	Equity Bespoke Baskets											
856	TradeReportType	Y	1	42	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Trade Report Cancel</td></tr></table>	Value	Description	6	Trade Report Cancel		
Value	Description											
6	Trade Report Cancel											
571	TradeReportID	N	20	43	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
39000	Pad1	U	1	63	Fixed String	not used						


15.9 Delete Basket Broadcast

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10626 (Trade-MatchReport, MsgType = DC)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25161	BasketTrdMatchID	Y	8	40	unsigned int	System defined Basket ID.						
60	TransactTime	Y	8	48	UTCTimestamp	Transaction timestamp.						
1300	MarketSegmentID	Y	4	56	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																								
25167	BasketExecID	Y	4	60	unsigned int	System generated transaction ID for a Basket transaction.																								
28899	BasketProfileID	N	4	64	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).																								
828	TrdType	Y	2	68	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets																		
Value	Description																													
1010	Basket of Equity Total Return Futures																													
1011	Equity Bespoke Baskets																													
285	DeleteReason	Y	1	70	unsigned int	Reason for deletion. <table><tr><td>Value</td><td>Description</td></tr><tr><td>100</td><td>Deletion via the TES Delete Request</td></tr><tr><td>101</td><td>Automatic deletion due to TES Activity State Change</td></tr><tr><td>102</td><td>Automatic deletion due to instrument expiration</td></tr><tr><td>103</td><td>Deletion caused by Clearing/Risk stop</td></tr><tr><td>104</td><td>Deletion caused by Trading stop</td></tr><tr><td>105</td><td>Deletion of Instrument</td></tr><tr><td>106</td><td>Suspension of Instrument</td></tr><tr><td>107</td><td>Deletion caused by a pre-trade risk event</td></tr><tr><td>108</td><td>Basket amendment cancelled</td></tr><tr><td>109</td><td>Amendment cancelled by user action</td></tr><tr><td>112</td><td>D-2 Order Cancellation</td></tr></table>	Value	Description	100	Deletion via the TES Delete Request	101	Automatic deletion due to TES Activity State Change	102	Automatic deletion due to instrument expiration	103	Deletion caused by Clearing/Risk stop	104	Deletion caused by Trading stop	105	Deletion of Instrument	106	Suspension of Instrument	107	Deletion caused by a pre-trade risk event	108	Basket amendment cancelled	109	Amendment cancelled by user action	112	D-2 Order Cancellation
Value	Description																													
100	Deletion via the TES Delete Request																													
101	Automatic deletion due to TES Activity State Change																													
102	Automatic deletion due to instrument expiration																													
103	Deletion caused by Clearing/Risk stop																													
104	Deletion caused by Trading stop																													
105	Deletion of Instrument																													
106	Suspension of Instrument																													
107	Deletion caused by a pre-trade risk event																													
108	Basket amendment cancelled																													
109	Amendment cancelled by user action																													
112	D-2 Order Cancellation																													
1011	MessageEventSource	Y	1	71	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>I</td><td>Broadcast to initiator</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	I	Broadcast to initiator	A	Broadcast to approver																		
Value	Description																													
I	Broadcast to initiator																													
A	Broadcast to approver																													
571	TradeReportID	N	20	72	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E																								
39040	Pad4	U	4	92	Fixed String	not used																								

15.10 Amend Basket Trade Request

This message is sent to the service "T7 Entry".

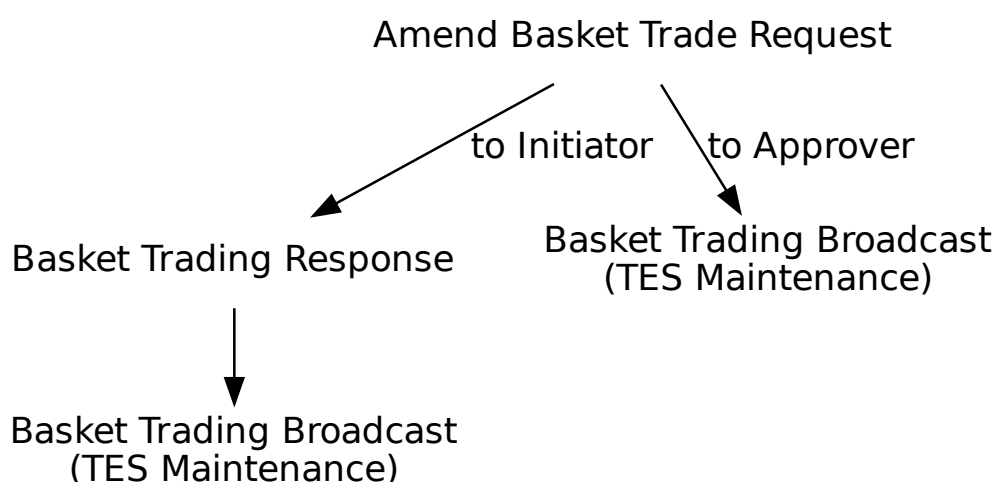

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10629 (Trade-MatchReport, MsgType = DC)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
25161	BasketTrdMatchID	Y	8	24	unsigned int	System defined Basket ID.
25167	BasketExecID	Y	4	32	unsigned int	System generated transaction ID for a Basket transaction.
1300	MarketSegmentID	Y	4	36	signed int	Product identifier.
200	MaturityMonthYear	Y	4	40	LocalMonth-YearCod	Month year code for expiry YYYYMM


Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
28899	BasketProfileID	N	4	44	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).								
828	TrdType	Y	2	48	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr><tr><td>1011</td><td>Equity Bespoke Baskets</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures	1011	Equity Bespoke Baskets		
Value	Description													
1010	Basket of Equity Total Return Futures													
1011	Equity Bespoke Baskets													
25169	NoBasketSideAlloc	Y	2	50	Counter	Number of trade match sides								
856	TradeReportType	Y	1	52	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr></table>	Value	Description	0	Submit				
Value	Description													
0	Submit													
25173	BasketTradeReport-Type	Y	1	53	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Addendum</td></tr><tr><td>5</td><td>No/Was (Substitute)</td></tr><tr><td>19</td><td>Terminate</td></tr></table>	Value	Description	4	Addendum	5	No/Was (Substitute)	19	Terminate
Value	Description													
4	Addendum													
5	No/Was (Substitute)													
19	Terminate													
25165	NoBasketRootParty-Grps	Y	1	54	Counter	Number of Basket Root Parties								
1889	NoInstrmtMatchSides	Y	1	55	Counter	Number of instrument match sides								
25168	BasketTradeReport-Text	N	20	56	Fixed String	User defined text message field. Valid characters: \x01-\x7E								
571	TradeReportID	N	20	76	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E								
<BasketRootPartyGrp> Cardinality: 1 - 2, Record counter: NoBasketRootPartyGrps														
1122	>RootPartySub-IDType	Y	2	96	unsigned int	RootParty sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>4001</td><td>Buyer</td></tr><tr><td>4002</td><td>Seller</td></tr></table>	Value	Description	4001	Buyer	4002	Seller		
Value	Description													
4001	Buyer													
4002	Seller													
22417	>RootPartyContra-Firm	Y	5	98	Fixed String	The identifier of the member counterparty institution. Valid characters: A-Z, 0-9, \x20								
22437	>RootPartyContra-Trader	Y	6	103	Fixed String	The identifier of the trader counterparty. Valid characters: A-Z, 0-9, \x20								
26162	>BasketSideTrade-ReportID	N	20	109	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E								

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
39070	>Pad7	U	7	129	Fixed String	not used						
<InstrmtMatchSideGrp> Cardinality: 1 - 199, Record counter: NoInstrmtMatchSides												
48	>SecurityID	Y	8	0	signed int	Instrument identifier.						
31	>LastPx	Y	8	8	PriceType	Price of this fill.						
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.						
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].						
1596	>ClearingTradePrice	U	8	32	PriceType	not used						
2489	>PackageID	U	4	40	unsigned int	not used						
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID						
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatchSideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<BasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoBasketSideAlloc												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	U	4	8	unsigned int	not used						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
25166	>InstrmtMatchSideID	Y	1	15	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
1840	>TradeAllocStatus	U	1	16	unsigned int	not used						
22001	>PartyExecutingFirm	Y	5	17	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting-Trader	Y	6	22	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39040	>Pad4	U	4	28	Fixed String	not used						

15.11 Basket Roll Request

This message is sent to the service "T7 Entry".

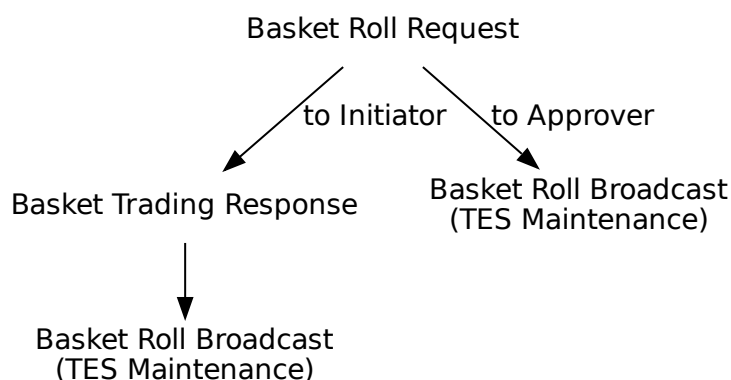

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description				
<MessageHeaderIn>										
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.				
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10633 (Trade-MatchReport, MsgType = DC)				
25028	NetworkMsgID	U	8	6	Fixed String	not used				
39020	Pad2	U	2	14	Fixed String	not used				
<RequestHeader>										
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.				
50	SenderSubID	Y	4	20	unsigned int	User ID.				
<MessageBody>										
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.				
28899	BasketProfileID	N	4	28	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).				
828	TrdType	Y	2	32	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures
Value	Description									
1010	Basket of Equity Total Return Futures									
25250	NoOldBasketSideAlloc	Y	2	34	Counter	Number of old basket trade match sides				

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25252	NoNewBasketSide-Alloc	Y	2	36	Counter	Number of new basket trade match sides						
856	TradeReportType	Y	1	38	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr></table>	Value	Description	0	Submit		
Value	Description											
0	Submit											
25165	NoBasketRootParty-Grps	Y	1	39	Counter	Number of Basket Root Parties						
25249	NoOldBasketInstrmt-MatchSides	Y	1	40	Counter	Number of old instrument match sides						
25251	NoNewBasketInstrmt-MatchSides	Y	1	41	Counter	Number of new instrument match sides						
571	TradeReportID	N	20	42	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
39020	Pad2	U	2	62	Fixed String	not used						
<OldBasketDataGrp>												
25161	BasketTrdMatchID	Y	8	64	unsigned int	System defined Basket ID.						
25167	BasketExecID	Y	4	72	unsigned int	System generated transaction ID for a Basket transaction.						
571	TradeReportID	N	20	76	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
200	MaturityMonthYear	Y	4	96	LocalMonth-YearCod	Month year code for expiry YYYYMM						
25173	BasketTradeReport-Type	Y	1	100	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Addendum</td></tr><tr><td>5</td><td>No/Was (Substitute)</td></tr></table>	Value	Description	4	Addendum	5	No/Was (Substitute)
Value	Description											
4	Addendum											
5	No/Was (Substitute)											
25168	BasketTradeReport-Text	N	20	101	Fixed String	User defined text message field. Valid characters: \x01-\x7E						
39070	Pad7	U	7	121	Fixed String	not used						
<NewBasketDataGrp>												
571	TradeReportID	N	20	128	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
200	MaturityMonthYear	Y	4	148	LocalMonth-YearCod	Month year code for expiry YYYYMM						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
25173	BasketTradeReport-Type	Y	1	152	unsigned int	Basket operation	
						Value	Description
						0	Submit
25168	BasketTradeReport-Text	N	20	153	Fixed String	User defined text message field. Valid characters: \x01-\x7E	
39030	Pad3	U	3	173	Fixed String	not used	
<BasketRootPartyGrp> Cardinality: 1-2, Record counter: NoBasketRootPartyGrps							
1122	>RootPartySub-IDType	Y	2	176	unsigned int	RootParty sub-type	
						Value	Description
						4001	Buyer
						4002	Seller
22417	>RootPartyContra-Firm	Y	5	178	Fixed String	The identifier of the member counter-party institution. Valid characters: A-Z, 0-9, \x20	
22437	>RootPartyContra-Trader	Y	6	183	Fixed String	The identifier of the trader counter-party. Valid characters: A-Z, 0-9, \x20	
26162	>BasketSideTrade-ReportID	N	20	189	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E	
39070	>Pad7	U	7	209	Fixed String	not used	
<OldBasketInstrmtMatchSideGrp> Cardinality: 1-199, Record counter: NoOldBasketInstrmtMatchSides							
48	>SecurityID	Y	8	0	signed int	Instrument identifier.	
31	>LastPx	Y	8	8	PriceType	Price of this fill.	
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.	
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].	
1596	>ClearingTradePrice	U	8	32	PriceType	not used	
2489	>PackageID	U	4	40	unsigned int	not used	
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID	
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type	
						Value	Description
						2001	Block Trade
						2004	Trade at Market

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<NewBasketInstrmtMatchSideGrp> Cardinality: 1 - 199, Record counter: NoNewBasketInstrmtMatchSides												
48	>SecurityID	Y	8	0	signed int	Instrument identifier.						
31	>LastPx	Y	8	8	PriceType	Price of this fill.						
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.						
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].						
1596	>ClearingTradePrice	U	8	32	PriceType	not used						
2489	>PackageID	U	4	40	unsigned int	not used						
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID						
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<OldBasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoOldBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	U	4	8	unsigned int	not used						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
77	>PositionEffect	N	1	15	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
25166	>InstrmtMatchSideID	Y	1	16	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
1840	>TradeAllocStatus	U	1	17	unsigned int	not used						
22001	>PartyExecutingFirm	Y	5	18	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20						
22012	>PartyExecuting- Trader	Y	6	23	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20						
39030	>Pad3	U	3	29	Fixed String	not used						
<NewBasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoNewBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	U	4	8	unsigned int	not used						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											
77	>PositionEffect	N	1	15	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open
Value	Description											
C	Close											
O	Open											
25166	>InstrmtMatchSideID	Y	1	16	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
1840	>TradeAllocStatus	U	1	17	unsigned int	not used						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
22001	>PartyExecutingFirm	Y	5	18	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20
22012	>PartyExecuting- Trader	Y	6	23	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20
39030	>Pad3	U	3	29	Fixed String	not used

15.12 Basket Roll Broadcast

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10634 (Trade-MatchReport, MsgType = DC)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>7</td><td>TES Maintenance</td></tr></table>	Value	Description	7	TES Maintenance		
Value	Description											
7	TES Maintenance											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
25167	BasketExecID	Y	4	40	unsigned int	System generated transaction ID for a Basket transaction.						
1300	MarketSegmentID	Y	4	44	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
28899	BasketProfileID	N	4	48	unsigned int	ID of the Basket profile, applicable only for Basket of Equity Total Return Futures(TrdType(828)=1010).						
828	TrdType	Y	2	52	unsigned int	Type of Basket trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1010</td><td>Basket of Equity Total Return Futures</td></tr></table>	Value	Description	1010	Basket of Equity Total Return Futures		
Value	Description											
1010	Basket of Equity Total Return Futures											
25250	NoOldBasketSideAlloc	Y	2	54	Counter	Number of old basket trade match sides						
25252	NoNewBasketSide-Alloc	Y	2	56	Counter	Number of new basket trade match sides						
856	TradeReportType	Y	1	58	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr></table>	Value	Description	0	Submit	5	No/Was (Replaced)
Value	Description											
0	Submit											
5	No/Was (Replaced)											
1011	MessageEventSource	Y	1	59	char	Receiver of a message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>I</td><td>Broadcast to initiator</td></tr><tr><td>A</td><td>Broadcast to approver</td></tr></table>	Value	Description	I	Broadcast to initiator	A	Broadcast to approver
Value	Description											
I	Broadcast to initiator											
A	Broadcast to approver											
25171	NoBasketRootParty-GrpsBC	Y	1	60	Counter	Number of Basket Root Parties						
25249	NoOldBasketInstrmt-MatchSides	Y	1	61	Counter	Number of old instrument match sides						
25251	NoNewBasketInstrmt-MatchSides	Y	1	62	Counter	Number of new instrument match sides						
31091	BasketAnonymity	N	1	63	unsigned int	Used to indicate anonymized trades in baskets. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes
Value	Description											
0	No											
1	Yes											
25168	BasketTradeReport-Text	N	20	64	Fixed String	User defined text message field. Valid characters: \x01-\x7E						
571	TradeReportID	N	20	84	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E						
<OldBasketDataBCGrp>												
60	TransactTime	Y	8	104	UTCTimestamp	Transaction timestamp.						
25161	BasketTrdMatchID	Y	8	112	unsigned int	System defined Basket ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
25248	OrigBasketTrdMatch-ID	N	8	120	unsigned int	System defined Original Basket ID.										
200	MaturityMonthYear	Y	4	128	LocalMonth-YearCod	Month year code for expiry YYYYMM										
25247	OptionalEarly-TerminationIndicator	Y	1	132	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
25173	BasketTradeReport-Type	Y	1	133	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Addendum</td></tr><tr><td>5</td><td>No/Was (Substitute)</td></tr></table>	Value	Description	4	Addendum	5	No/Was (Substitute)				
Value	Description															
4	Addendum															
5	No/Was (Substitute)															
571	TradeReportID	N	20	134	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E										
25168	BasketTradeReport-Text	N	20	154	Fixed String	User defined text message field. Valid characters: \x01-\x7E										
39020	Pad2	U	2	174	Fixed String	not used										
<NewBasketDataBCGrp>																
60	TransactTime	Y	8	176	UTCTimestamp	Transaction timestamp.										
25161	BasketTrdMatchID	Y	8	184	unsigned int	System defined Basket ID.										
25248	OrigBasketTrdMatch-ID	Y	8	192	unsigned int	System defined Original Basket ID.										
200	MaturityMonthYear	Y	4	200	LocalMonth-YearCod	Month year code for expiry YYYYMM										
25247	OptionalEarly-TerminationIndicator	Y	1	204	unsigned int	Indicates whether the counterparties have the right for early termination. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
25173	BasketTradeReport-Type	Y	1	205	unsigned int	Basket operation <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>4</td><td>Addendum</td></tr><tr><td>5</td><td>No/Was (Substitute)</td></tr><tr><td>19</td><td>Terminate</td></tr></table>	Value	Description	0	Submit	4	Addendum	5	No/Was (Substitute)	19	Terminate
Value	Description															
0	Submit															
4	Addendum															
5	No/Was (Substitute)															
19	Terminate															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
571	TradeReportID	N	20	206	Fixed String	User defined transaction ID. Part of the TES response and TES broadcast. Valid characters: \x01-\x7E	
25168	BasketTradeReport-Text	N	20	226	Fixed String	User defined text message field. Valid characters: \x01-\x7E	
39020	Pad2	U	2	246	Fixed String	not used	
<BasketRootPartyGrp> Cardinality: 2-3, Record counter: NoBasketRootPartyGrpsBC							
1122	>RootPartySub-IDType	Y	2	248	unsigned int	RootParty sub-type	
						Value	Description
						4001	Buyer
						4002	Seller
4003	Broker						
22417	>RootPartyContra-Firm	Y	5	250	Fixed String	The identifier of the member counter-party institution. Valid characters: A-Z, 0-9, \x20	
22437	>RootPartyContra-Trader	Y	6	255	Fixed String	The identifier of the trader counter-party. Valid characters: A-Z, 0-9, \x20	
26162	>BasketSideTrade-ReportID	N	20	261	Fixed String	User defined Basket trade ID. Valid characters: \x01-\x7E	
39070	>Pad7	U	7	281	Fixed String	not used	
<OldBasketInstrmtMatchSideGrp> Cardinality: 1-199, Record counter: NoOldBasketInstrmtMatchSides							
48	>SecurityID	Y	8	0	signed int	Instrument identifier.	
31	>LastPx	Y	8	8	PriceType	Price of this fill.	
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.	
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].	
1596	>ClearingTradePrice	N	8	32	PriceType	Price in clearing notation which can be preliminary or final depending on TradeReportType (856).	
2489	>PackageID	Y	4	40	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.	
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID	
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type	
						Value	Description
						2001	Block Trade
						2004	Trade at Market

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service.	
						Value	Description
						0	Do not publish trade
						1	Publish trade
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.	
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket.	
						Value	Description
						1	Add volume
						2	Remove volume
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E	
39060	>Pad6	U	6	74	Fixed String	not used	
<NewBasketInstrmtMatchSideGrp> Cardinality: 1 - 199, Record counter: NoNewBasketInstrmtMatchSides							
48	>SecurityID	Y	8	0	signed int	Instrument identifier.	
31	>LastPx	Y	8	8	PriceType	Price of this fill.	
483	>TransBkdTime	N	8	16	UTCTimestamp	Time of Commencement, the time when an Off-Book trade was concluded outside the T7 System.	
2589	>RelatedClosePrice	N	8	24	floatDecimal6	User defined index price. To be set for TrdType (1004) Trade at Market [mandatory].	
1596	>ClearingTradePrice	N	8	32	PriceType	Price in clearing notation which can be preliminary or final depending on TradeReportType (856).	
2489	>PackageID	Y	4	40	unsigned int	Identifier for a T7 Entry Service trade i.e. TES trade ID.	
1898	>SideMarket-SegmentID	Y	4	44	signed int	Product ID	

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
1008	>SideTrdSubTyp	Y	2	48	unsigned int	Sub-type of a trade type <table><tr><td>Value</td><td>Description</td></tr><tr><td>2001</td><td>Block Trade</td></tr><tr><td>2004</td><td>Trade at Market</td></tr></table>	Value	Description	2001	Block Trade	2004	Trade at Market
Value	Description											
2001	Block Trade											
2004	Trade at Market											
1227	>ProductComplex	Y	1	50	unsigned int	This field qualifies an instrument type on T7. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Simple instrument</td></tr></table>	Value	Description	1	Simple instrument		
Value	Description											
1	Simple instrument											
1390	>TradePublish-Indicator	Y	1	51	unsigned int	Indicates if a trade should be reported via the market reporting service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not publish trade</td></tr><tr><td>1</td><td>Publish trade</td></tr></table>	Value	Description	0	Do not publish trade	1	Publish trade
Value	Description											
0	Do not publish trade											
1	Publish trade											
25166	>InstrmtMatchSideID	Y	1	52	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.						
25163	>EffectOnBasket	N	1	53	unsigned int	Transaction effect on a basket. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Add volume</td></tr><tr><td>2</td><td>Remove volume</td></tr></table>	Value	Description	1	Add volume	2	Remove volume
Value	Description											
1	Add volume											
2	Remove volume											
28583	>TradeReportText	N	20	54	Fixed String	User defined TES ID. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E						
39060	>Pad6	U	6	74	Fixed String	not used						
<OldBasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoOldBasketSideAlloc												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.						
467	>IndividualAllocID	Y	4	8	unsigned int	Unique identifier for a TES trade side.						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller
Value	Description											
14001	Buyer											
14002	Seller											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell
Value	Description											
1	Buy											
2	Sell											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
77	>PositionEffect	N	1	15	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open																
Value	Description																											
C	Close																											
O	Open																											
25166	>InstrmtMatchSideID	Y	1	16	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.																						
1840	>TradeAllocStatus	Y	1	17	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
22001	>PartyExecutingFirm	Y	5	18	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20																						
22012	>PartyExecuting-Trader	Y	6	23	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20																						
39030	>Pad3	U	3	29	Fixed String	not used																						
<NewBasketSideAllocGrp> Cardinality: 1 - 398, Record counter: NoNewBasketSideAlloc																												
80	>AllocQty	Y	8	0	Qty	Quantity of the particular trade side in the TES trade.																						
467	>IndividualAllocID	Y	4	8	unsigned int	Unique identifier for a TES trade side.																						
803	>PartySubIDType	Y	2	12	unsigned int	Party sub-type <table><tr><td>Value</td><td>Description</td></tr><tr><td>14001</td><td>Buyer</td></tr><tr><td>14002</td><td>Seller</td></tr></table>	Value	Description	14001	Buyer	14002	Seller																
Value	Description																											
14001	Buyer																											
14002	Seller																											
54	>Side	Y	1	14	unsigned int	Side of the order. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																
Value	Description																											
1	Buy																											
2	Sell																											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																						
77	>PositionEffect	N	1	15	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open																
Value	Description																											
C	Close																											
O	Open																											
25166	>InstrmtMatchSideID	Y	1	16	unsigned int	ID to map element of InstrmtMatch-SideGrp and BasketSideAllocGrp.																						
1840	>TradeAllocStatus	Y	1	17	unsigned int	Status of an allocation in a T7 Entry Service trade. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Pending</td></tr><tr><td>2</td><td>Approved</td></tr><tr><td>3</td><td>Auto Approved</td></tr><tr><td>4</td><td>Uploaded</td></tr><tr><td>5</td><td>Canceled</td></tr><tr><td>7</td><td>Pending Reversal</td></tr><tr><td>8</td><td>Side Approved Reversal</td></tr><tr><td>9</td><td>Reversed</td></tr><tr><td>10</td><td>Cancelled Reversal</td></tr><tr><td>11</td><td>Auto Approved Reversal</td></tr></table>	Value	Description	1	Pending	2	Approved	3	Auto Approved	4	Uploaded	5	Canceled	7	Pending Reversal	8	Side Approved Reversal	9	Reversed	10	Cancelled Reversal	11	Auto Approved Reversal
Value	Description																											
1	Pending																											
2	Approved																											
3	Auto Approved																											
4	Uploaded																											
5	Canceled																											
7	Pending Reversal																											
8	Side Approved Reversal																											
9	Reversed																											
10	Cancelled Reversal																											
11	Auto Approved Reversal																											
22001	>PartyExecutingFirm	Y	5	18	Fixed String	Owning business unit name. Valid characters: A-Z, 0-9, \x20																						
22012	>PartyExecuting-Trader	Y	6	23	Fixed String	Owning user name. Valid characters: A-Z, 0-9, \x20																						
39030	>Pad3	U	3	29	Fixed String	not used																						

16 Other

16.1 Trade Notification

The Trade Notification message is the legally binding confirmation for a trade. For more details, please refer to the ETI Manual, chapter Trade Notifications.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10500 (Trade-CaptureReport, MsgType = AE)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Trade</td></tr></table>	Value	Description	1	Trade		
Value	Description											
1	Trade											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39070	Pad7	U	7	33	Fixed String	not used
<MessageBody>						
48	SecurityID	Y	8	40	signed int	Instrument identifier.
1650	RelatedSecurityID	N	8	48	signed int	Instrument identifier of the original T7 strategy.
44	Price	N	8	56	PriceType	Limit price. Required if OrdType (40) is Limit (2) or Stop Limit (4).
31	LastPx	Y	8	64	PriceType	Price of this fill.
32	LastQty	Y	8	72	Qty	Quantity executed in this fill.
28585	SideLastPx	N	8	80	PriceType	Fill price for the original T7 strategy.
1009	SideLastQty	N	8	88	Qty	Fill quantity for the original T7 strategy.
1596	ClearingTradePrice	N	8	96	PriceType	Price in clearing notation which can be preliminary or final depending on TradeReportType (856).
28736	ClearingTradeQty	N	8	104	Qty	Quantity in clearing notation.
60	TransactTime	Y	8	112	UTCTimestamp	Transaction timestamp.
37	OrderID	N	8	120	unsigned int	Exchange Order ID generated by the T7 System.
11	ClOrdID	N	8	128	unsigned int	Client Order ID: Unique participant defined order request identifier. For quotes the QuoteMsgID (1166) is provided in the trade notification.
151	LeavesQty	N	8	136	Qty	Remaining quantity of the order at the time of the execution. If the order has been executed partially this field contains the non-executed quantity. A remaining size of 0 indicates that the order is fully matched or no longer active.
14	CumQty	N	8	144	Qty	Cumulated executed quantity of an order.
20403	RootPartyIDClientID	N	8	152	unsigned int	MiFID field: Client Identifier field (ESMA Field 3 (Section A)) used to identify the client of an order for agent account of the member or participant of the trading venue.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
25123	ExecutingTrader	N	8	160	unsigned int	MiFID field: Executing Trader data Field(ESMA Field 5 (Section A))used to identify the person or algorithm within the member or participant of the trading venue who is responsible for the execution of the transaction resulting from the order.
20522	RootParty-IDInvestmentDecision-Maker	N	8	168	unsigned int	MiFID field: Investment decision within firm (ESMA Field 4 (Section A)) is the code used to identify the person or the algorithm within the member or participant of the Trading Venue who is responsible for the investment decision.
810	UnderlyingPx	N	8	176	PriceType	Underlying price associated with a derivative instrument.
1003	TradeID	Y	4	184	unsigned int	Uniquely identifies all order leg allocations referring to the same match event, simple instrument and price.
1126	OrigTradeID	N	4	188	unsigned int	In case of a trade reversal/modification this field provides the original trade identifier.
2424	MassOrderReportID	N	4	192	unsigned int	Mass order response identifier generated by the exchange
20459	RootParty-IDExecutingUnit	Y	4	196	unsigned int	Business Unit ID.
20455	RootPartyIDSessionID	N	4	200	unsigned int	Session ID.
20412	RootParty-IDExecutingTrader	N	4	204	unsigned int	Owning User ID.
25026	RootPartyIDClearing-Unit	N	4	208	unsigned int	Clearing Business Unit ID.
1300	MarketSegmentID	Y	4	212	signed int	Product identifier.
1649	RelatedSymbol	N	4	216	signed int	Product identifier of the original T7 strategy.
1506	SideTradeID	Y	4	220	unsigned int	Private trade identifier of an order or quote match step.
28582	MatchDate	Y	4	224	LocalMktDate	Business day of the match event.
880	TrdMatchID	Y	4	228	unsigned int	Unique identifier for each price level (match step) of a match event; it is used for public trade reporting.
1851	StrategyLinkID	N	4	232	unsigned int	Identifier that links all trades resulting from a match step of a strategy order.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
748	TotNumTradeReports	N	4	236	signed int	Number of leg executions of the original strategy order.										
762	SecuritySubType	N	4	240	signed int	Sub-type qualification/identification of the SecurityType										
442	MultiLegReporting-Type	N	1	244	unsigned int	Indicates if the trade resulted from a single order or a multi leg instrument. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Single instrument</td></tr><tr><td>2</td><td>Complex instrument</td></tr></table>	Value	Description	1	Single instrument	2	Complex instrument				
Value	Description															
1	Single instrument															
2	Complex instrument															
856	TradeReportType	Y	1	245	unsigned int	Type of Trade Report <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Submit</td></tr><tr><td>1</td><td>Alleged</td></tr><tr><td>5</td><td>No/Was (Replaced)</td></tr><tr><td>7</td><td>(Locked-In) Trade Break</td></tr></table>	Value	Description	0	Submit	1	Alleged	5	No/Was (Replaced)	7	(Locked-In) Trade Break
Value	Description															
0	Submit															
1	Alleged															
5	No/Was (Replaced)															
7	(Locked-In) Trade Break															
830	TransferReason	Y	1	246	unsigned int	Identifies the role for which the trade notification is received. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Owner</td></tr><tr><td>2</td><td>Clearer</td></tr></table>	Value	Description	1	Owner	2	Clearer				
Value	Description															
1	Owner															
2	Clearer															
20432	RootParty-IDBeneficiary	N	9	247	Fixed String	Final Beneficiary. Valid characters: \x20, \x22-\x7B, \x7D, \x7E										
20496	RootPartyIDTakeUp-TradingFirm	N	5	256	Fixed String	Take-up Member Short Name. Valid characters: A-Z, 0-9, \x20										
20413	RootPartyIDOrder-OriginationFirm	N	7	261	Fixed String	External Member ID. Valid characters: A-Z, 0-9, \x20										

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description														
574	MatchType	N	1	268	unsigned int	The point in the matching process at which this trade was matched. The value 3 (reporting from recognized markets) represents trades entered by Market Supervision. <table><tr><th>Value</th><th>Description</th></tr><tr><td>3</td><td>Confirmed Trade Report (reporting from recognized markets)</td></tr><tr><td>4</td><td>Auto-match incoming order</td></tr><tr><td>5</td><td>Cross Auction</td></tr><tr><td>7</td><td>Call Auction</td></tr><tr><td>11</td><td>Auto match resting order</td></tr><tr><td>13</td><td>Liquidity Improvement Cross</td></tr></table>	Value	Description	3	Confirmed Trade Report (reporting from recognized markets)	4	Auto-match incoming order	5	Cross Auction	7	Call Auction	11	Auto match resting order	13	Liquidity Improvement Cross
Value	Description																			
3	Confirmed Trade Report (reporting from recognized markets)																			
4	Auto-match incoming order																			
5	Cross Auction																			
7	Call Auction																			
11	Auto match resting order																			
13	Liquidity Improvement Cross																			
28610	MatchSubType	N	1	269	unsigned int	Indicates the auction type the trade originates from. Not filled for uncrossing, i.e. when a complex instrument switches to the instrument state "Continuous". <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Opening auction</td></tr><tr><td>2</td><td>Closing auction</td></tr><tr><td>3</td><td>Intraday auction</td></tr><tr><td>4</td><td>Circuit Breaker auction</td></tr><tr><td>6</td><td>CLIP matching outside BBO</td></tr></table>	Value	Description	1	Opening auction	2	Closing auction	3	Intraday auction	4	Circuit Breaker auction	6	CLIP matching outside BBO		
Value	Description																			
1	Opening auction																			
2	Closing auction																			
3	Intraday auction																			
4	Circuit Breaker auction																			
6	CLIP matching outside BBO																			
54	Side	Y	1	270	unsigned int	Side of the trade. Leg executions of sell orders for complex instruments will have an inverted value compared to the signature. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell								
Value	Description																			
1	Buy																			
2	Sell																			

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1444	SideLiquidityInd	N	1	271	unsigned int	Order initiator is passive or aggressive or other <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Added liquidity (passive)</td></tr><tr><td>2</td><td>Removed liquidity (aggressive, includes triggered orders)</td></tr><tr><td>4</td><td>Auction</td></tr></table>	Value	Description	1	Added liquidity (passive)	2	Removed liquidity (aggressive, includes triggered orders)	4	Auction
Value	Description													
1	Added liquidity (passive)													
2	Removed liquidity (aggressive, includes triggered orders)													
4	Auction													
1815	TradingCapacity	Y	1	272	unsigned int	This field designates if the trader is acting in the capacity of agent, trading for its own account or acting as a market maker. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Customer (Agency)</td></tr><tr><td>5</td><td>Principal (Proprietary)</td></tr><tr><td>6</td><td>Market Maker</td></tr></table>	Value	Description	1	Customer (Agency)	5	Principal (Proprietary)	6	Market Maker
Value	Description													
1	Customer (Agency)													
5	Principal (Proprietary)													
6	Market Maker													
1724	OrderOrigination	N	1	273	unsigned int	MiFID field: Field to indicate order received from a direct access or sponsored access customer <table><tr><th>Value</th><th>Description</th></tr><tr><td>5</td><td>Order received from a direct access customer</td></tr><tr><td>105</td><td>Order received from a sponsored access customer</td></tr></table>	Value	Description	5	Order received from a direct access customer	105	Order received from a sponsored access customer		
Value	Description													
5	Order received from a direct access customer													
105	Order received from a sponsored access customer													
23002	OrderAttribute-LiquidityProvision	N	1	274	unsigned int	MiFID field: Indication as to whether an order is submitted to a Trading Venue as part of a market making strategy. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Liquidity provision</td></tr><tr><td>0</td><td>No liquidity provision</td></tr></table>	Value	Description	1	Liquidity provision	0	No liquidity provision		
Value	Description													
1	Liquidity provision													
0	No liquidity provision													

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
23003	OrderAttributeRisk-Reduction	N	1	275	unsigned int	MiFID field: Indication as to whether the transaction reduces risk in an objectively measurable way in accordance with Article 57 of Directive 2014/EU. The field is only applicable for commodity derivative transactions. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>Risk reduction</td></tr><tr><td>0</td><td>No risk reduction</td></tr></table>	Value	Description	1	Risk reduction	0	No risk reduction
Value	Description											
1	Risk reduction											
0	No risk reduction											
25124	ExecutingTrader-Qualifier	N	1	276	unsigned int	MiFID field: Qualifier for field ExecutingTrader. It is required to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
21622	RootParty-IDInvestmentDecision-MakerQualifier	N	1	277	unsigned int	MiFID field: Qualifier for field Party-IDInvestmentDecisionMaker. Members/participants will have the possibility to specify an Investment qualifier value to distinguish between natural persons and Algos. <table><tr><th>Value</th><th>Description</th></tr><tr><td>22</td><td>Algo</td></tr><tr><td>24</td><td>Human/Natural person</td></tr></table>	Value	Description	22	Algo	24	Human/Natural person
Value	Description											
22	Algo											
24	Human/Natural person											
1	Account	N	2	278	Fixed String	Accounts to book trades and keep positions on. Valid characters: 1-9, \x41, \x47, \x49, \x4D, \x50, \x52						
20438	RootPartyIDPosition-Account	N	32	280	Fixed String	'Flexible Account' information. Valid characters: \x20, \x30-\x39, \x41-\x5A						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																
77	PositionEffect	N	1	312	char	Field is used for T7 position management purposes and indicates whether the order is submitted to open or close a position. <table><tr><td>Value</td><td>Description</td></tr><tr><td>C</td><td>Close</td></tr><tr><td>O</td><td>Open</td></tr></table>	Value	Description	C	Close	O	Open										
Value	Description																					
C	Close																					
O	Open																					
1031	CustOrderHandling-Inst	N	1	313	Fixed String	Identifies the source of an order, in accordance with the FIA guidelines for a rate Identifier.The field is for participant use only. <table><tr><td>Value</td><td>Description</td></tr><tr><td>W</td><td>Desk</td></tr><tr><td>Y</td><td>Electronic</td></tr><tr><td>C</td><td>Vendor-provided Platform billed by Executing Broker</td></tr><tr><td>G</td><td>Sponsored Access via Exchange API or FIX provided by Executing Broker</td></tr><tr><td>H</td><td>Premium Algorithmic Trading Provider billed by Executing Broker</td></tr><tr><td>D</td><td>Other, including Other-provided Screen</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	W	Desk	Y	Electronic	C	Vendor-provided Platform billed by Executing Broker	G	Sponsored Access via Exchange API or FIX provided by Executing Broker	H	Premium Algorithmic Trading Provider billed by Executing Broker	D	Other, including Other-provided Screen	*	More values
Value	Description																					
W	Desk																					
Y	Electronic																					
C	Vendor-provided Platform billed by Executing Broker																					
G	Sponsored Access via Exchange API or FIX provided by Executing Broker																					
H	Premium Algorithmic Trading Provider billed by Executing Broker																					
D	Other, including Other-provided Screen																					
*	More values																					
25007	FreeText1	N	12	314	Fixed String	First free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																
25008	FreeText2	N	12	326	Fixed String	Second free-format text field for trader specific or customer-related comments Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																										
25009	FreeText3	N	12	338	Fixed String	Third free-format text field for trader-specific or customer-related comments. Valid characters: \x20, \x23-\x25, \x28-\x2A, \x2C-\x3B, \x3F, \x41-\x5F, \x61-\x7B, \x7D, \x7E																										
1115	OrderCategory	N	1	350	char	Indicates if the trade notification results from an order or quote. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Order</td></tr><tr><td>2</td><td>Quote</td></tr></table>	Value	Description	1	Order	2	Quote																				
Value	Description																															
1	Order																															
2	Quote																															
40	OrdType	N	1	351	unsigned int	Order type. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Market</td></tr><tr><td>2</td><td>Limit</td></tr></table>	Value	Description	1	Market	2	Limit																				
Value	Description																															
1	Market																															
2	Limit																															
28587	RelatedProduct-Complex	N	1	352	unsigned int	Instrument type of the original T7 strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>Standard Option Strategy</td></tr><tr><td>3</td><td>Non-Standard Option Strategy</td></tr><tr><td>4</td><td>Volatility Strategy</td></tr><tr><td>5</td><td>Futures Spread</td></tr><tr><td>6</td><td>Inter-Product Spread</td></tr><tr><td>7</td><td>Standard Future Strategy</td></tr><tr><td>8</td><td>Pack and Bundle</td></tr><tr><td>9</td><td>Strip</td></tr><tr><td>11</td><td>Commodity Strip</td></tr><tr><td>12</td><td>Scaled Simple Instrument</td></tr><tr><td>13</td><td>Non-Standard Volatility Strategy</td></tr><tr><td>14</td><td>Total Return Future Strategy</td></tr></table>	Value	Description	2	Standard Option Strategy	3	Non-Standard Option Strategy	4	Volatility Strategy	5	Futures Spread	6	Inter-Product Spread	7	Standard Future Strategy	8	Pack and Bundle	9	Strip	11	Commodity Strip	12	Scaled Simple Instrument	13	Non-Standard Volatility Strategy	14	Total Return Future Strategy
Value	Description																															
2	Standard Option Strategy																															
3	Non-Standard Option Strategy																															
4	Volatility Strategy																															
5	Futures Spread																															
6	Inter-Product Spread																															
7	Standard Future Strategy																															
8	Pack and Bundle																															
9	Strip																															
11	Commodity Strip																															
12	Scaled Simple Instrument																															
13	Non-Standard Volatility Strategy																															
14	Total Return Future Strategy																															
28586	OrderSide	N	1	353	unsigned int	Side of the order in the original T7 strategy. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Buy</td></tr><tr><td>2</td><td>Sell</td></tr></table>	Value	Description	1	Buy	2	Sell																				
Value	Description																															
1	Buy																															
2	Sell																															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
22421	RootPartyClearing-Organization	Y	4	354	Fixed String	Clearing House Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
22401	RootPartyExecuting-Firm	Y	5	358	Fixed String	Participant Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
22412	RootPartyExecuting-Trader	N	6	363	Fixed String	Owning User Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
22404	RootPartyClearing-Firm	N	5	369	Fixed String	Clearing Member Short Name. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
1903	RegulatoryTradeID	N	52	374	Fixed String	TVTIC - Trading Venue Transaction Identification Code Valid characters: 0-9, A-Z, a-z, \x20
20473	RootParty-IDExecutionVenue	N	4	426	Fixed String	Market Segment Identification Code Valid characters: \x20, \x22-\x7B, \x7D, \x7E
32999	FeeDntCode	N	15	430	Fixed String	This field indicates the Fee Code associated with the transaction. Valid characters: \x41-\x45, \x47, \x4B, \x4D, \x4E, \x50, \x52, \x53, \x54, \x56, \x57, \x58
39030	Pad3	U	3	445	Fixed String	not used

16.2 Inquire Margin Based Risk Limit Request

Inquires the remaining risk allowance base limit for a member (only for Nodal Exchange). This message is sent to the service "Order and Quote Management".

Inquire Margin Based Risk Limit Request



Inquire Margin Based Risk Limit Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10323 (PartyRiskLimitsRequest, MsgType = CL)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
5948	PartitionID	Y	2	24	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.
22259	PartyDetailExecuting-Unit	N	5	26	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20
39000	Pad1	U	1	31	Fixed String	not used

16.3 Inquire Margin Based Risk Limit Response

Response with the remaining risk allowance base limit for a member (only for Nodal Exchange).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10324 (PartyRiskLimitsReport, MsgType = CM)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
36531	MarginBasedRiskLimitLong	Y	8	56	float	Margin Based Risk Limit Short.						
37531	MarginBasedRiskLimitShort	Y	8	64	float	Margin Based Risk Limit Short.						

16.4 Status Broadcast

Status Broadcast for Start-of-Day and End-of-Day

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10045 (TradingSessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>News</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	2	News	6	Risk Control
Value	Description											
2	News											
6	Risk Control											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
75	TradeDate	N	4	40	LocalMktDate	Business date.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1368	TradSesEvent	Y	1	44	unsigned int	Trading session event type.	
						Value	Description
						101	Start of Service
						104	End of Service
39030	Pad3	U	3	45	Fixed String	not used	

16.5 Trade Notification Status

This message informs about the end of the Trade Notification stream for the respective business day.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10501 (Trading-SessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Trade</td></tr></table>	Value	Description	1	Trade		
Value	Description											
1	Trade											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
1368	TradSesEvent	Y	1	40	unsigned int	Trading session event type.
						Value Description
						104 End of Service
39070	Pad7	U	7	41	Fixed String	not used

16.6 Update Remaining Risk Allowance Base Request

Updates the remaining risk allowance base for up to 1000 members at once (only for Nodal Exchange). This message is sent to the service "Order and Quote Management".

Update Remaining Risk Allowance Base Request



Update Remaining Risk Allowance Base Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10325 (PartyRiskLimitsDefinitionRequest, MsgType = CS)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
5948	PartitionID	Y	2	24	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.
1677	NoPartyRiskLimits	Y	2	26	Counter	Number of party risk limits
39040	Pad4	U	4	28	Fixed String	not used
<RRAUpdateBasePartyGrp> Cardinality: 0- 1000, Record counter: NoPartyRiskLimits						
34531	>RemainingRisk-AllowanceBaseLong	Y	8	32	float	Remaining Risk Allowance Base Long.
35531	>RemainingRisk-AllowanceBaseShort	Y	8	40	float	Remaining Risk Allowance Base Short.
1670	>RiskLimitID	Y	4	48	unsigned int	Identifier of the last Remaining Risk Allowance event
22259	>PartyDetail-ExecutingUnit	Y	5	52	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20

Deutsche Börse Group's T7 Release 15.0
Enhanced Trading Interface
Derivatives Message Reference

Deutsche Börse Group
Build 150.536.0.ga-150006001-56

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39070	>Pad7	U	7	57	Fixed String	not used

16.7 Update Remaining Risk Allowance Base Response

Acknowledgment for the update of the remaining risk allowance base for up to 1000 members at once (only for Nodal Exchange).

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10326 (Party-RiskLimitsDefinitionRequestAck, MsgType = CT)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 0 Not Last Message 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
1677	NoPartyRiskLimits	Y	2	56	Counter	Number of party risk limits
39060	Pad6	U	6	58	Fixed String	not used
<RRAUpdateBasePartyAckGrp> Cardinality: 0-1000, Record counter: NoPartyRiskLimits						
22259	>PartyDetail-ExecutingUnit	Y	5	64	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20
39000	>Pad1	U	1	69	Fixed String	not used

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description								
1764	>RiskLimitResult	Y	2	70	unsigned int	Risk Limit Result for failed events								
						<table><tr><th>Value</th><th>Description</th></tr><tr><td>10580</td><td>Margin Based Risk Limits not enabled for business unit</td></tr><tr><td>10581</td><td>Received Remaining Risk Allowance event ID is lower than lowest entry in Temporary Transaction List</td></tr><tr><td>10582</td><td>Received Remaining Risk Allowance event ID exceeds last entry in Temporary Transaction List</td></tr></table>	Value	Description	10580	Margin Based Risk Limits not enabled for business unit	10581	Received Remaining Risk Allowance event ID is lower than lowest entry in Temporary Transaction List	10582	Received Remaining Risk Allowance event ID exceeds last entry in Temporary Transaction List
Value	Description													
10580	Margin Based Risk Limits not enabled for business unit													
10581	Received Remaining Risk Allowance event ID is lower than lowest entry in Temporary Transaction List													
10582	Received Remaining Risk Allowance event ID exceeds last entry in Temporary Transaction List													

16.8 Trading Session Event

For more details, please refer to the ETI Manual, chapter Trading Session Events.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10307 (TradingSessionStatus, MsgType = h)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	N	4	32	unsigned int	Only set for Listener Data.						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	Y	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplIID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	57	Fixed String	not used						
<MessageBody>												
1300	MarketSegmentID	N	4	64	signed int	Product identifier.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description												
75	TradeDate	N	4	68	LocalMktDate	Business date.												
1368	TradSesEvent	Y	1	72	unsigned int	Trading session event type. <table><tr><th>Value</th><th>Description</th></tr><tr><td>101</td><td>Start of Service</td></tr><tr><td>102</td><td>Market Reset</td></tr><tr><td>103</td><td>End of Restatement</td></tr><tr><td>104</td><td>End of Service</td></tr><tr><td>105</td><td>Service Resumed</td></tr></table>	Value	Description	101	Start of Service	102	Market Reset	103	End of Restatement	104	End of Service	105	Service Resumed
Value	Description																	
101	Start of Service																	
102	Market Reset																	
103	End of Restatement																	
104	End of Service																	
105	Service Resumed																	
28722	RefApplLastMsgID	N	16	73	data	Last persisted application message identifier in case of a Market Reset event.												
39070	Pad7	U	7	89	Fixed String	not used												

16.9 Mass Cancellation Event

This message informs about the cancellation of orders and/or quotes because of a system event. While Quotes are always deleted, the deletion of orders (Standard/Lean) is indicated by the ExecInst (18) field.

For more details, please refer to the ETI Manual, chapter Mass Cancellation Events.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10308 (Order-MassActionReport, MsgType = BZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeaderME>												
21003	TrdRegTSTimeOut	N	8	8	UTCTimestamp	Matching engine out timestamp.						
25043	NotificationIn	N	8	16	UTCTimestamp	Timestamp the gateway receives a notification message from the Matching Engine.						
52	SendingTime	Y	8	24	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	N	4	32	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	36	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
28704	ApplMsgID	N	16	38	data	Application message identifier assigned to an order or quote event.						
1180	ApplID	Y	1	54	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>Session Data</td></tr><tr><td>5</td><td>Listener Data</td></tr></table>	Value	Description	4	Session Data	5	Listener Data
Value	Description											
4	Session Data											
5	Listener Data											
1352	ApplResendFlag	Y	1	55	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description																		
893	LastFragment	Y	1	56	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message														
Value	Description																							
1	Last Message																							
39070	Pad7	U	7	57	Fixed String	not used																		
<MessageBody>																								
1369	MassActionReportID	Y	8	64	UTCTimestamp	Transaction timestamp.																		
48	SecurityID	N	8	72	signed int	Instrument identifier.																		
1300	MarketSegmentID	Y	4	80	signed int	Product identifier.																		
28721	MassActionReason	Y	1	84	unsigned int	Reason for mass cancellation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>105</td><td>Product State Halt</td></tr><tr><td>106</td><td>Product State Holiday</td></tr><tr><td>107</td><td>Instrument Suspended</td></tr><tr><td>109</td><td>Complex Instrument Deletion</td></tr><tr><td>110</td><td>Volatility Interruption</td></tr><tr><td>111</td><td>Product temporarily not tradeable</td></tr><tr><td>121</td><td>Scaled Simple Instrument Deletion</td></tr><tr><td>122</td><td>D-2 Order Cancellation</td></tr></table>	Value	Description	105	Product State Halt	106	Product State Holiday	107	Instrument Suspended	109	Complex Instrument Deletion	110	Volatility Interruption	111	Product temporarily not tradeable	121	Scaled Simple Instrument Deletion	122	D-2 Order Cancellation
Value	Description																							
105	Product State Halt																							
106	Product State Holiday																							
107	Instrument Suspended																							
109	Complex Instrument Deletion																							
110	Volatility Interruption																							
111	Product temporarily not tradeable																							
121	Scaled Simple Instrument Deletion																							
122	D-2 Order Cancellation																							
18	ExecInst	N	1	85	unsigned int	Cancellation scope for orders. Quotes are always cancelled by Mass Cancellation Events.'No value' indicates no order cancellation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Persistent Order (FIX value 'H')</td></tr><tr><td>2</td><td>Non-persistent Order (FIX value 'Q')</td></tr><tr><td>3</td><td>Persistent and non-persistent orders affected (FIX value 'H Q')</td></tr></table>	Value	Description	1	Persistent Order (FIX value 'H')	2	Non-persistent Order (FIX value 'Q')	3	Persistent and non-persistent orders affected (FIX value 'H Q')										
Value	Description																							
1	Persistent Order (FIX value 'H')																							
2	Non-persistent Order (FIX value 'Q')																							
3	Persistent and non-persistent orders affected (FIX value 'H Q')																							
39020	Pad2	U	2	86	Fixed String	not used																		

16.10 Pre-Trade Risk Limits Definition Request

The Pre-Trade Risk Limits (PTRL) calculate in real-time how much of a given limit has already been consumed by incoming transactions and executions throughout the trading day. The limit can be set with this request. This message is sent to the service "Order and Quote Management".

Pre-Trade Risk Limits Definition Request



Pre-Trade Risk Limit Response
(Session Data)

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10312 (PartyRiskLimitsRequest, MsgType = CL)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
25205	NettingCoefficient	N	8	24	floatDecimal4	Weighting factor used in the Extended PTRL consumption calculation. Default value is 10000 for trading members and 0 for clearing members.						
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.						
1533	RiskLimitPlatform	Y	1	36	unsigned int	Scope for Pre-Trade risk limits <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>On-Book</td></tr><tr><td>1</td><td>Off-Book(TES)</td></tr></table>	Value	Description	0	On-Book	1	Off-Book(TES)
Value	Description											
0	On-Book											
1	Off-Book(TES)											
31669	NoRiskLimitsQty	Y	1	37	Counter							

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
1672	PartyDetailStatus	N	1	38	unsigned int	Member status. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr></table>	Value	Description	0	Active	1	Suspend				
Value	Description															
0	Active															
1	Suspend															
31763	RiskLimitGroupStatus	N	1	39	unsigned int	RiskLimitGroup status. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr></table>	Value	Description	0	Active	1	Suspend				
Value	Description															
0	Active															
1	Suspend															
28775	RiskLimitGroup	N	3	40	Fixed String	User Pre-Trade risk group. Valid characters: A-Z, 0-9, \x20										
22259	PartyDetailExecuting-Unit	N	5	43	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20										
<RiskLimitQtyGrp> Cardinality: 0-2, Record counter: NoRiskLimitsQty																
28777	>RiskLimitQty	N	8	48	Qty	Risk limit quantity - Special cases: leave empty for delete/reset limit, set 0 for no further trading										
1530	>RiskLimitType	Y	1	56	unsigned int	Type of risk limits <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Gross limit</td></tr><tr><td>2</td><td>Net limit</td></tr><tr><td>4</td><td>Long limit</td></tr><tr><td>5</td><td>Short limit</td></tr></table>	Value	Description	1	Gross limit	2	Net limit	4	Long limit	5	Short limit
Value	Description															
1	Gross limit															
2	Net limit															
4	Long limit															
5	Short limit															
39070	>Pad7	U	7	57	Fixed String	not used										

16.11 Pre-Trade Risk Limit Response

This response outlines the currently consumed Pre-Trade Risk Limits.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplatelD	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10313 (PartyRiskLimitsReport, MsgType = CM)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRResponseHeaderME>												
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway						
21002	TrdRegTSTimeIn	N	8	16	UTCTimestamp	Matching engine in timestamp.						
21003	TrdRegTSTimeOut	N	8	24	UTCTimestamp	Matching engine out timestamp.						
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.						
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39030	Pad3	U	3	53	Fixed String	not used						
<MessageBody>												
1667	RiskLimitReportID	Y	8	56	unsigned int	ID of a PartyRiskLimitReport						
1300	MarketSegmentID	Y	4	64	signed int	Product identifier.						
1669	NoRiskLimits	Y	1	68	Counter							
1672	PartyDetailStatus	Y	1	69	unsigned int	Member status. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr></table>	Value	Description	0	Active	1	Suspend
Value	Description											
0	Active											
1	Suspend											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
1533	RiskLimitPlatform	Y	1	70	unsigned int	Scope for Pre-Trade risk limits <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>On-Book</td></tr><tr><td>1</td><td>Off-Book(TES)</td></tr></table>	Value	Description	0	On-Book	1	Off-Book(TES)				
Value	Description															
0	On-Book															
1	Off-Book(TES)															
22259	PartyDetailExecuting-Unit	Y	5	71	Fixed String	Detail BusinessUnit name Valid characters: A-Z, 0-9, \x20										
39040	Pad4	U	4	76	Fixed String	not used										
<RiskLimitsRptGrp> Cardinality: 0-64, Record counter: NoRiskLimits																
28777	>RiskLimitQty	N	8	80	Qty	Risk limit quantity.										
28779	>RiskLimitOpenQty	N	8	88	Qty	Open quantity for orders or TES trades.										
28780	>RiskLimitNet-PositionQty	N	8	96	Qty	Net position quantity for a requested pre-trade risk limit scope.										
25205	>NettingCoefficient	N	8	104	floatDecimal4	Weighting factor used in the Extended PTRL consumption calculation. Default value is 10000 for trading members and 0 for clearing members.										
28905	>ActivationDate	N	4	112	LocalMktDate	Business date when change is active										
1530	>RiskLimitType	Y	1	116	unsigned int	Type of risk limits <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Gross limit</td></tr><tr><td>2</td><td>Net limit</td></tr><tr><td>4</td><td>Long limit</td></tr><tr><td>5</td><td>Short limit</td></tr></table>	Value	Description	1	Gross limit	2	Net limit	4	Long limit	5	Short limit
Value	Description															
1	Gross limit															
2	Net limit															
4	Long limit															
5	Short limit															
28776	>RiskLimit-RequestingPartyRole	Y	1	117	unsigned int	Requesting party role for a pre-trade risk limit. <table><tr><td>Value</td><td>Description</td></tr><tr><td>4</td><td>requested by Clearing firm</td></tr><tr><td>22</td><td>requested by Exchange</td></tr><tr><td>59</td><td>requested by Executing firm</td></tr></table>	Value	Description	4	requested by Clearing firm	22	requested by Exchange	59	requested by Executing firm		
Value	Description															
4	requested by Clearing firm															
22	requested by Exchange															
59	requested by Executing firm															
28778	>RiskLimitViolation-Indicator	N	1	118	unsigned int	Indicator for a pre-trade risk limit violation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
31763	>RiskLimitGroup-Status	N	1	119	unsigned int	RiskLimitGroup status.	
						Value	Description
						0	Active
						1	Suspend
28775	>RiskLimitGroup	N	3	120	Fixed String	User Pre-Trade risk group. Valid characters: A-Z, 0-9, \x20	
39050	>Pad5	U	5	123	Fixed String	not used	

16.12 Inquire Pre-Trade Risk Limits Request

This request retrieves the currently consumed Pre-Trade Risk Limits. This message is sent to the service "Order and Quote Management".

Inquire Pre-Trade Risk Limits Request



Pre-Trade Risk Limit Response
(Session Data)

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderIn>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10311 (PartyRiskLimitsRequest, MsgType = CL)						
25028	NetworkMsgID	U	8	6	Fixed String	not used						
39020	Pad2	U	2	14	Fixed String	not used						
<RequestHeader>												
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
50	SenderSubID	Y	4	20	unsigned int	User ID.						
<MessageBody>												
1300	MarketSegmentID	Y	4	24	signed int	Product identifier.						
1533	RiskLimitPlatform	Y	1	28	unsigned int	Scope for Pre-Trade risk limits <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>On-Book</td></tr><tr><td>1</td><td>Off-Book(TES)</td></tr></table>	Value	Description	0	On-Book	1	Off-Book(TES)
Value	Description											
0	On-Book											
1	Off-Book(TES)											
22059	PartyExecutingUnit	N	5	29	Fixed String	Executing BusinessUnit name Valid characters: \x01-\x7E						
28775	RiskLimitGroup	N	3	34	Fixed String	User Pre-Trade risk group. Valid characters: A-Z, 0-9, \x20						
39030	Pad3	U	3	37	Fixed String	not used						

16.13 Service Availability

The Service Availability message provides information on the availability of a partition. For more details, please refer to the ETI Manual, chapter Service Availability - partition scope.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10030 (User-Notification, MsgType = CB)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRBCHHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	Y	4	16	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
1180	ApplID	Y	1	20	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>3</td><td>Service Availability</td></tr></table>	Value	Description	3	Service Availability		
Value	Description											
3	Service Availability											
893	LastFragment	Y	1	21	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39020	Pad2	U	2	22	Fixed String	not used						
<MessageBody>												
25030	MatchingEngine-TradeDate	N	4	24	LocalMktDate	Current business day for Order/Quote Management service.						
25031	TradeManagerTradeDate	N	4	28	LocalMktDate	Current business day of Trades service.						
25032	ApplSeqTradeDate	N	4	32	LocalMktDate	Current business day of Retransmission of Order/Quote Events service.						
25047	T7EntryServiceTradeDate	N	4	36	LocalMktDate	Current business day of T7 Entry Service.						
25049	T7EntryServiceRtm-TradeDate	N	4	40	LocalMktDate	Current business day of Retransmission of T7 Entry Service.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
5948	PartitionID	Y	2	44	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
25005	MatchingEngine-Status	Y	1	46	unsigned int	Order/Quote Management service: Informs if trading is active for grouping of T7 products. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
25006	TradeManagerStatus	Y	1	47	unsigned int	Trades service: Informs about the availability of the retransmission service of trades for a grouping of T7 products. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
28732	ApplSeqStatus	Y	1	48	unsigned int	Retransmission of Order/Quote Events service: Informs about the availability of the retransmission services for order and quote events (session data and listener data) for a grouping of T7 products. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
25048	T7EntryServiceStatus	Y	1	49	unsigned int	T7 Entry Service: informs if TES trading is active for grouping of T7 products. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
25050	T7EntryServiceRtm-Status	Y	1	50	unsigned int	T7 Entry Retransmission Service: Informs about the availability of the retransmission services for TES trade events. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											

Deutsche Börse Group's T7 Release 15.0
Enhanced Trading Interface
Derivatives Message Reference

Deutsche Börse Group
Build 150.536.0.ga-150006001-56

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
39050	Pad5	U	5	51	Fixed String	not used

16.14 Service Availability Market

The Service Availability Market message provides information on the availability of a market. For more details, please refer to the ETI Manual, chapter Service Availability - market scope.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10044 (User-Notification, MsgType = CB)						
39020	Pad2	U	2	6	Fixed String	not used						
<NRBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
28727	ApplSubID	Y	4	16	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
1180	ApplID	Y	1	20	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>10</td><td>Service Availability Market</td></tr></table>	Value	Description	10	Service Availability Market		
Value	Description											
10	Service Availability Market											
893	LastFragment	Y	1	21	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Not Last Message</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	0	Not Last Message	1	Last Message
Value	Description											
0	Not Last Message											
1	Last Message											
39020	Pad2	U	2	22	Fixed String	not used						
<MessageBody>												
25052	SelectiveRequestForQuoteServiceTradeDate	N	4	24	LocalMktDate	Business date of the Selective Service for Quote Service.						
25051	SelectiveRequestForQuoteServiceStatus	Y	1	28	unsigned int	State of the Selective Service for Quote Service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
25053	SelectiveRequestFor-QuoteRtmService-Status	Y	1	29	unsigned int	State of the Selective Service for Quote Retransmission Service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
25237	NewsRtmService-Status	Y	1	30	unsigned int	State of the News Retransmission Service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
25238	RiskControlRtm-ServiceStatus	Y	1	31	unsigned int	State of the Risk Control Retransmission Service. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											

16.15 News

The News message provides public information from the T7 market supervision. News messages distributed without an ApplSeqNum are not part of the retransmission responses. For more details, please refer to the ETI Manual, chapter News.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10031 (News, MsgType = B)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	N	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	N	4	24	unsigned int	Unique ID assigned by the T7 system during broadcast subscription in order to link broadcasts to the related subscription.						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>News</td></tr></table>	Value	Description	2	News		
Value	Description											
2	News											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
42	OrigTime	Y	8	40	UTCTimestamp	Creation timestamp of the News message.
30354	VarTextLen	Y	2	48	Counter	Number of used bytes for field VarText (30355).
148	Headline	Y	256	50	Fixed String	The headline of a News message. Valid characters: \x20, \x22-\x7B, \x7D, \x7E
30355	VarText	N	2000	306	Variable String	News text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E

16.16 Entitlement Notification

This message informs about entitlement updates of the business unit. For more details, please refer to the ETI Manual, chapter Risk Control.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10034 (Party-EntitlementsUpdateReport, MsgType = CZ)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	U	4	24	unsigned int	not used						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	Y	4	48	LocalMktDate	Business date.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
20259	PartyDetail- IDExecutingUnit	Y	4	52	unsigned int	Business Unit ID.										
20816	RequestingParty- IDExecutingSystem	Y	4	56	unsigned int	System ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Eurex Clearing</td></tr><tr><td>2</td><td>T7 trading system</td></tr></table>	Value	Description	1	Eurex Clearing	2	T7 trading system				
Value	Description															
1	Eurex Clearing															
2	T7 trading system															
1301	MarketID	N	2	60	unsigned int	Market ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>XEUR</td></tr><tr><td>2</td><td>XEEE</td></tr><tr><td>12</td><td>NODX</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	1	XEUR	2	XEEE	12	NODX	*	More values
Value	Description															
1	XEUR															
2	XEEE															
12	NODX															
*	More values															
1324	ListUpdateAction	Y	1	62	char	Invocation (D = Delete) or release (A = Add) of a trading limitation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Add (Invocation)</td></tr><tr><td>D</td><td>Delete (Release)</td></tr></table>	Value	Description	A	Add (Invocation)	D	Delete (Release)				
Value	Description															
A	Add (Invocation)															
D	Delete (Release)															
22807	RequestingParty- EnteringFirm	Y	9	63	Fixed String	Entering Entity Short Name. Valid characters: A-Z, 0-9, \x20										
22804	RequestingParty- ClearingFirm	N	9	72	Fixed String	Clearing Member Short Name. Valid characters: A-Z, 0-9, \x20										
1672	PartyDetailStatus	Y	1	81	unsigned int	Member status. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Active</td></tr><tr><td>1</td><td>Suspend</td></tr></table>	Value	Description	0	Active	1	Suspend				
Value	Description															
0	Active															
1	Suspend															
39060	Pad6	U	6	82	Fixed String	not used										

16.17 Party Action Report

A Member supervisor or T7 market supervision has stopped or released a trader or a business unit for one or all markets.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10042 (Party-ActionReport, MsgType = DI)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	U	4	24	unsigned int	not used						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	N	4	48	LocalMktDate	Business date.						
20812	RequestingParty- IDExecutingTrader	N	4	52	unsigned int	Owning User ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
20059	PartyIDExecutingUnit	Y	4	56	unsigned int	Business Unit ID.										
20659	TargetParty- IDExecutingUnit	N	4	60	unsigned int	Target Business Unit ID.										
20012	PartyIDExecuting- Trader	N	4	64	unsigned int	Owning User ID.										
20816	RequestingParty- IDExecutingSystem	Y	4	68	unsigned int	System ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>2</td><td>T7 trading system</td></tr></table>	Value	Description	2	T7 trading system						
Value	Description															
2	T7 trading system															
1301	MarketID	N	2	72	unsigned int	Market ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>XEUR</td></tr><tr><td>2</td><td>XEEE</td></tr><tr><td>12</td><td>NODX</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	1	XEUR	2	XEEE	12	NODX	*	More values
Value	Description															
1	XEUR															
2	XEEE															
12	NODX															
*	More values															
25272	OrderDeletion- Instruction	N	1	74	unsigned int	Instruction specifying if orders of targeted Sponsored Access Unit ID need to be deleted. Can be send only when PartyActionType is Halt_Trading(1) <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>No</td></tr><tr><td>1</td><td>Yes</td></tr></table>	Value	Description	0	No	1	Yes				
Value	Description															
0	No															
1	Yes															
2329	PartyActionType	Y	1	75	unsigned int	Type of party action report. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Halt trading</td></tr><tr><td>2</td><td>Reinstate</td></tr></table>	Value	Description	1	Halt trading	2	Reinstate				
Value	Description															
1	Halt trading															
2	Reinstate															
20807	RequestingParty- IDEnteringFirm	Y	1	76	unsigned int	ID of the entering firm. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Participant</td></tr><tr><td>2</td><td>Market Supervision</td></tr></table>	Value	Description	1	Participant	2	Market Supervision				
Value	Description															
1	Participant															
2	Market Supervision															
39030	Pad3	U	3	77	Fixed String	not used										

16.18 Risk Notification

This message informs about risk events for the business unit. For more details, please refer to the ETI Manual, chapter Risk Control.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10033 (PartyRiskLimitsUpdateReport, MsgType = CR)						
39020	Pad2	U	2	6	Fixed String	not used						
<RBCHeader>												
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
1181	ApplSeqNum	Y	8	16	unsigned int	Application sequence number assigned to a non-order related T7 ETI data stream.						
28727	ApplSubID	U	4	24	unsigned int	not used						
5948	PartitionID	Y	2	28	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
1352	ApplResendFlag	Y	1	30	unsigned int	Indicates a retransmission message. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>False</td></tr><tr><td>1</td><td>True</td></tr></table>	Value	Description	0	False	1	True
Value	Description											
0	False											
1	True											
1180	ApplID	Y	1	31	unsigned int	Identifier for an ETI data stream. <table><tr><td>Value</td><td>Description</td></tr><tr><td>6</td><td>Risk Control</td></tr></table>	Value	Description	6	Risk Control		
Value	Description											
6	Risk Control											
893	LastFragment	Y	1	32	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Last Message</td></tr></table>	Value	Description	1	Last Message		
Value	Description											
1	Last Message											
39070	Pad7	U	7	33	Fixed String	not used						
<MessageBody>												
60	TransactTime	Y	8	40	UTCTimestamp	Transaction timestamp.						
75	TradeDate	Y	4	48	LocalMktDate	Business date.						
20259	PartyDetail-IDExecutingUnit	Y	4	52	unsigned int	Business Unit ID.						

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description										
20659	TargetParty- IDExecutingUnit	N	4	56	unsigned int	Target Business Unit ID.										
20816	RequestingParty- IDExecutingSystem	Y	4	60	unsigned int	System ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>Eurex Clearing</td></tr><tr><td>2</td><td>T7 trading system</td></tr></table>	Value	Description	1	Eurex Clearing	2	T7 trading system				
Value	Description															
1	Eurex Clearing															
2	T7 trading system															
1301	MarketID	N	2	64	unsigned int	Market ID. <table><tr><td>Value</td><td>Description</td></tr><tr><td>1</td><td>XEUR</td></tr><tr><td>2</td><td>XEEE</td></tr><tr><td>12</td><td>NODX</td></tr><tr><td>*</td><td>More values</td></tr></table>	Value	Description	1	XEUR	2	XEEE	12	NODX	*	More values
Value	Description															
1	XEUR															
2	XEEE															
12	NODX															
*	More values															
25240	InventoryCheckType	N	1	66	unsigned int	Indicator for checking open orders and quotes. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Do not check</td></tr><tr><td>1</td><td>Check</td></tr></table>	Value	Description	0	Do not check	1	Check				
Value	Description															
0	Do not check															
1	Check															
1324	ListUpdateAction	Y	1	67	char	Invocation (A = Add) or release (D = Delete) of a risk limitation. <table><tr><td>Value</td><td>Description</td></tr><tr><td>A</td><td>Add (Invocation)</td></tr><tr><td>D</td><td>Delete (Release)</td></tr></table>	Value	Description	A	Add (Invocation)	D	Delete (Release)				
Value	Description															
A	Add (Invocation)															
D	Delete (Release)															
1767	RiskLimitAction	N	1	68	unsigned int	Risk protection action. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Queue Inbound</td></tr><tr><td>2</td><td>Reject</td></tr><tr><td>4</td><td>Warning</td></tr></table>	Value	Description	0	Queue Inbound	2	Reject	4	Warning		
Value	Description															
0	Queue Inbound															
2	Reject															
4	Warning															
22807	RequestingParty- EnteringFirm	N	9	69	Fixed String	Entering Entity Short Name. Valid characters: A-Z, 0-9, \x20										
22804	RequestingParty- ClearingFirm	N	9	78	Fixed String	Clearing Member Short Name. Valid characters: A-Z, 0-9, \x20										
39000	Pad1	U	1	87	Fixed String	not used										

16.19 Ping Request

This request (and it's corresponding response) is reserved for internal use only i.e. the right to use the request will not be granted to participants. This message is sent to the service "Order and Quote Management".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10320 (Test-Request, MsgType = 1)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
5948	PartitionID	Y	2	24	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.
39060	Pad6	U	6	26	Fixed String	not used

16.20 Ping Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10321 (Heartbeat, MsgType = 0)
39020	Pad2	U	2	6	Fixed String	not used
<NRResponseHeaderME>						
5979	RequestTime	Y	8	8	UTCTimestamp	In timestamp; filled always by the gateway
21002	TrdRegTSTimeIn	Y	8	16	UTCTimestamp	Matching engine in timestamp.
21003	TrdRegTSTimeOut	Y	8	24	UTCTimestamp	Matching engine out timestamp.
7765	ResponseIn	Y	8	32	UTCTimestamp	Timestamp the gateway receives a message from the Matching Engine.
52	SendingTime	Y	8	40	UTCTimestamp	Outgoing delta timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	48	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
893	LastFragment	Y	1	52	unsigned int	Indicates whether this message is the last fragment (part) of a sequence of messages belonging to one dedicated transaction. Value Description 1 Last Message
39030	Pad3	U	3	53	Fixed String	not used
<MessageBody>						
60	TransactTime	Y	8	56	UTCTimestamp	Transaction timestamp.

16.21 Gap Fill

This message informs that the provided message must be skipped over, due to the fact that the T7 system is not able to provide the functional data to the participant. The exchange may be contacted for further error analysis.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderOut>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10032 (ApplicationMessageReport, Msg-Type = BY)	
39020	Pad2	U	2	6	Fixed String	not used	
<NotifHeader>							
52	SendingTime	Y	8	8	UTCTimestamp	Outgoing timestamp; filled always by the gateway	
<MessageBody>							
28724	ApplIDStatus	Y	4	16	unsigned int	Application sequencing related error code.	
						Value	Description
						105	Error converting response or broadcast
						*	More values
28728	RefApplSubID	N	4	20	unsigned int	Unique ID for the subscription instance assigned by the T7 system during broadcast subscription.	
30354	VarTextLen	Y	2	24	Counter	Number of used bytes for field Var-Text (30355).	
1355	RefApplID	Y	1	26	unsigned int	Application identifier of a T7 ETI data stream.	
						Value	Description
						1	Trade
						2	News
						3	Service Availability
						4	Session Data
						5	Listener Data
						6	Risk Control
						7	TES Maintenance
						8	TES Trade
						9	SRQS Maintenance
						10	Service Availability Market

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
1409	SessionStatus	Y	1	27	unsigned int	Session status.	
						Value	Description
						0	Session active
						4	Session logout complete
30355	VarText	Y	2000	28	Variable String	Error text. Valid characters: \x09, \x0A, \x0D, \x20-\x7B, \x7D, \x7E	

16.22 TES Inquire Boundary Prices Request

This message is used to inquire boundary prices This message is sent to the service "T7 Entry".

TES Inquire Boundary Prices Request



TES Inquire Boundary Prices Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10329 (PartyDetailsListRequest, MsgType = CF)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	N	8	24	signed int	Instrument identifier.
1300	MarketSegmentID	Y	4	32	signed int	Product identifier.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
828	TrdType	Y	2	36	unsigned int	Type of TES trade.	
						Value	Description
						1	Block Trade
						12	Exchange for Swap
						1000	Vola Trade
						1001	EFP-Fin Trade
						1002	EFP-Index Futures Trade
						1004	Trade at Market
						1006	Eurex/Xetra Enlight triggered trade
						1007	QTPIP BLOCK TRADE
						1010	Basket of Equity Total Return Futures
						1011	Equity Bespoke Baskets
1227	ProductComplex	N	1	38	unsigned int	This field qualifies an instrument type on T7.	
						Value	Description
						1	Simple instrument
						2	Standard Option Strategy
						3	Non-Standard Option Strategy
						4	Volatility Strategy
						5	Futures Spread
						6	Inter-Product Spread
						7	Standard Future Strategy
						8	Pack and Bundle
						9	Strip
						10	Flexible Simple Instrument
						11	Commodity Strip
						12	Scaled Simple Instrument
						13	Non-Standard Volatility Strategy
						14	Total Return Future Strategy
39000	Pad1	U	1	39	Fixed String	not used	


16.23 TES Inquire Boundary Prices Response

This message informs about inquire boundary prices

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10330 (PartyDetailsListReport, MsgType = CG)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used
<MessageBody>						
25269	MinBoundaryPrice	N	8	32	PriceType	Minimum Boundary Price
25270	MaxBoundaryPrice	N	8	40	PriceType	Maximum Boundary Price
1300	MarketSegmentID	Y	4	48	signed int	Product identifier.
39040	Pad4	U	4	52	Fixed String	not used

16.24 Trading Action Request

This request is used by a Sponsored Access Provider to stop or release its dedicated Sponsored Access Unit. This message is sent to the service "Marketwide Analytics and Risk Service".



Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
<MessageHeaderIn>							
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.	
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10904 (TradingActionRequest, MsgType = U34)	
25028	NetworkMsgID	U	8	6	Fixed String	not used	
39020	Pad2	U	2	14	Fixed String	not used	
<RequestHeader>							
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.	
50	SenderSubID	Y	4	20	unsigned int	User ID.	
<MessageBody>							
1533	RiskLimitPlatform	Y	1	24	unsigned int	Scope for Pre-Trade risk limits	
						Value	Description
						0	On-Book
25272	OrderDeletion-Instruction	N	1	25	unsigned int	Instruction specifying if orders of targeted Sponsored Access Unit ID need to be deleted. Can be send only when PartyActionType is Halt_Trading(1)	
						Value	Description
						0	No
						1	Yes

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description	
2329	PartyActionType	Y	1	26	unsigned int	Type of party action report.	
						Value	Description
						1	Halt trading
						2	Reinstate
39000	Pad1	U	1	27	Fixed String	not used	
20059	PartyIDExecutingUnit	Y	4	28	unsigned int	Business Unit ID.	
20659	TargetParty-IDExecutingUnit	Y	4	32	unsigned int	Target Business Unit ID.	
39040	Pad4	U	4	36	Fixed String	not used	

16.25 Trading Action Response

This message is the response to the Trading Action Request. This message is sent to the service "Marketwide Analytics and Risk Service".

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description						
<MessageHeaderOut>												
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.						
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10905 (Trading-ActionReport, MsgType = U35)						
39020	Pad2	U	2	6	Fixed String	not used						
<ResponseHeader>												
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.						
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway						
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.						
39040	Pad4	U	4	28	Fixed String	not used						
<MessageBody>												
25273	NoPartitionIDs	Y	1	32	Counter	Number of partition IDs						
39070	Pad7	U	7	33	Fixed String	not used						
<MatchingEngineStatusGrp> Cardinality: 0-12, Record counter: NoPartitionIDs												
5948	>PartitionID	Y	2	40	unsigned int	Grouping of T7 products. Belongs to the scope of Service Availability and Retransmit requests.						
25005	>MatchingEngine-Status	Y	1	42	unsigned int	Order/Quote Management service: Informs if trading is active for grouping of T7 products. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Unavailable</td></tr><tr><td>1</td><td>Available</td></tr></table>	Value	Description	0	Unavailable	1	Available
Value	Description											
0	Unavailable											
1	Available											
39050	>Pad5	U	5	43	Fixed String	not used						

16.26 Update Reference Price Request

This message is used to update reference price. This message is sent to the service "Order and Quote Management".

Update Reference Price Request



Update Reference Price Response

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderIn>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplateID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10331 (PartyDetailsListRequest, MsgType = CF)
25028	NetworkMsgID	U	8	6	Fixed String	not used
39020	Pad2	U	2	14	Fixed String	not used
<RequestHeader>						
34	MsgSeqNum	Y	4	16	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
50	SenderSubID	Y	4	20	unsigned int	User ID.
<MessageBody>						
48	SecurityID	Y	8	24	signed int	Instrument identifier.
1150	TradingReferencePrice	Y	8	32	PriceType	Trading Reference Price
1300	MarketSegmentID	Y	4	40	signed int	Product identifier.
39040	Pad4	U	4	44	Fixed String	not used

16.27 Update Reference Price Response


This message is the response of Update Reference Price Request.

Tag	Field Name	Req'd	Len	Ofs	Data Type	Description
<MessageHeaderOut>						
9	BodyLen	Y	4	0	unsigned int	Number of bytes for the message, including this field.
28500	TemplatID	Y	2	4	unsigned int	Unique identifier for a T7 ETI message layout. Value: 10332 (Party-DetailsListReport, MsgType = CG)
39020	Pad2	U	2	6	Fixed String	not used
<ResponseHeader>						
5979	RequestTime	Y	8	8	UTCTimestamp	Gateway request in timestamp.
52	SendingTime	Y	8	16	UTCTimestamp	Outgoing timestamp; filled always by the gateway
34	MsgSeqNum	Y	4	24	unsigned int	Message sequence number used by the participant for requests sent to the gateway.
39040	Pad4	U	4	28	Fixed String	not used


A Appendix

A.1 T7 Entry Service Message Flow


ETI: Message flow for EnterTESTradeRequest

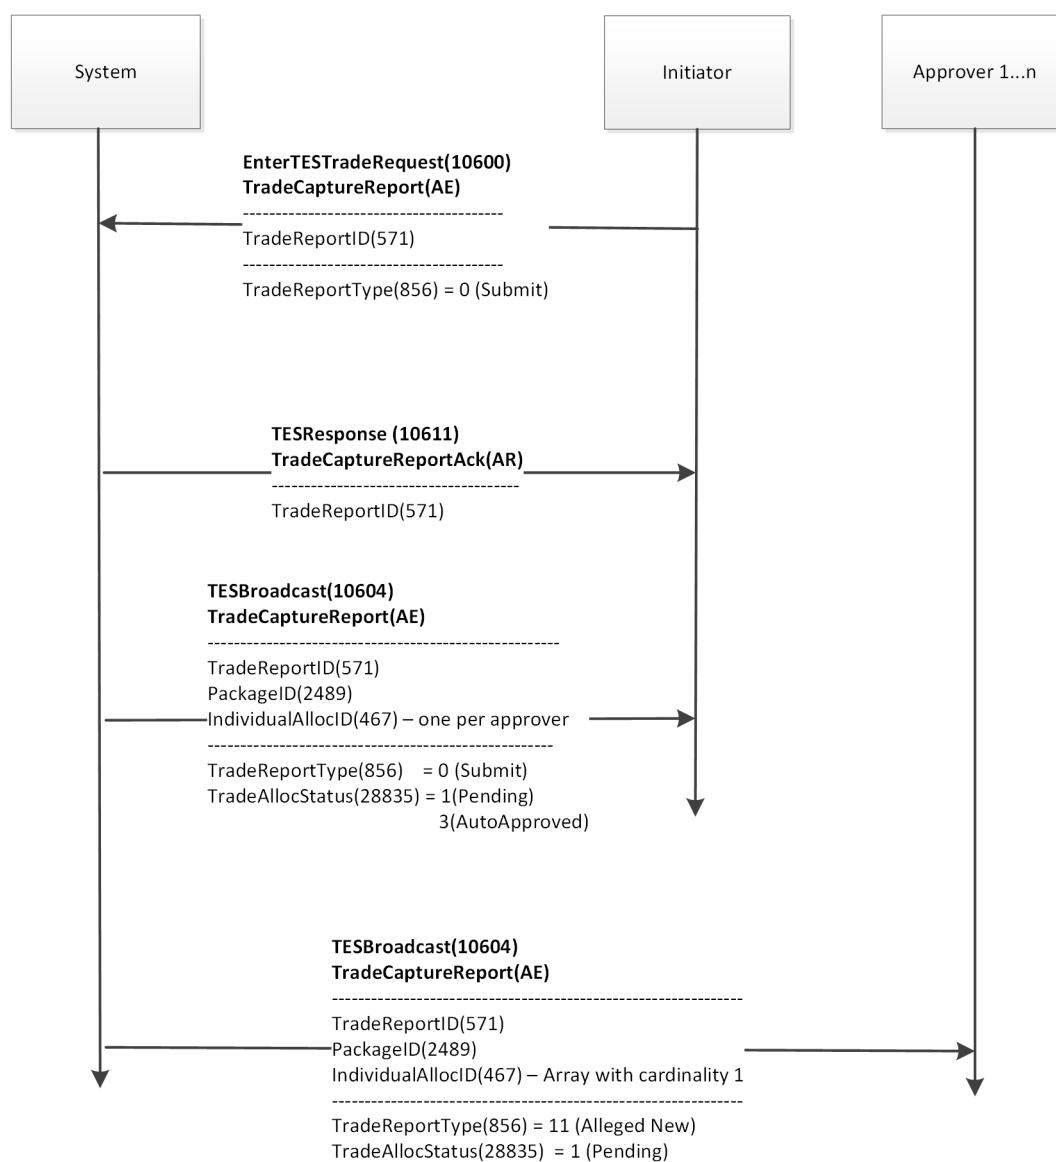


ETI: Message flow for ApproveTESTradeRequest

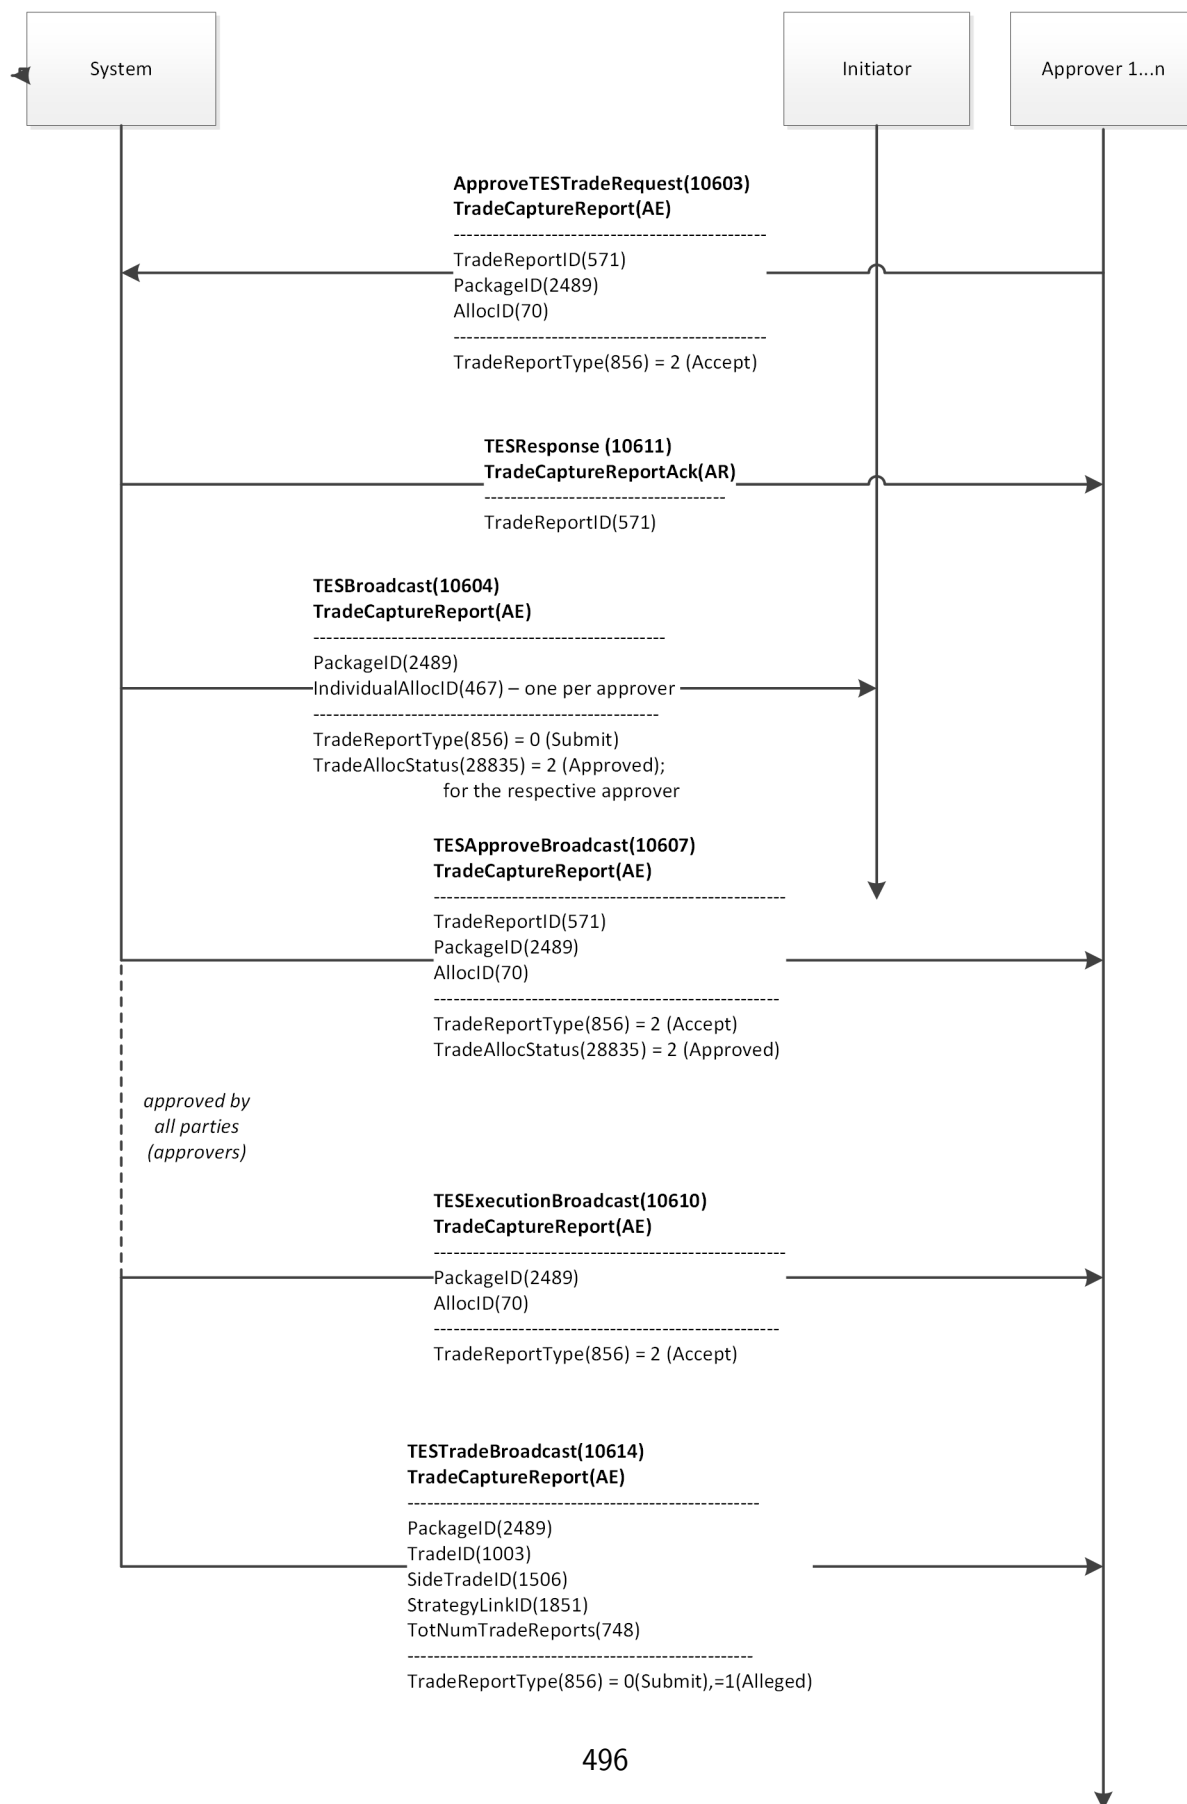

ETI: Message flow for ReverseTESTradeRequest

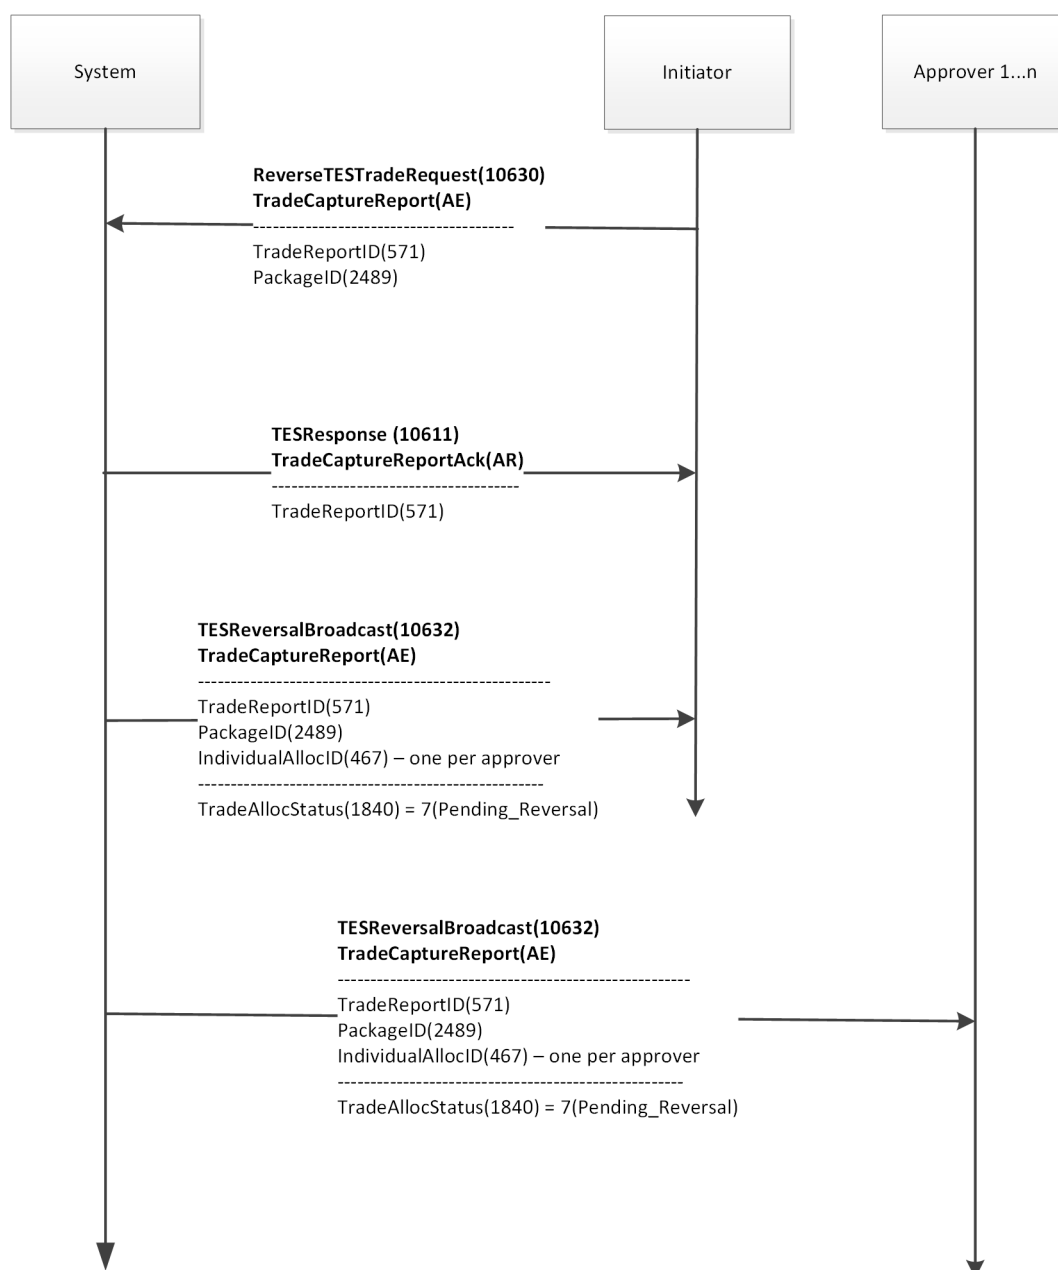


ETI: Message flow for ApproveReverseTESTradeRequest

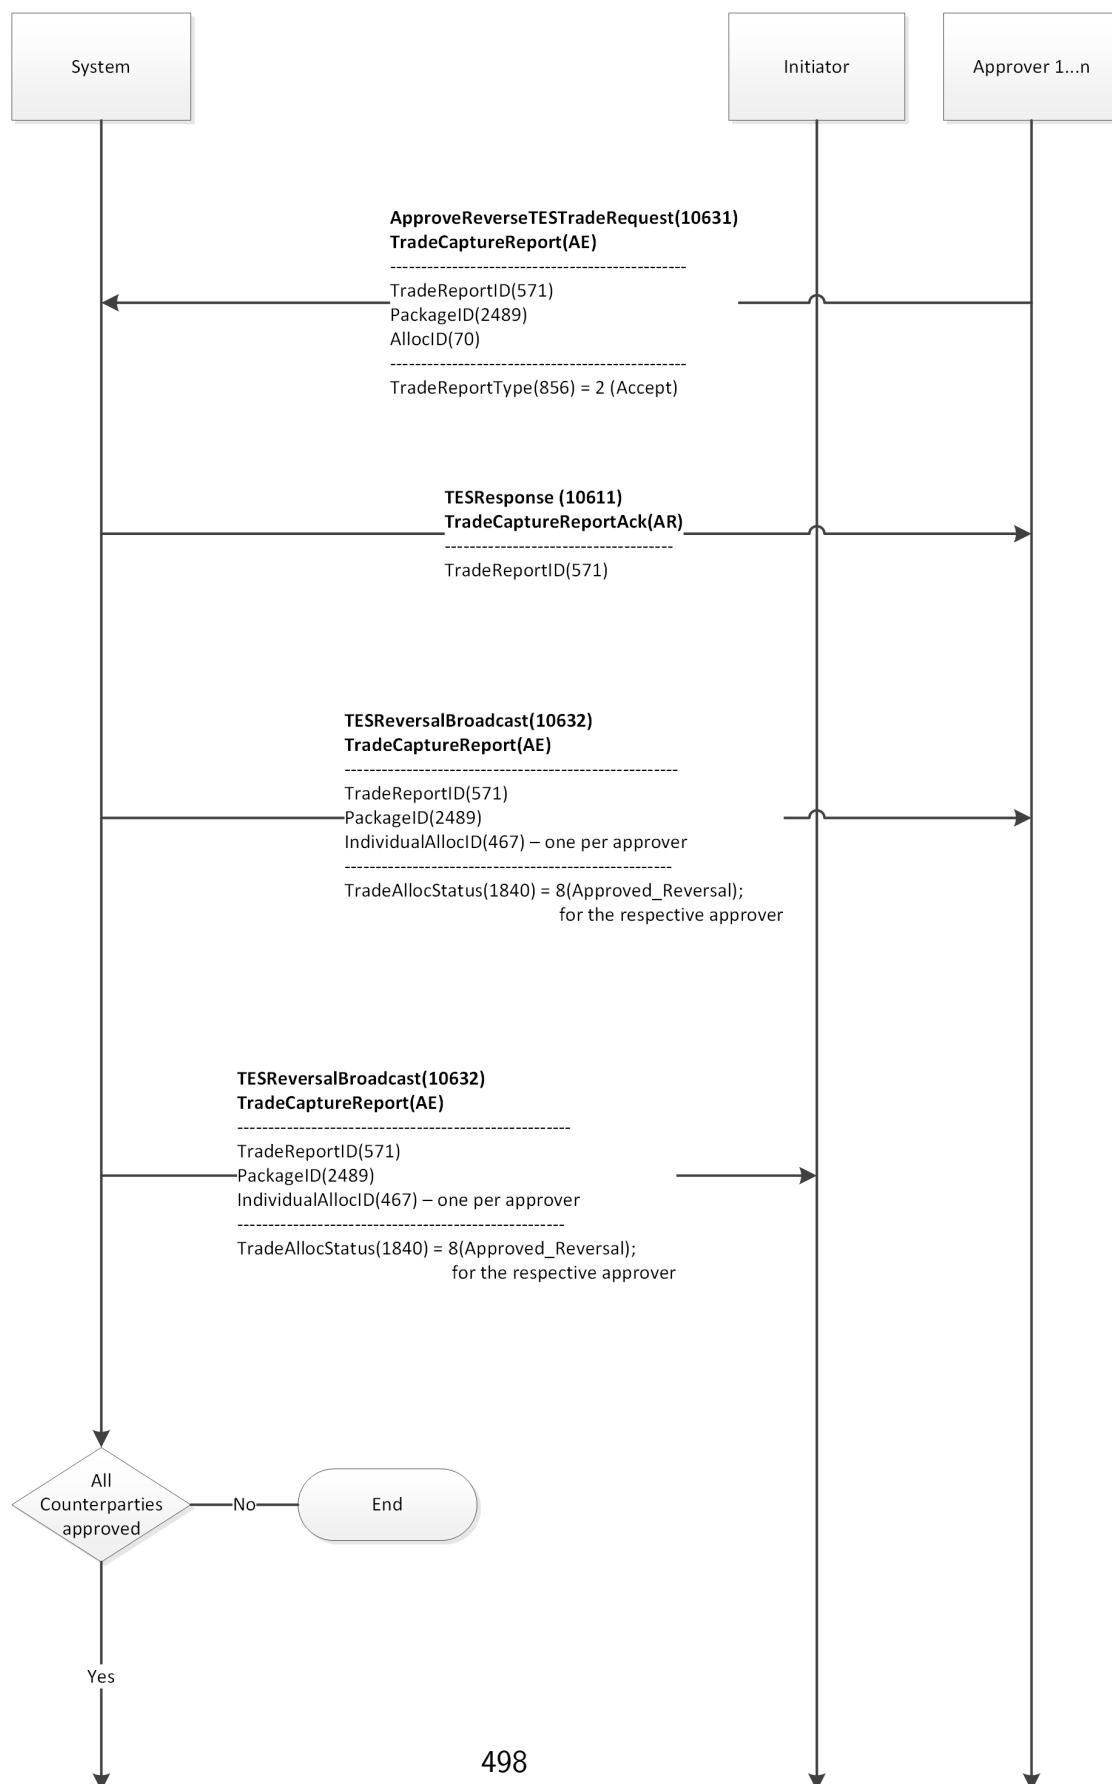


ETI: Message flow for ApproveReverseTESTradeRequest

Continued from the previous page

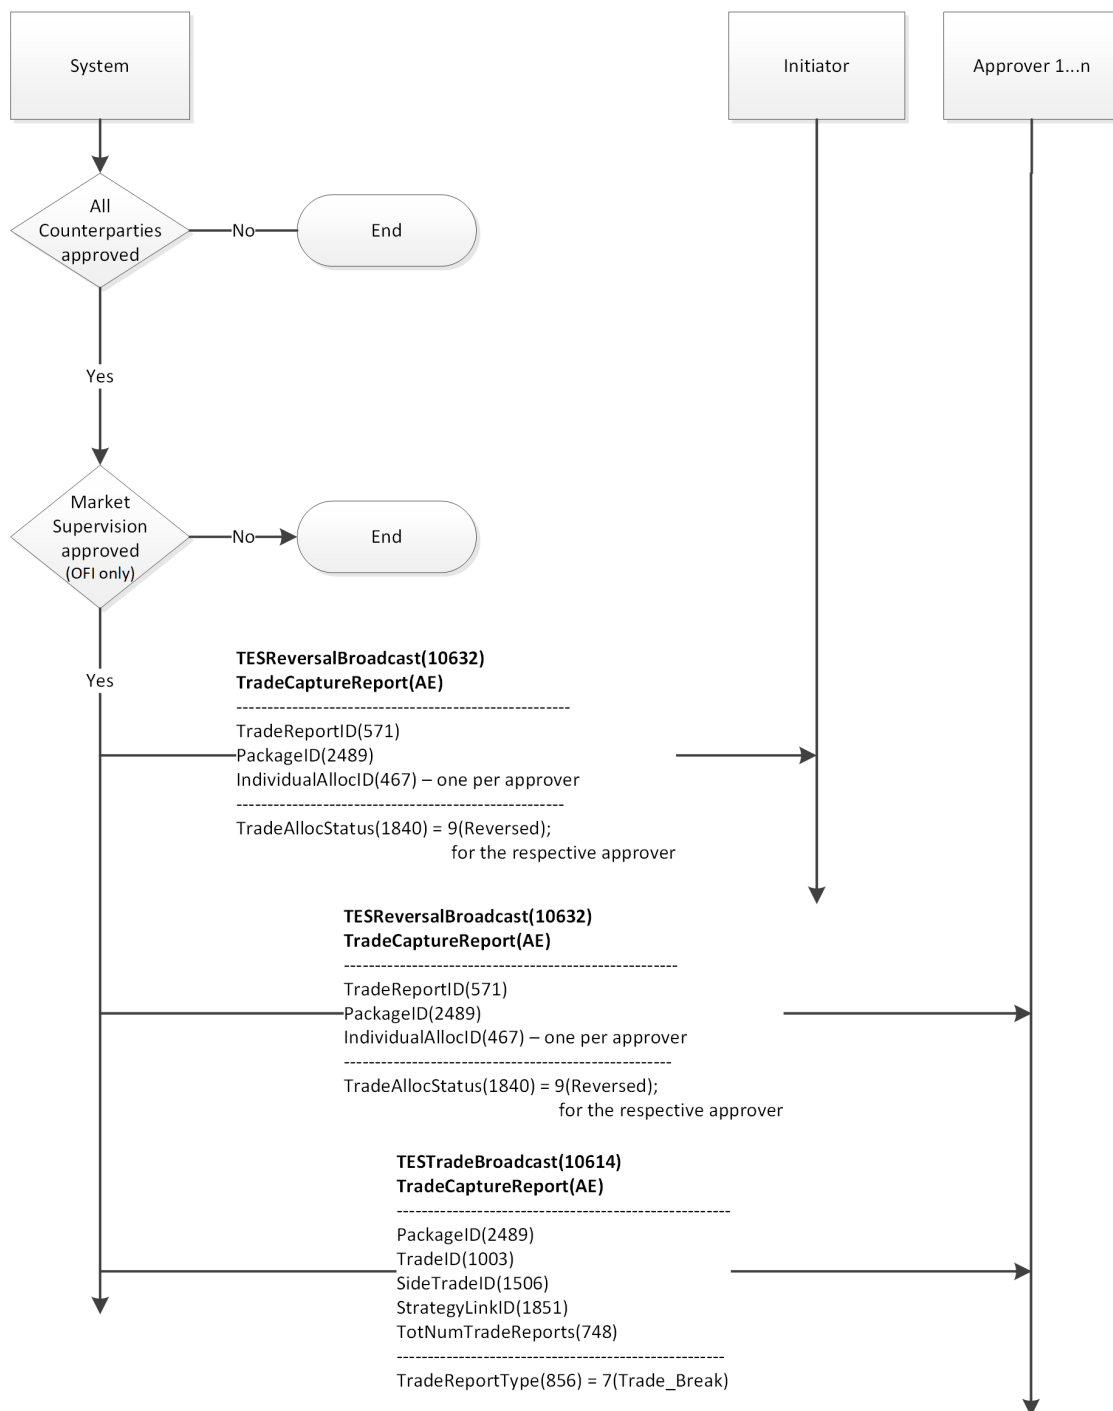

A.2 SRQS Message Flows


ETI: Message flow for SRQS Open Negotiation

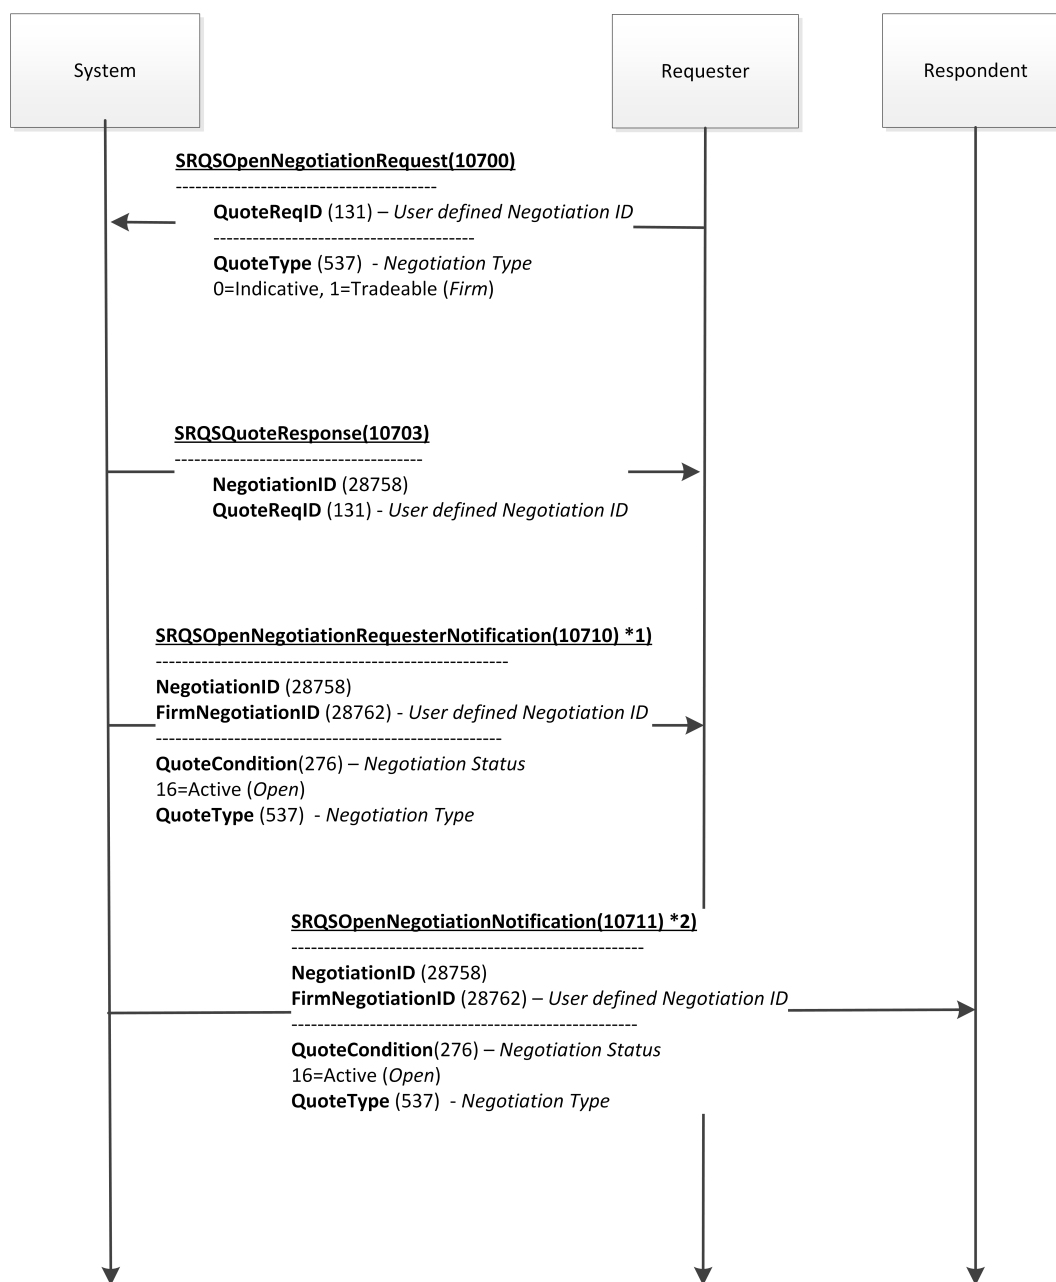

*1) to the business unit of the negotiation related requester

*2) to the business units of the addressed target parties

ETI: Message flow for SRQS Update Negotiation (by Requester)

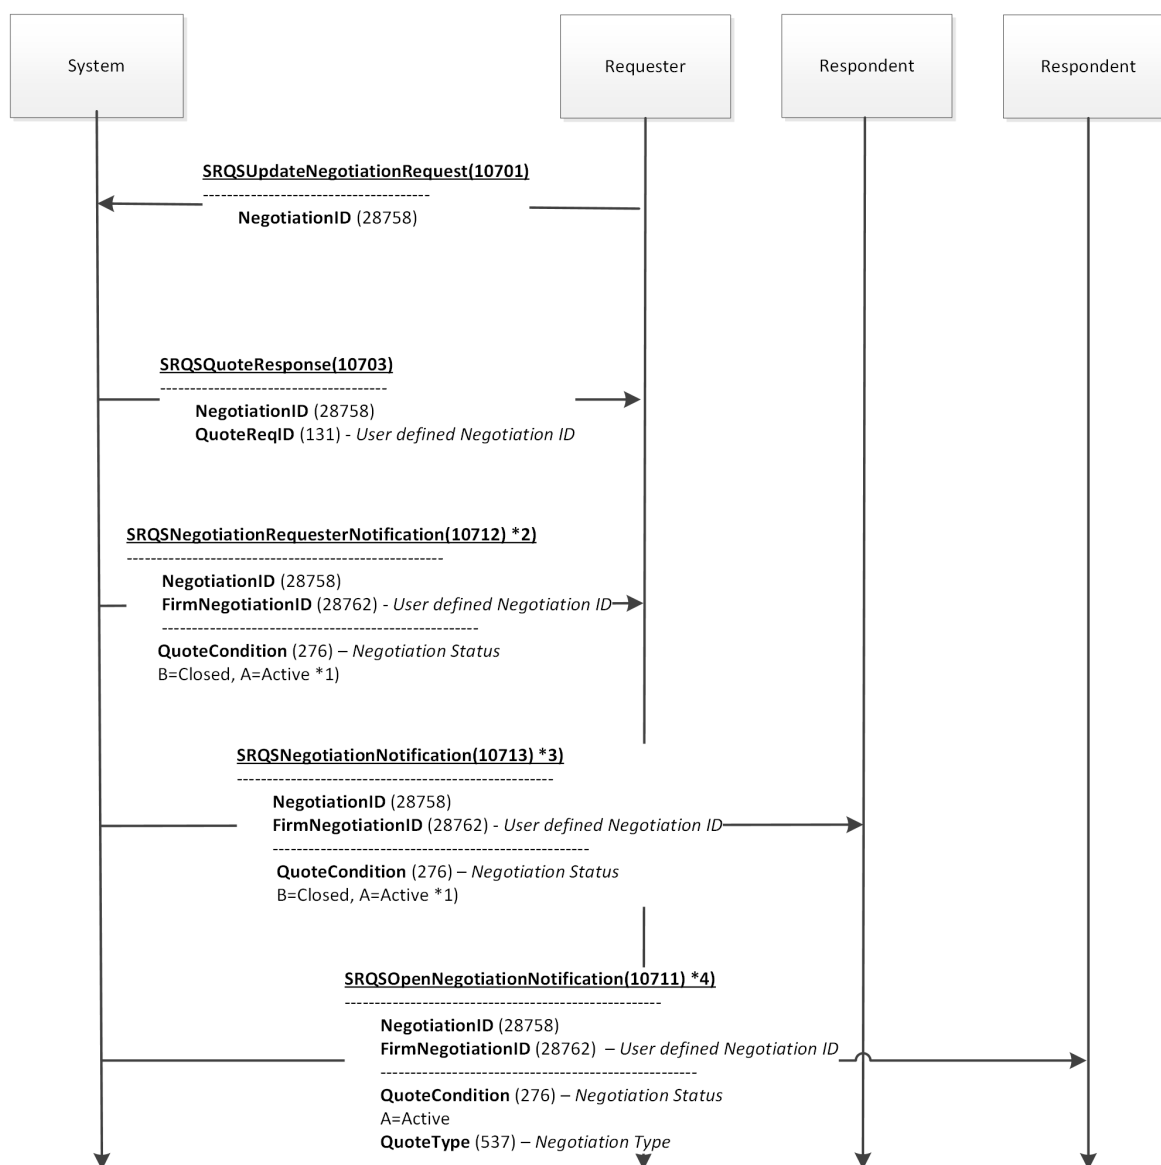


*1) Closed when set by the requester.

*2) to the business unit of the negotiation related requester

*3) to the business units of addressed target parties already involved in that negotiation

*4) to the business units of newly addressed target parties


ETI: Message flow for SRQS Enter Quote

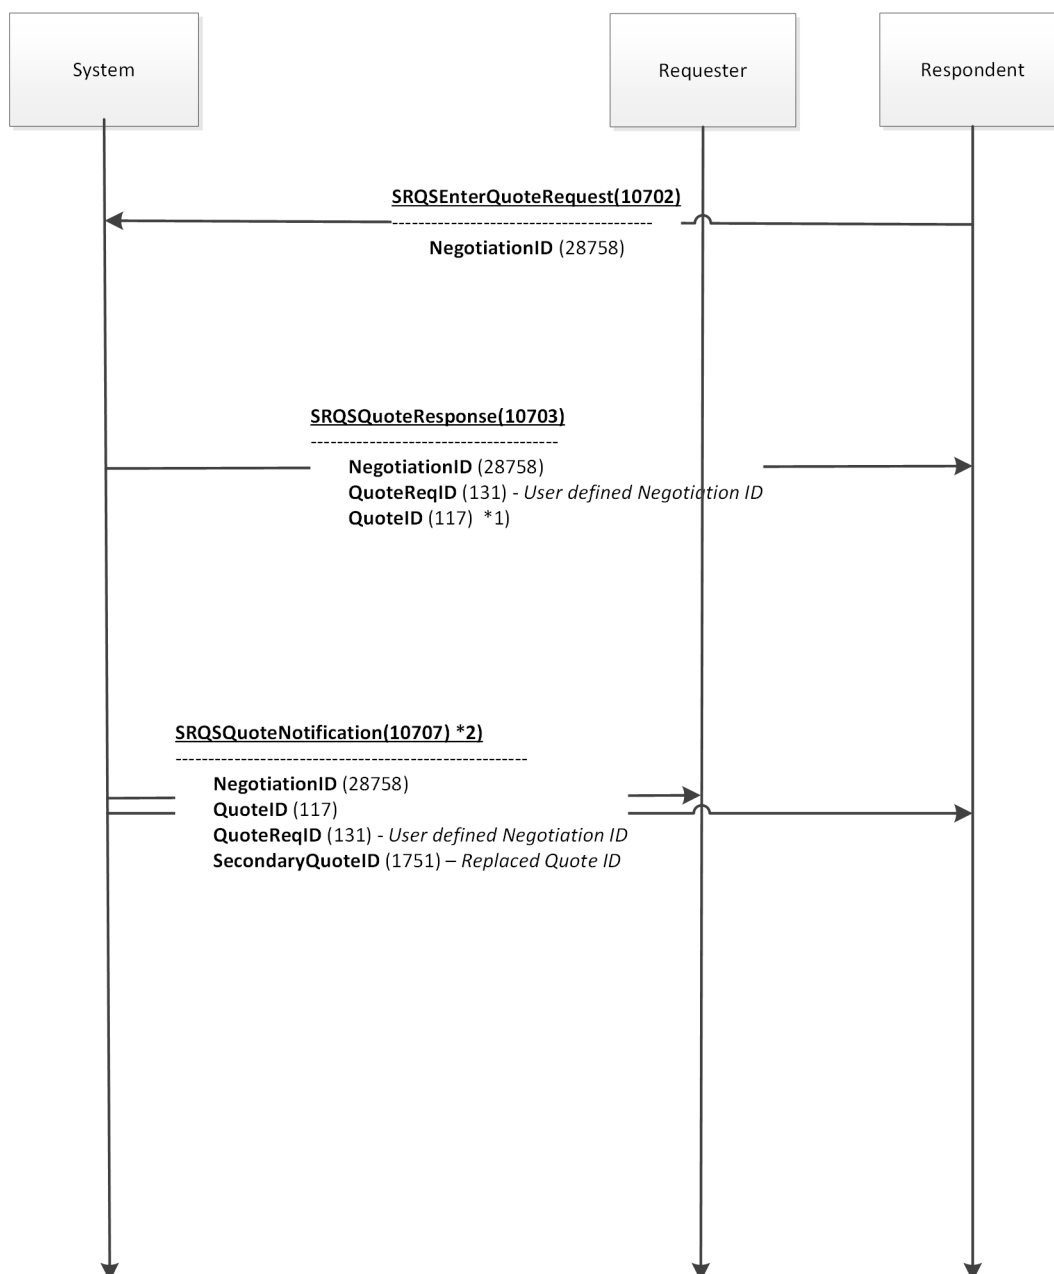

*1) any „overwritten“ (updated) quote will result in a new QuoteID – not set in case of Quote delete

*2) to the business units of the quoting respondent and the negotiation related requester


ETI: Message flow for SRQS Hit Quote

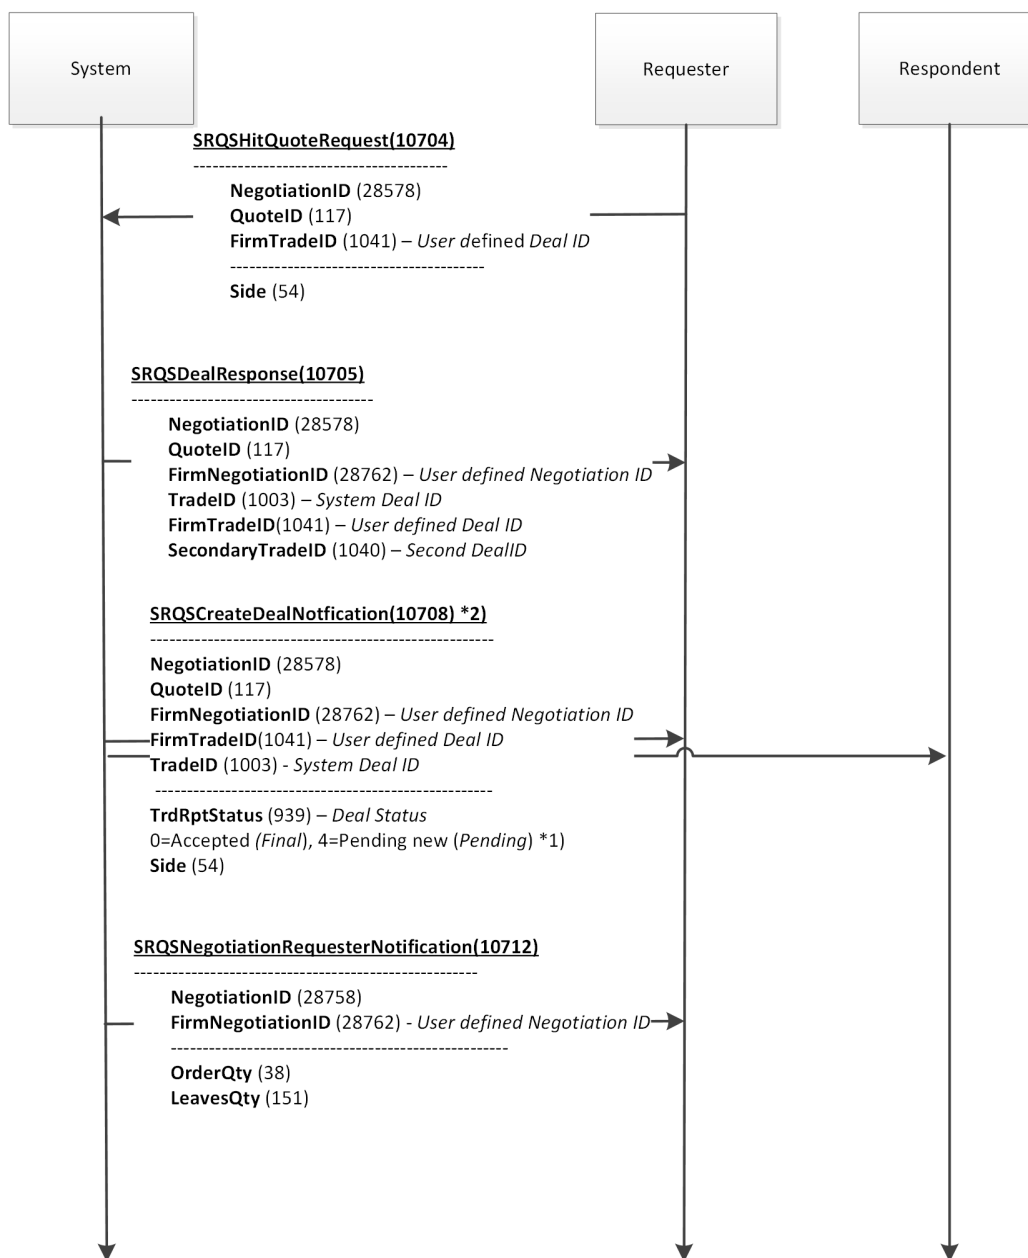

*1) depending on NegotiationType: [Firm → Final | Indicative → Pending]

*2) to the business units of quote hitting requester and the quote owning respondent

ETI: Message flow for SRQS Confirm Deal *1)

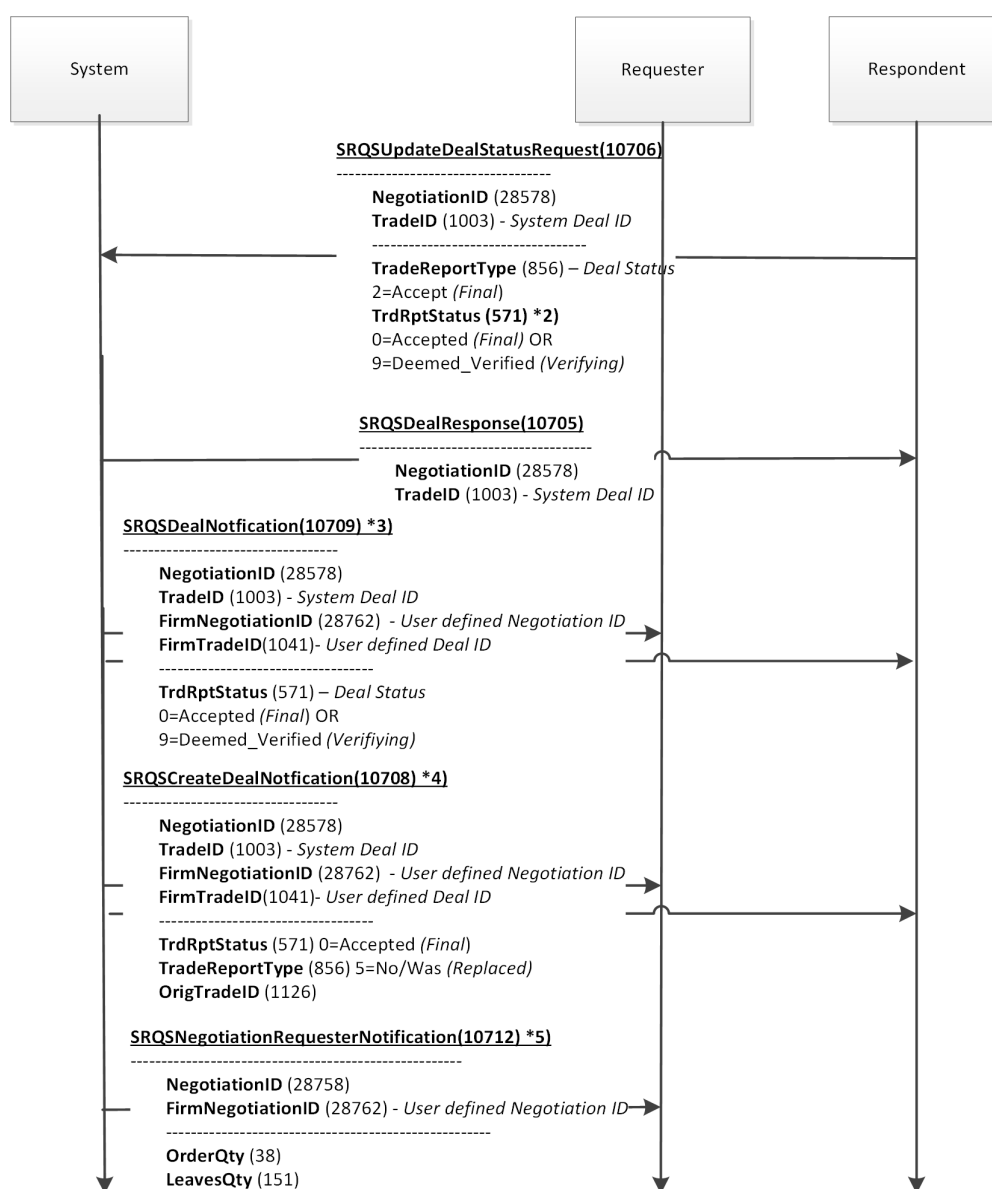

*1) either needed for indicative negotiations (finalize deal) or working delta (verify or finalize deal)


*2) working delta deal only

*3) to the business units of the deal status updating respondent and the deal related requester – for finalizing non-working delta or verifying working delta deals

*4) to the business units of the deal finalizing respondent and the deal related requester – only in case of finalizing a working delta deal

*5) only in case of a final deal

ETI: Message flow for SRQS Cancel Deal *1)

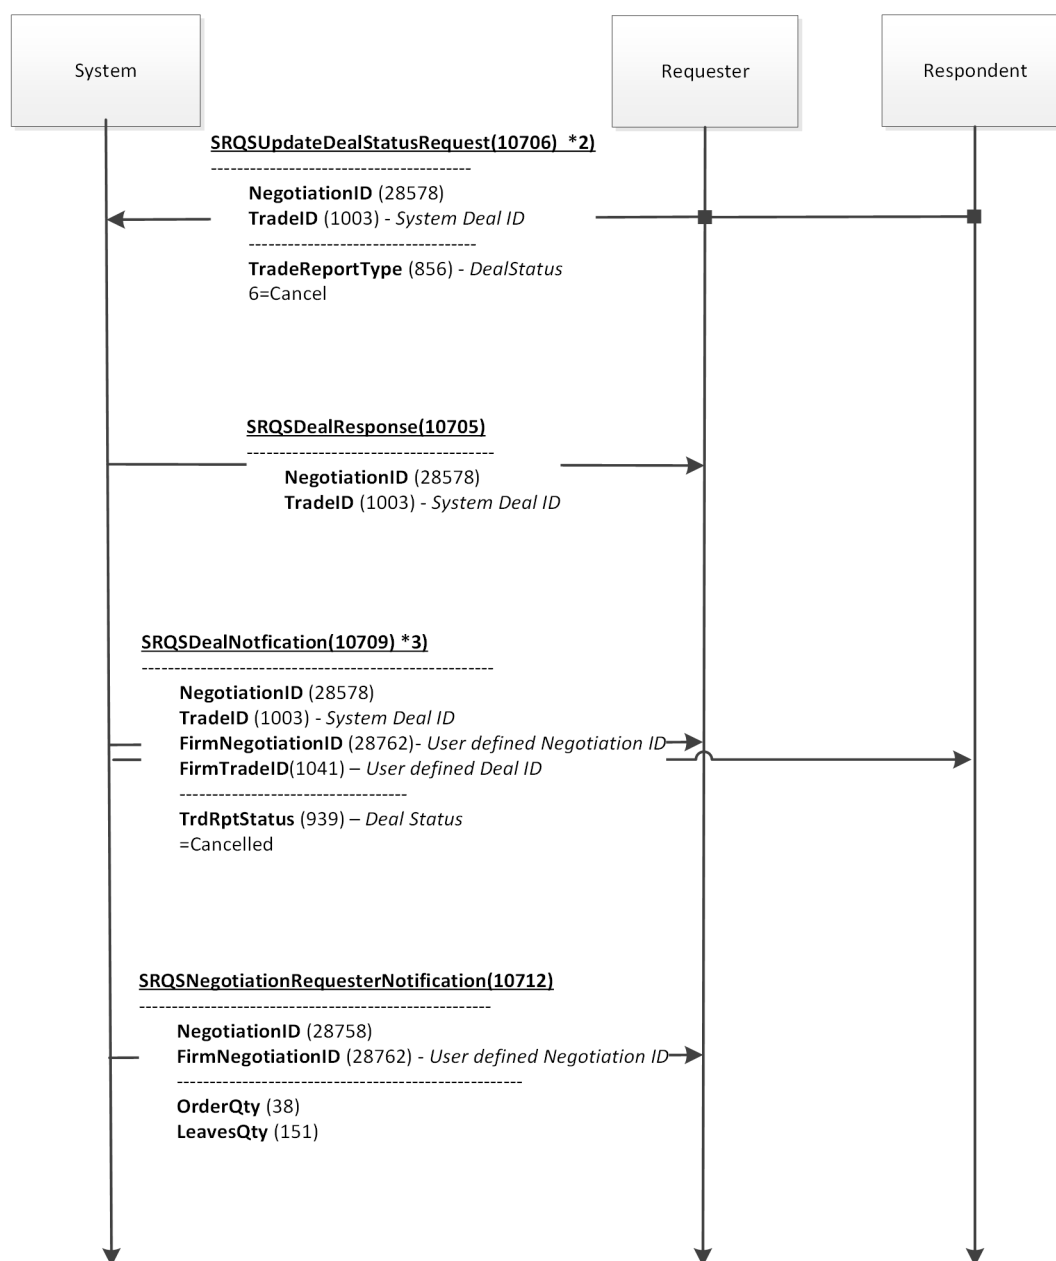


*1) only in case of indicative negotiations

*2) Request can be sent from both requester and respondent

*3) to the business unit of the deal cancelling requester and the deal related respondent


ETI: Message flow for SRQS approved mutual cancellation *1) *2)

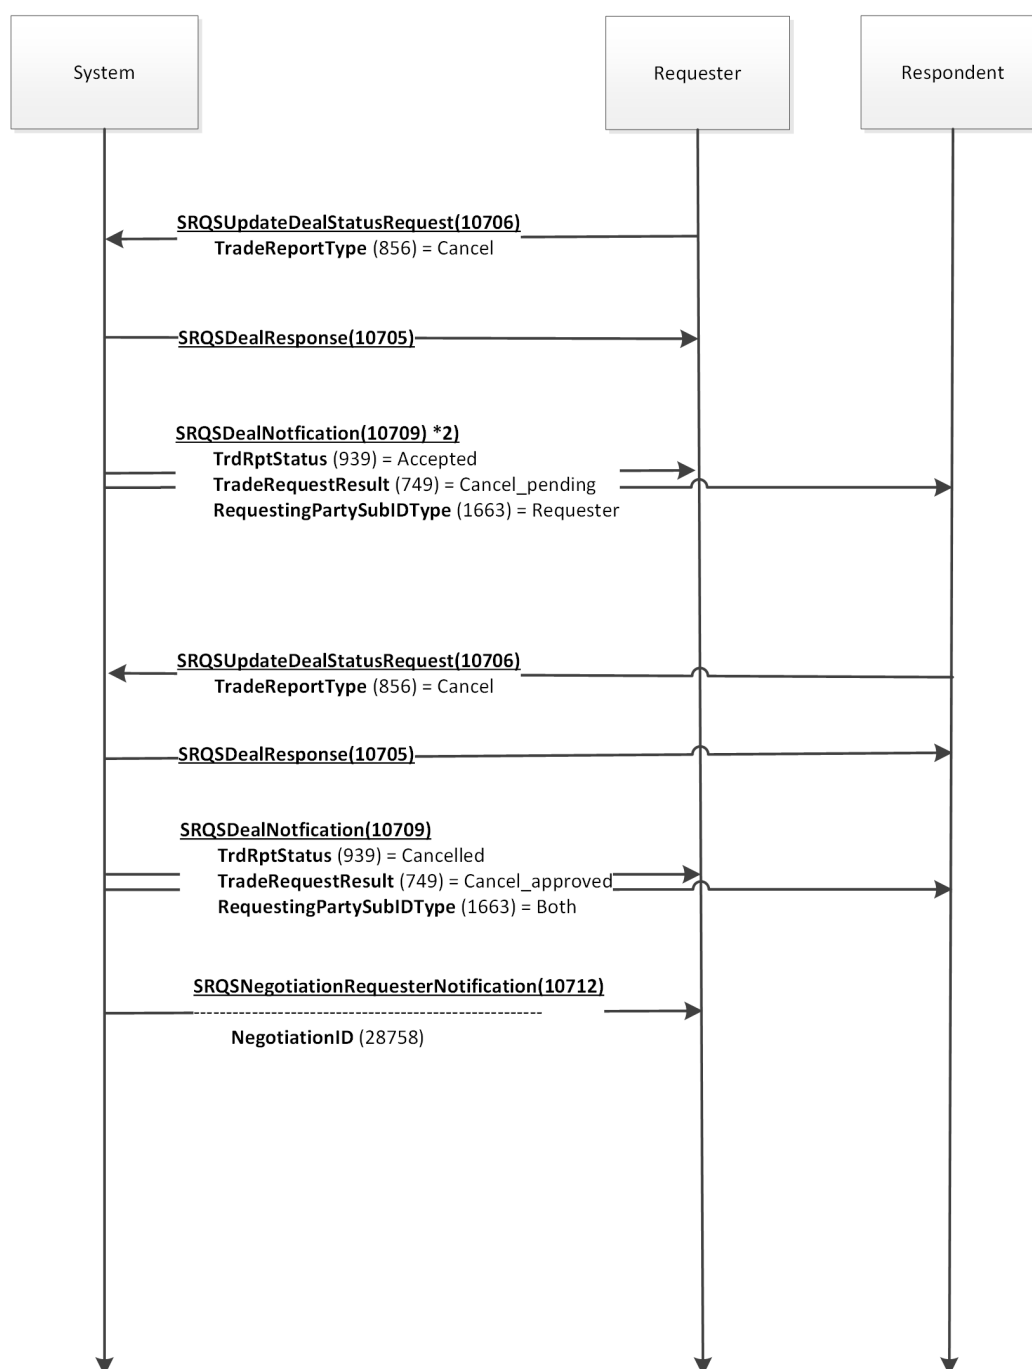

*1) only valid for final STP deal and after negotiation expiry.

*2) same message flow is valid if mutual cancellation is triggered by a respondent


ETI: Message flow for SRQS declined mutual cancellation *1) *2)

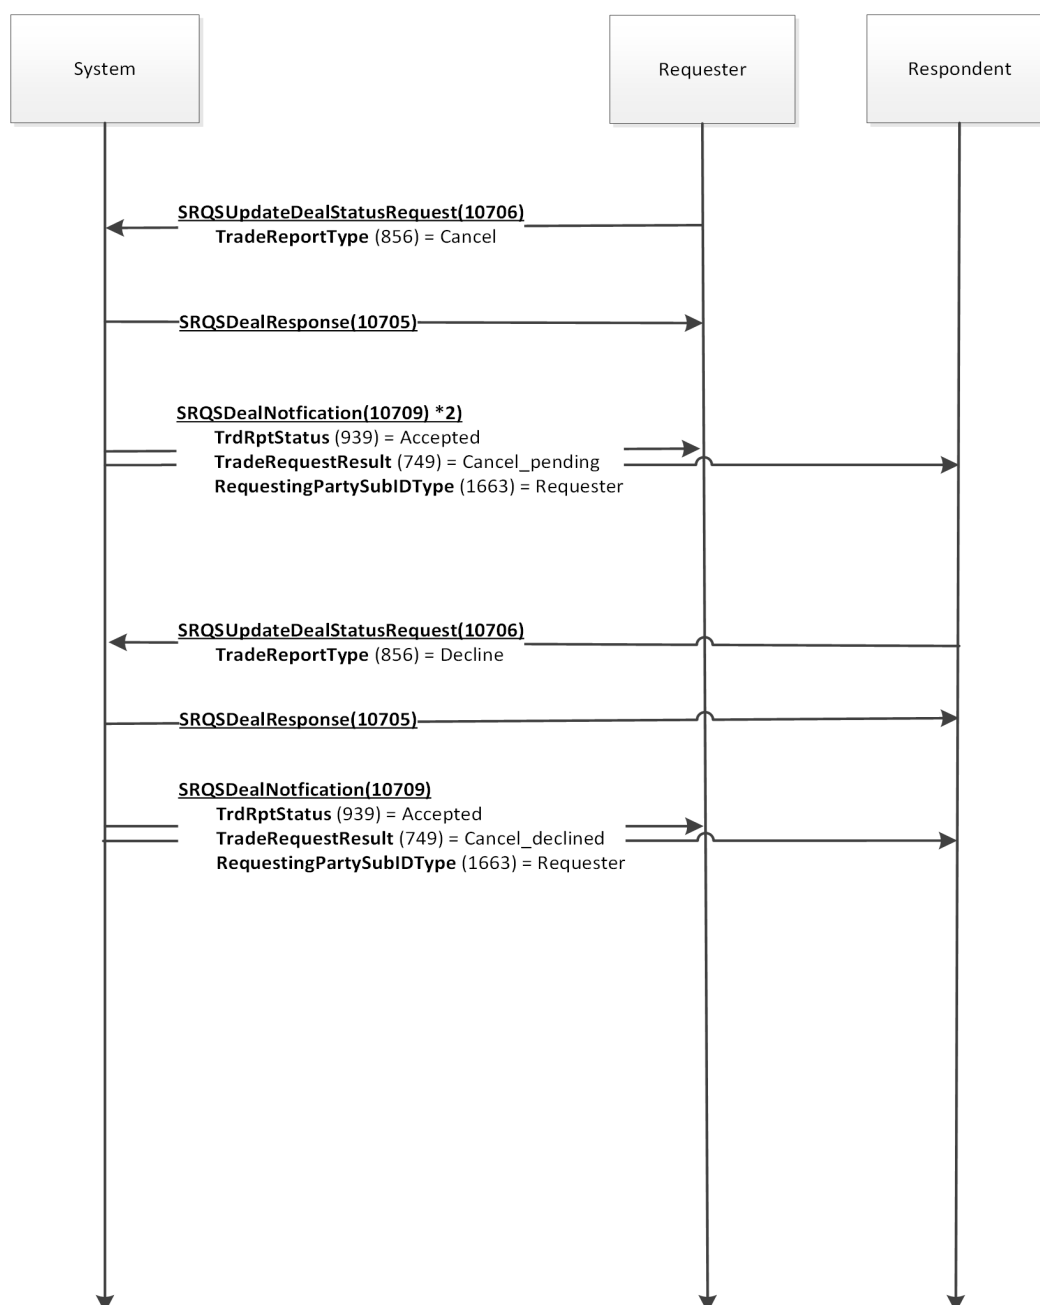

*1) only valid for final STP deals and after negotiation expiry


*2) same message flow is valid if mutual cancellation is triggered by a respondent

ETI: Message flow for SRQS Start of Day

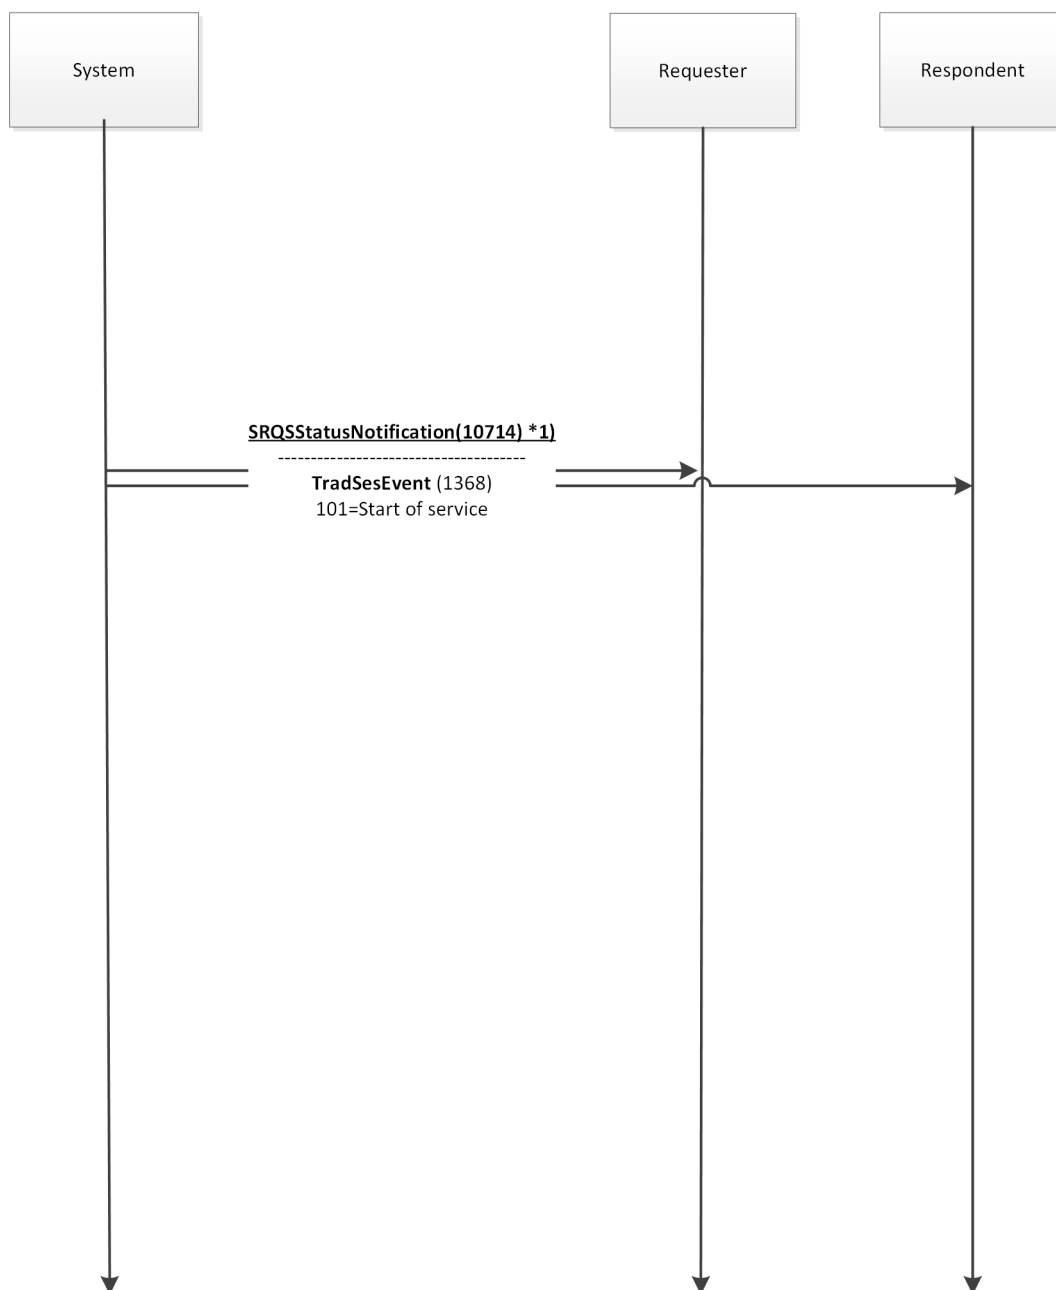

*1) to all known business units

ETI: Message flow for SRQS End of Day

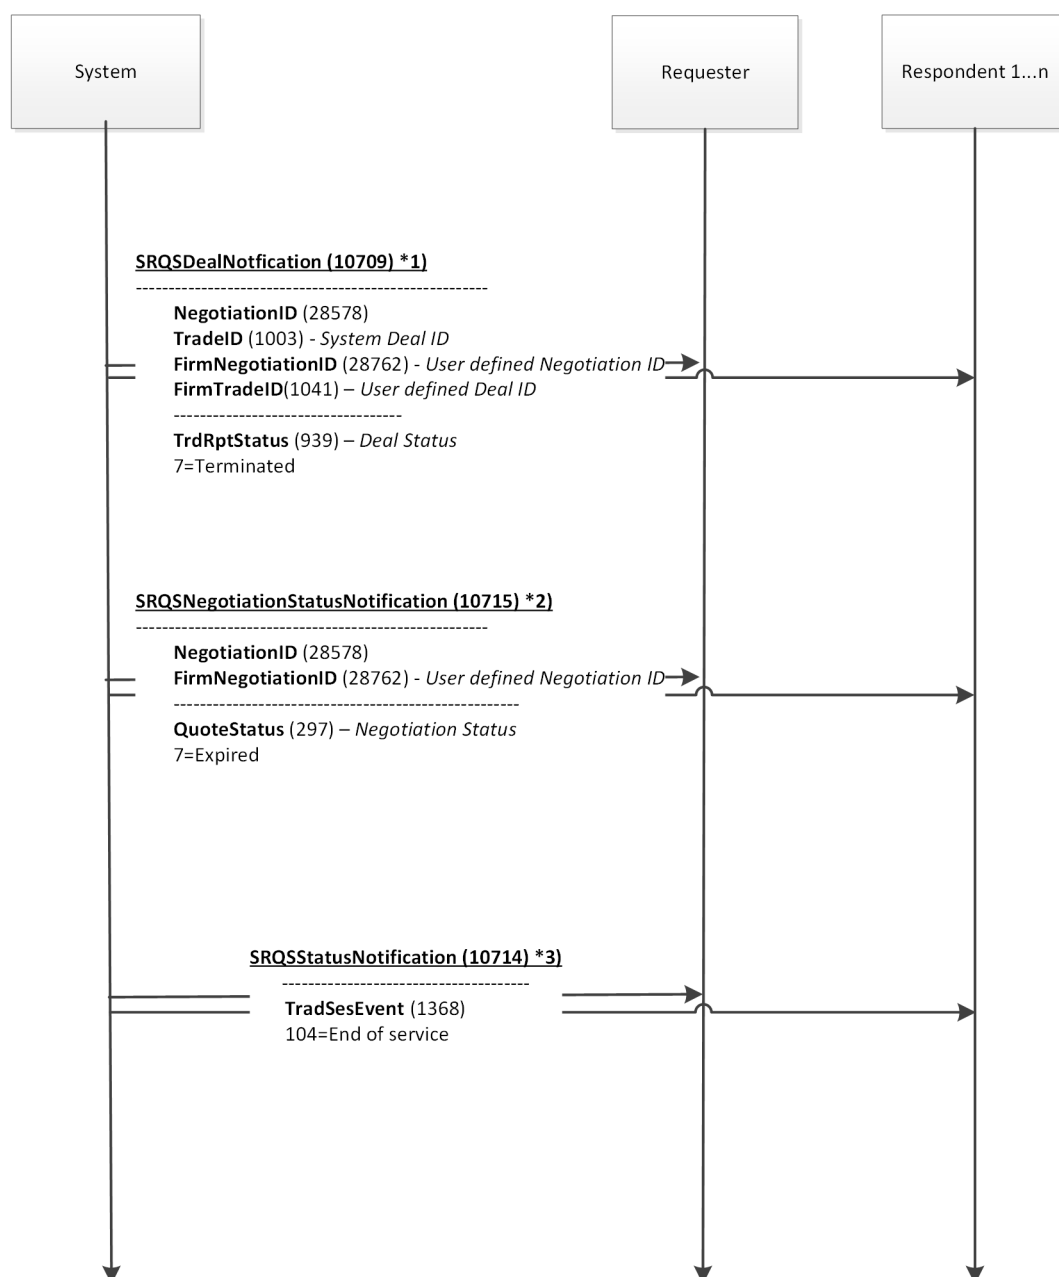


*1) for all pending deals: to requester and related respondent

*2) for all open negotiations: to requester and all respondents

*3) to all known business units

A.3 Variable Arrays

How to Access Variable Arrays and Fields within Variable Arrays

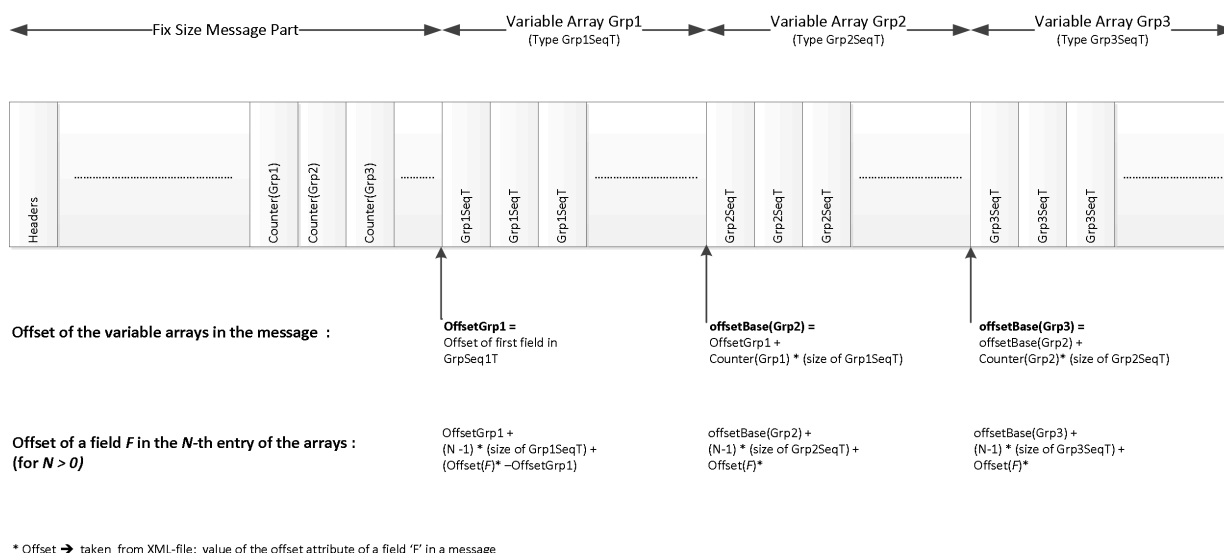

A.4 XML Interface Description

The ETI interface description is also available as a machine readable XML file. The structure of the XML is described by an XML schema file.

The XML file consists of the following parts and definitions:

Definitions	Description
MessageFlow	A "MessageFlow" is a flow diagram describing the system behavior from the user's point of view. The MessageFlow is represented as a tree of nodes.
ApplicationMessage	An "ApplicationMessage" represents a top-level structure which describes a message transmitted between the participant and user and the exchange. In contrast to the "Structure" definition, all components and repeating groups are uncollapsed. Valid values and description of fields are provided in the application scope.
Structure	A "Structure" is either the definition of a top-level-structure ("Message") or of a (repeated) sub-structure. Components and repeating groups are provided in a collapsed representation. All fields show the complete list of valid values.
DataType	A "DataType" is the technical and functional description of a data field. Each "DataType" is part of a (multi-level) inheritance tree based on the following "rootTypes": String , float , int , and data .

Definitions	Description
-------------	-------------

For a detailed description of all available XML elements and attributes please refer to the XML schema file.

B Change Log

B.1 T7 Release 15.0 – Version 2 (ETI 15.0-D0002)

Changes to the T7 Release 15.0 – Version 1:

- changed valid value *Derivatives* to *D0002* of field *DefaultCstmApp/VerSubID* in message [Session Logon Response](#) (10001)
- added field *Price* in message [SRQS Hit Quote Request](#) (10704)
- changed usage of field *QuoteID* in message [SRQS Hit Quote Request](#) (10704)

B.2 T7 Release 15.0 – Version 1 (ETI 15.0-D0001)

Changes to the T7 Release 14.1 – Version 2:

- changed valid value *Derivatives* to *D0001* of field *DefaultCstmApp/VerSubID* in message [Session Logon Response](#) (10001)
- added valid value *Auto_Approved_Reversal(11)* to field *TradeAllocStatus* in messages [Basket Trading Broadcast](#) (10625), [Basket Roll Broadcast](#) (10634), [Approve TES Trade Broadcast](#) (10607), [TES Broadcast](#) (10604), [TES Reversal Broadcast](#) (10632), [TES Trade Upload Broadcast](#) (10613)
- added valid value *D2_Order_Cancellation(112)* to field *DeleteReason* in messages [Delete Basket Broadcast](#) (10626), [Delete TES Trade Broadcast](#) (10606)
- added valid value *D2_Order_Cancellation(171)* to field *QuoteEntryRejectReason* in message [Mass Quote Response](#) (10406)
- added valid value *D2_Order_Cancellation(122)* to field *MassActionReason* in messages [Order Mass Cancellation Notification](#) (10122), [Mass Cancellation Event](#) (10308), [Quote Mass Cancellation Notification](#) (10410)
- added valid values *User_Group_Halt_Trading(124)*, *Risk_Monitoring_Session_Loss(126)*, *Risk_Service_Unavailable(127)* to field *MassActionReason* in message [Order Mass Cancellation Notification](#) (10122)

- added valid values *Sponsored_Access_Trading_session(4)*, *Sponsored_Access_Back_Office_session(5)* to field *SessionSubMode* in message [Session List Inquire Response](#) (10036)
- removed fields *ApplUsageOrders*, *ApplUsageQuotes*, *OrderRoutingIndicator*, *FIXEngineName*, *FIXEngineVersion*, *FIXEngineVendor*, *ApplicationSystemName*, *ApplicationSystemVersion*, *ApplicationSystemVendor* in messages [Session Logon](#) (10000), [Session Logon \(Password encrypted\)](#) (19000)
- added fields *TargetPartyIDExecutingUnit*, *OrderDeletionInstruction* in messages [Party Action Report](#) (10042), [Risk Notification](#) (10033)
- added field *OrderDeletionInstruction* in message [Party Action Report](#) (10042)
- changed usage of field *RequestingPartyEnteringFirm* in message [Risk Notification](#) (10033)
- added valid values *Gross_limit(1)*, *Net_limit(2)* to field *RiskLimitType* in messages [Pre-Trade Risk Limit Response](#) (10313), [Pre-Trade Risk Limits Definition Request](#) (10312)
- added valid value *flexible_simple_instrument(10)* to field *ProductComplex* in messages [SRQS Open Negotiation Notification for Respondent](#) (10711), [SRQS Open Negotiation Request](#) (10700), [SRQS Open Negotiation Notification for Requester](#) (10710)
- added messages [TES Inquire Boundary Prices Request](#) (10329), [TES Inquire Boundary Prices Response](#) (10330), [Trading Action Request](#) (10904), [Trading Action Response](#) (10905), [Update Reference Price Request](#) (10331), [Update Reference Price Response](#) (10332)