
Command Reference: RelativeDiff()

Create a relative difference time series

Version 10.00.01, 2011-05-15

A `RelativeDiff()` command creates a new relative difference time series, computed by subtracting the time series and then dividing by one of the time series. This is useful when analyzing the relative magnitudes of two time series over time. Most of the properties for the new time series are the same as the first time series. The alias for the result can be referenced by other commands. The divisor can be either of the time series. The result is set to missing if either time series value is missing or the divisor is zero.

The following dialog is used to edit the command and illustrates its syntax.

Edit RelativeDiff() Command

Create a new unitless time series with data values:
 $TS = (TS1 - TS2)/Divisor$
where the Divisor is either TS1 or TS2.
Attempting to divide by zero sets the data point to the missing value.
The metadata for the result is a copy of TS1 except for the alias.

Time series 1 (TS1): DelNorte

Time series 2 (TS2): Alamosa

Divisor: DivideByTS1 Required - specify time series for divisor.

Alias to assign: RelativeDiff Insert: -- Select Specifier -- Required - use %L for location, etc.

Command:
`RelativeDiff (TSID1="DelNorte", TSID2="Alamosa", Divisor=DivideByTS1, Alias="RelativeDiff")`

Cancel OK

RelativeDiff

RelativeDiff() Command Editor

The command syntax is as follows:

```
RelativeDiff (Parameter=Value,...)
```

The following older command syntax is updated to the above syntax when a command file is read:

```
TS Alias = RelativeDiff (Parameter=Value,...)
```


Command Parameters

Parameter	Description	Default
TSID1	The time series identifier or alias for the first time series.	None – must be specified.
TSID2	The time series identifier or alias for the second time series (subtracted from the first).	None – must be specified.
Divisor	Indicates whether the first time series is the divisor (DivideByTS1) or the second time series is the divisor (DivideByTS2).	None – must be specified.
Alias	The alias to assign to the time series, as a literal string or using the special formatting characters listed by the command editor. The alias is a short identifier used by other commands to locate time series for processing, as an alternative to the time series identifier (TSID).	None – must be specified.

A sample command file to process data from the State of Colorado's HydroBase database is as follows:


```
StartLog(LogFile="Example_RelativeDiff.log")
SetOutputPeriod(OutputStart="01/1912",OutputEnd="12/1998")
# (1912-1998) RIO GRANDE AT ALAMOSA, CO. DWR Streamflow Monthly
ReadTimeSeries(Alias="Alamosa","08223000.DWR.Streamflow.Month~HydroBase")
# (1890-1998) RIO GRANDE NEAR DEL NORTE, CO. DWR Streamflow Monthly
ReadTimeSeries(TSID="08220000.USGS.Streamflow.Month~HydroBase",
    Alias="DelNorte")
RelativeDiff(TSID1="DelNorte",TSID2="Alamosa",
    Divisor=DivideByTS1,Alias="RelativeDiff")
```

The input time series for the command are shown in the following figure:

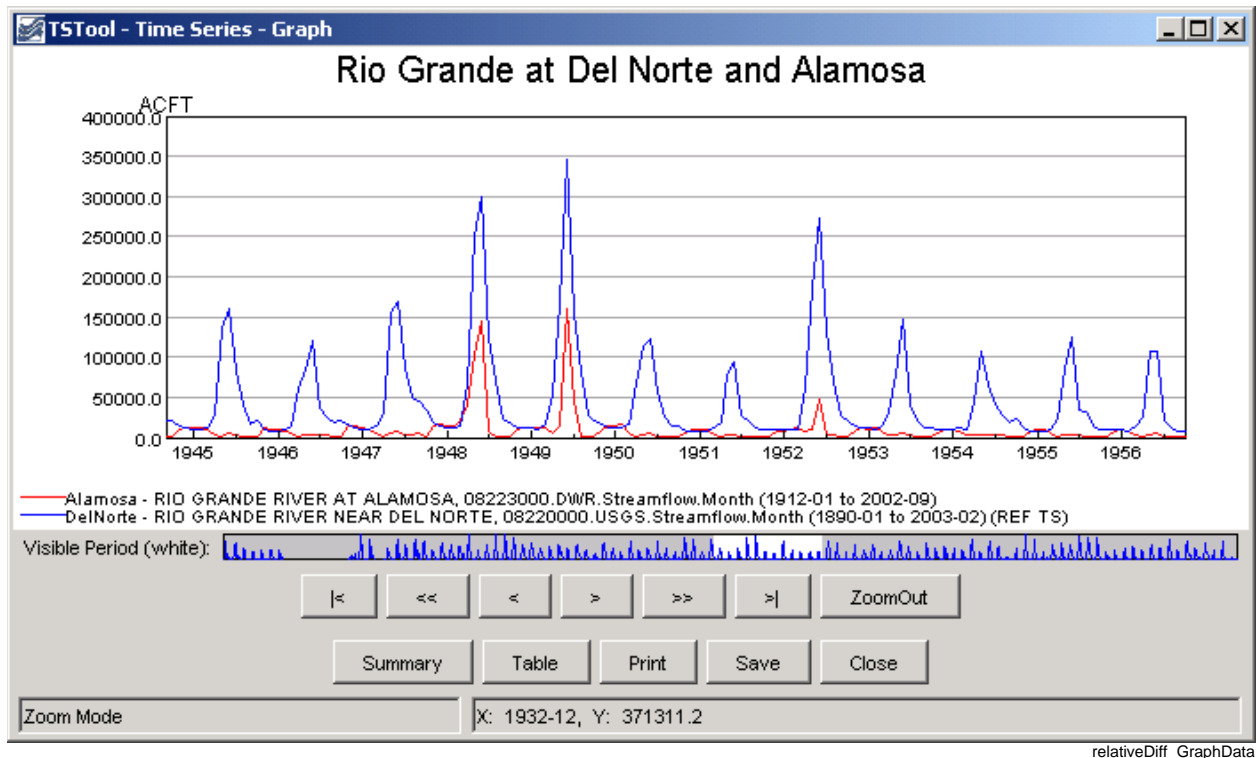

Data for the RelativeDiff() Command

The results of processing the commands are shown in the following figure:

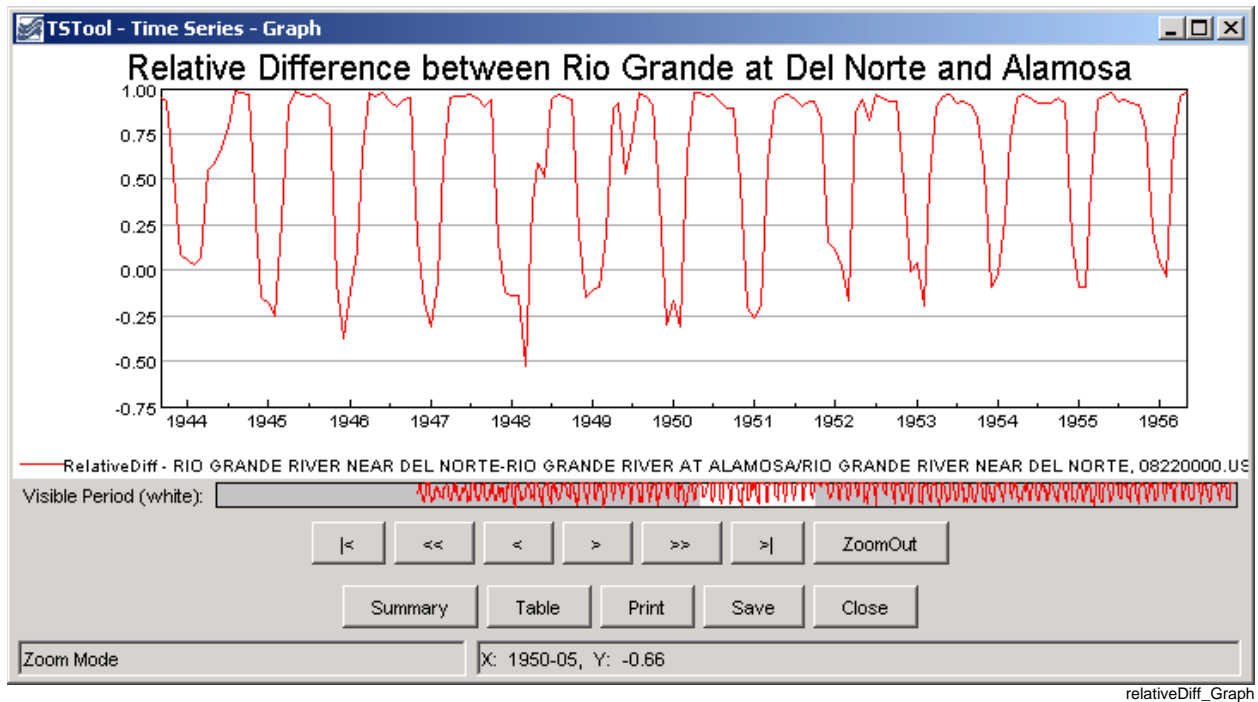

Results of the RelativeDiff() Command