


---

# 5 Tools

Version 06.10.06, 2005-08-05, Color, Acrobat Distiller

This chapter discusses the tools available under the **Tools** menu. The **Tools** menu lists tools that perform additional analysis on time series that are selected in the **Time Series Results** list. These features are similar to the **Results** menu features in that a level of additional analysis is performed to produce the data product. Tools may or may not correspond to commands – often tools internally execute the features available in commands, in order to implement a more complicated analysis.

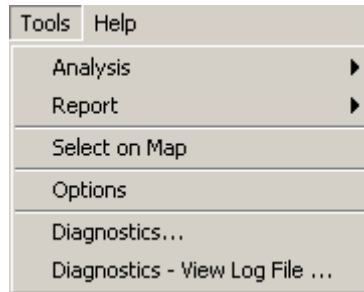

Menu\_Tools

## Tools Menu

### 5.1 Analysis Tools

Analysis tools analyze time series and typically produce an output report.

A screenshot of a single menu item: 'Mixed Station Analysis... (under development)'.

Menu\_Tools\_Analysis

## Tools...Analysis Menu

Currently, only the Mixed Station Analysis tool is available, and it is under development (see the next section).

### 5.1.1 Mixed Station Analysis

**This tool is under development.**

The Mixed Station Analysis tool is an interactive tool that tries to find the best combination of time series necessary to fill data using regression or the MOVE2 method. The optimal results can then optionally be used as parameters for the `fillMixedStation()` command. The following figure illustrates the Mixed Station Analysis tool.

**Mixed Station Analysis**

This tool finds the best fit from independent time series to fill dependent time series.  
 The dependent and independent time series can be selected using the TS list parameters:  
 AllMatchingTSID - time series selected from the list below (\* will analyze all previous time series)  
 Right-click on the time series area to select or deselect all. Active only if the TS list selection is "MatchingTSID"  
 The working directory is: J:\CDSS\develop\Apps\TSTool\test\Commands\fillRegression

Dependent TS list: AllMatchingTSID How to get the dependent time series to fill.

Dependent time series: 06759500.USGS.Streamflow.Month  
 06754000.DWR.Streamflow.Month

Independent TS list: AllMatchingTSID How to get the independent time series.

Independent time series: 06759500.USGS.Streamflow.Month  
 06754000.DWR.Streamflow.Month

Analysis method(s): OLSRegression

Number of equations: OneEquation

Transformation(s): None

Analysis period: to

Minimum Data Count: Minimum number of overlapping points required for analysis.

Minimum R: Minimum correlation required for a best fit. (default = 0.5)

Best Fit: R

Fill period: to

Intercept: Blank or 0.0 are allowed (Linear 'None' transformation only).

Output file: Browse

Close Analyze View Results Create fill commands Copy commands to TSTool Fill Dependents

Ready

Menu\_Tools\_MixedStationAnalysis

**Mixed Station Analysis Interface**

## 5.2 Report Tools

Report tools analyze time series, typically creating a summary report.


```
Data Coverage by Year...
Data Limits Summary...
Month Summary (Daily Means)...
Month Summary (Daily Totals)...
Year to Date Total... <Daily or real-time CFS Only!>
```

Menu\_Results\_Report

### Tools...Report Menu

#### 5.2.1 Data Coverage by Year Report

The **Tools...Report - Data Coverage by Year** menu processes the time series that have been selected and produces a report similar to the following (abbreviated). This report is useful, in particular, for evaluating data availability for multiple time series over a period. Although effort has been taken to make the report as compact as possible, it will likely need to be printed in landscape format on a large paper size.

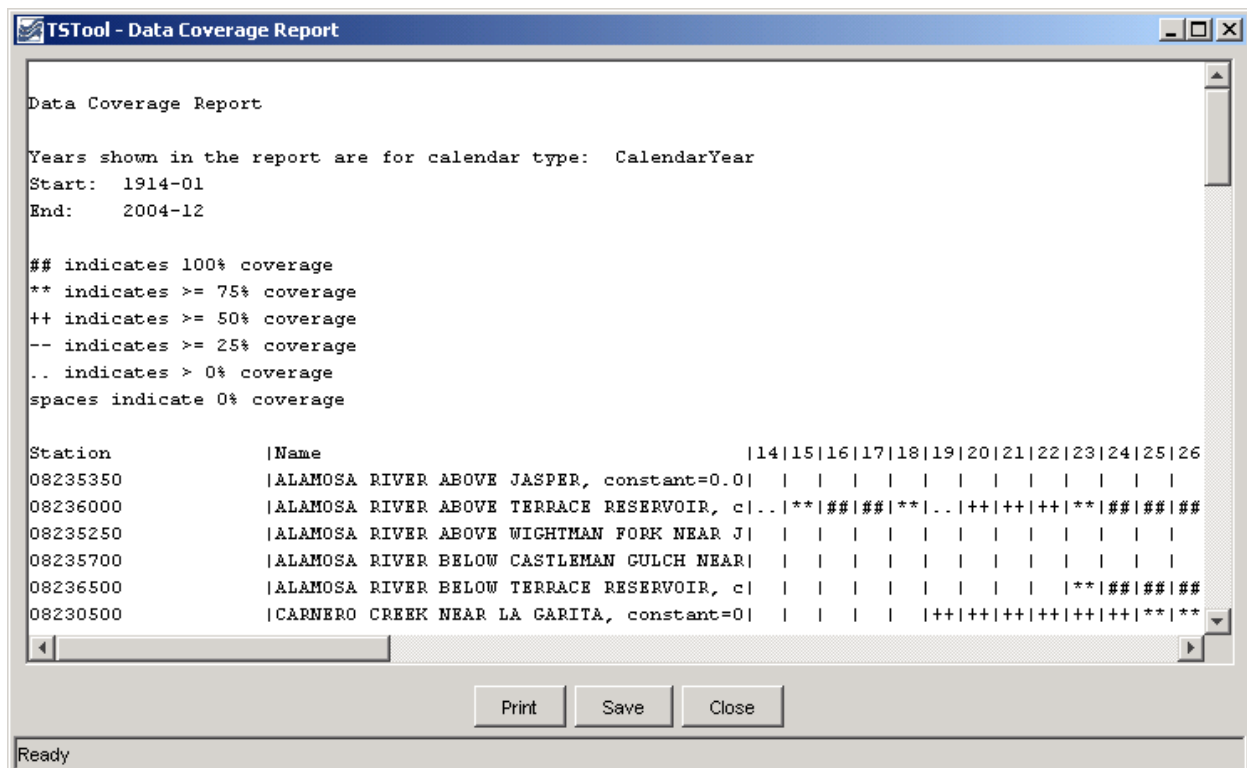


Menu\_Results\_Report\_DataCoverage

### Data Coverage by Year Report

### 5.2.2 Data Limits Summary Report

The **Tools...Report - Data Limits Summary** menu processes the time series that have been selected and produces a report similar to the following (abbreviated). The data limits summary for each time series is included. This report is useful, in particular, for evaluating data availability for specific time series. Currently, only monthly time series have detailed summaries. All other data intervals shown overall period summaries. The value -999 is used to indicate missing data.

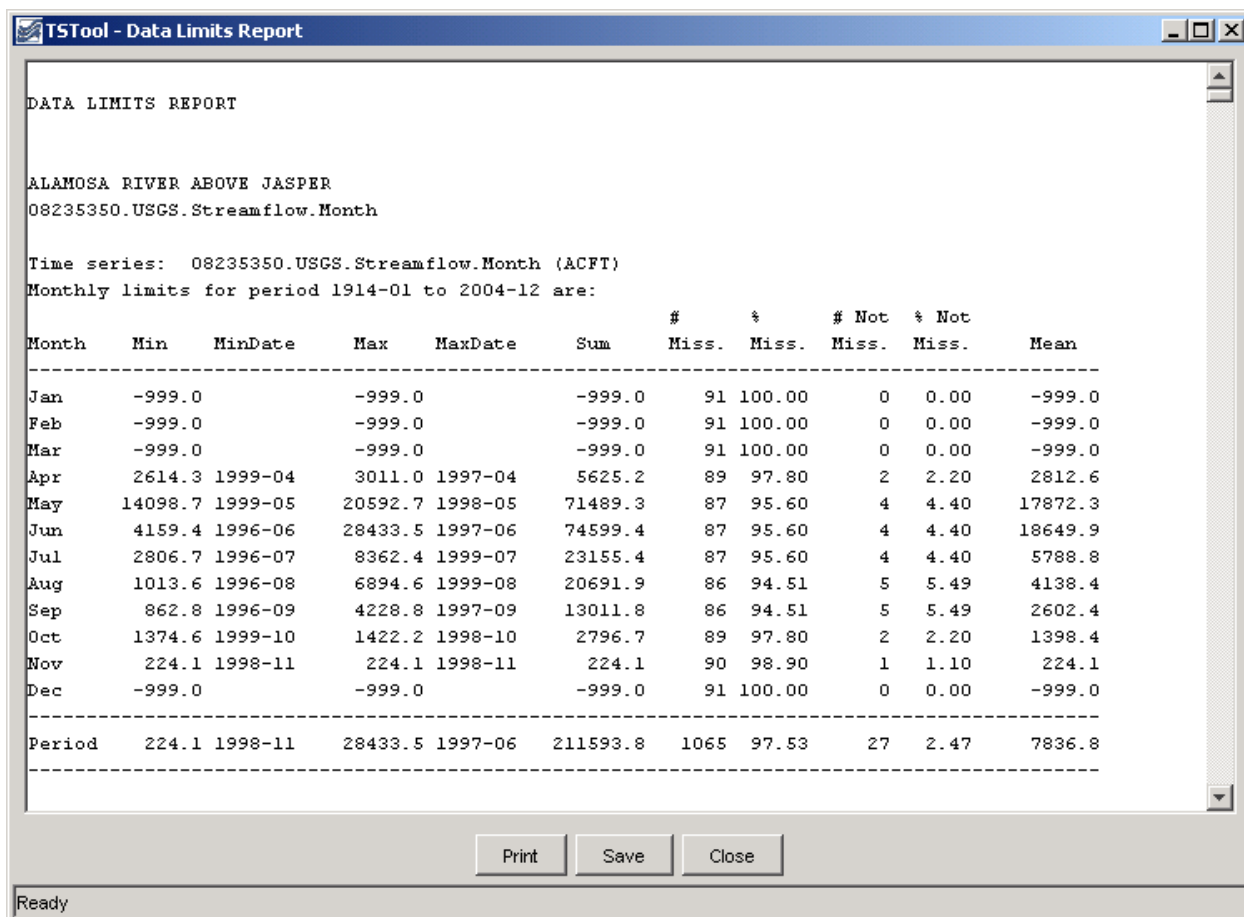

Menu\_Report\_DataLimits

**Data Limits Summary Report**

### 5.2.3 Month Summary Reports

The **Tools...Report - Month Summary** menu process the time series that have been selected and produces a report similar to the following (abbreviated). This report is similar to default summary output for monthly time series; however, it is applied to shorter data intervals, including minute, hour, and day interval. Values are first accumulated to daily values (by averaging the values in a day if the **Daily Means** report is chosen or by totaling the values in a day if the **Daily Totals** report is chosen). For example, use total for precipitation and means for average flows or daily temperature. The daily values are then further accumulated to produce monthly values, again using means or totals. The report includes a header for the time series, the report, and footnotes. Values are only shown if full data are available for a month and statistics are computed using only complete months.

**TSTool - Monthly Summary Report (Daily Means)**

MONTHLY SUMMARY REPORT (Daily Means)

Time Series Identifier = 08235350.USGS.Streamflow.Day  
 Description = ALAMOSA RIVER ABOVE JASPER  
 Data source = USGS  
 Data type = Streamflow  
 Data interval = Day  
 Data units = CFS  
 Period = 1995-07-01 to 1999-10-31  
 Orig./Avail. period = 1995-07-01 to 1999-10-31

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
1995	NC	NC	NC	NC	NC	NC	NC	92.45	48.10	NC
1996	NC	NC	NC	NC	290.00	69.90	45.65	16.48	14.50	NC
1997	NC	NC	NC	50.60	308.45	477.83	108.39	78.97	71.07	NC
1998	NC	NC	NC	NC	334.90	278.30	86.55	36.48	24.17	23.10
1999	NC	NC	NC	43.93	229.29	427.63	136.00	112.13	60.83	22.30
Min	NC	NC	NC	43.93	229.29	69.90	45.65	16.48	14.50	22.30
Max	NC	NC	NC	50.60	334.90	477.83	136.00	112.13	71.07	23.10
Mean	NC	NC	NC	47.27	290.66	313.42	94.15	67.30	43.73	22.70
SDev	NC	NC	NC	4.71	44.87	183.13	38.14	39.72	23.96	0.50
MMxD	NC	NC	45.00	125.75	534.75	492.00	261.40	114.80	94.20	38.20
MMnD	NC	NC	20.00	35.50	75.00	183.00	71.60	46.60	26.80	21.20

Notes:

- Years shown are calendar years.
- Annual values and statistics are computed only on non-missing data.
- NC indicates that a value is not computed because of missing data or the data value itself is missing
- Statistics are for values shown in the main table except:
  - MMxD are the means of the maximum daily values in a month.
  - MMnD are the means of the minimum daily values in a month.

Print Save Close


Ready

Menu\_Tools\_MonthSummaryDailyMean

Monthly Summary (Daily Mean) Report

### 5.2.4 Year to Date Total Report

The **Tools...Report - Year to Date Total** menu processes the time series that have been selected and produces a report similar to the following (abbreviated). This report is useful, in particular, for comparing on a volumetric basis the different years of a time series over a full period. The year-to-date volumes are sorted; to find a particular year, use the **Search** button on the report display. The report information can then be used, for example, to select time series traces for analysis and output. Currently, this report can only be used to process daily CFS data. Real-time data can be analyzed by first converting to a daily interval using the `changeInterval()` command. **Warning: some years may have no data at the beginning of a year and the corresponding year-to-date totals will consequently be zero. Refer to the data coverage and data limit reports for more detail.**

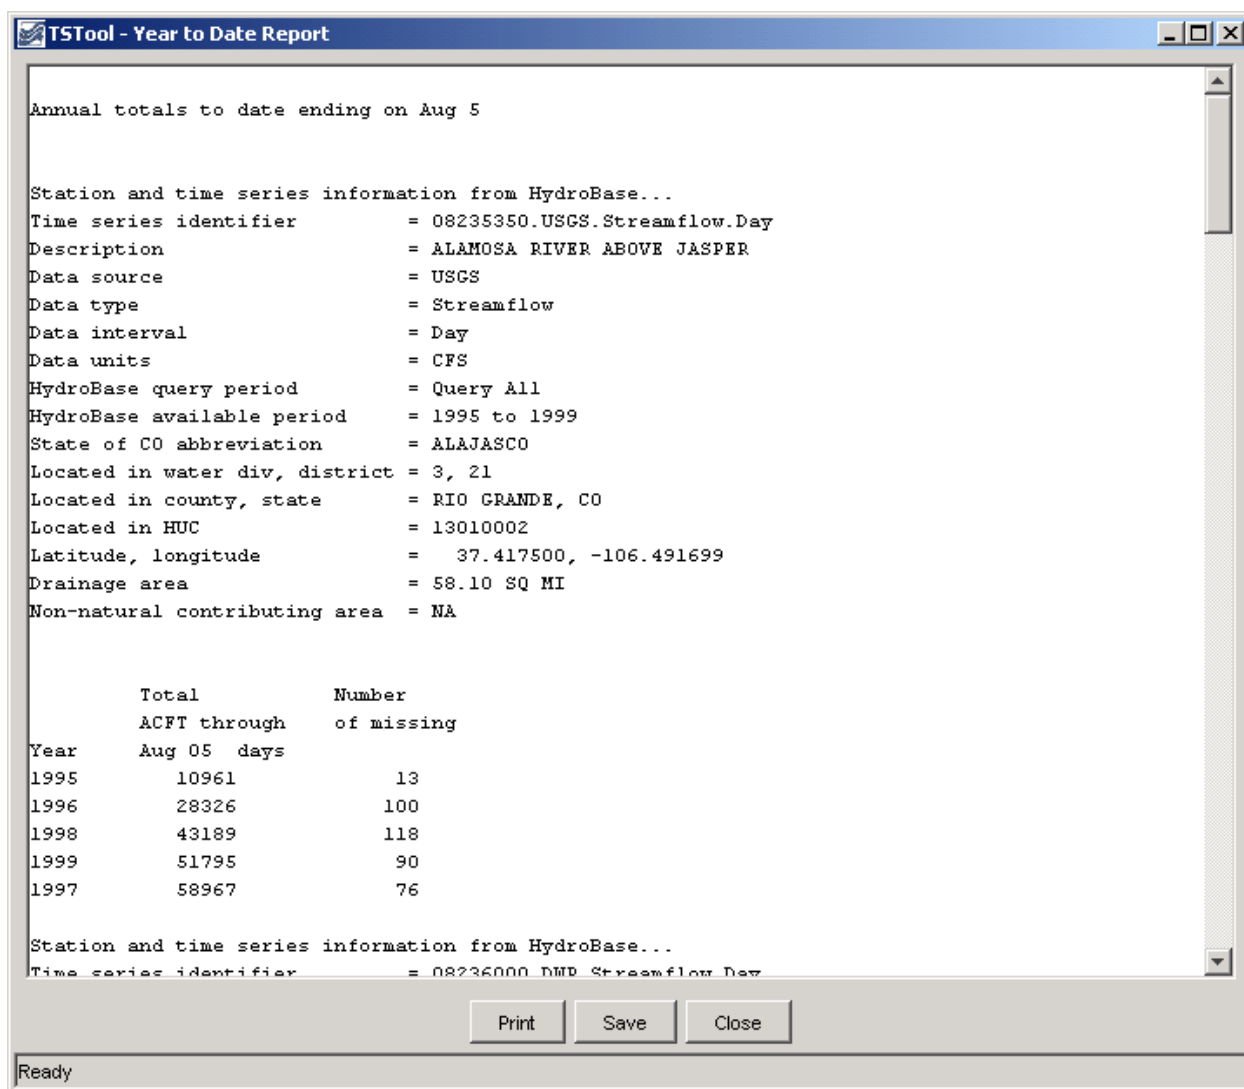

Menu\_Tools\_Report\_YearToDateTotal


### Year to Date Total Report

## 5.3 Map Tools

The **Tools...Show on Map** button is enabled when a map is displayed (using **View...Map**) and time series are listed in the upper right part of the main window. The locations corresponding to selected time series or all time series in this list can be displayed on the map. See **Chapter 8 – Using the Map** for more information.

## 5.4 Diagnostics

Diagnostics features are useful for troubleshooting. When an error occurs, a small warning dialog may be displayed, as shown in the following figure:

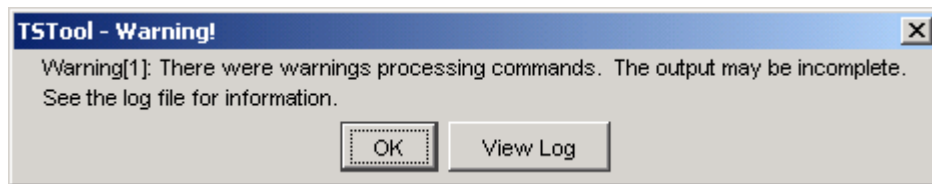


Diagnostics\_Warning

**Example Warning Message Dialog**

If results are not as expected, also review the messages in the status bar at the bottom of the main or secondary windows.

### 5.4.1 Diagnostics Settings

The **Tools...Diagnostics** menu item displays the **Diagnostics** dialog, which is used to set message levels and view messages as the application runs. The **Diagnostics** dialog (see the following figure) can be used to evaluate a problem.

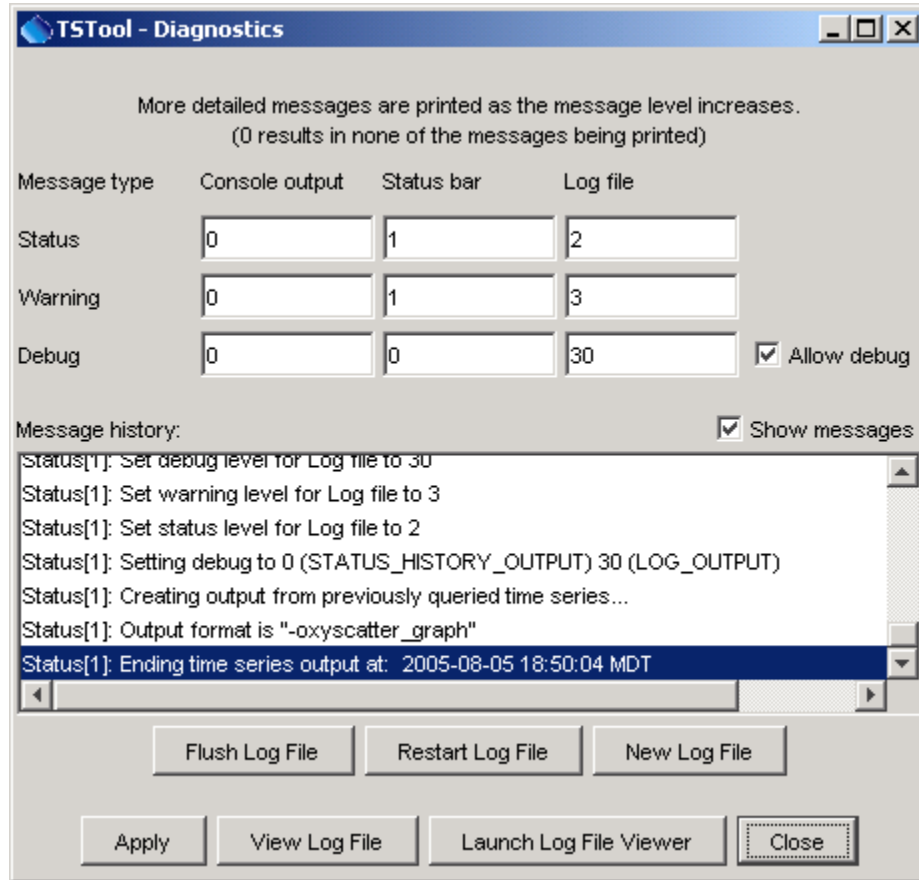

**Diagnostics Interface**

Diagnostics

The settings at the top of the dialog are used to specify the level of detail for messages printed to the console window, the status area at the bottom of the main window (and the **Diagnostics** dialog), and the log file. The log file contains warning, status, and debug messages, many of which are not normally displayed in the main interface. The log file is created in the *logs* directory under the installation directory. The **Diagnostics** interface features are as follows:

#### **Status, Warning, Debug**

Enter integer values, with larger numbers resulting in more output and slower performance. Zero indicates no output. If troubleshooting, a good guideline is to set the debug level to 10 or 30 (and select the **Allow Debug** checkbox). The default settings are often enough for normal troubleshooting and result in good software performance.

#### **Allow Debug**


Select to enable debug messages. Turning on debug messages will significantly slow down the software.



<b>Show Messages</b>	Select to display messages in the <b>Diagnostics</b> window.
<b>Flush Log File</b>	Force messages to be written to the log file. Messages can be buffered in memory and may not otherwise immediately be written to the log file.
<b>Restart Log File</b>	Restart the log file. This is useful if a long session has occurred and troubleshooting will occur on new actions.
<b>New Log File</b>	Open a new log file, with a new name.
<b>Apply</b>	Apply the settings in the <b>Diagnostics</b> dialog.
<b>View Log File</b>	View the log file in an integrated window. The <b>View Log File</b> button will be enabled if the log file has been opened.
<b>Launch Log File Viewer</b>	View the log file using a viewer from the operating system. On Windows computers, Notepad will be used.
<b>Close</b>	Apply the settings in the <b>Diagnostics</b> dialog and close the window.

### 5.4.2 Diagnostics – View Log File

The **Tools...Diagnostics – View Log File** menu item displays the integrated log file viewer. Selecting this menu item is equivalent to selecting the **View Log File** button in the **Diagnostics** dialog. The log file viewer will be displayed in a window as shown in the following figure:

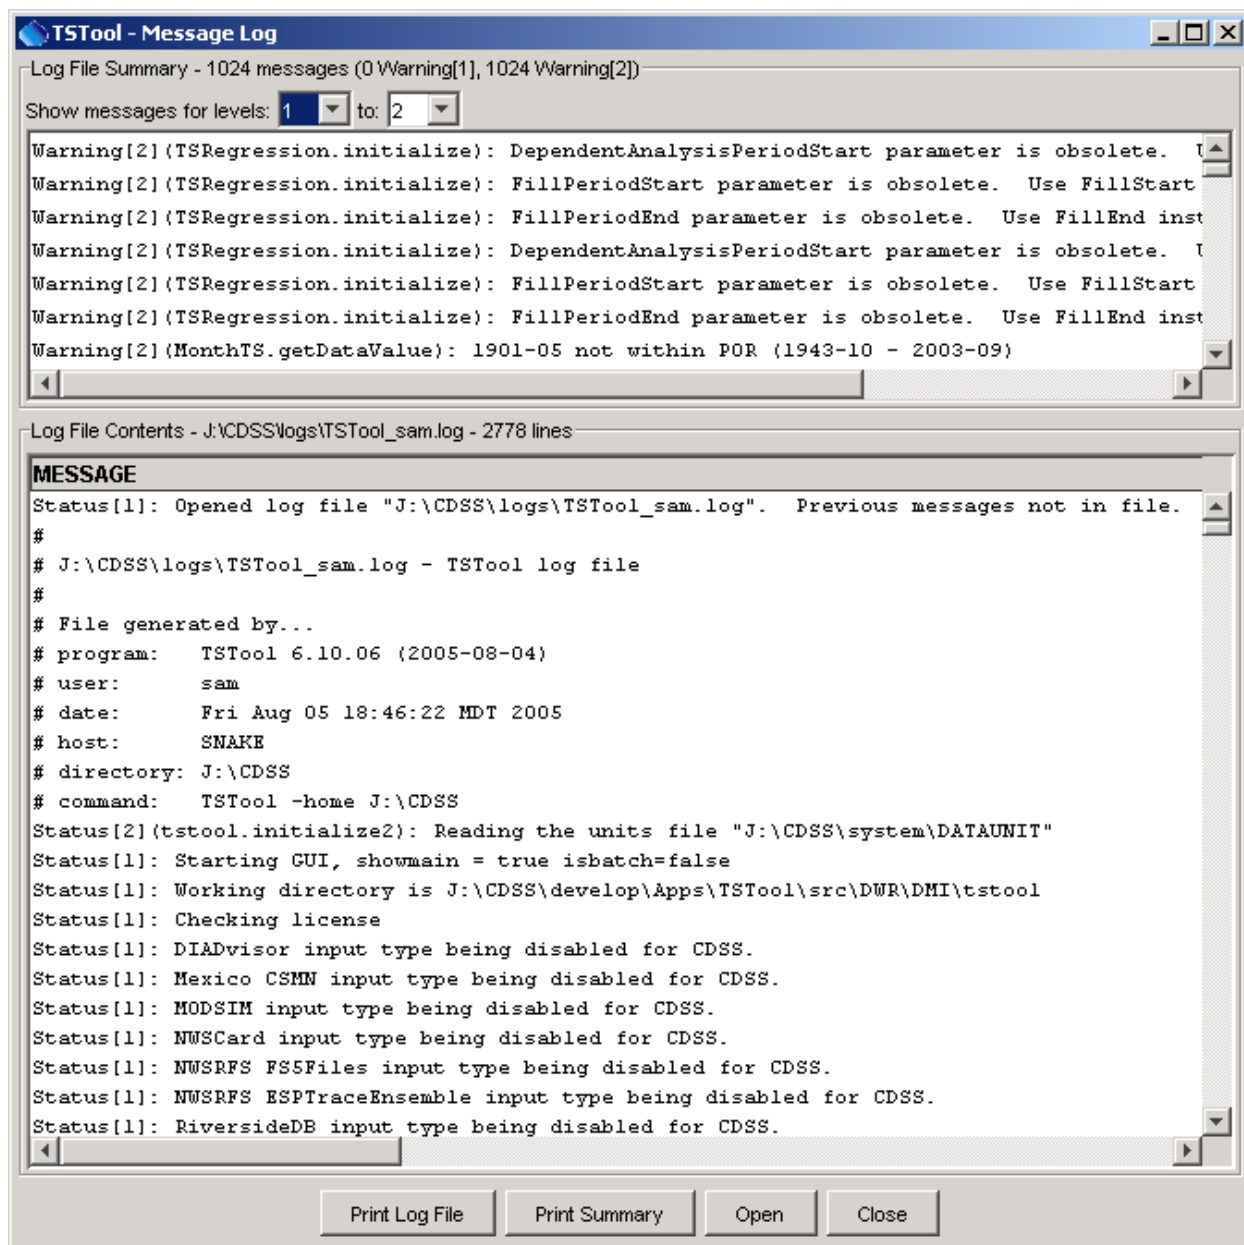

Diagnostics\_ViewLog

**Log File Viewer Window**

The log file messages can be scrolled. To find a string in the log file, right-click and select the **Find** menu item. The information in the log file can also be copied and pasted into email, when contacting support.