

Command Reference: AppendTable()

Append one table to another table

Version 10.21.00, 2013-06-28

The `AppendTable()` command appends rows from one table to another table. For appended rows:

- values in columns that are not matched are set to null in the receiving table
- values in columns where the data types do not match are set to null in the receiving table

The following dialog is used to edit the command and illustrates the syntax of the command.

Edit AppendTable() Command

This command appends records from one table to the bottom of another table.
Columns in the second table must be mapped to columns in the first table and match in type.

Table ID to modify: Required - original table.

Table ID to append from ("append table"): Required - table to append from.

Column names to append from append table: Optional - names of columns to append (default=append all matching columns).

Column map: Optional - to change append table names (default=no changes).

Column filters: Optional - filter appended rows by matching column pattern (default=append all rows).

Command:

AppendTable

AppendTable() Command Editor

The command syntax is as follows:


```
AppendTable (Parameter=Value, ...)
```

Command Parameters

Parameter	Description	Default
TableID	The identifier for the original table, to which records will be appended.	None – must be specified.
AppendTableID	The identifier for the table from which to append.	None – must be specified.
IncludeColumns	The names of columns to append from AppendTableID, separated by commas. See also ColumnMap to indicate how to map column names in the append table to the first table (necessary if the column names don't match).	Append all of the columns from AppendTableID that match columns in TableID.
ColumnMap	The map of the append table columns to the first table's columns, necessary when column names are not	If no map, append table column names in

Parameter	Description	Default
	the same: AppendColumn1:OriginalColumn1, AppendColumn2:OriginalColumn2	IncludeColumns must have the same name in the first table.
ColumnFilters	Filters that limit the number of rows being appended from the append table, using the syntax: FilterColumn1:FilterPattern1, FilterColumn2:FilterPattern2 Patterns can use * to indicate wildcards for matches. Only string values can be checked (other data types are converted to strings for comparison). Comparisons are case-independent. All patterns must be matched in order to append the row. In the future a command may be added to perform queries on tables, similar to SQL for databases.	No filtering.

The following figures show the input tables and results (modified first table) corresponding to the parameters shown in the editor dialog figure above. Note that the column names for “Table2” have a “2”.

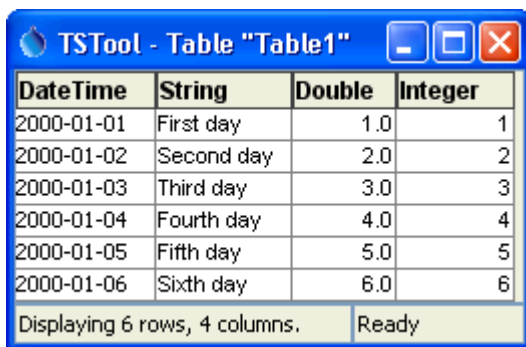


DateTime	String	Double	Integer
2000-01-01	First day	1.0	1
2000-01-02	Second day	2.0	2
2000-01-03	Third day	3.0	3
2000-01-04	Fourth day	4.0	4
2000-01-05	Fifth day	5.0	5
2000-01-06	Sixth day	6.0	6

Displaying 6 rows, 4 columns. Ready

AppendTable_Table1

Table Corresponding to TableID in Command Editor

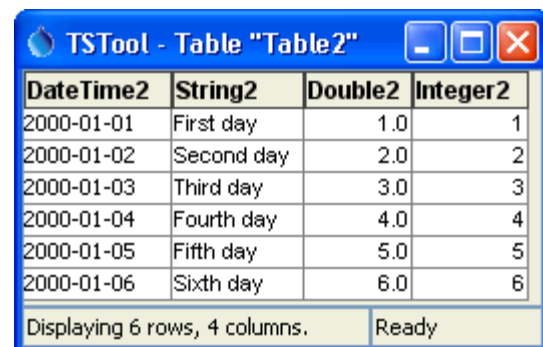


DateTime2	String2	Double2	Integer2
2000-01-01	First day	1.0	1
2000-01-02	Second day	2.0	2
2000-01-03	Third day	3.0	3
2000-01-04	Fourth day	4.0	4
2000-01-05	Fifth day	5.0	5
2000-01-06	Sixth day	6.0	6

Displaying 6 rows, 4 columns. Ready

AppendTable_Table2

Table Corresponding to AppendTableID in Command Editor

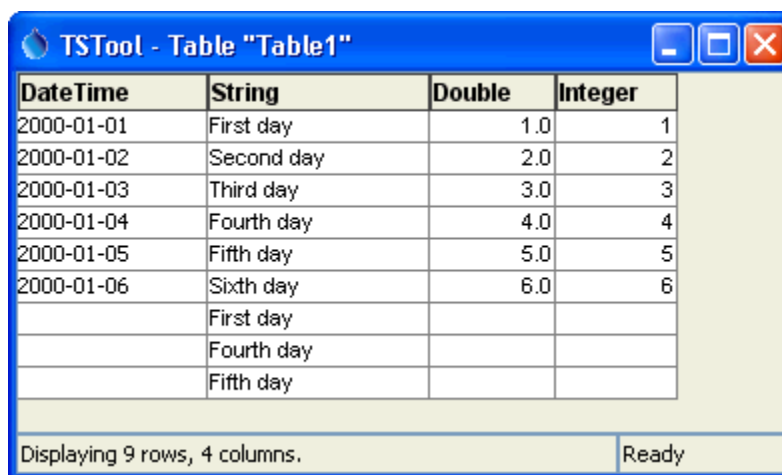

DateTime	String	Double	Integer
2000-01-01	First day	1.0	1
2000-01-02	Second day	2.0	2
2000-01-03	Third day	3.0	3
2000-01-04	Fourth day	4.0	4
2000-01-05	Fifth day	5.0	5
2000-01-06	Sixth day	6.0	6
	First day		
	Fourth day		
	Fifth day		

Displaying 9 rows, 4 columns. Ready

AppendTable_Table1

Table Corresponding to Results from Parameters in Command Editor