


Command Reference: FreeTable()

Free a table

Version 12.00.00, 2017-03-23

The `FreeTable()` command frees a table. The table will not be available for subsequent commands, although a new table with the same name can be created and used with subsequent commands. This command is useful, for example, when looping through blocks of commands where logic is repeated and the table contents are recreated.

The following dialog is used to edit the command and illustrates the syntax of the command.

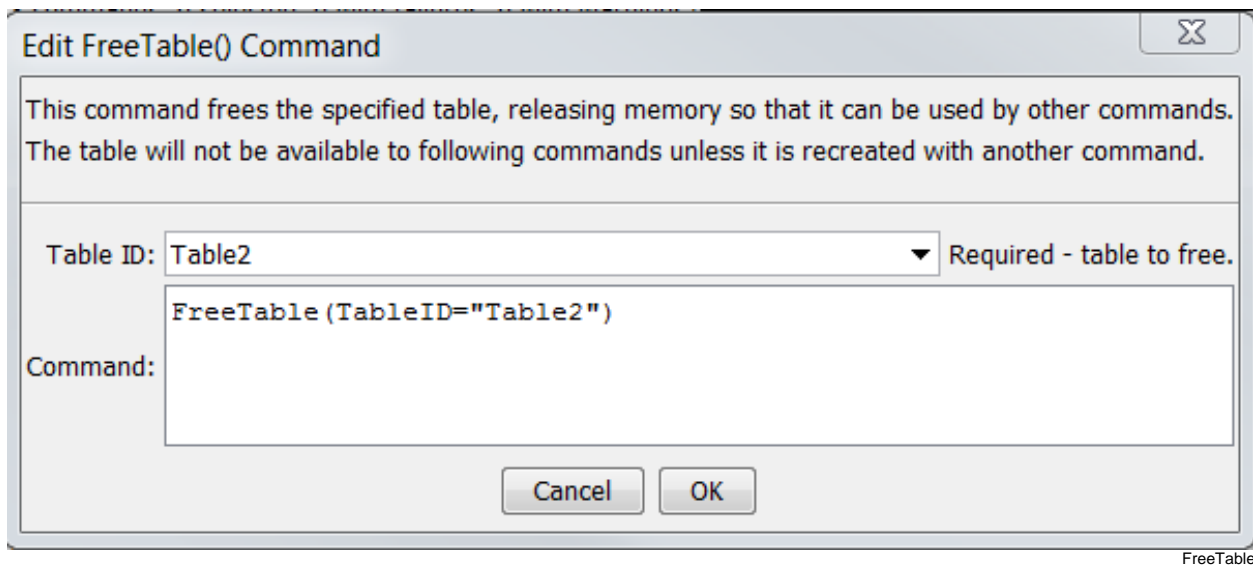

FreeTable() Command Editor

The command syntax is as follows:

```
FreeTable (Parameter=Value,...)
```

Command Parameters

Parameter	Description	Default
TableID	The identifier for the original table. Can be specified using <code>\${Property}</code> syntax.	None – must be specified.

This page is intentionally blank.