

---

# Command Reference: SetPatternFile()


## Set the pattern file to be used with FillPattern() commands

Version 08.16.04, 2008-09-19

This command has been replaced with `ReadPatternFile()` – TSTool will automatically convert the command.

The `SetPatternFile()` command specifies a pattern file to be used with `FillPattern()` commands (see the `FillPattern()` command for more information).

The following dialog is used to edit the command and illustrates the command syntax.

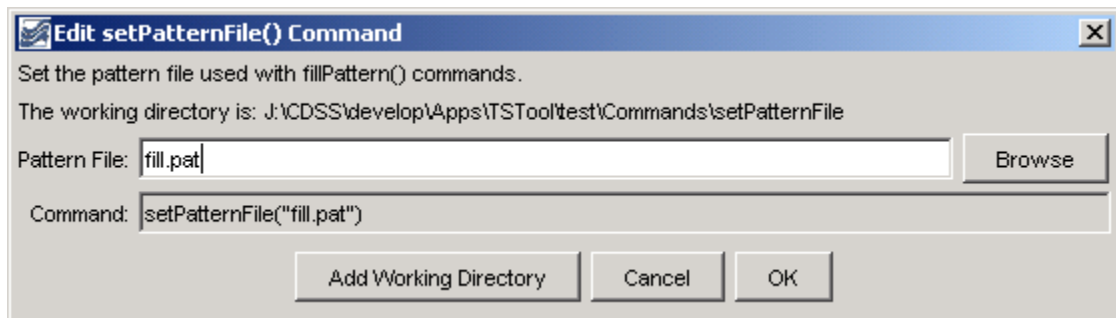

SetPatternFile

**SetPatternFile() Command Editor**

The command syntax is as follows:

```
SetPatternFile (PatternFile)
```

### Command Parameters

Parameter	Description	Default
PatternFile	The path to the pattern file, which can be absolute or relative to the working directory. The <b>Browse</b> button can be used to select the pattern file (if a relative path is desired, remove the leading path after the select).	None – must be specified.

A sample commands file is as follows:

```
SetPatternFile ("fill.pat")
```

This page is intentionally blank.