Command Reference: Wait()
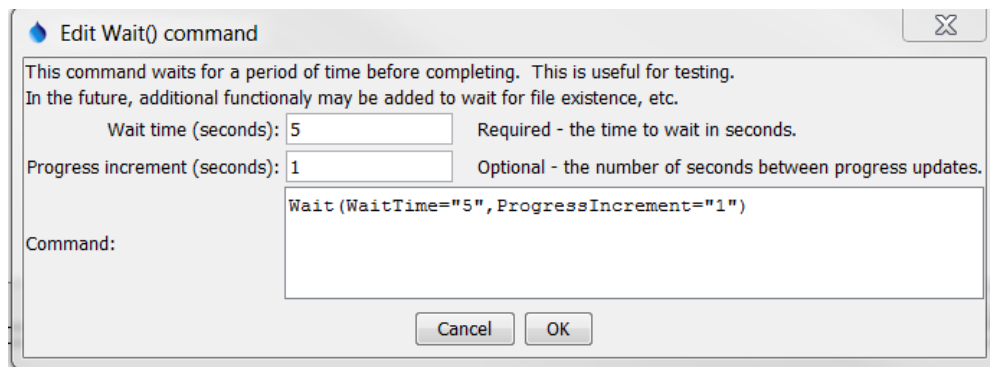
Wait a specified time before continuing

The `Wait()` command waits a specified time before continuing. Examples of use include:

- Testing to simulate slow datastores.
- Waiting for an external process to finish. Functionality will be added in the future to wait for a file to exist or not exist.

The following dialog is used to edit this command and illustrates the command syntax.

Wait() Command Editor

The command syntax is as follows:

```
Wait(Parameter=Value,…)
```

Command Parameters

Parameter	Description	Default
WaitTime	The number of seconds to wait.	None – must be specified.
ProgressIncrement	The number of seconds between progress updates in the main TSTool progress indicator.	WaitTime divided by ten.

This page is intentionally blank.