


---

# Command Reference: setDebugLevel()

## Set Level for Debug Messages

Version 06.08.02, 2004-08-03, Color, Acrobat Distiller

The `setDebugLevel()` command sets the debug levels for screen and log file diagnostic messages. This command can be used multiple times with different debug level (e.g., to isolate a problem). The following dialog is used to edit this command and illustrates the command syntax.

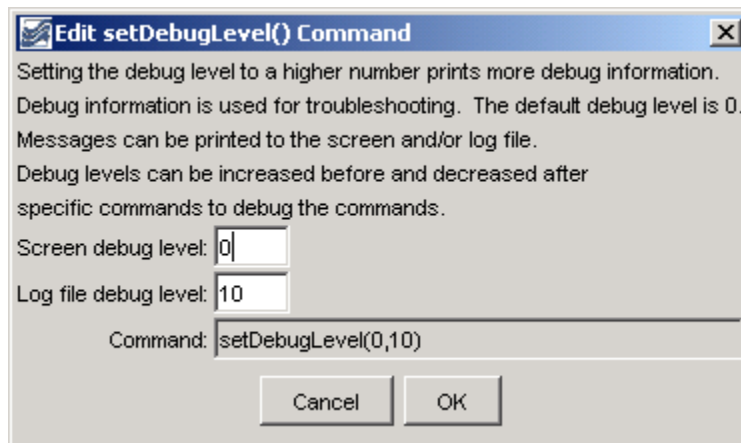

**setDebugLevel() Command Editor**

setDebugLevel

The command syntax is as follows:

```
setDebugLevel (ScreenLevel,LogFileLevel)
```

### Command Parameters

Parameter	Description	Default
ScreenLevel	The debug level for the screen (0+).	None – must be specified.
LogFileLevel	The debug level for the log file (0+).	None – must be specified.

A sample commands file is as follows:

```
setDebugLevel(0,10)
```

This page is intentionally blank.