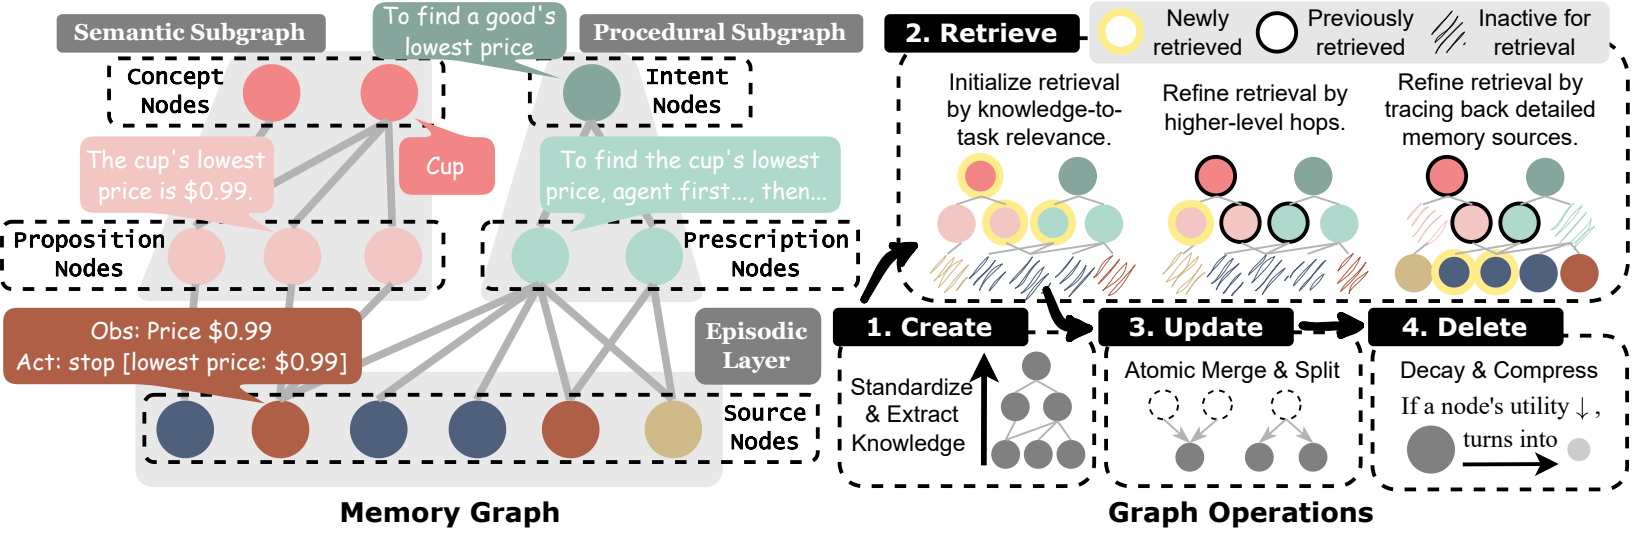

Semantic Subgraph
To find a good's lowest price
Procedural Subgraph
Concept Nodes
Intent Nodes
The cup's lowest price is $0.99.
Cup
To find the cup's lowest price, agent first..., then...
Proposition Nodes
Prescription Nodes
Obs: Price $0.99
Act: stop [lowest price: $0.99]
Episodic Layer
Source Nodes
Memory Graph
2. Retrieve
Newly retrieved
Previously retrieved
Inactive for retrieval
Initialize retrieval by knowledge-to-task relevance.
Refine retrieval by higher-level hops.
Refine retrieval by tracing back detailed memory sources.
1. Create
Standardize & Extract Knowledge
3. Update
Atomic Merge & Split
4. Delete
Decay & Compress
If a node's utility ↓,
turns into
Graph Operations