
A Desktop workspace

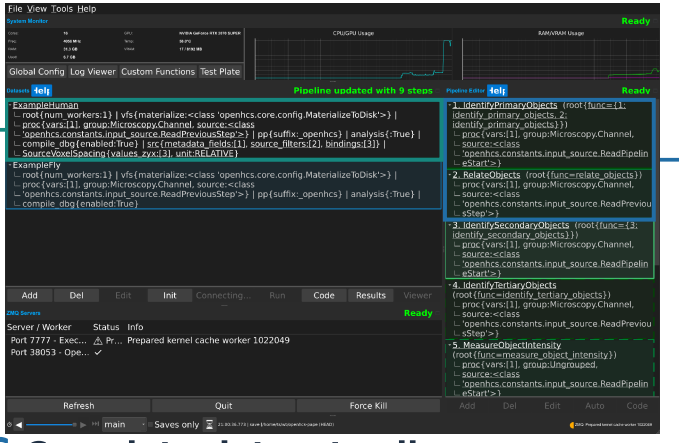

B Expanded analysis steps

1. IdentifyPrimaryObjects (root{func={1: identify_primary_objects, 2: identify_primary_objects}})
   - proc{vars:[1], group:Microscopy.Channel,
   - source:<class
   - 'openhcs.constants.input_source.ReadPipelin
   - eStart'>}
2. RelateObjects (root{func=relate_objects})
   - proc{vars:[1], group:Microscopy.Channel,
   - source:<class
   - 'openhcs.constants.input_source.ReadPreviou
   - sStep'>}

C Complete dataset cell

ExampleHuman
- root{num_workers:1} | vfs{materialize:<class 'openhcs.core.config.MaterializeToDisk'>} |
- proc{vars:[1], group:Microscopy.Channel, source:<class
- 'openhcs.constants.input_source.ReadPreviousStep'>} | pp{suffix:_openhcs} | analysis{:True} |
- compile_dbg{enabled:True} | src{metadata_fields:[1], source_filters:[2], bindings:[3]} |
- SourceVoxelSpacing{values_zyx:[3], unit:RELATIVE}

D Add a function; edit the same settings in a form or Python

Define the function in Python

```python
from openhcs.core.memory \
    import numpy

@numpy
def paper_rescale_signal(
    image,
    gain: float=1.2,
    offset: float=0.0,
):
    """Rescale image intensities
    with a gain and offset.

    gain: Multiplicative
    intensity scale.
    offset: Constant added after
    scaling.
    """
    return image * gain + offset
```

Documentation from the function definition

Register

Adjust settings in a generated form



Or edit the same settings in Python

```python
# Edit this function pattern and save to apply changes

from openhcs.processing.custom_functions \
    import paper_rescale_signal

pattern = [
    (paper_rescale_signal, {
            'gain': 1.2,
            'offset': 0.0,
            'enabled': True
        })
 ]
```