Compose functions, array views and data routes

A Collect images along a chosen stack axis

Stack axis: site, Z, channel or time; each image has Y × X pixels.

For each stack, other acquisition coordinates stay fixed.

Choose Z instead:

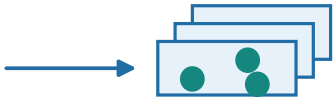

Z × Y × X volume

B Assign function chains to groups

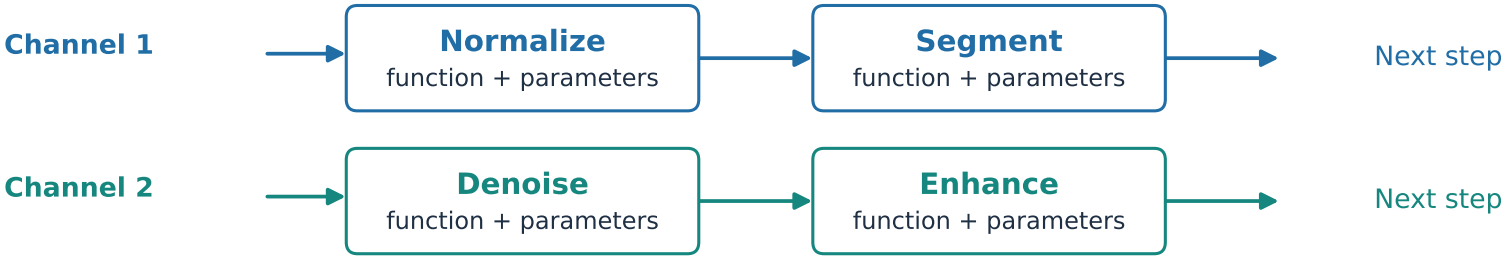

Dictionary: a chain for each group List: a shared chain Function: one operation

C Carry named results alongside the image flow

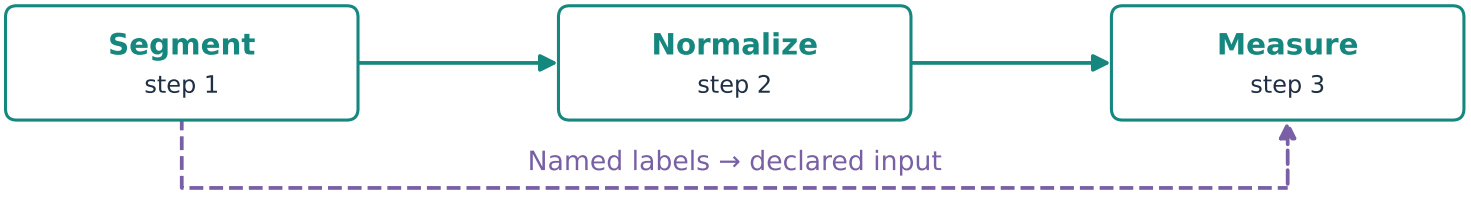

Artifact routing is independent of saving images, labels or tables to disk.
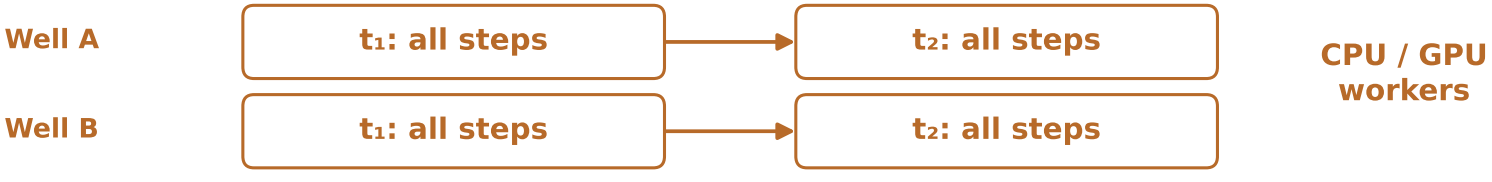
D Run the pipeline across timepoints and wells