
I Array grouping, named results and scheduling

A Collect images along a chosen stack axis


Stack axis: site, Z, channel or time; each image has Y × X pixels.



For each stack, other acquisition coordinates stay fixed.


Choose Z instead:  Z × Y × X volume

B Assign function chains to groups

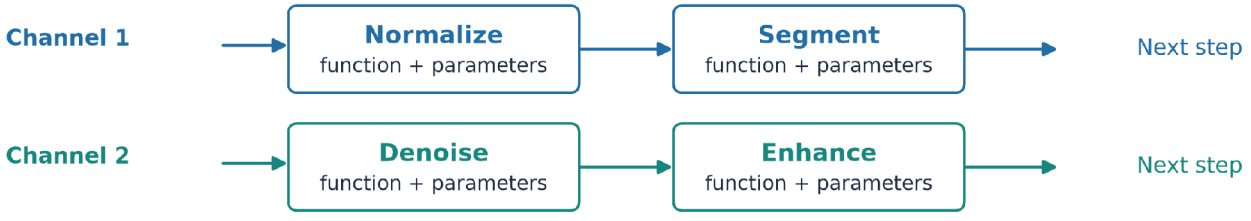


Dictionary: a chain for each group List: a shared chain Function: one operation

C Carry named results alongside the image flow

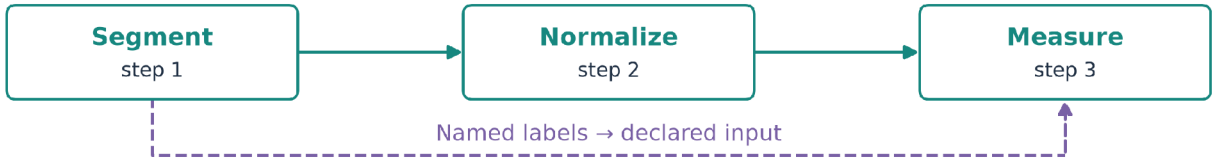


Artifact routing is independent of saving images, labels or tables to disk.

D Run the pipeline across timepoints and wells

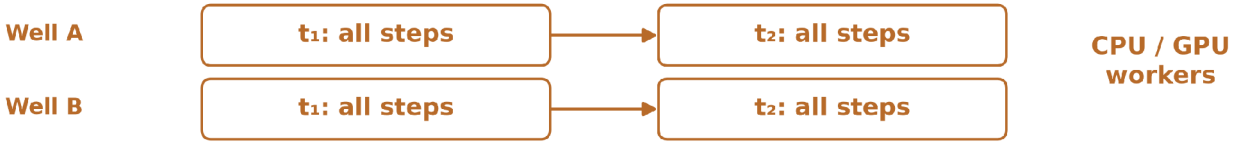

II Prepared execution bundle

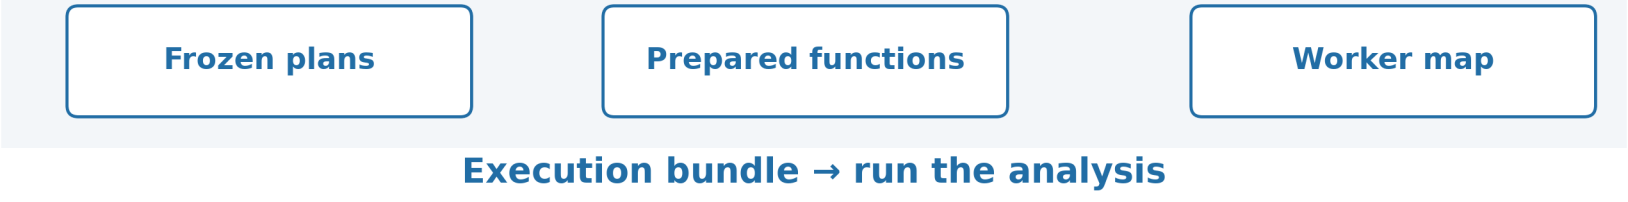

Execution bundle → run the analysis