


Compose functions, array views and data routes

A Choose array axes and processing groups

Example acquisition: wells × time × channels × Z × Y × X

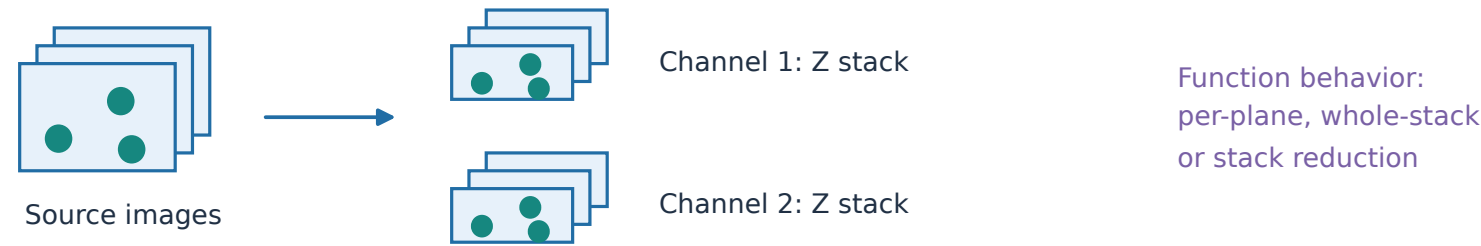


`variable_components = [Z_INDEX]`

Z varies within each array.

`group_by = CHANNEL`


Channel identity selects a group.

B Assign function chains to groups

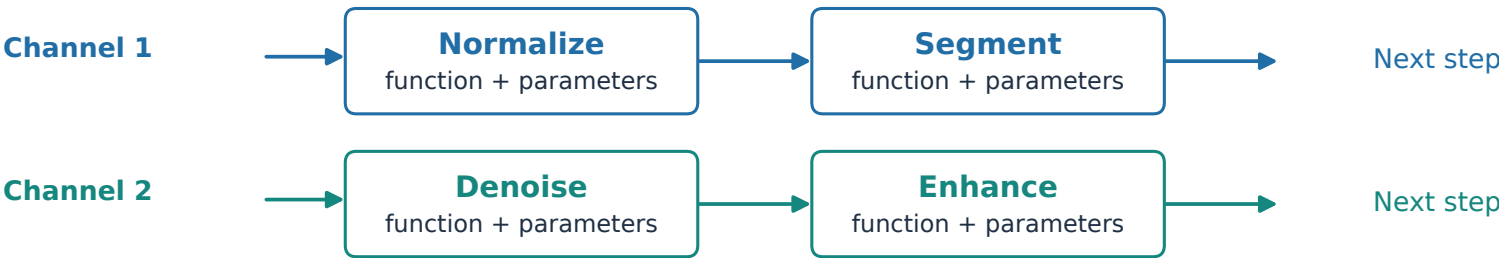

Dictionary: a chain for each group List: a shared chain Function: one operation

C Carry named results alongside the image flow

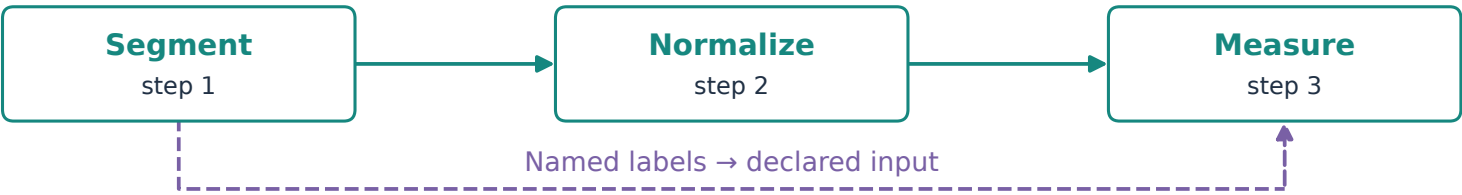

Artifact routing is independent of saving images, labels or tables to disk.

D Run the pipeline across timepoints and wells

