


A Array axes and processing groups

Example acquisition: wells × time × channels × Z × Y × X

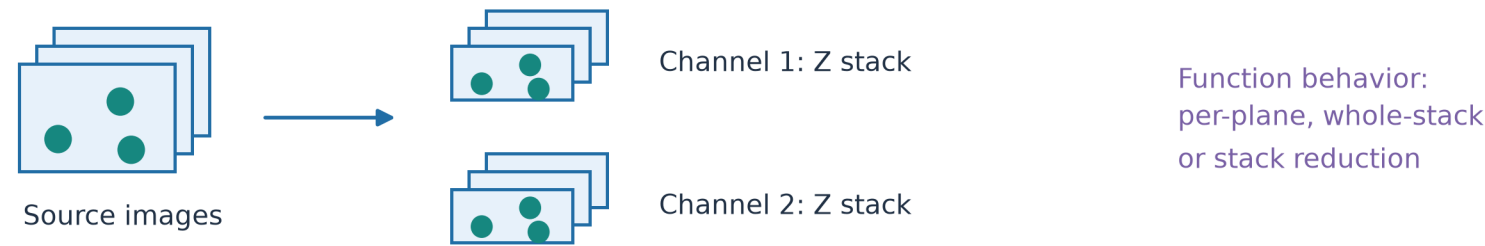


`variable_components = [Z_INDEX]`

Z varies within each array.

`group_by = CHANNEL`

Channel identity selects a group.

B Preparation: inputs, storage and execution tasks

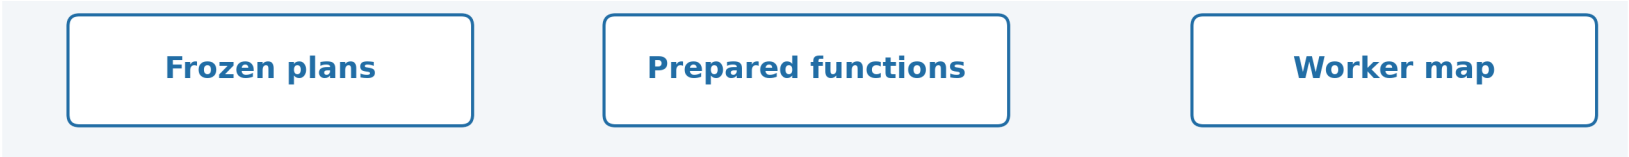

C Typed function declaration

```
from openhcs.core.memory import numpy

@numpy
def paper_rescale_signal(image, gain: float=1.2, offset: float=0.0):
    return image * gain + offset
```

D The same parameters in the editor and MCP



`openhcs:paper_rescale_signal`

`gain: float = 1.2`
Multiplicative intensity scale.

`offset: float = 0.0`
Constant added after scaling.

Use the reaistered function in ordinary pipeline steps